

---

# Integrator Lab: Solving First Order ODEs in MATLAB and Picard Approximation

## Table of Contents

Student Information .....	1
Set up an inline function representation of an ODE and solve it .....	2
Examining the output .....	2
Understanding the components of the solution data structure .....	2
Visualizing and comparing the solution .....	3
Exercise 1 .....	4
Computing an approximation at a specific point .....	5
Exercise 2 .....	6
Errors, Step Sizes, and Tolerances .....	7
Exercise 3 .....	8
Exercise 4 .....	9
Exercise 5 .....	11
Exercise 6 - When things go wrong .....	12
Using symbolic variables to define functions .....	14
Exercise 7 .....	18
Obtaining Picard approximations .....	19
Exercise 8 .....	21

This lab will teach you to numerically solve first order ODEs using a built in MATLAB integrator, `ode45`. `ode45` is a good, general purpose tool for integrating first order equations (and first order systems). It is not always the right algorithm, but it is usually the right algorithm to try first. This lab will also teach you how to manipulate symbolic functions in MATLAB.

You will learn how to use the `ode45` routine, how to interpolate between points, and how MATLAB handles data structures. You will also learn how to use MATLAB for exact symbolic calculations and write your own Picard approximation code.

Opening the m-file `lab2.m` in the MATLAB editor, step through each part using cell mode to see the results. Compare the output with the PDF, which was generated from this m-file.

There are eight exercises in this lab that are to be handed in at the end of the lab. Write your solutions in the template, including appropriate descriptions in each step. Save the .m file and submit it online using Blackboard.

MAT292, Fall 2018, Stinchcombe & Parsch MAT292, Fall 2018, Stinchcombe & Khovanskii MAT292, Fall 2017, Stinchcombe & Sinnamon MAT292, Fall 2015, Sousa MAT292, Fall 2013, Sinnamon & Sousa MAT292, Fall 2011, Hart & Pym

## Student Information

Student Name: Aidan Lawford-Wickham

Student Number: 1005089226

## Set up an inline function representation of an ODE and solve it

MATLAB has many built in routines for solving differential equations of the form

$$y' = f(t, y)$$

We will solve them using `ode45`, a high precision integrator. To do this, we will need to construct an inline function representation of  $f$ , an initial condition, and specify how far we want MATLAB to integrate the problem. Once we have set these, we pass the information to `ode45` to get the solution.

For a first example, we will solve the initial value problem

$$y' = y, \quad y(0) = 1$$

which has as its answer  $y = e^t$ .

```
% Set up the right hand side of the ODE as an inline function
f = @(t,y) y;

% The initial conditions
t0 = 0;
y0 = 1;

% The time we will integrate until
t1 = 2;

soln = ode45(f, [t0, t1], y0);
```

## Examining the output

When we execute the `ode45`, it returns a data structure, stored in `soln`. We can see the pieces of the data structure with a display command:

```
disp(soln);

    solver: 'ode45'
   extdata: [1x1 struct]
         x: [0 0.2000 0.4000 0.6000 0.8000 1 1.2000 1.4000 1.6000
1.8000 2]
         y: [1x11 double]
        stats: [1x1 struct]
        idata: [1x1 struct]
```

## Understanding the components of the solution data structure

The most important elements of the data structure are stored in the `x` and `y` components of the structure; these are vectors. Vectors `x` and `y` contain the points at which the numerical approximation to the initial value problem has been computed. In other words,  $y(j)$  is the approximate value of the solution at  $x(j)$ .

**NOTE:** Even though we may be studying a problem like  $u(t)$  or  $y(t)$ , MATLAB will always use  $x$  for the independent variable and  $y$  for the dependent variable in the data structure.

Pieces of the data structure can be accessed using a period, as in C/C++ or Java. See the examples below:

```
% Display the values of |t| at which |y(t)| is approximated
fprintf(' Vector of t values: ');
disp(soln.x);
% Display the the corresponding approximations of |y(t)|
fprintf(' Vector of y values: ');
disp(soln.y);

% Display the approximation of the solution at the 3rd point:
fprintf(' Third element of the vector of t values: %g\n',soln.x(3));
fprintf(' Third element of the vector of y values: %g\n',soln.y(3));
```

*Vector of t values: Columns 1 through 7*

0	0.2000	0.4000	0.6000	0.8000	1.0000	1.2000
---	--------	--------	--------	--------	--------	--------

*Columns 8 through 11*

1.4000	1.6000	1.8000	2.0000
--------	--------	--------	--------

*Vector of y values: Columns 1 through 7*

1.0000	1.2214	1.4918	1.8221	2.2255	2.7183	3.3201
--------	--------	--------	--------	--------	--------	--------

*Columns 8 through 11*

4.0552	4.9530	6.0496	7.3891
--------	--------	--------	--------

*Third element of the vector of t values: 0.4*  
*Third element of the vector of y values: 1.49182*


## Visualizing and comparing the solution

We can now visualize the solution at the computed data points and compare with the exact solution.

```
% Construct the exact solution
tt = linspace(0,2,50);
yy = exp(tt);

% Plot both on the same figure, plotting the approximation with x's
plot(tt, yy, soln.x, soln.y, 'x', 'MarkerSize',10, 'LineWidth', 2);
% NOTE: the MarkerSize and LineWidth are larger than their defaults of
6
% and 1, respectively. This makes the print out more readable.

% Add a label to the axis and a legend
xlabel('t');
legend('Exact', 'Numerical','Location','Best');
```

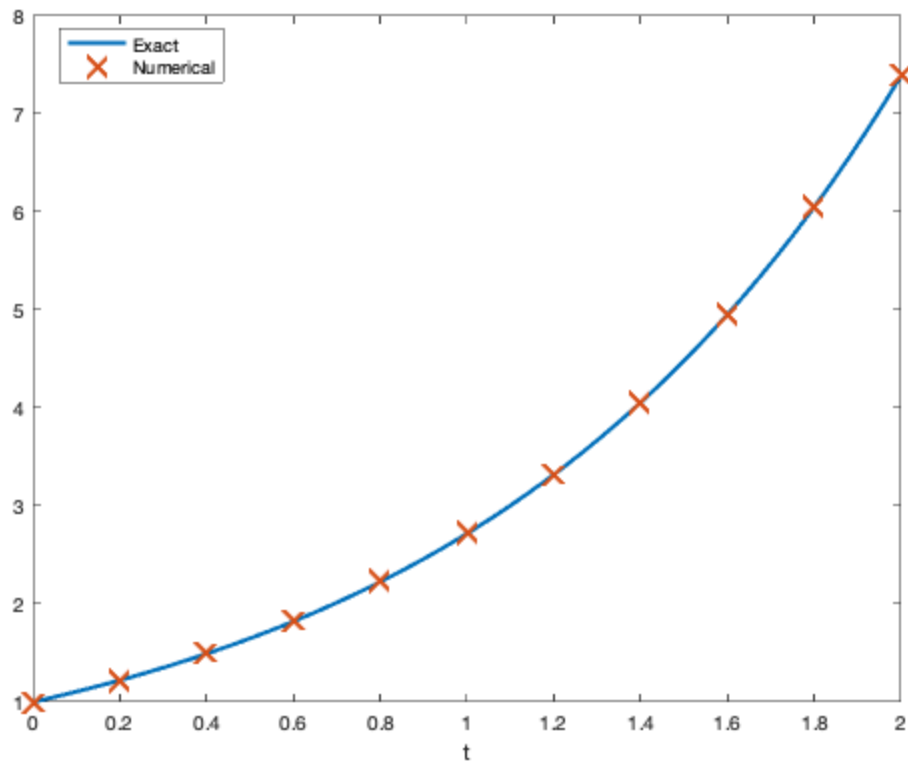

## Exercise 1

Objective: Solve an initial value problem and plot both the numerical approximation and the corresponding exact solution.

Details: Solve the IVP

$$y' = y \tan t + \sin t, \quad y(0) = -1/2$$

from  $t = 0$  to  $t = \pi$ .

Compute the exact solution (by hand), and plot both on the same figure for comparison, as above.

Your submission should show the construction of the inline function, the use of `ode45` to obtain the solution, a construction of the exact solution, and a plot showing both. In the comments, include the exact solution.


Label your axes and include a legend.

```
% Define the function
f = @(t, y) y*tan(t) + sin(t);
% Provide initial conditions and final time
t_i = 0;
t_f = pi;
y_i = -1/2;

% Solve ODE
solution = ode45(f, [t_i, t_f], y_i);
```

```
% Create exact solution
tt = linspace(0, pi, 50);
yy = (-0.5).*cos(tt);

% Plot solutions
plot(tt, yy, solution.x, solution.y, 'x', 'MarkerSize',
     10, 'LineWidth', 2);
xlabel('t')
ylabel('y')
legend('Exact', 'Numerical', 'Location', 'Best')
```

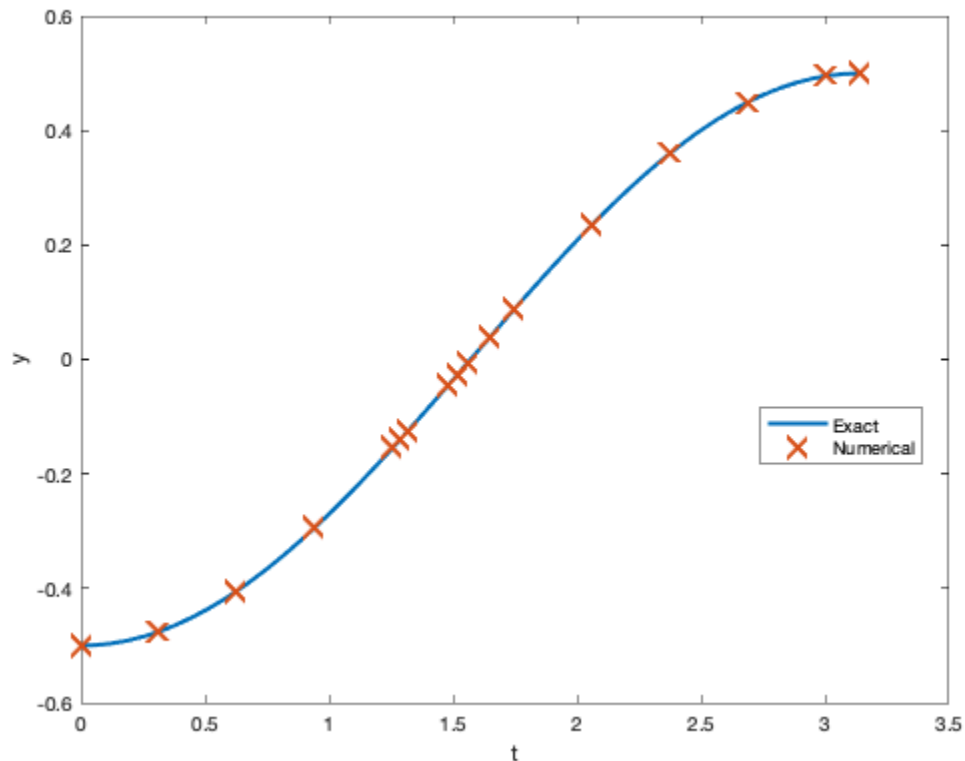

## Computing an approximation at a specific point

As you should be able to see by examining `soln.x`, `ode45` returns the solution at a number of points between `t0` and `t1`. But sometimes we want to know the solution at some intermediate point.

To obtain this value, we need to interpolate it in a consistent way. Fortunately, MATLAB provides a convenient function, `deval`, specifically for this.

```
% Compute the solution at t = .25:
deval(soln, .25)

% Compute the solution at t = 1.6753:
```

```
fprintf(' Solution at 1.6753: %g\n', deval(soln, 1.6753));

% Compute the solution at 10 grid points between .45 and 1.65:
tinterp = linspace(.45, 1.65, 10);
deval(soln, tinterp)

% Alternatively:
deval(soln, linspace(.45, 1.65, 10))

ans =

    1.2840

Solution at 1.6753: 5.3404

ans =

Columns 1 through 7

    1.5683    1.7920    2.0476    2.3396    2.6734    3.0547    3.4903

Columns 8 through 10

    3.9882    4.5570    5.2070

ans =

Columns 1 through 7

    1.5683    1.7920    2.0476    2.3396    2.6734    3.0547    3.4903

Columns 8 through 10

    3.9882    4.5570    5.2070
```

## Exercise 2

Objective: Interpolate a solution at a number of grid points

Details: For the solution you computed in exercise 1, use deval to compute the interpolated values at 10 grid points between 2 and 3.

```
% Create range of grid points and compute solution
tinterp = linspace(2, 3, 10)
deval(solution, tinterp)

tinterp =

Columns 1 through 7
```

---

```

2.0000    2.1111    2.2222    2.3333    2.4444    2.5556    2.6667

Columns 8 through 10

2.7778    2.8889    3.0000

ans =

Columns 1 through 7

0.2081    0.2572    0.3032    0.3454    0.3833    0.4166    0.4447

Columns 8 through 10

0.4673    0.4841    0.4950

```

## Errors, Step Sizes, and Tolerances

As you may have noticed, in contrast to the IODE software, at no point do we set a step size for our solution. Indeed, the step size is set adaptively to conform to a specified error tolerance.

Roughly speaking, given the solution at  $(t_j, y_j)$ , `ode45` computes two approximations of the solution at  $t_{j+1} = t_j + h$ ; one is of greater accuracy than the other. If the difference is below a specified tolerance, the step is accepted and we continue. Otherwise the step is rejected and the smaller step size,  $h$ , is used; it is often halved.

We can compute the global truncation error at each solution point, figure out the maximum error, and visualize this error (on a linear-log scale):

```

% Compute the exact solution
yexact = exp(soln.x);

% Compute the pointwise error; note the use of MATLAB's vectorization
err = abs(yexact - soln.y);

disp(err);

fprintf('maximum error: %g \n', max(err));

semilogy(soln.x, err, 'LineWidth', 2);
xlabel('t');
ylabel('error');

1.0e-06 *

Columns 1 through 7


0    0.0152    0.0371    0.0679    0.1106    0.1688    0.2475

Columns 8 through 11

0.3526    0.4922    0.6764    0.9179

```

*maximum error: 9.17923e-07*

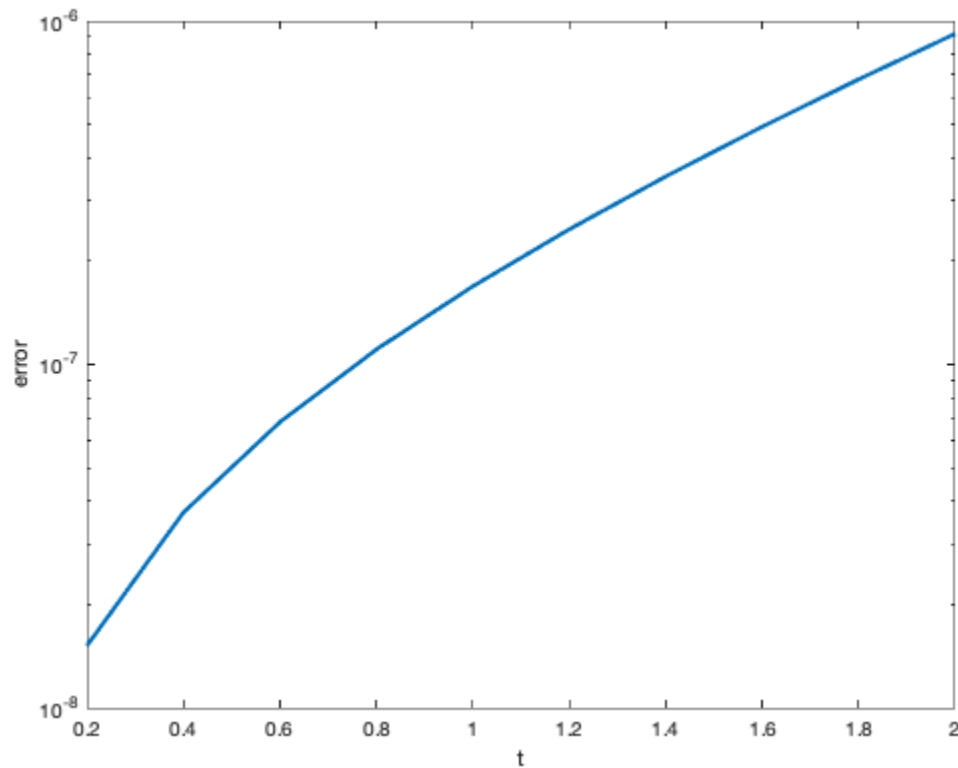

## Exercise 3

Objective: Examine the error of a solution generated by ode45

Details: For your solution to exercise 1, compute the pointwise error, identify the maximum value of the error, and visualize the error on a linear-log plot (use semilogy to plot the log of the error vs. t). Write in the comments where the error is largest, and give a brief (1-2 sentences) explanation of why it is largest there. Make sure to label your axes.

```
% Compute the exact solution
yexact = (-0.5).*cos(solution.x);

% Compute pointwise error
error = abs(yexact - solution.y);

disp(error)

fprintf('Maximum error: %g \n', max(error));

% Visualize error on linear-log
semilogy(solution.x, error, 'LineWidth', 2);
xlabel('t');
ylabel('error');
```



```
% Largest error is 1.807e-05, which occurs at t = 1.559 or pi/2.
% Largest error occurs here since tan(pi/2) is undefined, and the
% function y = tan(t) approaches infinity as t approaches pi/2.
% This makes the ratio between y and t step very large.
```

```
1.0e-04 *
```

```
Columns 1 through 7
```

```
0    0.0001    0.0006    0.0021    0.0070    0.0077    0.0087
```


```
Columns 8 through 14
```

```
0.0230    0.0408    0.1807    0.0254    0.0114    0.0068    0.0055
```

```
Columns 15 through 17
```

```
0.0047    0.0043    0.0043
```

```
Maximum error: 1.8068e-05
```

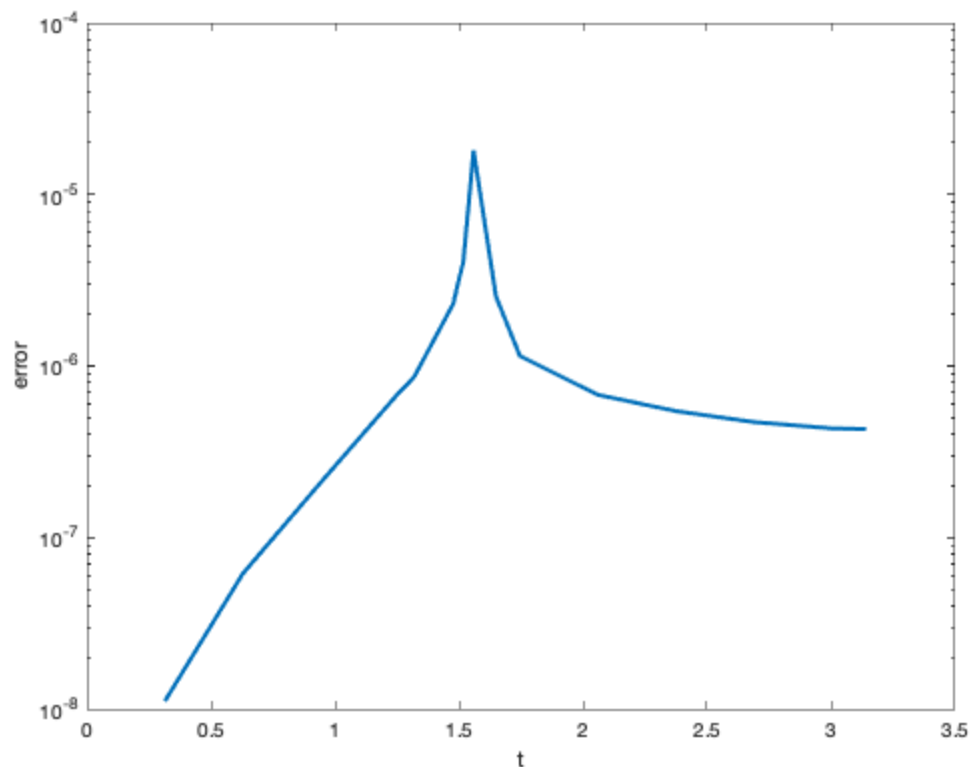

## Exercise 4

Objective: Solve and visualize a nonlinear ode using ode45

Details: Solve the IVP

$$y' = 1 / y^2, \quad y(1) = 1$$

from  $t=1$  to  $t=10$  using `ode45`. Find the exact solution and compute the maximum pointwise error. Then plot the approximate solution and the exact solution on the same axes.

Your solution should show the definition of the inline function, the computation of its solution in this interval, the computation of the exact solution at the computed grid points, the computation of the maximum error, and a plot of the exact and approximate solutions.

*%Your axes should be appropriately labeled and include a legend.*

*% Define ODE inline and init conditions*

```
f = @(t, y) 1/(y.^2);
```

```
t_0 = 1;
```

```
y_0 = 1;
```

*% Integration limit*

```
t = 10;
```

*% Compute and display solution*

```
solution = ode45(f, [t_0, t], y_0);
```

```
disp(solution)
```

*% Exact solution*

```
tt = linspace(1, 10, 50);
```

```
yy = (3.*tt - 2).^(1/3);
```

*% Plot exact and numerical solutions*

```
plot(tt, yy, solution.x, solution.y, 'x', 'MarkerSize',  
10, 'LineWidth', 2);
```

```
xlabel('t');
```

```
ylabel('y');
```

```
legend('Exact', 'Numerical', 'Location', 'Best');
```

*% Find exact solution*

```
yexact = (3.*solution.x - 2).^(1/3);
```

*% Pointwise error*


```
error = abs(yexact - solution.y);
```

*% Max error*

```
fprintf('Maximum error: %g\n', max(error));
```

```
    solver: 'ode45'  
    extdata: [1x1 struct]  
           x: [1x12 double]  
           y: [1x12 double]  
       stats: [1x1 struct]  
       idata: [1x1 struct]
```

```
Maximum error: 0.0017118
```

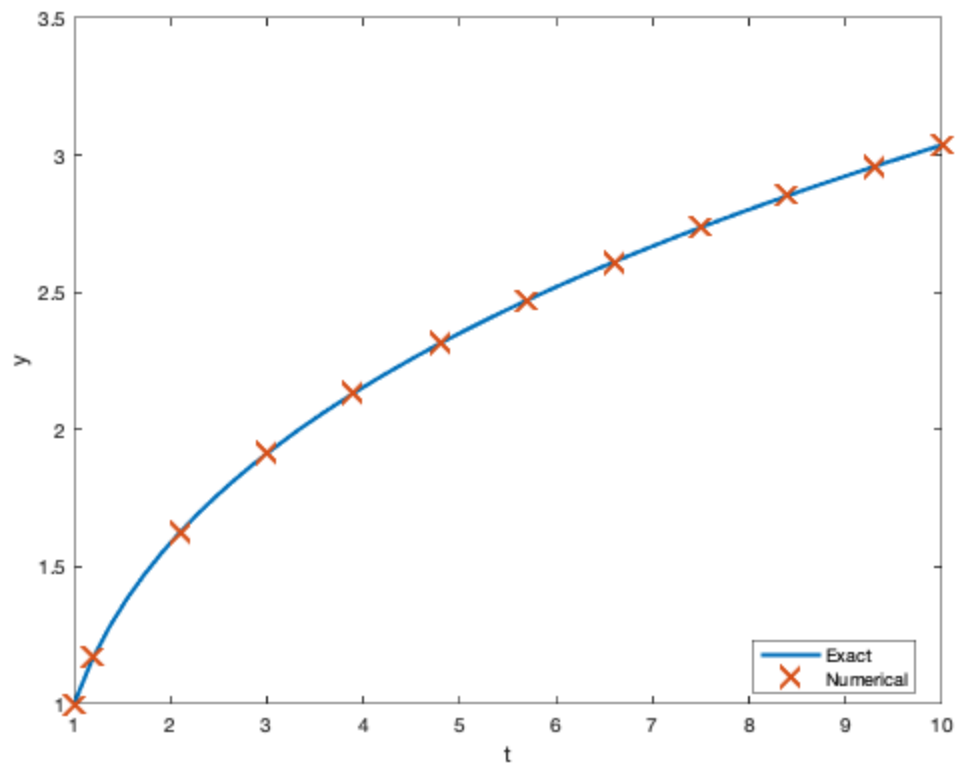

## Exercise 5

Objective: Solve and visualize an ODE that cannot be solved by hand with ode45.

Details: Solve the IVP

$$y' = 1 - t y / 2, \quad y(0) = -1$$

from  $t=0$  to  $t=10$ .

Your solution should show you defining the inline function, computing the solution in this interval, and plotting it.

Your axes should be appropriately labeled


```
% Define ODE inline
f = @(t, y) 1 - t.*(y./2);

% Define init conditions and integral limit
t_0 = 0;
y_0 = -1;
t_limit = 10;

% Compute numerical solution
solution = ode45(f, [t_0, t_limit], y_0);
disp(solution);
```

```
% Plot solution
plot(solution.x, solution.y, 'x', 'MarkerSize', 10, 'LineWidth', 2);
xlabel('t');
ylabel('y');
legend('Numerical', 'Location', 'Best');

solver: 'ode45'
extdata: [1x1 struct]
      x: [1x17 double]
      y: [1x17 double]
stats: [1x1 struct]
idata: [1x1 struct]
```

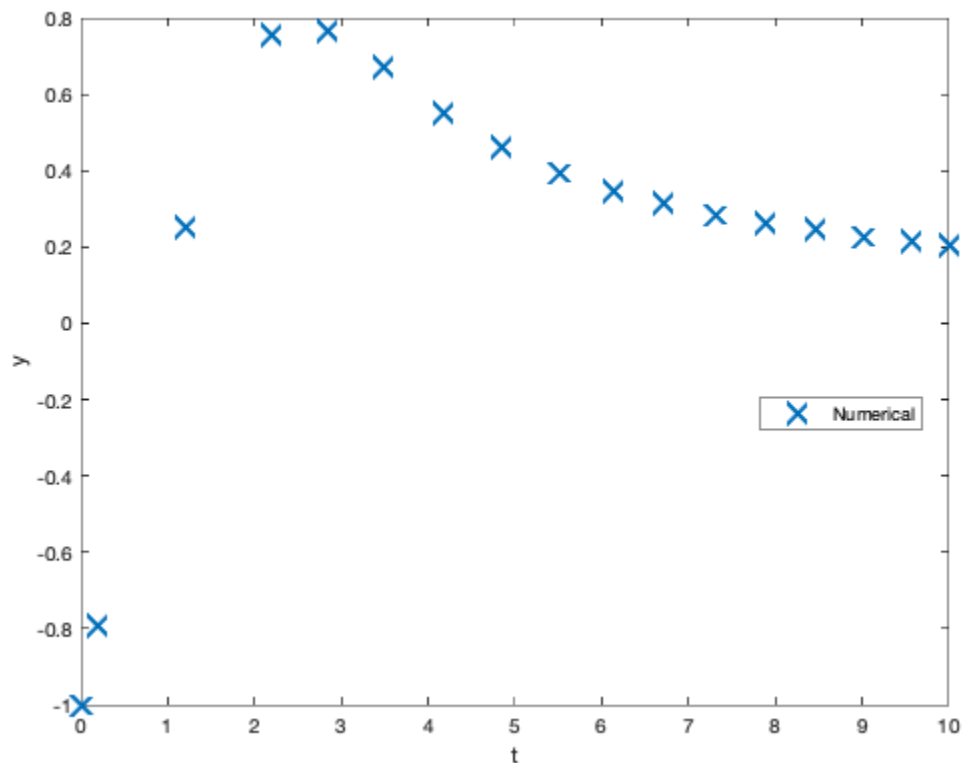

## Exercise 6 - When things go wrong

Objective: Solve an ode and explain the warning message

Details: Solve the IVP:

$$y' = y^3 - t^2, \quad y(0) = 1$$

from  $t=0$  to  $t=1$ .

Your solution should show you defining the inline function, and computing the solution in this interval.

If you try to plot the solution, you should find that the solution does not make it all the way to  $t = 1$ .

In the comments explain why MATLAB generates the warning message that you may see, or fails to integrate all the way to  $t=1$ . HINT: Try plotting the direction field for this with IODE.

```
% Define the ODE inline
f = @(t, y) y.^3 - t.^2;

% Initial conditions and integral limit
t_0 = 0;
y_0 = 1;
t_limit = 1;


% Solve numerically
solution = ode45(f, [t_0, t_limit], y_0);
disp(solution);

% Plot solution
plot(solution.x, solution.y, 'x', 'MarkerSize', 10, 'LineWidth', 2);
xlabel('t');
ylabel('y');
legend('Numerical', 'Location', 'Best');

% The given error message: "Warning: Failure at t=5.066046e-01.
  Unable to
% meet integration tolerances without reducing the step size below the
% smallest value allowed (1.776357e-15) at time t."

% This error message occurs for the same reason we saw a peak in the
  error
% in exercise 4. The solution approaches an asymptote at this value of
  t,
% taking the step size out of the tolerance range and requiring it to
  be
% decreased until eventually the smallest step size is reached.

Warning: Failure at t=5.066046e-01.  Unable to meet integration
  tolerances
without reducing the step size below the smallest value allowed
  (1.776357e-15)
at time t.
    solver: 'ode45'
    extdata: [1x1 struct]
           x: [1x79 double]
           y: [1x79 double]
    stats: [1x1 struct]
    idata: [1x1 struct]
```

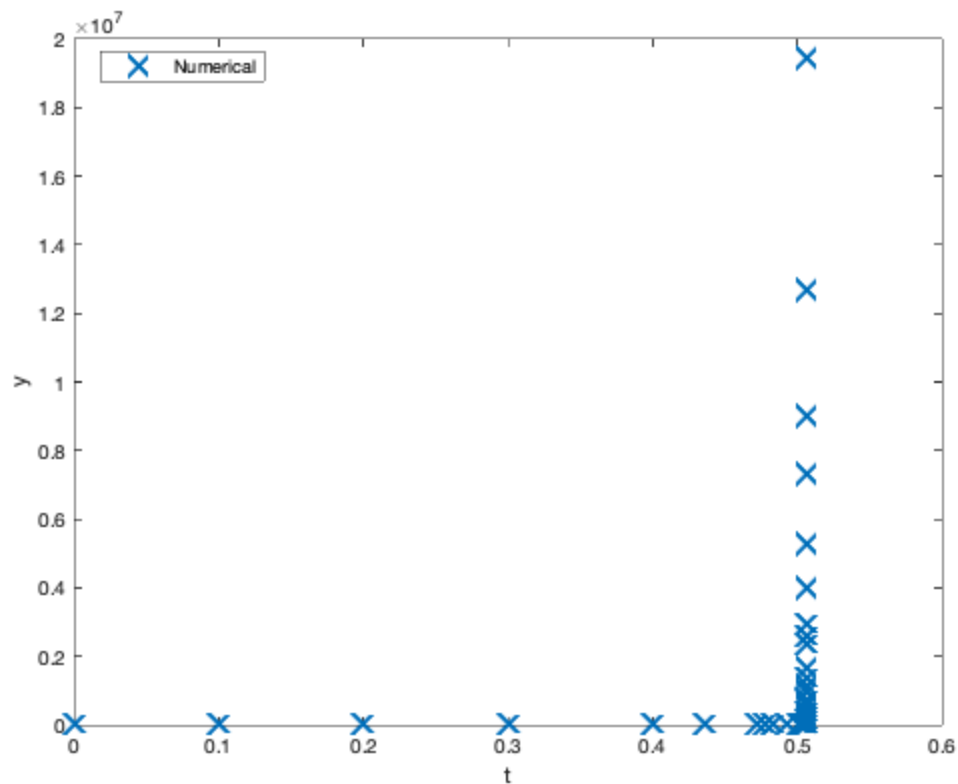

## Using symbolic variables to define functions

We can define symbolic variables to let MATLAB know that these variables will be used for exact computations

```
% Start by defining the variables as symbolic  
syms t s x y
```

```
% Define a function by simply writing its expression
```

```
f = cos(t)  
g = sin(t)  
h = exp(2*x)
```

```
% We can manipulate these functions
```

```
simplify(f^2+g^2)  
diff(h)
```

```
% We can plot a function defined symbolically using the command |  
ezplot|.   
% Learn about the command |ezplot|:
```

```
help ezplot
```

```
% Plot the function |f(t)| and |h(x)|
```

```
ezplot(f)
ezplot(h)
```

```
f =
```

```
cos(t)
```

```
g =
```

```
sin(t)
```

```
h =
```

```
exp(2*x)
```

```
ans =
```

```
1
```

```
ans =
```

```
2*exp(2*x)
```

*EZPLOT (NOT RECOMMENDED) Easy to use function plotter*

```
=====
EZPLOT is not recommended. Use FPLOTT or FIMPLICIT instead.
=====
```

*EZPLOT(FUN) plots the function FUN(X) over the default domain  $-2\pi < X < 2\pi$ , where FUN(X) is an explicitly defined function of X.*

*EZPLOT(FUN2) plots the implicitly defined function FUN2(X,Y) = 0 over the default domain  $-2\pi < X < 2\pi$  and  $-2\pi < Y < 2\pi$ .*

*EZPLOT(FUN,[A,B]) plots FUN(X) over  $A < X < B$ .  
EZPLOT(FUN2,[A,B]) plots FUN2(X,Y) = 0 over  $A < X < B$  and  $A < Y < B$ .*

*EZPLOT(FUN2,[XMIN,XMAX,YMIN,YMAX]) plots FUN2(X,Y) = 0 over  $XMIN < X < XMAX$  and  $YMIN < Y < YMAX$ .*

*EZPLOT(FUNX,FUNY) plots the parametrically defined planar curve FUNX(T) and FUNY(T) over the default domain  $0 < T < 2\pi$ .*

`EZPLOT(FUNX,FUNY,[TMIN,TMAX])` plots  $FUNX(T)$  and  $FUNY(T)$  over  $TMIN < T < TMAX$ .

`EZPLOT(FUN,[A,B],FIG)`, `EZPLOT(FUN2,[XMIN,XMAX,YMIN,YMAX],FIG)`, or `EZPLOT(FUNX,FUNY,[TMIN,TMAX],FIG)` plots the function over the specified domain in the figure window `FIG`.

`EZPLOT(AX,...)` plots into `AX` instead of `GCA` or `FIG`.

`H = EZPLOT(...)` returns handles to the plotted objects in `H`.

Examples:

The easiest way to express a function is via a string:

```
ezplot('x^2 - 2*x + 1')
```

One programming technique is to vectorize the string expression using

the array operators `.*` (`TIMES`), `./` (`RDIVIDE`), `.\` (`LDDIVIDE`), `.^` (`POWER`).

This makes the algorithm more efficient since it can perform multiple

function evaluations at once.

```
ezplot('x.*y + x.^2 - y.^2 - 1')
```

You may also use a function handle to an existing function.

Function

handles are more powerful and efficient than string expressions.

```
ezplot(@humps)
```

```
ezplot(@cos,@sin)
```

`EZPLOT` plots the variables in string expressions alphabetically.

```
subplot(1,2,1), ezplot('1./z - log(z) + log(-1+z) + t - 1')
```

To avoid this ambiguity, specify the order with an anonymous function:

```
subplot(1,2,2), ezplot(@(z,t)1./z - log(z) + log(-1+z) + t - 1)
```

If your function has additional parameters, for example `k` in `myfun`:

```
%-----%
```

```
function z = myfun(x,y,k)
```

```
z = x.^k - y.^k - 1;
```

```
%-----%
```

then you may use an anonymous function to specify that parameter:

```
ezplot(@(x,y)myfun(x,y,2))
```

See also `EZCONTOUR`, `EZCONTOURF`, `EZMESH`, `EZMESH3`, `EZPLOT3`, `EZPOLAR`, `EZSURF`, `EZSURFC`, `PLOT`, `VECTORIZE`, `FUNCTION_HANDLE`.


Documentation for `ezplot`

```
doc ezplot
```

Other functions named `ezplot`

```
sym/ezplot
```



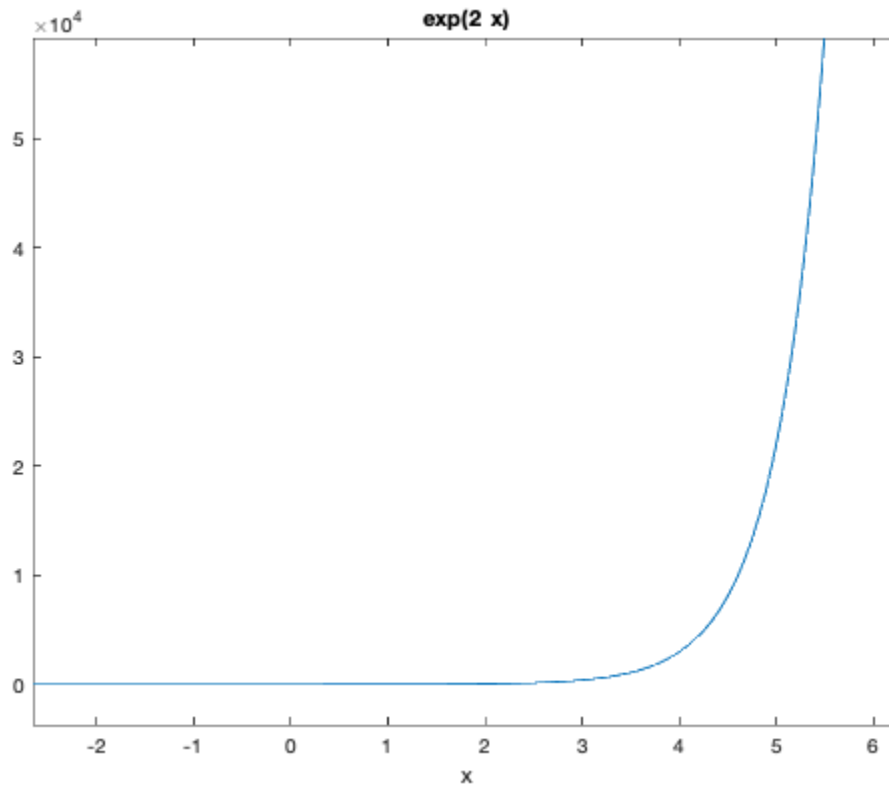

If we try to evaluate the function  $f(0)$ , we get an error message.

The symbolic variables are not meant to be used to evaluate functions, but to manipulate functions, compute derivatives, etc. To evaluate a function using symbolic variables is a little cumbersome:

```
% We need to substitute the variable by a value:
```

```
subs(f,t,pi)
```

```
ans =
```

```
-1
```

This expression means: In the expression  $f$ , substitute the variable  $t$  by the number  $\pi$ .

```
% If we use a value where the cosine does not have a "nice"  
expression, we  
% need to approximate the result:
```

```
subs(f,t,2)
```

```
% We need to use the command |eval|
```


```
eval(subs(f,t,2))
```

```
ans =
```

```
cos(2)
```

```
ans =
```

```
-0.4161
```

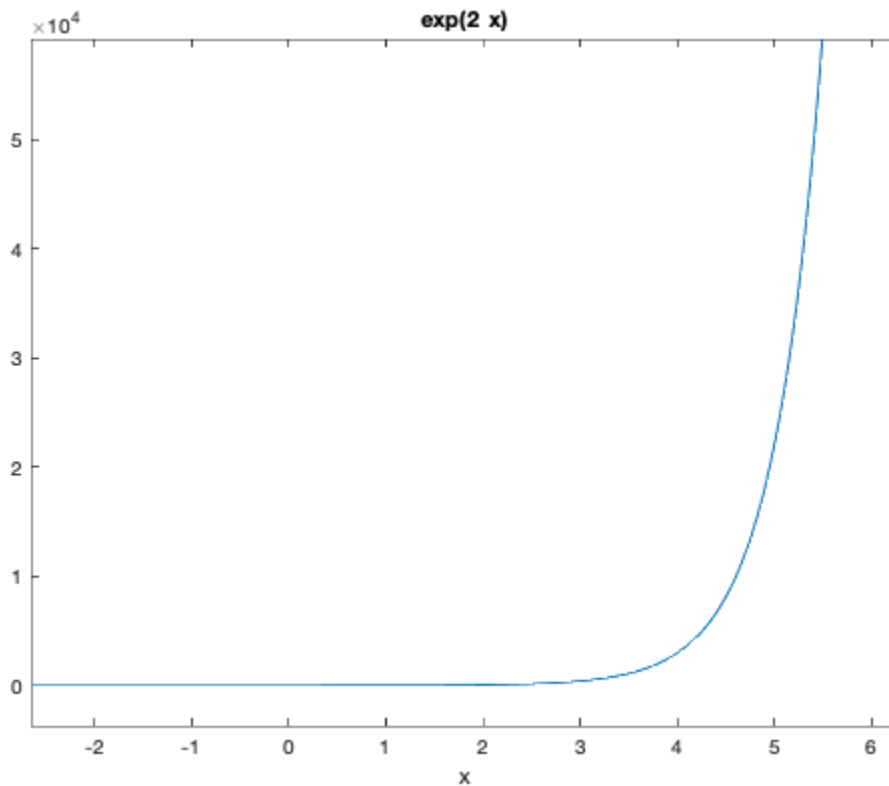

## Exercise 7

Objective: Define a function using symbolic variables and manipulate it.

Details: Define the function  $f(x) = \sin(x)\cos(x)$

Use MATLAB commands to obtain a simpler form of this function, compute value of this function for  $x=\pi/4$  and  $x=1$ , and plot its graph.


```
% Define symbolic variable  
syms x;
```

```
% Define and simplify function  
f = sin(x).*cos(x);
```

```
s = simplify(f);  
  
% Plot simplified function  
ezplot(s);  
  
% Compute values for the function  
value_1 = subs(f, x, pi/4);  
disp(value_1);  
value_2 = eval(subs(f, x, 1));  
disp(value_2);
```

1/2

0.4546

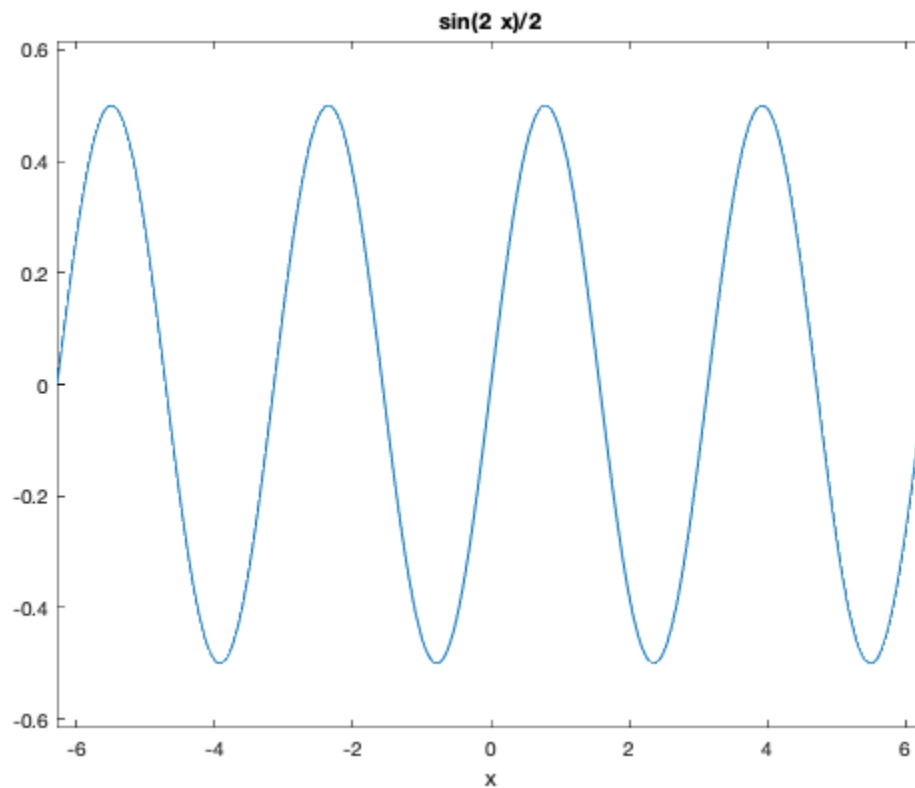

## Obtaining Picard approximations

Consider an initial value problem

$$y' = 1 + y \quad y(0) = 0$$

First we need to define the variables we will be using

```
syms t s y;
```

```
% We then need to define the function f

f = 1+y; % we define it without the @(t,y) because it is a symbolic
function

% We set up our initial approximation phi_0 = 0:

phi=[sym(0)]; % we will keep a list with all the approximations

% Set up a loop to get successive approximations using Picard
iterations

N=5;

for i = 1:N
    func=subs(f,y,phi(i)); % prepare function to integrate: y ->
previous phi
    func=subs(func,t,s); % variable of integration is s, so we
need to change
                        % t -> s

    newphi = int(func, s, 0 ,t); % integrate to find next
approximation

    phi=cat(2,phi,[newphi]); % update the list of approximations
by adding new phi
end

% Show the last approximation

phi(N+1)

% Plot the approximation just found

picard=eplot(phi(N+1),[0,5]);
set(picard,'Color','green'); % set the color of the graph to
green


% In this case, the exact solution is
%
% |y=e^t-1|
%
% Compare the approximation and the exact solutions

hold on;
exact=eplot(exp(t)-1,[0,5]);

xlabel('t');
ylabel('y');
title('Picard Approximations');
legend('Picard Approximation', 'Exact
Solution','Location','NorthWest');
```

`ans =`

`(t*(t^4 + 5*t^3 + 20*t^2 + 60*t + 120))/120`

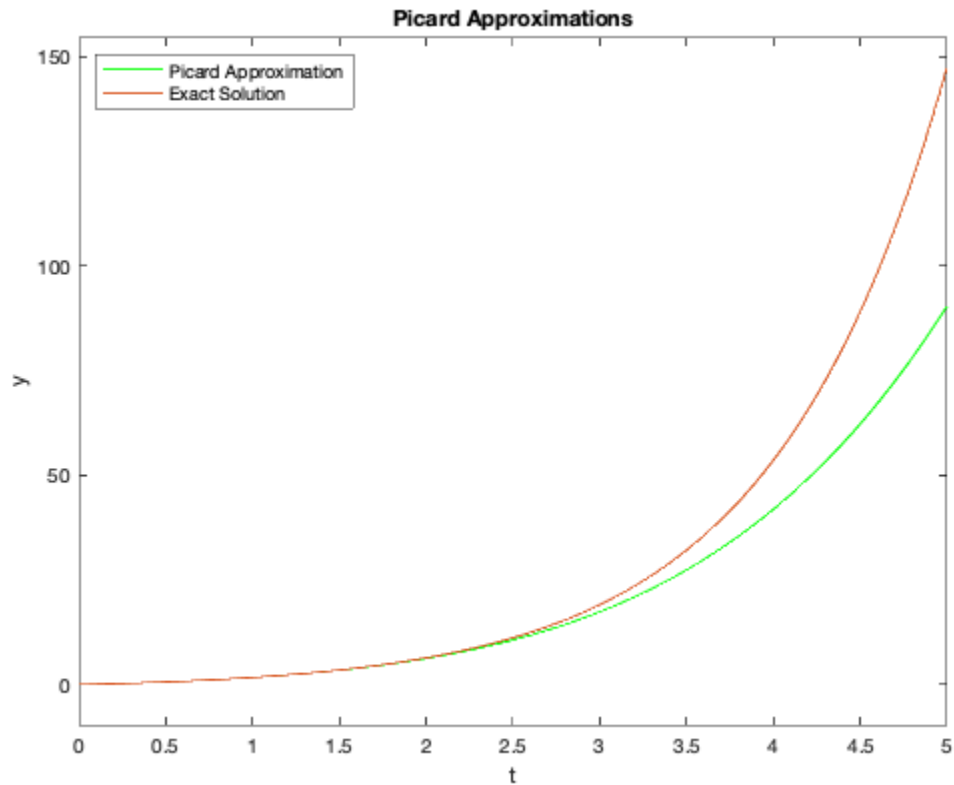

## Exercise 8

Objective: Solve your own Picard Approximation and compare it to the exact solution.

Details: Consider the IVP

$$\begin{cases} y' = 1+y^2 \\ y(0) = 1 \end{cases}$$

Find the Picard approximation  $\phi_5$ . For better efficiency, do not keep all the previous approximations.

Compute the exact solution (by hand), and plot both on the same figure for comparison, as above.

Label your axes and include a legend.

HINT. The initial condition has 1 instead of 0, so the Picard method needs to be adapted.

```
% Initialize symbolic variables
syms t s y;

% Define function
```

```
f = 1+y^2;

% Make initial approximation
phi=[sym(1)];

% Get approximations over a loop
N=5;
for i = 1:N
    % Prepare integration
    func=subs(f,y,phi);
    func=subs(func,t,s);

    % Find next approximation
    newphi = int(func, s, 0 ,t)+1;
    phi=cat(2,phi,[newphi]);
end

phi(N+1)


% Plot Picard approximation
picard=ezplot(phi(N+1),[0,5]);
set(picard,'Color','green');

hold on;
exact=ezplot(tan(t+pi/4),[0,5]);

xlabel('t');
ylabel('y');
title('Picard Approximations');
legend('Picard Approximation', 'Exact  
Solution','Location','NorthWest');

ans =

(2*t*(2*t^2 + 3*t + 3))/3 + 1
```

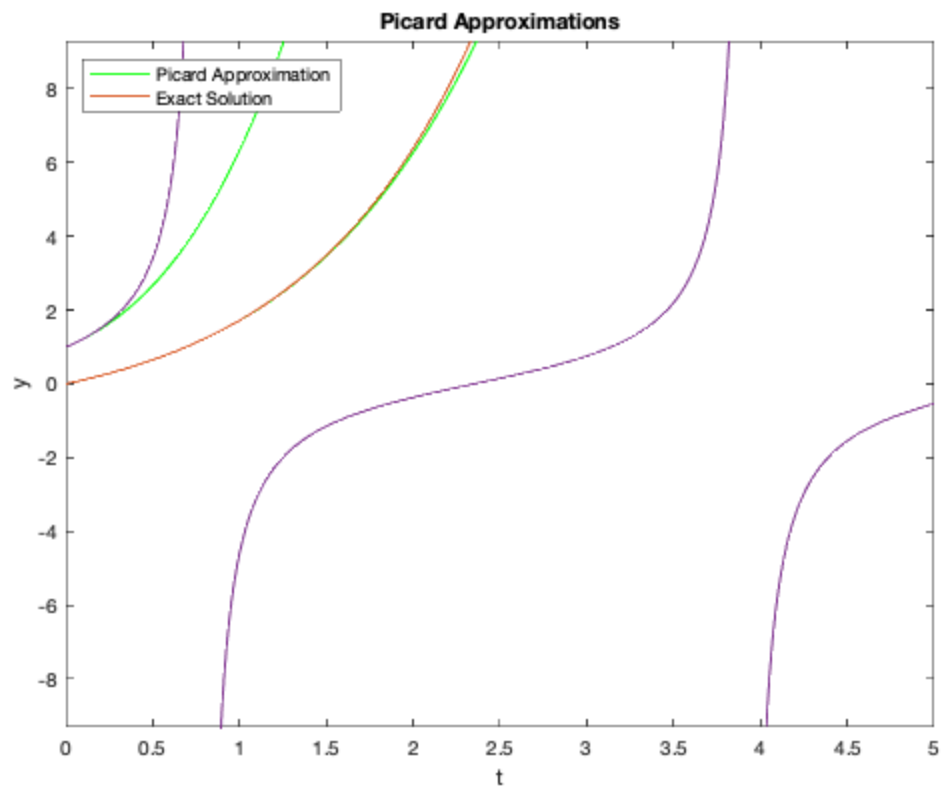

*Published with MATLAB® R2019b*