

API Request of Facebook.com with Postman and Whoisxmlapi on Apple Computers

This guide will walk you through the creation of a successful API request for "facebook.com" using **Postman** and an **API key** from **Whoisxmlapi** on an Apple computer. With these tools, you will be sending an API request to **Whoisxmlapi** and retrieving WHOIS information, which includes various domain registration details. It covers:

- Required Tools
- Getting your API Key
- Creating the API Request in Postman
- Troubleshooting

It does not cover **Postman** API requests as performed on a Windows computer. The experience for Windows users may differ slightly.

Required Tools

- **Whoisxmlapi:** Free service for API generation. Free account creation required.
- **Postman:** A tool for creating API requests. Free account creation and installation required.

Before you Download:

You will have two download options for **Postman**:

- **Postman for Mac Intel Chips**
- **Postman for Mac Apple Chips**


To ensure you download the correct version for your specific Mac Chip:

1. Click the **Apple icon** • in the top left of your computer screen
2. Select the **"About This Mac"** option in the drop-down menu
3. Read the **"Processor"** line
 - a. **IF** you see **"Intel"**
 - i. Download **Postman for Mac Intel Chips**
 - b. **IF** you see **"Apple MX"**
 - i. Download **Postman for Mac Apple Chips**

Getting your API key

An **API key** is needed to authenticate your API request. To receive your API key from **Whoisxmlapi**:

1. Log in to **Whoisxmlapi**
2. Click your account name in the top right of the web page
3. Select the **"My Products"** option in the drop-down menu
4. Locate the **"Your API key"** line above the Product table

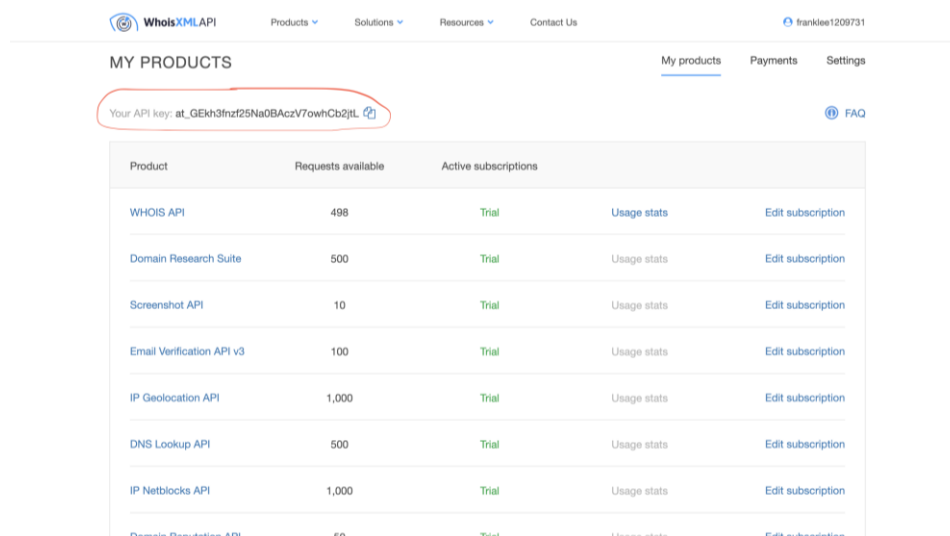

The screenshot shows the 'My Products' page on the WhoisXMLAPI website. At the top, there is a navigation bar with links for Products, Solutions, Resources, and Contact Us. Below this, the 'MY PRODUCTS' section is visible, with tabs for 'My products', 'Payments', and 'Settings'. A red circle highlights the 'Your API key' section, which displays the key: `at_GEKh3fnzf25Na0BAczV7owhCb2jTL`. Below this, a table lists various products with their request limits and subscription status.


Product	Requests available	Active subscriptions
WHOIS API	498	Trial
Domain Research Suite	500	Trial
Screenshot API	10	Trial
Email Verification API v3	100	Trial
IP Geolocation API	1,000	Trial
DNS Lookup API	500	Trial
IP Netblocks API	1,000	Trial
Domain Reputation API	50	Trial

5. Copy down your generated **API key**

You may also generate a new **API key**:

1. Click your account name in the top right of the web page
2. Select the **"Settings"** option in the drop-down menu


3. Locate the **"API key"** line in the **"General"** section
4. Click **"Generate new API key"** and a new key will be generated

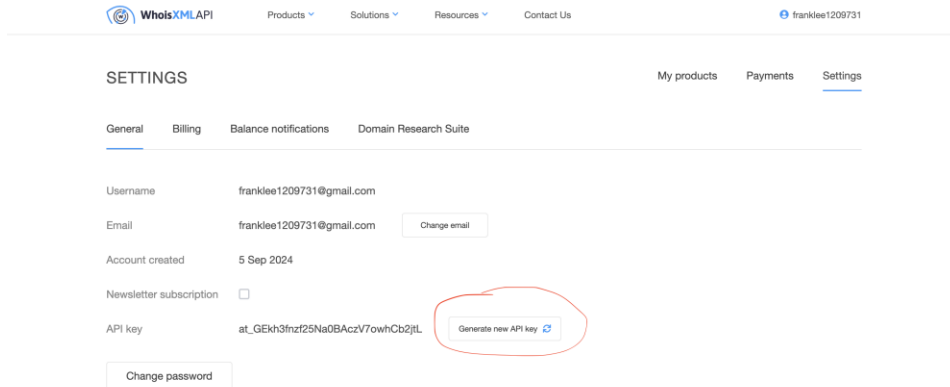


Creating the API Request in Postman

You now have the required components to make an API request in Postman. To make an API request:

1. Open **Postman** and log in
2. Click the **"+"** option in the program tab bar

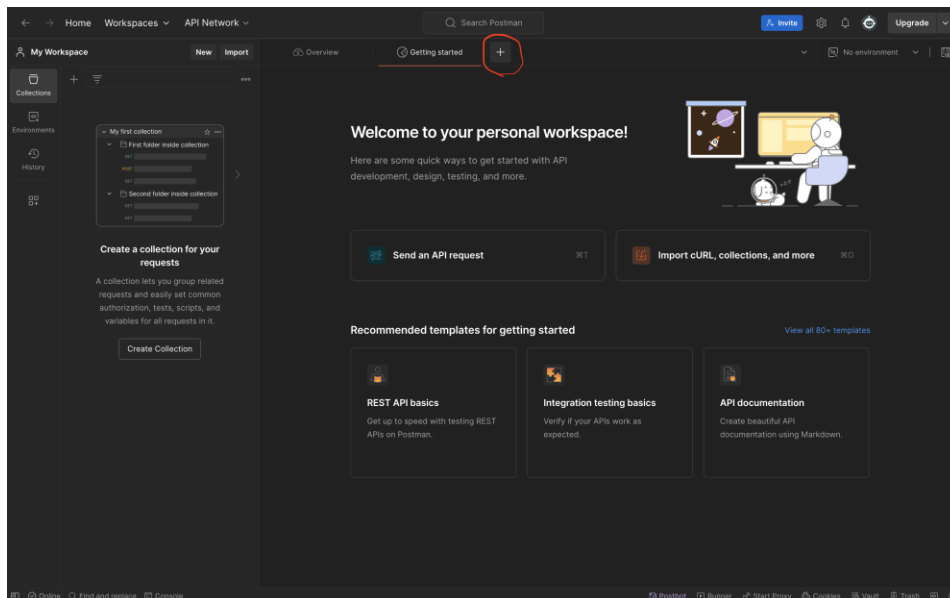


3. Ensure the request type is set to **GET**

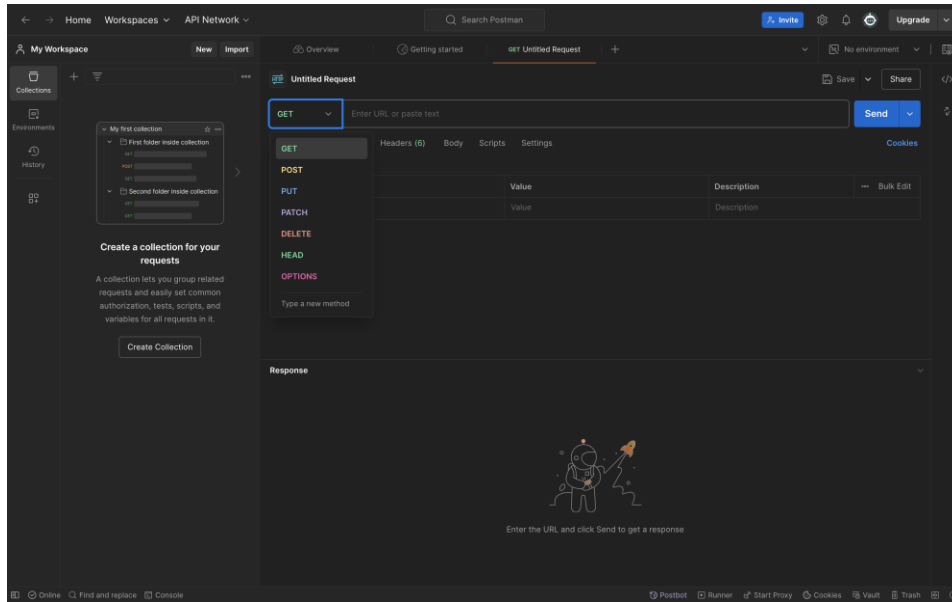


4. Enter the following URL in the URL bar, replacing **"YOURKEY"** with your **API key** from **Whoisxmlapi**:

<https://www.whoisxmlapi.com/whoisserver/WhoisService?apiKey=YOURKEY&domainName=facebook.com>

5. Click **"Send"** next to the URL bar

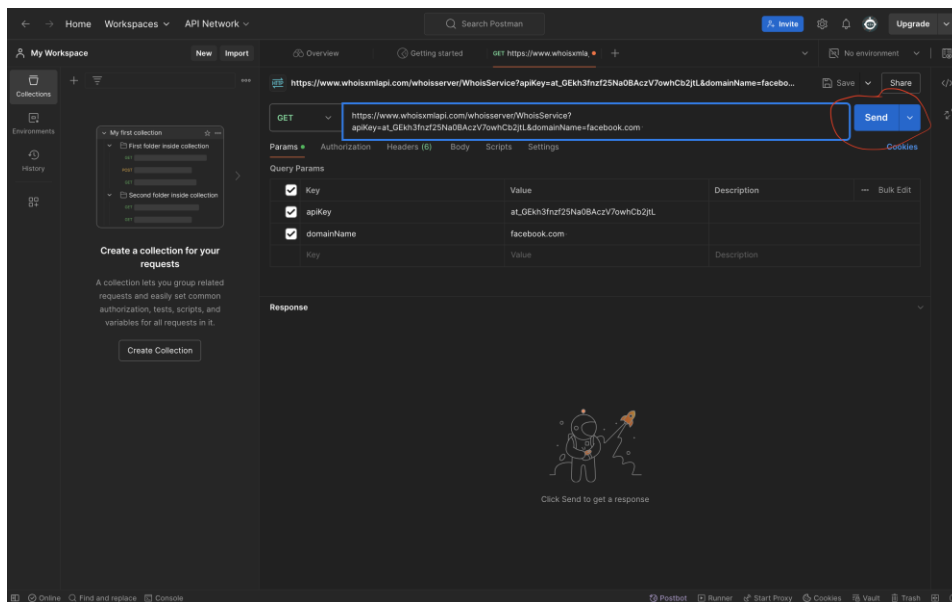

6. Review the response in the **"Body"** section. A successful API request will include publicly available WHOIS information, including creation date, update date, expiration date, and registrant details.

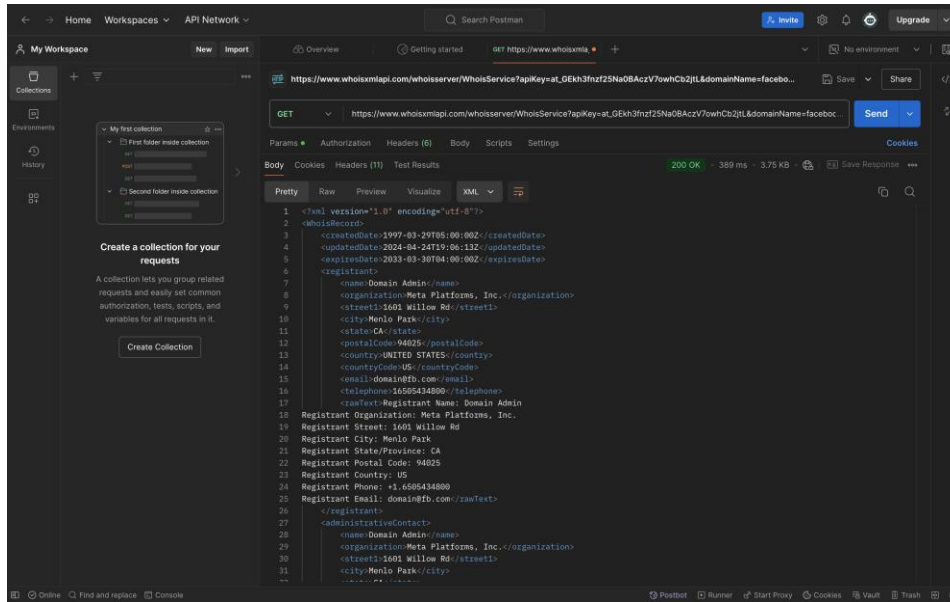

Troubleshooting

After clicking “**Send**” in **Postman**, the following error codes may appear:

- **API_KEY_05:** Invalid API key. Double-check your **API key** in your inputted URL with the API key from your “**My products**” page in **Whoisxmlapi**.
- **MISSING_WHOIS_DATA:** No matching domain. Ensure you have inputted the correct domain name.

For more troubleshooting, visit Postman’s official page at

www.learning.postman.com/docs/introduction/troubleshooting-inapp/.

You have successfully created an API request using **Postman** and **Whoisxmlapi**! This guide may be used for any domain by modifying the **domainName** parameter of the URL in the URL bar.