

Python

1991 → first version
release - 0.9.0

35 years

python 1.0 — 1994

python 2.0 — oct 2000
python 2.7.18 — 2020
python 3.0 — Dec 2008

3.14.6 — 10 June 2026

python 3 is not backward

compatible with python 2

python 3 - 3.9 to 3.14


Machine code.

main.c

↓ compilation

main.exe $\Rightarrow$ CPU


main.c

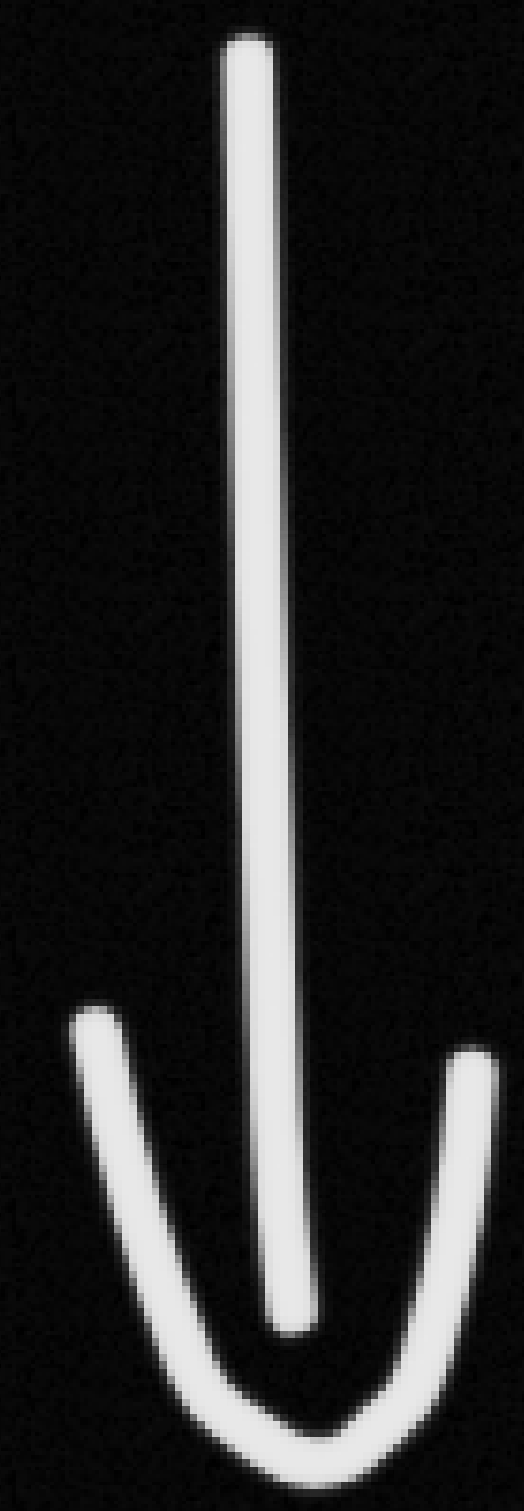


Compiler

(Windows)


main.exe

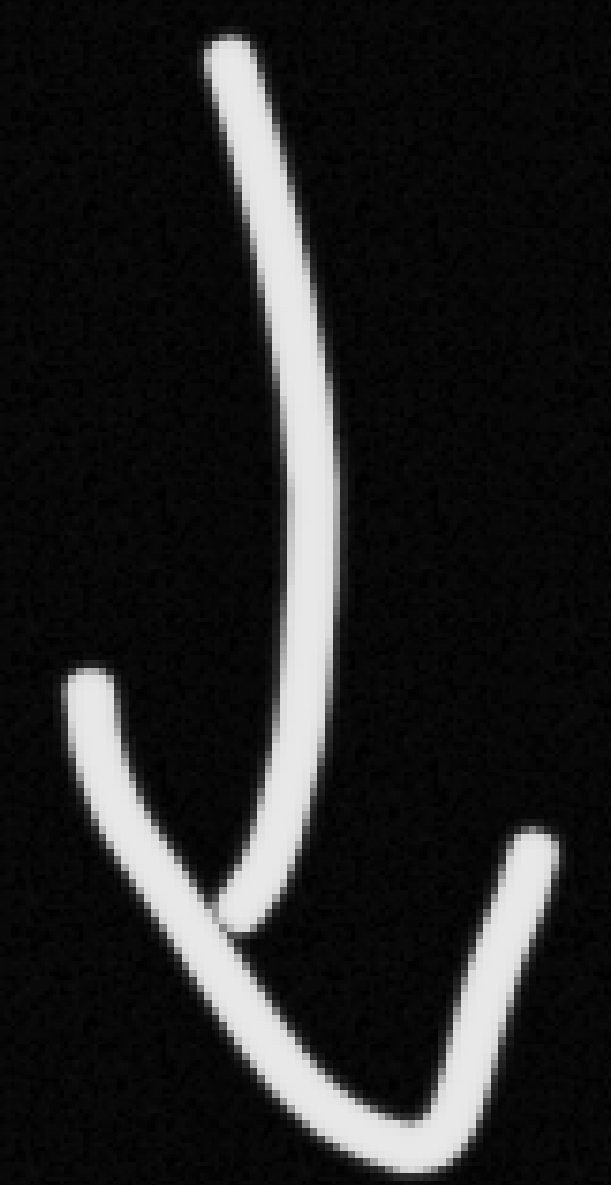

windows

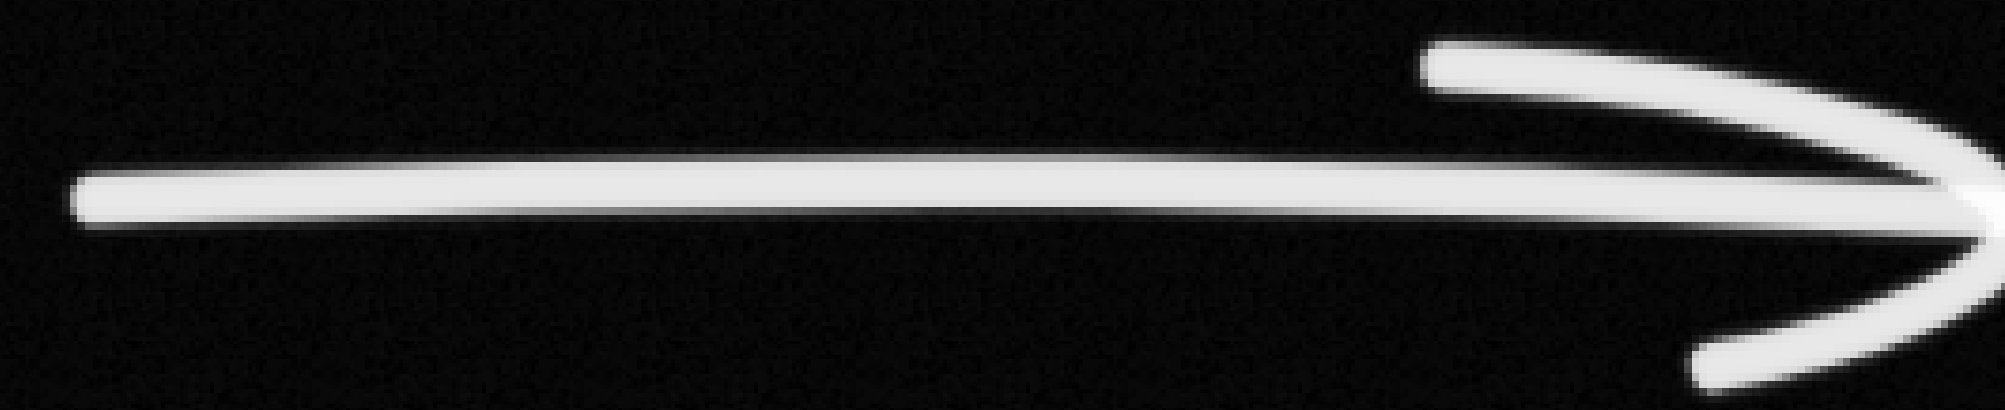

Linux

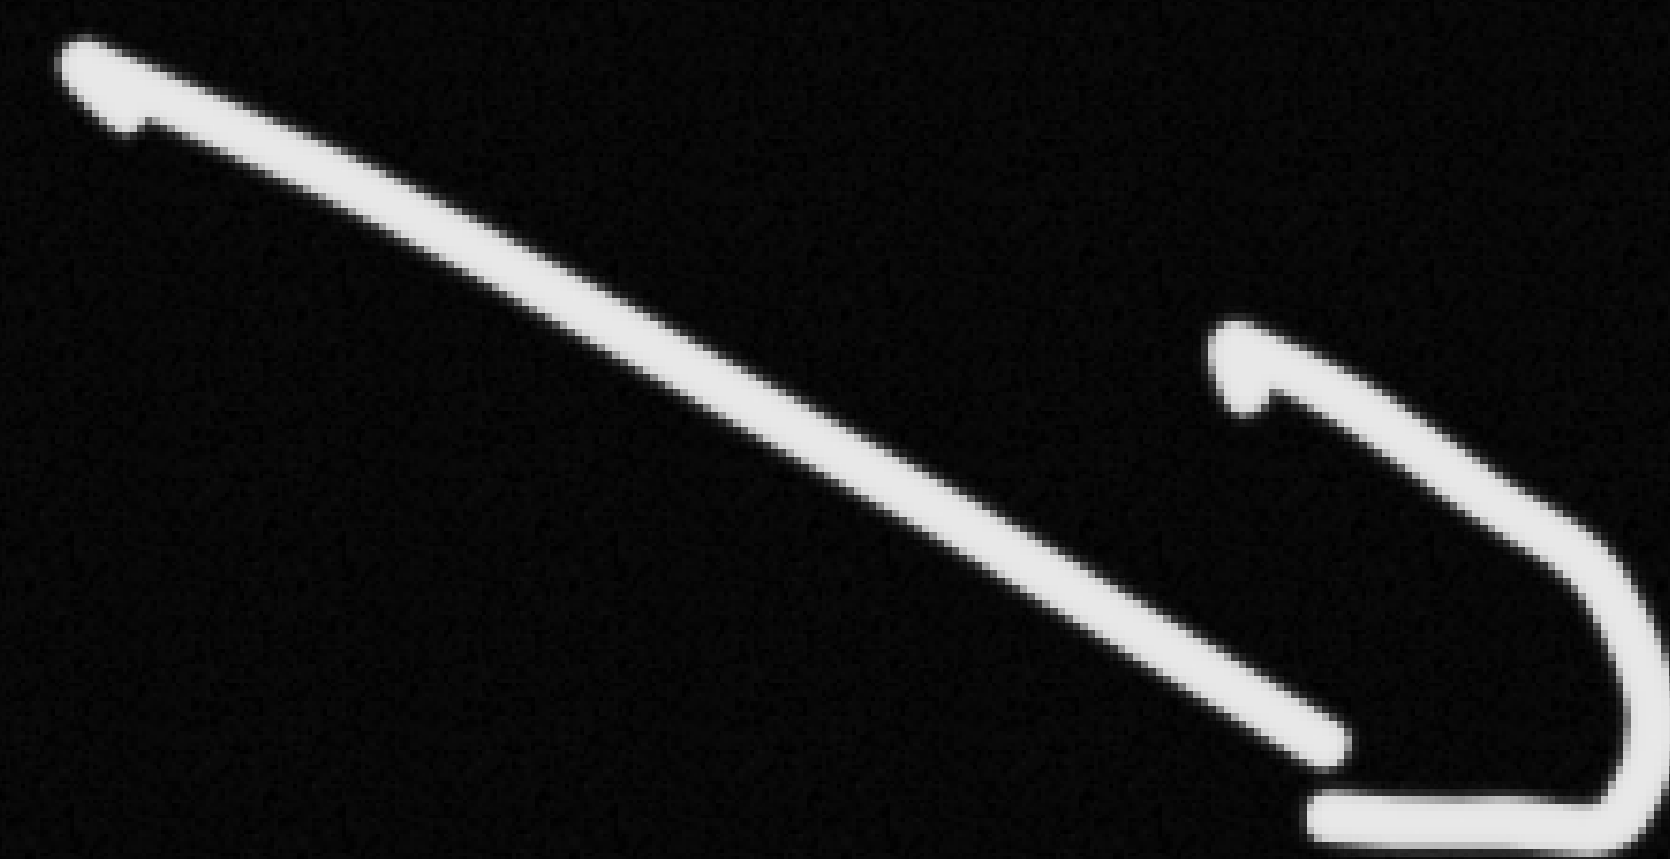

mac

Source Code (.py)




↓ compile

• .pyc (Bytecode)

↓ Interpreter (PVM)


output

• P4C

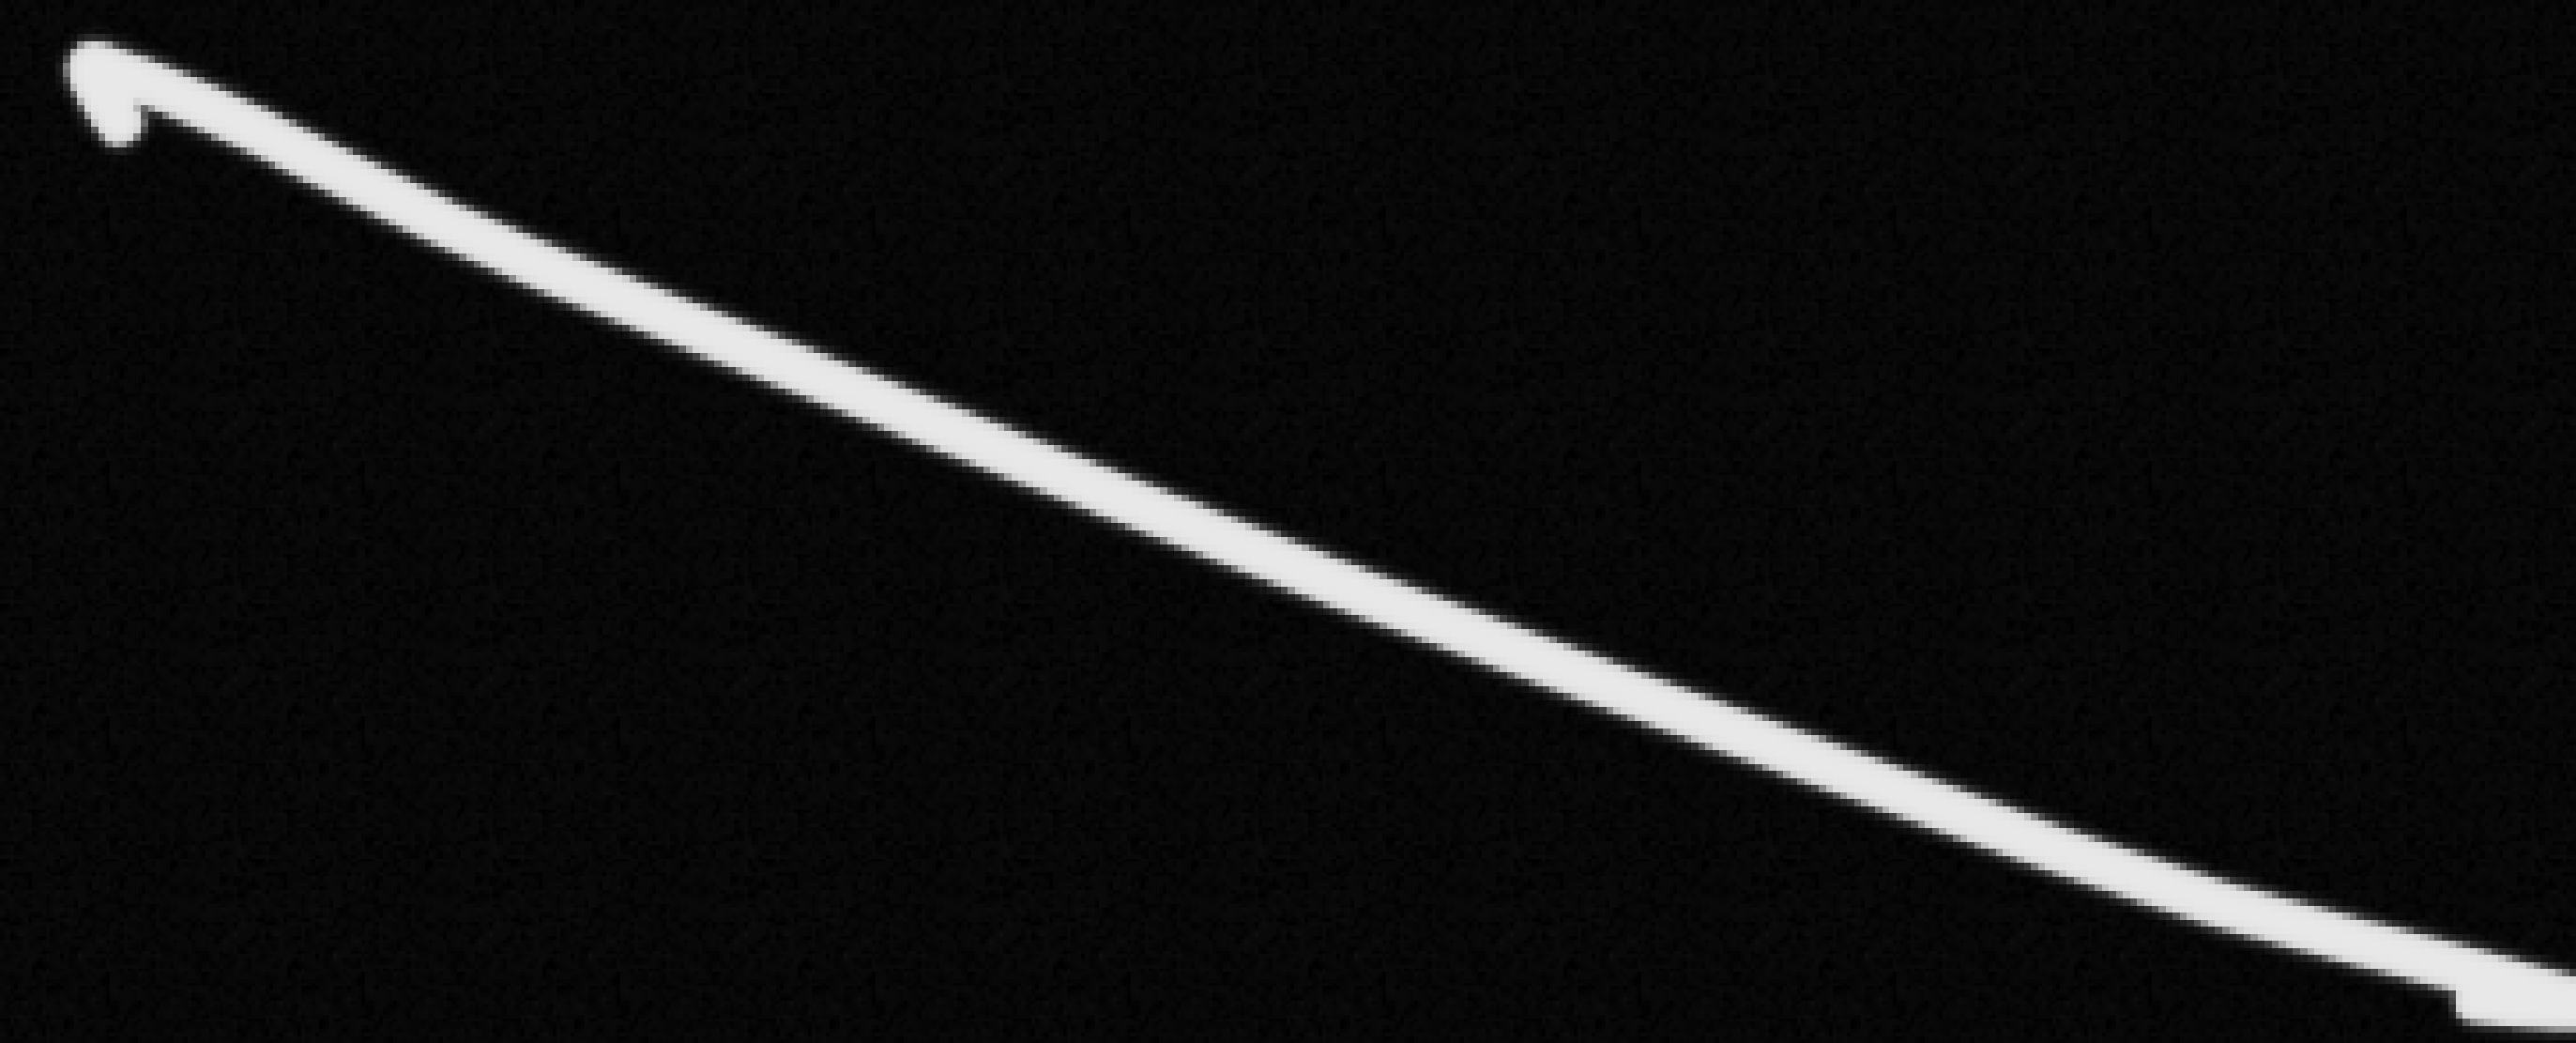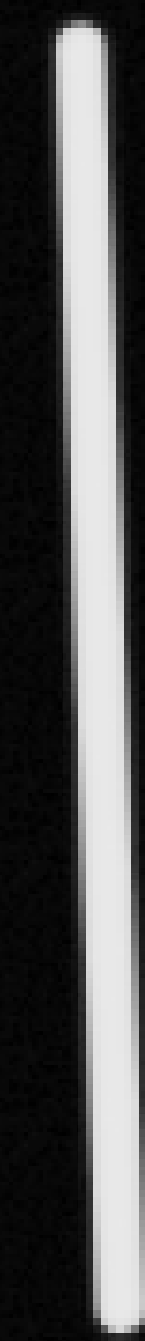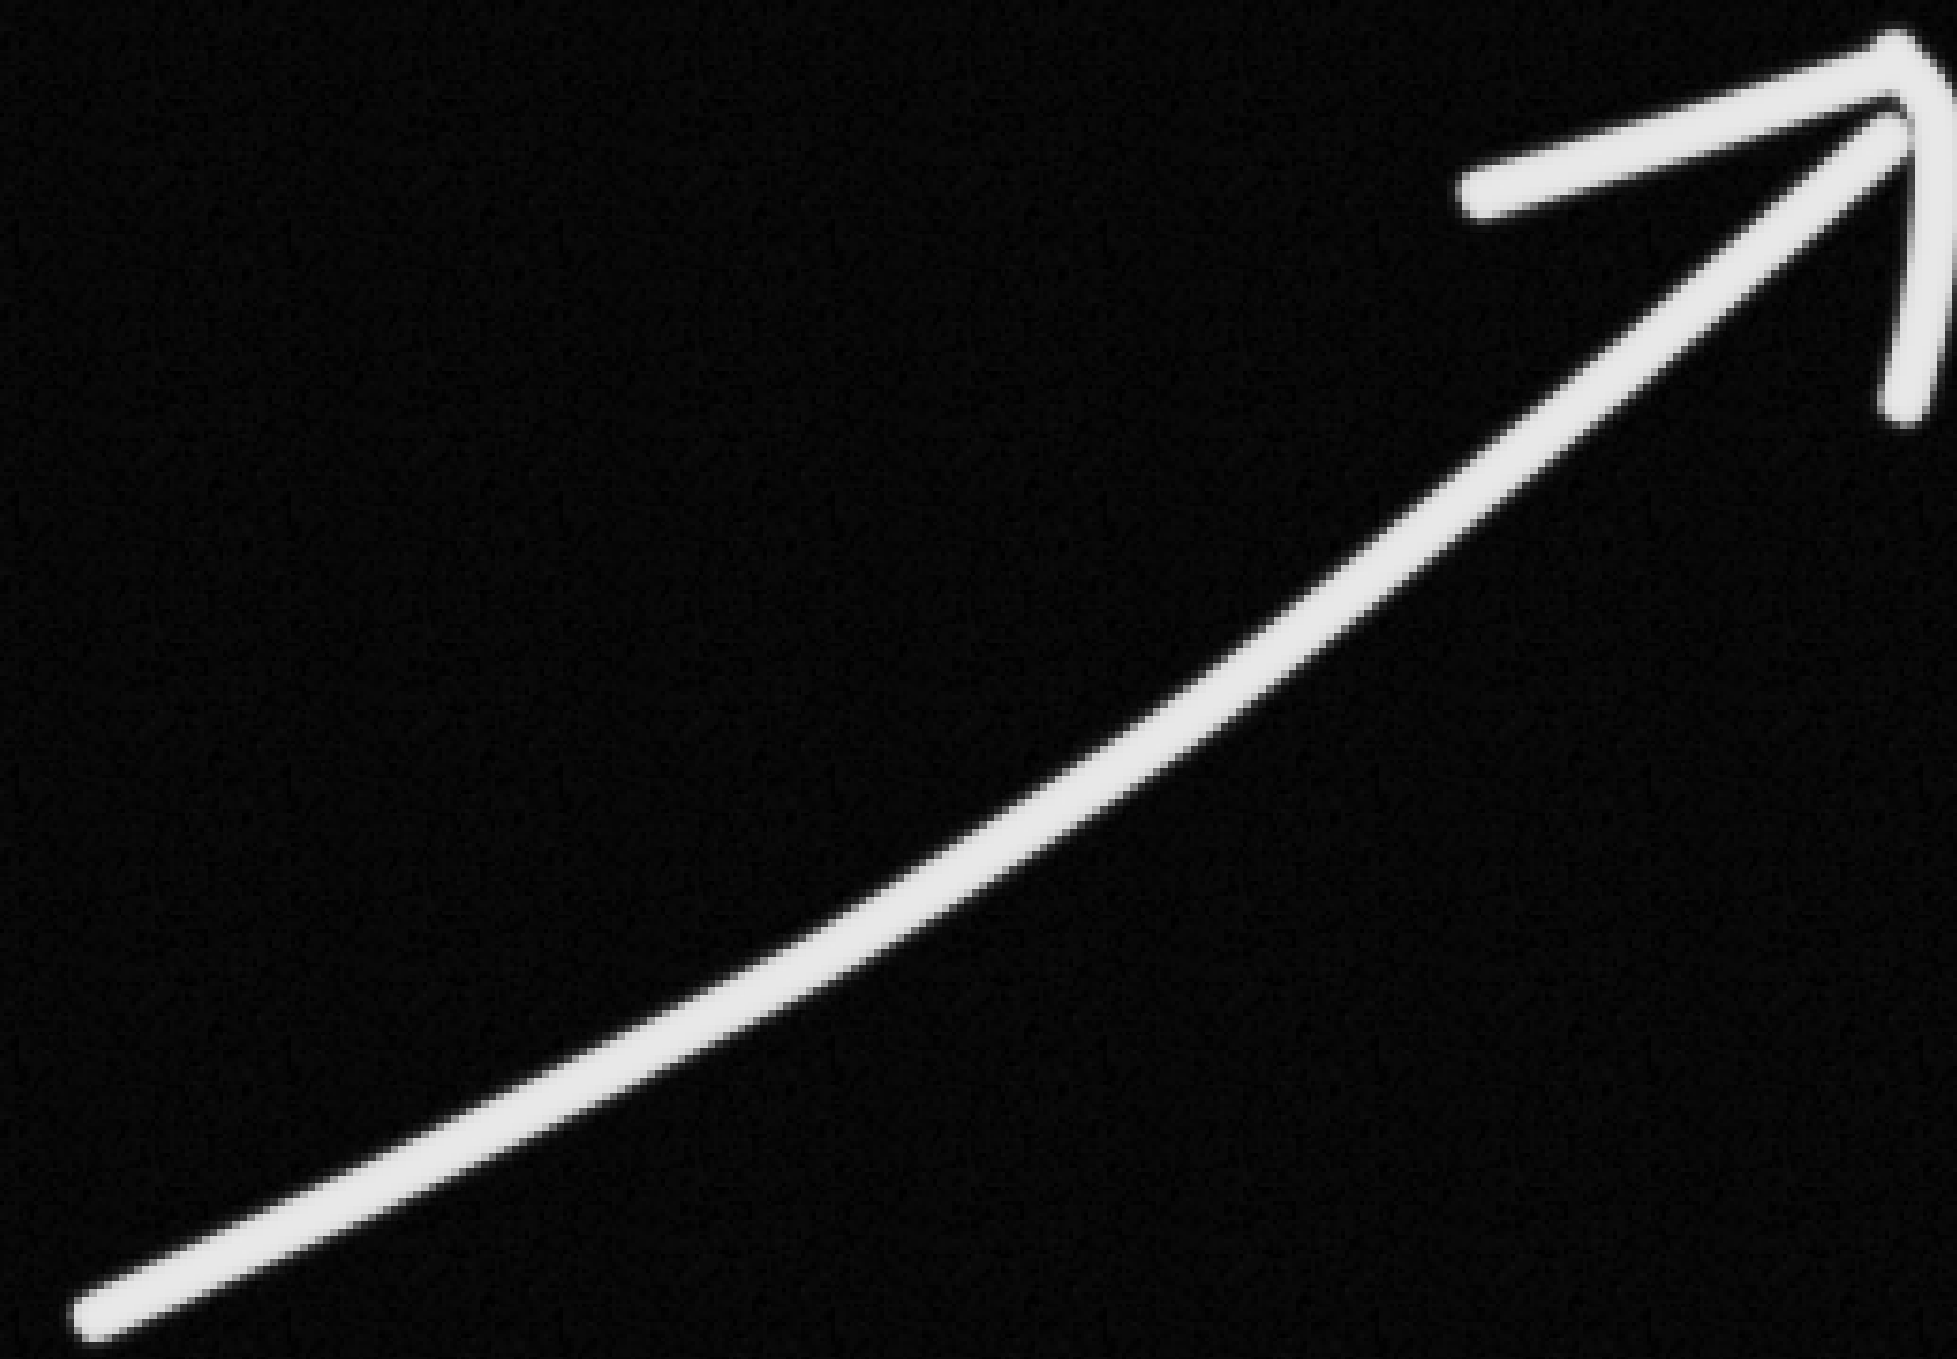

Linux

PVM

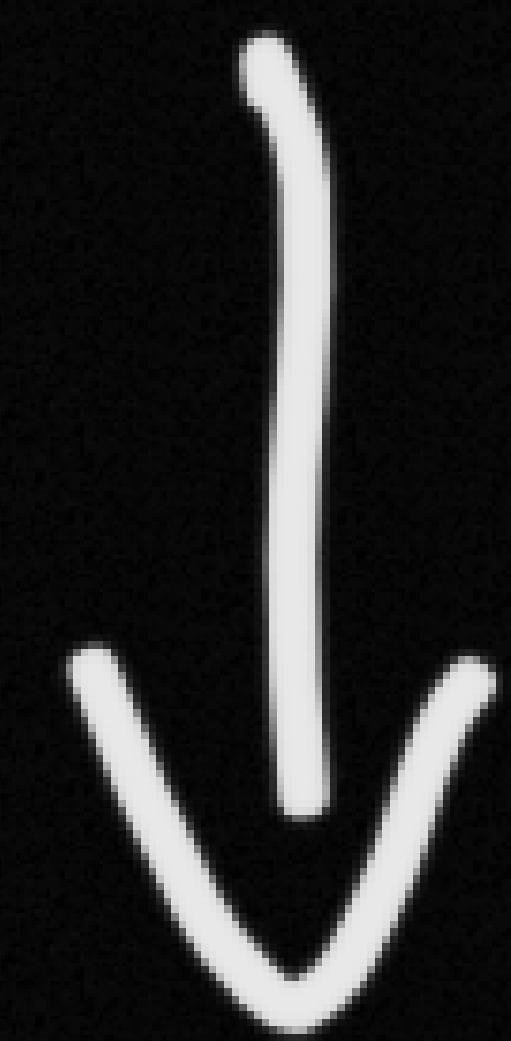

Windows

PVM



mac

PVM



Identifier — Python Identifier
is a name used to identify
a variable, function, class,
module or other object.

variable name
function name
class name
module name

} Identifier

Age = 25 "twenty-five" True
↓
Variable integer 2+3j
25.0
Identifier

def summation():

summation()

Identifizieren



```
class Employee :  
    def --init--(self):
```

```
        fun1(self):
```

I identify

```
e1 = Employee()
```

functions.py

~~folder~~

↳ new_functions.py

```
def display():
```

```
def show():
```

```
import functions  
functions.display()
```

Identifier

Rules for creating identifier

1. Start with alphabet or
an underscore.

eg. $a = 10$ ✓
 $A = 10$ ✓
 $_a = 10$ ✓
 $_A = 10$ ✓

$1a = 10$ ✗
 $\$a = 10$ ✗

Python Data Types -

Basic types - int, float, complex,
bool, String, bytes

Container data types - list, tuple, set,
dictionary

User defined data type - class

Python is Dynamically typed
language

age = 25

age = "twenty-five"

age = 2 + 3j

int age = 25;

age = "twenty-five";

