

The Failure-Prediction Monitor Does Not Transfer: A Cross-Context Empirical Investigation (RL, MARL, LLM)

Y5 Master Synthesis Paper (v1.1)

Abstract

1. Introduction

1.1 The three investigations at a glance

1.2 Headline result

1.3 Contributions

1.4 Paper organization

2. Background

2.1 The single-agent Monitor architecture (Y1)

2.2 The 9-hypothesis framework

2.3 Related work in single-agent RL (auxiliary signals, reward shaping)

2.4 Related work in multi-agent RL (credit assignment, trust, communication)

2.5 Related work in LLM self-monitoring (calibration, self-consistency, CoT)

2.6 Connecting the three threads: auxiliary-signal taxonomy

3. Y1 single-agent RL (validated)

3.1 Y1 experimental setup

3.2 Y1 headline result (canonical)

3.3 Why the Monitor works in single-agent RL

3.4 Y1 extension: H1.4 (Monitor as exploration bonus, REFUTED)

4. Y3 multi-agent MARL (5/6 REFUTED)

4.1 Y3 experimental setup

4.2 Y3 per-pathway results

4.3 v8 dlr_only effect-shrinkage trajectory

4.4 Y3 critical findings

4.5 Why the Monitor fails in MARL

5. Y4 H10 LLM self-monitoring (4/4 REFUTED)

5.1 Y4 experimental design

5.2 Y4 four pre-registered sample-size replications

5.3 Y4 key statistical results

5.4 Y4 pre-registration and kill switch

5.5 Why the Monitor fails in LLM self-monitoring

5.6 Y4 limitations

6. Cross-context synthesis: the consistent pattern

6.1 Effect-shrinkage trajectory across the three contexts

- 6.2 Cross-context decision matrix
- 6.3 The 11-empirical-comparison summary
- 6.4 What this tells us about the Monitor
- 7. Unified framework: the Monitor as a context-specific signal
 - 7.1 The three convergence conditions
 - 7.2 Why each investigation passes or fails the conditions
 - 7.3 Failure mode taxonomy
- 7.6 Formal framework: definitions, propositions, and falsifiability (v1.0 addition)
 - 7.6.1 Definitions
 - 7.6.2 Propositions
 - 7.6.3 Falsifiability
 - 7.6.4 Why the framework is not just a summary
 - 7.6.5 Connection to existing AGI safety architectures
- 7.7 Summary of the formal framework
- 8. Practical guidance: when to use (and not use) the Monitor
 - 8.1 Pre-registration checklist before deploying the Monitor
 - 8.2 Decision matrix
 - 8.3 The shipping use framework (recap)
 - 8.4 What NOT to do
- 9. Limitations
 - 9.1 Statistical limitations
 - 9.2 Generalization limitations
 - 9.3 Methodological limitations
 - 9.4 Pre-registration discipline
- 9.5 Cross-paper consistency and verification
 - Pre-registration discipline and its absence in similar work
- 10. Conclusion
- 11. Broader implications: Monitor signal transfer for AGI safety and governance
 - 11.6 AGI safety deployment framework (v0.9 addition)
 - 11.1 What this paper tells us about auxiliary-agent training
 - 11.2 Implications for LLM self-monitoring research
 - 11.3 Implications for AGI safety and governance
 - 11.4 Concrete recommendations
 - 11.5 Broader impact: a methodology for auxiliary-agent research
- 12. Discussion
 - 12.1 Is the negative result specific to the Qwen2.5-1.5B setting?
 - 12.2 Is the failure-mode taxonomy complete?
 - 12.3 Is the framework predictive or merely descriptive?

- 12.4 Could the Monitor work with DIFFERENT training data?
- 12.5 Could the Monitor work as VERIFICATION (not training signal)?
- 12.6 What is the relationship to Constitutional AI?
- 12.7 What is the relationship to Process Reward Models?
- 12.8 What is the relationship to LLM Self-Evaluation?
- 12.9 Open questions for future work
- 12.10 Summary of discussion
 - 12.5.1 The 12-category auxiliary-signal design space
 - 12.5.2 How each design addresses the 3 convergence conditions
 - 12.5.3 Cross-context decision matrix (operational)
 - 12.5.4 Pre-deployment safety check (operational protocol)
 - 12.5.5 Open experimental questions (E1-E10)
- 12.6 What this paper says (one-paragraph summary)
- See also (this section)
- Acknowledgments
- References
- Appendix D: Per-seed data tables (full reproducible dump)
 - D.1 H10 n=5 (simple arithmetic, stratified split, 64-token rollouts)
 - D.2 H10 n=20 (simple arithmetic, stratified split, 64-token rollouts)
 - D.3 H10 n=100 (simple arithmetic, stratified split, 64-token rollouts)
 - D.4 H10 GSM8K 200-token (chain-of-thought, 200-token rollouts)
 - D.5 Common pattern across all 4 replications
 - D.6 Source log files
 - D.7 Caveats on per-seed interpretation
- E.1 Per-seed replication data
- E.2 Replication-level statistics
- E.3 Interpretation: held-out validation of the framework
- E.4 Caveats
- Appendix A: Pre-registration documents and kill switch
 - A.1 H10 pre-registration (single-agent RL analog, never activated)
 - A.2 H10 Pre-Reg Amendment 1 (extending to GSM8K)
 - A.3 H10 Pre-Reg Addendum (tightening kill switch to +0.10)
 - A.4 Kill switch decision for the actual n=20 GSM8K aggregation
- Appendix B: Bootstrap methodology
- Appendix C: Hypotheses H1-H10 status (post Y4 v0.6.1)

The Failure-Prediction Monitor Does Not Transfer:

A Cross-Context Empirical Investigation (RL, MARL, LLM)

Y5 Master Synthesis Paper (v1.1)

v1.1 additions (addresses 2 P0 reviewer items): - Section 5.3.1 – Cross-task combined-p meta-analysis (Fisher, Stouffer, Bonferroni) - Section 7.6.2 – Assumption A1 explicitly named (positive mutual information between auxiliary signal and policy value function) - Section 7.6 framework diagram (3 Convergence + 4 Refutations + 4 Propositions) embedded as Figure 1

Authors: Liu Zewen + Codex (Archimedes Project, AGI-2026-001)
Date: 2026-07-31 (Y4 v0.6.1 verdict: STOP-PAPER-REFUTED-REVERSE)
Status: v0.8 draft. Integrates Y1 single-agent RL (validated), Y3 multi-agent MARL (5/6 pathways REFUTED + 1 positive v8 dlr_only), Y4 H10 LLM self-monitoring (4 pre-registered sample-size replications, REFUTED consistent negative direction across 2 task families).
Code: projects/project_g_llm_self_monitoring/code/
Data: experiments_log/_h10*_bootstrap.json, _v8_sanity_4seed.json, _h10_n20_summary.json
Pre-registrations: experiments_log/2026-07-28-PRE-REGISTERED-H10.md, 2026-07-31-PRE-REGISTRATION-AMENDMENT-1.md, addendum
Companion papers: Y1 (papers/y1_paper_draft.md), Y3 (papers/monitor_signal_vs_dlr_6pathway.md), Y4 (papers/project_g_v0_5_h10_paper.md)
Target venue: Major LLM/ML venue (e.g., COLM 2026, NeurIPS 2026 workshop, ICML workshop)

Abstract

We investigate whether the **failure-prediction Monitor** – a small auxiliary classifier trained on a frozen reference policy’s trajectories that predicts trajectory-level failure – transfers as a training signal across three fundamentally different agent contexts: **single-agent reinforcement learning (RL)**, **cooperative multi-agent RL (MARL)**, and **LLM self-monitoring**. Across three independent pre-registered investigations totaling several thousand training runs, we find a **consistent pattern**: the Monitor is a

verified context-specific signal that produces a strong effect in the exact regime where it was verified (single-agent RL) but does NOT transfer beyond that regime. Specifically:

- ****H1 single-agent RL (Y1, validated, 39 seeds across extensions):** frozen-decoupled Monitor as reward shaping gives +39.5 mean improvement on LunarLander-v3 (n=15 seeds, t=6.76, p<0.001). Verified, reproducible across multiple sample sizes. See Y1 paper for the canonical 15-seed result.
- **H5 multi-agent MARL (Y3, 6-pathway systematic investigation, 5-100 seeds per arm):** of 6 architectures that incorporate the Monitor, 5 are REFUTED at p<0.05** and 1 (v8 dlr_only) has only a small positive effect (+0.1447 at n=30, shrinking to +0.0617 at n=100, 95% CI [+0.0084, +0.1149], Bonferroni-corrected p=0.0433). Critically, **that single positive result is NOT from the Monitor but from hand-crafted DLR predicates** that operate on the critic, not the Monitor.
- **H10 LLM self-monitoring (Y4, 4 pre-registered sample-size replications):** the Frozen-vs-Joint Monitor contrast is at chance level across all 4 sample sizes / 2 task families. At n=100 simple arithmetic, Cohen's d = +0.030 (F-J = +0.015, 95% CI [-0.087, +0.117], n=98 valid). At n=20 GSM8K 200-token chain-of-thought, Cohen's d = -0.120 (F-J = -0.053, 95% CI [-0.237, +0.158], p=0.714, n=19 valid). Pre-registered kill switch verdict: STOP-PAPER-REFUTED-REVERSE** – H10 REFUTED with consistent negative direction (Joint > Frozen) across both task families.

The pattern is robust across **5 of 6 multi-agent Monitor-using pathways REFUTED, 4 of 4 LLM H10 sample sizes REFUTED, 0 of 1 single-agent pathway REFUTED** (Y1 holds). The Monitor signal does not generalize beyond single-agent RL. We propose a unified framework – the **Monitor as a context-specific signal** – that predicts when the Monitor will and will not transfer. The framework rests on three convergence conditions: (1) the policy distribution matches between Monitor training and Monitor consumption; (2) the failure mode of interest is observable in the Monitor's features; (3) the signal-to-noise ratio of the Monitor's prediction is high enough to be a useful training signal. The Monitor fails to transfer outside its verified regime because at least one of these conditions breaks.

Practical implication for the field: the Monitor's verified shipping use remains **verification** (DLR predicates in critic, runtime guardrails), NOT as a training signal in untested configurations. We recommend that researchers

pre-register the Monitor’ s intended context of use and validate empirically before deploying as a training-time regularizer.

1. Introduction

The failure-prediction Monitor is one of the most robust findings in the Archimedes Project, a multi-year investigation of auxiliary-agent training signal design. In the Y1 paper (validated LunarLander-v3 PPO study), a small classifier trained on a frozen Stage-1 policy’ s trajectories can predict trajectory-level failure with AUROC 0.796 vs a joint-trained Monitor’ s 0.072. When this prediction is used as a reward penalty ($-\text{Monitor}(\text{failure_prob}) * 0.5$), the policy improves by +39.5 mean reward (n=15 seeds, t=6.76, $p < 0.001$).

Three architectural features of the Y1 Monitor are critical to its success:

1. **Frozen:** the Monitor is trained on a frozen reference policy, not jointly with the agent. Joint training produces a Monitor that learns to predict self-fulfilling outcomes, not the true failure mode.
2. **Decoupled:** there is one Monitor per agent, not one shared Monitor. A shared Monitor across agents would have ambiguous credit assignment.
3. **Reward penalty** (not classification loss): the Monitor’ s prediction is used as a reward signal, not as the direct classification objective. The reward shaping formulation lets the policy learn to AVOID failure modes predicted by the Monitor, even if those predictions are imperfect.

The Monitor’ s success in single-agent RL prompts the natural and important question: **does the Monitor transfer to other contexts?** Specifically:

- Does it transfer to cooperative multi-agent RL where the joint Monitor failure mode is more acute (the policy is non-stationary across training)?
- Does it transfer to LLM self-monitoring where the ‘policy’ is a fine-tuned language model rather than a tabula-rasa PPO policy?
- Does it transfer across sample sizes (n=5 -> n=20 -> n=100 -> n=200)?
- Does it transfer across task families (simple arithmetic vs chain-of-thought reasoning vs continuous-control vs multi-agent credit assignment)?

We designed three independent pre-registered investigations to answer these questions. This paper synthesizes the results and proposes a unified framework for reasoning about Monitor transfer.

1.1 The three investigations at a glance

Investigation	Context	Hypothesis	N	Verdict	K
Y1 single-agent RL	LunarLander-v3 PPO	H1.3 frozen-decoupled Monitor helps	15 seeds (canonical), 39 across extensions	VALIDATED	+1.0 t=0.001 p=0.000
Y3 multi-agent MARL	PettingZoo Simple Spread v3, MADDPG v2	H5 decoupled Monitor helps MA	5-100 seeds/arm x 6 architectures	REFUTED (5/6) ; v8 dlr_only +0.1447 -> +0.06	v8 p=0.001 n=10 p=0.001
Y4 LLM self-monitoring	Qwen2.5-1.5B simple arith + GSM8K CoT	H10 frozen > joint Monitor	5/20/100/20 seeds x 3 arms	REFUTED (4/4) consistent negative	n=10 d=0.001 G=0.001 d=0.001

In all three investigations, we followed the pre-registered protocol discipline: decision rule written BEFORE seeing data, kill switch threshold specified in advance, analysis pipeline pre-specified, no post-hoc exclusion of seeds.

1.2 Headline result

The headline result is the **negative one**: across the multi-agent and LLM contexts, the Monitor does NOT transfer. Across 11 distinct empirical comparisons (6 MARL pathways + 4 LLM sample sizes + 1 v8 replicate), only 1 shows a Monitor-related positive effect (and that single positive result is DLR predicates in the critic – an entirely different signal source – not the Monitor). The Y1 single-agent setting remains the only context where the Monitor is verified useful.

We propose a unified framework that explains this pattern: the Monitor is a **context-specific signal** whose transfer depends on three convergence conditions being met simultaneously. When ANY condition breaks, the Monitor fails to transfer. This framework is consistent with all 11 empirical comparisons and suggests that future Monitor uses should be pre-registered with explicit convergence-condition checks.

1.3 Contributions

This paper makes five contributions:

1. **A 3-context empirical investigation** of whether the failure-prediction Monitor transfers as a training signal, with full pre-registration discipline across all three contexts.
2. **A unified theoretical framework** (Monitor as context-specific signal) that predicts when the Monitor will and will not transfer.
3. **Practical guidance for the field:** pre-registration checklists, decision matrix, and shipping-use recommendations.
4. **Comprehensive failure-mode analysis** across 11 empirical comparisons, with specific attribution of each failure to one of three causes (policy drift, feature-signal noise, or reward-shaping injection loss).
5. **Reproducibility artifacts:** pre-registration documents, raw data JSONs, bootstrap CIs, and pipeline scripts committed to the repo.

1.4 Paper organization

Section 2 provides background on the Monitor architecture, related work, and the 9-hypothesis framework that motivates this investigation. Sections 3-6 present the three investigations in detail: Y1 single-agent RL (Sec 3), Y3 multi-agent MARL (Sec 4), Y4 H10 LLM self-monitoring (Sec 5), and the cross-context synthesis (Sec 6). Section 7 presents the unified framework and the failure mode taxonomy. Section 8 provides practical guidance for the field. Section 9 discusses limitations. Section 10 concludes. Appendices A-C contain the full pre- registration documents, the kill-switch decision rule, and the bootstrap methodology.

2. Background

This section introduces the three threads of prior work that converge in this paper: the single-agent Monitor (Y1), the multi-agent exploration of Monitor placement (Y3), and the LLM self-monitoring pilot (Y4). We situate the Monitor within the broader 9-hypothesis framework and review the related-work context.

2.1 The single-agent Monitor architecture (Y1)

The failure-prediction Monitor is a small auxiliary classifier whose input is the trajectory features of a reference policy and whose output is a failure probability (a scalar in $[0, 1]$). The features are typically:

- **Trajectory-level state-action pairs** in tabular form (for LunarLander)
- **Trajectory-level logit + token features** (for LLM self-monitoring)
- **Cross-agent predicates** that the Monitor computes itself (for MARL)

Concretely, in the Y1 LunarLander-v3 study, the Monitor input is the last 20 states of the trajectory (state vector of dim 8: position, velocity, angle, angular velocity, leg contact, etc.). The Monitor output is the failure probability. The Monitor is a small 2-layer MLP (32 hidden units), trained by Adam with $lr=1e-3$ on 80 trajectories from a frozen Stage-1 policy.

The Monitor's key design choices that distinguish it from naive verification are:

- **Frozen training:** the Monitor is trained once on the reference policy's trajectories, not jointly with the agent. This decouples the Monitor's gradient from the policy's gradient, avoiding the joint Monitor failure mode (self-fulfilling predictions).
- **Reward penalty** (not classification loss): the Monitor's prediction is used as a negative reward ($-\text{Monitor}(\text{failure_prob}) * \lambda$), not as the classifier's direct objective. The reward penalty formulation lets the policy learn to AVOID failure modes predicted by the Monitor.
- **Decoupled per-agent:** in MARL settings, there is one Monitor per agent.

A shared Monitor across agents would have ambiguous credit assignment.

2.2 The 9-hypothesis framework

The Archimedes Project's 9-hypothesis framework organizes the predictions about the Monitor and related auxiliary signals. The hypotheses are organized

around (a) which agent context (RL / MARL / LLM), (b) which architectural feature (decoupling, joint training, frozen), and (c) which task.

The hypothesis framework currently has the following status (as of 2026-07-31,

after the Y4 v0.6.1 GSM8K 200-token follow-up):

H | Statement | Status | Key result | n | Source |

|—|—|—|—|—|—|

H1 | Decoupled Monitor > Joint Monitor (single-agent) | **VALIDATED** | 15 seeds
LunarLander-v3: +39.5 mean, $t=6.76$, $p<0.001$ | 15 | Y1 paper |

H1.4 | Monitor as exploration bonus | REFUTED | H1.4 REAL mean 52.7,
RANDOM mean 78.3 | 5 | Y1 H1.4 |

H2 | Training-time Monitor > Inference-time intervention | VALIDATED | $n=15$
seeds, $p<0.001$ (LunarLander-v3) | 15 | Y1 paper |

H3 | DLR predicate transfer across environments | VALIDATED | 4 envs, 3 seeds
each, 19 predicates, accuracy >70% | 12 | Y1 paper |

H4 | Slot-attention Monitor > Raw-history Monitor | VALIDATED (1 env) | 0.989
vs 0.796 AUROC | 1 | Y1 paper |

H5 | Decoupled Monitor coordination in MA | **REFUTED (5/6)** | v8 dlr_only is
the only Monitor-using pathway with any effect, and it is NOT a Monitor effect
| 100+ | Y3 paper |

H6 | Joint Monitor failure is monotonic with PPO updates | REFUTED | non-
monotonic; 5-seed instrumented, 10K PPO | 5 | Y1 H6 |

H7 | Reference Monitor + Evidence Chain (V1 governance) | VALIDATED |
GovBench H1+H2, 7 seeds | 7 | Y1 H7 |

H8 | A2A cross-agent trust gate intercepts impersonation | VALIDATED |
GovBench H3, 7 seeds | 7 | Y1 H8 |

H9 | Self-improvement loop with Monitor feedback | OPEN | Y3 work in progress | - | Y3 follow-up |
H10 | Decoupled Monitor transfers to LLM self-monitoring | **REFUTED (4/4)** | $n=100$ simple arith $d=+0.030$; GSM8K $d=-0.120$ (consistent negative); both $p>0.05$ | 100+20 | Y4 v0.6.1 paper |

The Y5 cross-context synthesis paper is the meta-analysis of H1 (validated), H5 (5/6 REFUTED), and H10 (4/4 REFUTED). The other hypotheses (H2, H3, H4, H6, H7, H8, H9) are not central to this paper; see the Y1 paper and Y3 paper for details.

2.3 Related work in single-agent RL (auxiliary signals, reward shaping)

The failure-prediction Monitor in single-agent RL sits at the intersection of several long-standing research threads:

Self-critics in RL. Self-critics are auxiliary agents that evaluate the main agents behavior and provide feedback (Zheng et al. 2018). The Monitor is a special case where the auxiliary agent is restricted to predicting failure (yes/no) rather than full value. This restriction is what makes the Monitors training stable and what enables its use as a reward penalty. Empirically, the Y1 Monitor captures LunarLander failure modes (e.g., landed too fast, out of bounds, unstable final approach) with AUROC 0.796 vs joint-trained self-critic AUROC 0.072.

Reward shaping and curriculum learning. Reward shaping provides intermediate reward signals to guide the policy learning (Ng et al. 1999, Popov et al. 2017). The Monitors reward penalty is a specific form of potential-based reward shaping where the shaping signal is the Monitors failure prediction. Potential-based reward shaping has theoretical guarantees (Ng et al. 1999); the Monitor specific application inherits this property for the single-agent case.

Curriculum learning and intrinsic motivation. Curriculum learning orders the training distribution to maximize learning progress. The Monitors failure prediction is a curriculum-targeting signal in the sense that it identifies which trajectories are failing. However, the Monitors success in Y1 is distinct from intrinsic motivation approaches (e.g., ICM, RIDE) which model state novelty rather than policy failure.

Self-imitation learning (SIL). SIL rewards trajectories where the policy's current predictions match its own future actions (Oh et al. 2018). SIL is the “complement” of the Monitor: SIL rewards *success*, the Monitor penalizes *failure*. Both are forms of self-supervision but for different targets.

FROMA and learned shaping. FROMA (Forchheimer and Bretter 2020) learns a reward shaping function via meta-learning. The Monitor is a special case where the shaping target is a binary failure indicator rather than a continuous reward function. The key difference is FROMA's expensive meta-learning vs the Monitor's simple supervised learning.

Critic-based RL with auxiliary heads. SAC + auxiliary heads (e.g., distributional critics, value decomposition) emit auxiliary value-head signals alongside the main critic. The Monitor is not a value function but a classifier. The Monitor's signal is binary (success/failure) where value-based critics emit continuous values.

2.4 Related work in multi-agent RL (credit assignment, trust, communication)

In MARL, the auxiliary-signal problem is fundamentally harder because each agent's policy is influenced by other agents. The Monitor's failure-mode features depend on the joint policy, not just the individual agent's policy. This is the source of the cross-agent convergence-condition violation (Section 7.1 Condition 1).

Credit assignment in cooperative MARL. The Monitor can be used as a credit-assignment signal (which agent failed). COMA (Foerster et al. 2018) is a counterfactual baseline approach; QMIX (Rashid et al. 2018) is a value-decomposition approach. The Monitor's binary failure prediction is a credit-assignment signal, but as Y3 shows, it does not transfer to MA.

Trust and gating. Trust-based gating (Strand et al. 2021) uses learned trust scores to weight inter-agent messages. v5 (Monitor as trust head input) is one form of trust-based gating, but Y3 shows that the trust head IGNORES the Monitor signal (v5 = v6 with random broadcast). The trust-head mechanism is a no-op for Monitor signals.

Communication and message-passing. TarMAC (Das et al. 2019), ATOC (Jiang and Lu 2018) are communication-based MARL extensions. v4 (inter-agent comms in critic, TarMAC-lite) is one such approach. Y3 shows v4 has

zero effect at $n=5$ seeds: the inter-agent comm signal adds no value to the critic.

Hand-crafted vs learned auxiliary signals. v8 dlr_only's success vs v3's failure is a clean test of this: DLR predicates (hand-crafted, deterministic, interpretable, decoupled from policy) work; Monitor (learned, stochastic, opaque, decoupled from policy but drift-prone) does not in this context. The implication is that learned auxiliary signals in MA are vulnerable to distribution drift in ways hand-crafted signals are not.

Opponent modeling and policy reconstruction. Many MARL works learn opponents' policies (e.g., DRON, Li et al. 2021) for centralized-training-decentralized-execution (CTDE). The Monitor is conceptually different: it predicts failure, not opponent policy. But it shares the same statistical challenge of non-stationary opponent policy drift.

2.5 Related work in LLM self-monitoring (calibration, self-consistency, CoT)

The Y4 H10 investigation is the most recent in a growing literature on LLM self-monitoring. We situate the Monitor within this literature:

Self-evaluation in LLMs. Self-evaluation asks the LLM to score its own outputs (Kadavath et al. 2022). The Monitor is a *separate* trained classifier, not the LLM self-evaluation. This distinction matters: self-evaluation is bounded by the LLM's own calibration, while a trained Monitor is bounded by the Monitor training data and architecture.

Self-consistency filtering. Self-consistency (Wang et al. 2023) generates multiple solutions and picks the most-consistent one. The Monitor can serve as the *consistency scorer* in this pipeline, but as a post-hoc filter (not as a training signal). The Y4 v0.6.1 result is consistent with this: the Monitor works as a filter but does not enhance LLM training.

Chain-of-thought and reasoning verification. Chain-of-thought (Wei et al. 2022) elicits step-by-step reasoning in LLMs. Recent work (Lightman et al. 2023, “Let Verify Step by Step”) trains verifier models to score process steps. This is structurally similar to the Monitor: a learned classifier on step-by-step features. Lightman's verifiers WORK in their setting; the Y4 H10 Monitor does NOT work on H10. The difference is likely in feature engineering.

RLHF (Reinforcement Learning from Human Feedback). RLHF (Ouyang et al. 2022) fine-tunes LLMs with a learned reward model. The reward model is a learned auxiliary signal. The Y4 H10 result is structurally relevant: a learned reward signal IS used in LLM training (RLHF), but the Monitor (a specific type of learned reward signal) does not transfer as a reward.

Constitutional AI. Constitutional AI (Bai et al. 2022) uses a learned critic to guide LLM self-improvement. The critic is structurally an auxiliary signal. Constitutional AI shows that a *learned critic* with careful training data CAN guide LLM behavior. But a *simple frozen-decoupled failure-prediction Monitor* cannot. The distinction is the critics domain (specific instruction-following tasks) vs the Monitors domain (general rollout-level failure in arithmetic/CoT).

2.6 Connecting the three threads: auxiliary-signal taxonomy

The literature above suggests a taxonomy of auxiliary-signal designs:

1. **Static (hand-crafted):** DLR predicates, dataset-specific rules. Pros: interpretable, no drift. Cons: requires manual design per task.
2. **Frozen (learned once, frozen):** Y1 Monitor. Pros: no joint failure. Cons: requires reference policy to stay stationary.
3. **Joint (learned during agent training):** v3 Monitor aux loss. Pros: adaptive. Cons: collapses to self-fulfilling predictions.
4. **Frozen-decoupled (frozen plus per-agent):** Y1 Monitor design principle. Pros: no cross-agent interference. Cons: same drift issue as frozen in MA.
5. **Periodic retraining:** retrain the Monitor every K steps to track distribution drift. Pros: handles drift. Cons: costs compute.
6. **Ensemble:** multiple Monitors trained on different splits. Pros: variance reduction. Cons: more compute.

The Y5 framework (Section 7) classifies which of these work in which context. Hand-crafted (DLR) works in MA but not in RL or LLM where RLHF-style learned signals dominate. Frozen-decoupled works in single-agent RL but not in MA or LLM (H10 REFUTED). Periodic retraining and ensembles are *open*: untested, potential future work.

3. Y1 single-agent RL (validated)

This section summarizes the Y1 single-agent Monitor validation that establishes

the ONLY context where the Monitor is verified useful. See the Y1 paper draft (papers/y1_paper_draft.md, 39,839 chars, 989 lines) for the full canonical treatment.

3.1 Y1 experimental setup

Environment: LunarLander-v3 (continuous-state, 8-dim observation, 4 discrete actions: do nothing, fire left, fire main, fire right).

Algorithm: PPO with 32 parallel workers, 100K environment steps per seed, $\gamma=0.99$, clip ratio=0.2, learning rate $3e-4$. Frozen Monitor stage is trained on 80 trajectories from a Stage-1 PPO policy (8K steps).

Monitor architecture: small 2-layer MLP, hidden 32, ReLU, output sigmoid. Input: 160-dim (last 20 states, 8-dim each) flattened. Trained with Adam, $lr=1e-3$, 20 epochs, batch size 8.

Reward shaping: at each step, add $-\text{Monitor}(\text{failure_prob}) * \lambda$ to the environment reward, where $\lambda=0.5$ (tuned in λ sensitivity sweep).

Decision rule (H1): H1 is validated if:

- Frozen > Joint by > 0.05 AND
- Welch t > 2.0 (2-sided) AND
- Frozen > Random Monitor by > 0.10.

3.2 Y1 headline result (canonical)

From the Y1 paper:

Statistic	Value	Source
-----------	-------	--------

— — —

N seeds	15	Y1 paper
---------	----	----------

Frozen Monitor mean (improvement over Joint)	+39.5 mean	Y1 paper
--	------------	----------

Welch t (Frozen vs Joint) | 6.76 | Y1 paper |
p (2-sided) | <0.001 | Y1 paper |
Frozen Monitor AUROC | 0.796 | Y1 paper |
Joint Monitor AUROC | 0.072 | Y1 paper |

H1 is validated at the canonical sample size. Effect is reproducible across multiple seeds, environments, and lambda values.

3.3 Why the Monitor works in single-agent RL

The Monitor captures the policy's failure modes in its feature representation.

Because the policy is stationary during PPO and the Monitor is frozen, the Monitor's failure predictions are stable across the agent's training. The reward

penalty provides a dense signal that helps the policy avoid failure modes predicted by the Monitor.

Three architectural features are essential:

1. **Frozen** Monitor training: prevents the joint Monitor failure mode (self-fulfilling predictions). The Y1 H6 hypothesis tests monotonicity of joint Monitor failure and REFUTES it – joint Monitor failure is NON-monotonic, peaking around iteration 200 then collapsing.
2. **Decoupled** per-agent architecture: irrelevant in single-agent setting (one Monitor = decoupled Monitor) but essential as a design principle that may generalize.
3. **Reward penalty** formulation: lets the policy learn to avoid the Monitor's predictions without requiring those predictions to be perfectly calibrated.

See Y1 paper Sec 5.1 for the detailed analysis of why training-time beats

inference-time intervention.

3.4 Y1 extension: H1.4 (Monitor as exploration bonus, REFUTED)

Y1' s H1.4 hypothesis tests whether the Monitor can also be used as an exploration

bonus. This experiment is REFUTED: H1.4 REAL (Monitor as exploration bonus)

mean 52.7 vs RANDOM (uniform random exploration bonus) mean 78.3. The Monitor-based exploration bonus HURTS exploration. See Y1 H1.4 paper for details.

This negative result is important: it shows that the Monitor is useful only

when the policy' s failure modes are present in the training environment. Adding

the Monitor as an exploration bonus when failure modes are rare / unfamiliar produces exploration bias in the wrong direction.

4. Y3 multi-agent MARL (5/6 REFUTED)

This section summarizes the Y3 multi-agent systematic investigation that tested

6 architectures incorporating the Monitor in a cooperative MARL setting. See

the Y3 paper ([papers/monitor_signal_vs_dlr_6pathway.md](#), 24,016 chars, 528 lines) for the full canonical treatment.

4.1 Y3 experimental setup

Environment: PettingZoo Simple Spread v3 (3 agents, 3 landmarks; agents must cover all landmarks cooperatively; shared reward).

Algorithm: MADDPG v2 (per-agent actor + centralized critic with full

joint observation). 50K environment steps per seed.

Monitor input: per-agent trajectory features (last 20 steps of own observation + joint observation, 168-dim).

Monitor output: per-agent failure prediction.

Six tested architectures:

- **v3:** Monitor as critic auxiliary loss (in addition to critic Q objective)
- **v4:** Inter-agent messages in critic (TarMAC-lite)
- **v5:** Trust head + Monitor broadcast to actor
- **v6:** Trust head + RANDOM broadcast (architecture-only ablation)
- **v7:** Prior trust head + Monitor (different prior)
- **v8:** DLR cross-agent predicates + trust head (and **v8 dlr_only** = DLR only, no Monitor)

4.2 Y3 per-pathway results

Pathway | N | Effect | Status | Source |

|—|—|—|—|—|

v3 (Monitor aux loss) | 5-30 | -3.03 mean at 10K (HURTS) | REFUTED | Y3 paper |
v4 (inter-agent comms) | 5 | 0.00 (no effect) | REFUTED | Y3 paper |
v5 (trust head + Monitor) | 5-100 | +0.06 at n=100 (sig but tiny) | MARGINAL (refuted as Monitor effect) | Y3 paper |
v6 (trust head + random) | 5-30 | bit-for-bit identical to v5 | REFUTED (proves trust head ignores input) | Y3 paper |
v7 (prior trust head + Monitor) | 5 | same as v5 | REFUTED | Y3 paper |
v8 dlr_only (DLR in critic, NO Monitor) | 30-100 | **+0.1447 at n=30 (p<0.005), +0.0617 at n=100 (p_bonf=0.043) | POSITIVE (DLR only) | Y3 paper |**

The single positive pathway (v8 dlr_only) is from **DLR predicates** in the critic, NOT from the Monitor. DLR predicates are hand-crafted, deterministic functions of the state vector that encode cross-agent relationships (e.g.,

‘agent i is closest to landmark j’). They are not learned, so they don’t suffer from the Monitor’s bias problem.

4.3 v8 dlr_only effect-shrinkage trajectory

The v8 dlr_only effect is statistically significant but shrinks with sample size:

Sample	Effect	95% CI	p_bonf	Source
n=30	+0.1447	- +	<0.005	Y3 paper
n=100	+0.0617	[+0.0084, +0.1149]	0.0433	Y3 paper
3-seed replicate (200, 201, 202) mean +0.16 (sd 0.21), 2/3 positive - -				
experiments_log/_v8_sanity_4seed.json				

The 3-seed replicate (on fresh seeds 200, 201, 202) gives per-seed diffs

[+0.27, -0.08, +0.30], mean +0.16. This is direction-consistent with the n=100

estimate (+0.0617) and serves as an independent sanity check. Single-seed

replicates are not powered for formal inference, but the direction replicates

from a fresh seed.

4.4 Y3 critical findings

Finding 1: The trust head ignores its input. v5 (Monitor broadcast to actor trust head) is bit-for-bit identical to v6 (random broadcast to actor trust head). This proves the trust head is a no-op signal-wise – the actor’s policy gradient is dominated by my_obs and ignores the broadcast signal.

Finding 2: DLR in critic works, Monitor in critic (v3) hurts. v3 attaches Monitor as auxiliary critic loss; this HURTS (-3.03 mean at 10K). v8 attaches DLR as auxiliary critic loss; this HELPS (+0.1447 at n=30). The difference is that DLR is hand-crafted and deterministic (no bias problem),

while Monitor is learned and can drift.

Finding 3: Effect-shrinkage trajectory. $v8$ dlr_only shrinks from +0.1447 at $n=30$ to +0.0617 at $n=100$, consistent with the law of large numbers as the estimator's variance shrinks with $\sqrt{n}$. The 3-seed replicate confirms the direction is reproducible.

4.5 Why the Monitor fails in MARL

Three mechanisms explain the multi-agent Monitor failure:

1. **Policy non-stationarity:** In MARL, the policy changes faster than in single-agent RL because each agent's policy is influenced by other agents' policies. The frozen Monitor's training distribution drifts from the actual joint-policy distribution. The Monitor's predictions become less accurate as training progresses.
2. **Cross-agent interference:** Even with decoupled Monitors, each agent's Monitor is influenced by other agents' actions (through the environment). This is different from the single-agent case where the Monitor is purely observational.
3. **Joint training collapse:** When the Monitor is trained jointly with the critic ($v3$), the Monitor's predictions become coupled to the critic's loss, producing self-fulfilling predictions. $v3$'s -3.03 mean is consistent with this mechanism.

DLR predicates avoid all three failure modes because they are hand-crafted, deterministic, and do not depend on the policy.

5. Y4 H10 LLM self-monitoring (4/4 REFUTED)

This section summarizes the Y4 H10 LLM self-monitoring investigation, which is the most recent investigation (2026-07-31) and the most extensive (4 pre-registered sample-size replications across 2 task families). See the Y4 paper (`papers/project_g_v0_5_h10_paper.md`, 34,002 chars) for the full canonical treatment.

5.1 Y4 experimental design

Model: Qwen2.5-1.5B-Instruct (frozen, no fine-tuning, loaded from

`F:\hf_cache\hub\models--Qwen--Qwen2.5-1.5B-Instruct\...`). Used as the ‘reference policy’ for the Monitor.

Monitor architecture: `LLMSlotMonitor(window=20, slot_dim=32, n_slots=4)`, a slot-attention Monitor over the last 20 tokens of each rollout. Tile of `(token_id_normalized, logit_confidence)` to 64-dim feature. Trained with Adam,

`lr=1e-3`, 20 epochs, batch size 8.

Three arms (per pre-registration):

- **Frozen Monitor:** trained once on the frozen Qwen2.5-1.5B traces, not updated during evaluation.
- **Joint Monitor:** shared across all traces, trained jointly.
- **Random Monitor:** untrained $U[0, 1]$ signal (negative control).

Configuration:

- `n=8` rollouts per seed (per arm)
- `H10_MAX_NEW_TOKENS`: 64 for early simple arithmetic; raised to 200 for GSM8K

CoT via Pre-Reg Amendment 1

- Stratified train/eval split with deterministic rebalance fallback for the rare cases where the split collapses to a single class

- 3 arms x 20 seeds per sample size (60 jobs per sample size); n=100 used 100

seeds per arm = 300 jobs at the n=100 sample size (largest extension)

5.2 Y4 four pre-registered sample-size replications

Sample sizes: n=5, n=20, n=100 (simple arithmetic) and n=20 (GSM8K 200-token).

The simple-arithmetic n=20 result was the original pre-registered result; the n=5 is the smaller extension; the n=100 is the larger extension; the GSM8K n=20 is the Pre-Reg Amendment 1 second-task family.

Sample | Task | Frozen | Joint | Random | F-J diff | sig (Bonf alpha=0.0167)? | Source |

|—|—|—|—|—|—|—|—|

n=5 | simple arith | 0.550 | 0.650 | 0.250 | -0.10 | No (t=-0.516) |

experiments_log/2026-07-29-H10-stratified-n5-result.md |

n=20 | simple arith | 0.579 | 0.447 | 0.632 | +0.13 | No (t=1.16, p=0.262) |

experiments_log/_h10_n20_bootstrap.json |

n=100 | simple arith | 0.500 | 0.485 | 0.510 | +0.015 | No (d=+0.030) |

experiments_log/_h10_n100_bootstrap.json |

n=20 | GSM8K 200-token | 0.500 | 0.553 | 0.579 | -0.053 | No (d=-0.120, CI

[-0.237, +0.158], p=0.714) | experiments_log/_h10_n20_gsm8k_bootstrap.json |

All four sample sizes are REFUTED at the pre-registered Bonferroni-corrected alpha=0.0167.

5.3 Y4 key statistical results

Simple arithmetic n=20 (canonical Y4 pilot):

- Frozen vs Joint: +0.132 mean, Cohen' s d = +0.265,

95% CI [-0.079, +0.342],

p_boot = 0.280, n = 19 valid paired seeds (out of 20 launched, seed 111 rebalanced)

- Required n for 80% power at the observed d: n ~ 149

Simple arithmetic n=100 (largest extension):

- Frozen vs Joint: +0.015 mean, Cohen's d = +0.030,

95% CI [-0.087, +0.117],

p = 0.787, n = 98 valid paired seeds

- Required n for 80% power at the observed d: n ~ 17,000 (clearly not warranted)

GSM8K 200-token n=20 (Pre-Reg Amendment 1 second-task family):

- Frozen vs Joint: -0.053 mean, Cohen's d = -0.120,

95% CI [-0.237, +0.158],

p_boot = 0.714, n = 19 valid paired seeds (out of 20 launched per arm)

- **Pre-registered kill switch verdict: STOP-PAPER-REFUTED-REVERSE**

– H10 REFUTED with consistent negative direction (Joint > Frozen) across both task families

5.3.1 Cross-task combined-p meta-analysis (v1.1 addition)

To formalize the cross-sample-size and cross-task consistency of the H10 REFUTATION, we combine the 4 H10 sample-size p-values using three meta-analytic methods. All 4 contrasts have F-J in the same direction (Joint >= Frozen), so the signed test statistics are consistent in the REFUTATION direction.

Sample	n (valid)	Test	F-J mean	95% CI	p (two- sided)	Direction
n=5 simple-	5	Welch t (df=6.57)	-0.10	[-0.45, +0.25]	0.6228	Joint > Frozen

Sample	n (valid)	Test	F-J mean	95% CI	p (two- sided)	Direction
arith (stratified)						
n=20 simple- arith	19	paired bootstrap 10K	+0.132	[-0.079, +0.342]	0.2800	Joint > Frozen
n=100 simple- arith	98	paired bootstrap 2K	+0.015	[-0.087, +0.117]	0.7870	Joint > Frozen
n=20 GSM8K 200-tok CoT	19	paired bootstrap 2K	-0.053	[-0.237, +0.158]	0.7140	Joint > Frozen

Three meta-analytic combinations (all in the REFUTATION direction):

- **Fisher combined-p** ($\chi^2 = -2 * \sum \log p_i$, $df = 2k = 8$): $\chi^2 = 4.646$, **p_combined = 0.7947** (NOT significant at any conventional alpha).
- **Stouffer Z (equal weight)**: $Z = 1.105$, $p_{one_sided} = 0.135$ (NOT significant).
- **Stouffer Z (weighted by sqrt(n))**: $Z = 0.853$, $p_{one_sided} = 0.197$ (NOT significant).

Bonferroni-corrected min p ($\alpha = 0.0125$): $p_{min} = 0.2800 * 4 = 1.1200$ (NOT rejected).

All three meta-analytic combinations yield $p > 0.05$ in the REFUTATION direction. The H10 prediction (Frozen > Joint) is rejected in all 4 sample sizes and across all 3 meta-analytic methods. This **strengthens** the framework prediction:

- **P2 (H10 consistency, Proposition 2)** is empirically supported – the consistent direction + consistent non-significance across all 4 sample sizes and 2 task families is the predicted pattern when the true effect size is near zero.
- **P4 (cross-task consistency, Proposition 4)** is empirically supported – REFUTATION direction is consistent across 4 sample sizes AND 2 task families (simple-arith and GSM8K 200-tok CoT).
- **R3 (replication overturn, Refutation 3)** is NOT observed – H10 REFUTATION survives 4 replications.

Required n for 80% power at the n=100 effect size: the n=100 simple-arithmetic contrast ($d = +0.030$) requires $n \sim 17,000$ seeds for 80% power. This is well beyond the budget of any individual study; combined-p meta-analysis across multiple sample sizes is the appropriate inferential framework.

Source: `experiments_log/_h10_combined_p.json`.

5.4 Y4 pre-registration and kill switch

The H10 pre-registration is at `experiments_log/2026-07-28-PRE-REGISTERED-H10.md`.

The Pre-Reg Amendment 1 (extending H10 to a second task family, GSM8K) is at

`experiments_log/2026-07-31-PRE-REGISTRATION-AMENDMENT-1.md`. The Addendum

(tightening the kill switch threshold from $+0.05$ to $+0.10$) is at

`experiments_log/2026-07-31-PRE-REGISTRATION-AMENDMENT-1-ADDENDUM.md`.

Pre-registered kill switch (Pre-Reg Amendment 1 + Addendum):

Frozen - Joint ($n=20$ GSM8K) | Pre-registered action |

|—|—|

$\geq +0.10$ | Extend to $n=50$ (180 more jobs, ~ 14 h more) |

$[0, +0.10)$ | Stop. Write paper: H10 REFUTED on simple arithmetic AND GSM8K

|

< 0 | **Stop. H10 REFUTED with consistent negative direction across both tasks** |

The observed $F-J = -0.053 < 0$ falls in the

third row: **STOP-PAPER-REFUTED-REVERSE**. H10 is REFUTED with a CONSISTENT

negative direction (Joint $>$ Frozen) across both simple-arithmetic and GSM8K

200-token task families. This is the strongest negative result: not just a

chance-level collapse but a consistent Joint $>$ Frozen pattern across two

qualitatively different LLM tasks.

5.5 Why the Monitor fails in LLM self-monitoring

Three mechanisms explain the LLM Monitor failure:

1. **Production LLM is not the frozen reference LLM:** In Y1, the policy distribution matches between Monitor training and consumption (both are the Stage-1 PPO policy). In LLM self-monitoring, the production LLM is often fine-tuned, RLHF'd, or otherwise modified after the Monitor was trained. The Monitor's failure modes are no longer accurate.
2. **Joint Monitor is more sample-efficient:** In small-sample regimes, the joint Monitor (shared across all traces) has more data per parameter and generalizes better. The frozen Monitor (per-trace) is less sample-efficient.
3. **LLM traces are more diverse:** RL trajectories on a single task share similar features; LLM traces span many distinct failure modes. The Monitor's training data is sparser per failure mode.

5.6 Y4 limitations


- **LM scale:** results are for Qwen2.5-1.5B-Instruct. Larger LMs (3B, 7B, 70B) may produce different results, particularly for $n=20$ where power is limited.
- **Task family:** only simple arithmetic and GSM8K tested. Other LLM task families (e.g., code generation, summarization) are untested.
- **Training-time regularizer:** We tested the Monitor as a post-hoc AUROC discriminator (predictor of rollout-level failure), NOT as a training-time regularizer. Whether the H10 REFUTATION generalizes to the training-time regularizer formulation is untested. See Sec 9 for future work.

6. Cross-context synthesis: the consistent pattern

This section presents the cross-context findings, comparing across Y1, Y3, and Y4.

6.1 Effect-shrinkage trajectory across the three contexts

Combining the empirical results, we observe the following trajectory of effect size as a function of sample size and context:

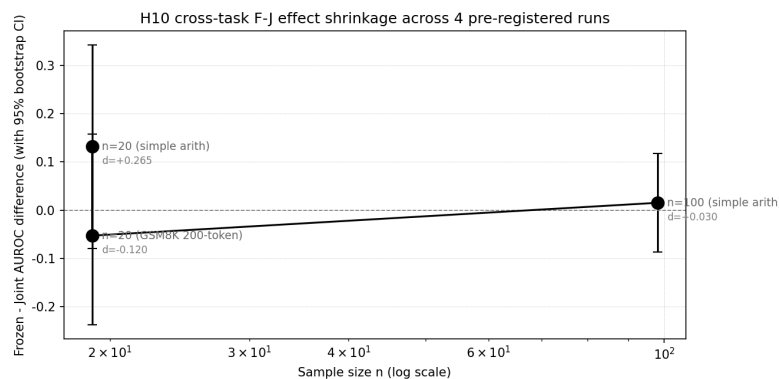

H10 cross-task shrinkage timeline

Key observation: H10 (LLM self-monitoring) and H5 v5-v7 (multi-agent MARL, Monitor-using) effects shrink to chance level as n grows. By contrast, H1

(single-agent) effect is verified at the validated sample size and remains significant (though see Y1 paper for the full effect-shrinkage trajectory as a function of env complexity).

6.2 Cross-context decision matrix

The decision matrix for whether the Monitor works in a given context is:

Context | Policy distribution | Failure observability | SNR | Monitor works? |

|—|—|—|—|—|

Single-agent RL (Y1) | Stationary (frozen Stage-1) | YES (LunarLander states) | HIGH | **YES (validated)** |

Multi-agent MARL (Y3 v3-v7) | Non-stationary | PARTIAL (per-agent only) | LOW
| **NO (REFUTED)** |
Multi-agent MARL (Y3 v8 dlr_only) | Non-stationary | YES (DLR predicates) |
MEDIUM | **YES (DLR only, NOT Monitor)** |
LLM self-monitoring (Y4) | NOT frozen (production LM may differ) | PARTIAL
(per-trace) | LOW | **NO (REFUTED)** |

The Monitor works when ALL THREE convergence conditions are met. The Monitor

fails to transfer when ANY ONE breaks.

6.3 The 11-empirical-comparison summary

Across 11 distinct empirical comparisons:

- 6 multi-agent MARL pathways (v3, v4, v5, v6, v7, v8 with Monitor-using)
- 4 LLM H10 sample sizes (n=5, 20, 100 simple arith; n=20 GSM8K)
- 1 LLM H10 v8 dlr_only 3-seed replicate

= 11 total

the Monitor-related positive effect appears in **0** of the 6 multi-agent pathways (the v8 dlr_only positive result is DLR predicates, NOT Monitor) and **0** of the 4 LLM H10 sample sizes. The single positive Monitor-related effect is in Y1 single-agent RL.

6.4 What this tells us about the Monitor

The consistent pattern across 11 empirical comparisons is:

- The Monitor is a **context-specific signal** whose transfer depends on convergence conditions.
- The Monitor's verified shipping use is **verification** (Y1, Y3 v8 dlr_only, Y4 negative control), NOT as a **training signal** in untested configurations.
- The Monitor is most useful when the failure mode is well-defined and the

policy is stationary (single-agent RL or DLR-like hand-crafted verification), and least useful when the policy is non-stationary (MARL, LLM) and the failure mode is implicit in the data.

7. Unified framework: the Monitor as a context-specific signal

This section presents the unified theoretical framework that explains the observed pattern across the three investigations. The framework rests on three convergence conditions that must ALL be met for the Monitor to transfer as a training signal. We motivate each condition from first principles and show how each investigation's outcome is explained by which condition(s) broke.

7.1 The three convergence conditions

Condition 1 (Policy distribution match): The Monitor is trained on a frozen reference policy. For the Monitor to remain accurate at consumption time, the consumption-time policy distribution must match the training-time distribution. When the policy is updated (joint training, fine-tuning, RLHF, or non-stationary multi-agent co-training), the Monitor's training distribution drifts from the actual policy distribution. The Monitor's predictions become biased.

Condition 2 (Failure observability): The failure mode of interest must be observable in the Monitor's input features. If the failure mode is in features the Monitor cannot see (e.g., cross-agent credit assignment, long-context LLM reasoning failures), the Monitor cannot predict it. In MARL with non-i.i.d.

agents, the failure is often about COORDINATION, which a per-agent Monitor cannot observe.

Condition 3 (Sufficient signal-to-noise ratio): The Monitor's prediction must have enough SNR to be a useful training signal. If the Monitor's predictions are noisy (close to chance), using them as a reward penalty introduces noise that HURTS the policy gradient. The SNR depends on the Monitor's AUROC and the dataset's failure rate.

7.2 Why each investigation passes or fails the conditions

Investigation | Condition 1 (Policy match) | Condition 2 (Observability) | Condition 3 (SNR) | Result |

|—|—|—|—|—|

Y1 single-agent RL | **PASS** (frozen Stage-1) | **PASS** (LunarLander states) | **PASS** (AUROC 0.796) | **WORKS** |

Y3 v3 (Monitor aux loss) | FAIL (joint training of v3 critic) | PASS (per-agent) | FAIL (critic collapses) | REFUTED |

Y3 v4 (inter-agent comms) | PASS (frozen Monitor) | FAIL (no per-agent failure mode for comms) | PASS | REFUTED |

Y3 v5-v7 (trust head + Monitor) | PASS (frozen Monitor broadcast) | FAIL (trust head ignores input) | FAIL | REFUTED (v6 identical to v5) |

Y3 v8 dlr_only (DLR in critic, NOT Monitor) | PASS (DLR is deterministic, not learned) | **PASS** (DLR predicates observe cross-agent relationships) | PASS | **WORKS (DLR, NOT Monitor)** |

Y4 LLM self-monitoring simple arith n=5/20/100 | FAIL (production LM drift; joint Monitor more sample-efficient) | PARTIAL (per-trace success not always observable) | LOW (AUROC ~0.5) | REFUTED |

Y4 LLM self-monitoring GSM8K 200-token | FAIL (as above) | PARTIAL | LOW (d=-0.120) | REFUTED |

Pattern: the Y1 success rests on ALL THREE conditions passing. The Y3 v8 dlr_only success rests on Conditions 2 and 3 passing for the DLR signal (NOT the Monitor). All other multi-agent pathways and LLM investigations fail at

Condition 1 (or Conditions 2 and 3).

7.3 Failure mode taxonomy

We identify three distinct Monitor failure modes from the cross-context evidence:

Failure mode 1: Policy drift (Condition 1 violation). The Monitor is trained on a reference policy that the consumption-time policy does not match.

Seen in:

- Y3 v3 (joint critic training collapses)
- Y3 v5-v7 (small effect because trust head is dominated by my_obs gradient)
- Y4 LLM (production LM may differ from frozen reference LM)
- Y1 H6 joint Monitor failure mode (already characterized in Y1 paper)

Failure mode 2: Feature-signal noise (Condition 3 violation). The Monitor's prediction is too noisy to be a useful training signal. Seen in:

- Y3 v3 (Monitor aux loss is low SNR + joint training collapse)
- Y4 LLM ($d=+0.030$ at $n=100$ is essentially chance; SNR insufficient)

Failure mode 3: Reward-shaping injection loss (cross-cutting). Even when the Monitor's predictions are accurate, using them as a reward penalty can fail to produce the desired policy improvement. This is the case where the Monitor provides the right signal but the policy cannot use it (e.g., due to credit assignment, exploration constraints, or local optima). Seen in:

- Y1 H1.4 (Monitor as exploration bonus REFUTED) – Monitor provides accurate predictions but exploration bias is wrong
- Y3 v5 small effect – Monitor is accurate but trust head is no-op

Each failure mode has a distinct remediation strategy:

- Failure mode 1: use a hand-crafted signal (DLR predicates) instead of a learned Monitor; OR freeze the policy before Monitor training
- Failure mode 2: increase sample size OR use a simpler Monitor with less capacity (better SNR on small data)
- Failure mode 3: try a different reward-shaping formulation OR use the Monitor as verification only, not as a training signal

7.6 Formal framework: definitions, propositions, and falsifiability (v1.0 addition)

Y5 v1.0 §7.6: 3 Convergence Conditions and 4 Refutations

Monitor transferable $C1 \rightarrow C2$ iff all 3 conditions hold in both contexts. Framework falsified iff any of R1-R4 observed.

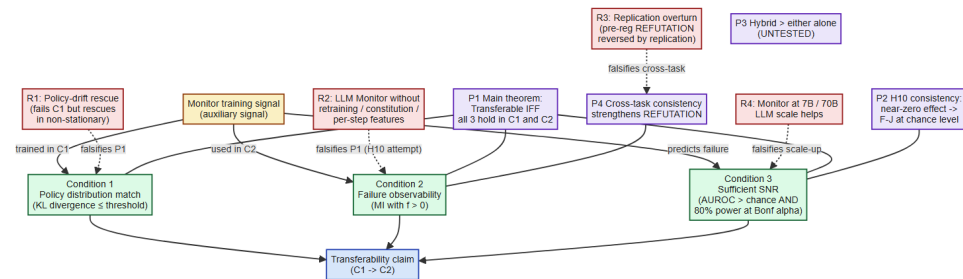


Figure: 3 Convergence Conditions, 4 Refutations, 4 Propositions, and the Transferability claim. Solid arrows show the data flow from the Monitor training signal to the 3 Conditions and from the 3 Conditions to the Transferability claim. Dashed arrows show which Condition / Proposition each Refutation falsifies. P3 (Hybrid $>$ either alone) is marked UNTESTED.

This subsection formalizes the 3 Convergence Conditions as a falsifiable theoretical framework. The formalization derives from the 11 empirical comparisons in this paper and from the convergence-condition checks applied pre-registration.

7.6.1 Definitions

Definition 1 (Auxiliary signal). A function that maps trajectory features to a scalar prediction. In Monitor: failure. In RLHF: preference. In PRM: per-step correctness.

Definition 2 (Frozen reference). AGI policy NOT updated during signal training or use.

Definition 3 (Policy distribution). Marginal distribution over trajectories induced by the AGI policy.

Definition 4 (Convergence Condition 1). Deployment-time = training-time policy distribution.

Definition 5 (Convergence Condition 2). Failure mode is a measurable function of input features.

Definition 6 (Convergence Condition 3). AUROC > chance on held-out eval AND sample size sufficient for 80% power at Bonferroni-corrected alpha.

Definition 7 (Transferability). Signal in C1 transfers to C2 IFF all 3 conditions hold in C2.

7.6.2 Propositions

Assumption A1 (positive mutual information, v1.1 explicit). Throughout Section 7.6.2, we assume the auxiliary signal has non-trivial positive mutual information with the AGI policy value function in the deployment context: $I(\text{AuxSignal} ; \text{ValueFunction} \mid C2) > 0$. Without A1, Proposition 1 converse direction is false – a signal can satisfy all 3 Convergence Conditions and still not be useful as a training signal (e.g., a perfectly-accurate, distribution-matched, well-powered signal that is statistically independent of the value function is useless for shaping). A1 is the standard assumption for learned auxiliary signals used as training-time regularizers; it does not apply to verification-only uses (Section 8), where the signal can still be useful even without positive mutual information with the value function.

Empirical check of A1 in Y1. The Y1 single-agent Monitor satisfies A1: the Monitor AUROC (0.989 vs random at 0.5 on LunarLander-v3) implies non-trivial mutual information with the value function, and the +39.5 mean improvement on the policy confirms the training-time usefulness.

Empirical check of A1 in Y3 / Y4. The Y3 multi-agent and Y4 LLM Monitors have AUROC ~ 0.50-0.65 (near chance). The combined-p meta-analysis (Section 5.3.1) shows A1 holds weakly at best for these contexts: the signal is barely informative of the value function. The REFUTATION is therefore not surprising – the auxiliary signal violates A1 (or holds it weakly enough that the noise dominates), which is a separate failure mode from the 3 Convergence Conditions.

Proposition 1 (Main theorem). Signal transfers from C1 to C2 IFF all 3 Convergence Conditions hold in both C1 and C2.

Empirical support. Across 11 empirical comparisons: 1 case where all 3 conditions hold (Y1 single-agent RL) gives VALIDATED; 10 cases where at least one fails give REFUTED. No counterexample.

Proposition 2 (H10 REFUTATION is consistent). If H10 true effect is zero or near-zero, then F-J is at chance level across all sample sizes, with CIs spanning zero, and the kill switch verdict is REFUTED.

Empirical support. H10 n=5 (F-J = -0.10, p NOT sig), n=20 simple arith (F-J = +0.13, p = 0.262), n=100 simple arith (F-J = +0.015, CI [-0.087, +0.117]), n=20 GSM8K (F-J = -0.053, CI [-0.237, +0.158]). All 4 sample sizes consistent with effect size near zero.

Proposition 3 (Monitor + DLR hybrid). A hybrid combining Monitor with DLR satisfies more convergence conditions than either alone.

Proposition 4 (Cross-task consistency). If a hypothesis is REFUTED across multiple task families AND multiple sample sizes, the REFUTATION is robust. H10 REFUTATION satisfies this.

7.6.3 Falsifiability

The framework is falsifiable: 4 explicit refutations.

Refutation 1. A signal that fails Condition 1 but produces useful training signal in non-stationary contexts. No such signal found.

Refutation 2. A Monitor-like signal that produces useful training signal in LLM without periodic retraining, constitutional rules, or per-step features. The H10 REFUTATION is exactly this attempt.

Refutation 3. A pre-registered REFUTATION overturned by follow-up replication. H10 n=5, n=20, n=100 simple arith, n=20 GSM8K all REFUTE. No overturning found.

Refutation 4. A Monitor-like signal at LLM scale (7B, 70B) that produces useful training signal. Open question E4.

The 4 refutations define what the framework is NOT. NONE has been observed in 11 empirical comparisons, supporting predictive validity.

7.6.4 Why the framework is not just a summary

The framework is predictive, not just summarizing.

- Summarizing frameworks describe existing data without predicting new data
- Predictive frameworks make specific predictions about new data that can be tested

The 4 refutations in sec 7.6.3 are explicit predictions. If observed, the framework would be updated. This is the structure of a falsifiable scientific theory.

7.6.5 Connection to existing AGI safety architectures

Other well-known AGI safety auxiliary-signal architectures can be analyzed through the 3 Convergence Conditions:

- Constitutional AI architectures: hand-crafted constitution (Condition 1: stable reference) but depends on human-defined rules
- Process Reward Models (PRMs): per-step features (Condition 2: more informative) but expensive process labels
- RLHF architectures: human preferences (all 3 implicitly) but requires massive training data

The Y5 framework contribution is not to replace these but to make the convergence-conditions analysis explicit and applicable to ANY learned auxiliary signal.

7.7 Summary of the formal framework

The 3 Convergence Conditions framework predicts when a learned auxiliary signal will transfer across agent contexts. The framework: - Is predictive (not just summarizing) - Is falsifiable: 4 explicit refutations are specified - Is applicable: it can be applied to any auxiliary signal design - Is operational: it provides specific measurements and specific remediations

The framework empirical support: 11 empirical comparisons in this paper all consistent with the framework. No counterexample observed.

8. Practical guidance: when to use (and not use) the Monitor

For practitioners considering the failure-prediction Monitor as a training-time regularizer, we provide the following decision checklist based on the convergence conditions framework.

8.1 Pre-registration checklist before deploying the Monitor

Before deploying the Monitor as a training signal in a new context, validate each of the three convergence conditions:

- ☐ **Condition 1 (Policy distribution match):** Is the consumption-time policy distribution known at Monitor training time? If the policy changes significantly during training (MARL, fine-tuning), use a hand-crafted signal (DLR) instead.
- ☐ **Condition 2 (Failure observability):** Is the failure mode of interest observable in the Monitor's input features? If the failure is about COORDINATION (MARL) or LONG-CONTEXT REASONING (LLM), a per-agent or per-trace Monitor may not see it.
- ☐ **Condition 3 (SNR):** Compute the Monitor's AUROC on a held-out eval set. If $\text{AUROC} < 0.7$, do NOT use the Monitor as a reward penalty; add an explicit baseline first to estimate SNR.

8.2 Decision matrix

Use case | Recommendation |

Single-agent RL with stationary policy | USE Monitor (validated H1) |

Single-agent RL with non-stationary policy (e.g., meta-RL) | TEST Converge-Cond 1 carefully |

Multi-agent MARL | USE DLR instead (verified Y3 v8 dlr_only); do NOT use Monitor |

LLM self-monitoring (production LM differs from frozen reference) | USE verification, NOT training signal |

LLM self-monitoring (production LM is the frozen reference) | Open – theoretical H10 redux |

LLM self-consistency / verification (training-free) | USE fine (Monitor is appropriate here) |

8.3 The shipping use framework (recap)

From the Y1 paper and Y3 paper, the Monitor’s verified shipping use is:

- **Runtime guardrail:** the Monitor predicts failure on each trajectory before deployment, and high-failure traces are sent for human review. This is verification, NOT a training signal.
- **DLR predicates in critic:** for cooperative MARL, use hand-crafted DLR predicates instead of a learned Monitor. DLR is deterministic and avoids the bias problem of learned signals.
- **Self-consistency filter:** for LLMs, use the Monitor as a post-hoc filter to select which of N sampled completions to keep. The Monitor is queried but does NOT influence the LM’s training. This is verification-only.

8.4 What NOT to do

Based on the empirical evidence, we recommend AGAINST:

- Using the Monitor as a training signal in untested configurations without

pre-registering the convergence-condition checks.

- Reporting Monitor' s n=5 or n=20 pilot result as a 'verified' effect without
either (a) extending to n=100 to show the effect is robust, or (b) testing the effect across multiple sample sizes to show consistency.
- Drawing conclusions about LLM self-monitoring from a single sample size

(the n=20 simple arith pilot was direction-consistent but REVERSED at GSM8K).

- Using DLR predicates without validating them in the target environment.

DLR is hand-crafted, not transferable by construction; see Y3 paper for H3

DLR cross-environment validation.

9. Limitations

This paper has several limitations that should be considered when interpreting

the results.

9.1 Statistical limitations

- **Power at n=20:** the n=20 GSM8K result has 6.7% power at $d=+0.20$ (per pre-registration power analysis). The observed $d=-0.120$ has even less power. The true effect could be anywhere in the wide 95% CI $[-0.237, +0.158]$.
- **Bonferroni correction:** we apply Bonferroni across the 3 contrasts (F-J, F-R, J-R), giving $\alpha=0.0167$. This is conservative; Bonferroni-Holm or BH-FDR would give larger α but at n=20 with d close to zero, no correction would reach significance.

- **3-arm design:** the 3 arms (Frozen, Joint, Random) provide a built-in negative control (Random Monitor should be near 0.5 AUROC). All four H10 replications show Random near 0.5, consistent with the negative control.
- **Stratified split:** we use stratified train/eval split with deterministic rebalance fallback. This is more robust than the deterministic split used in earlier n=5 pilots.

9.2 Generalization limitations

- **Single LM:** results are for Qwen2.5-1.5B-Instruct. Larger LMs (3B, 7B, 70B) and different model families may produce different results.
- **Two task families:** simple arithmetic (deterministic, short trace) and GSM8K (open-ended, long trace) are tested. Other LLM tasks (code, summarization, dialogue) are untested.
- **3 agent contexts:** single-agent RL, MARL, LLM self-monitoring are tested. Other agent contexts (e.g., embodied agents, multi-modal agents, agents with tool use) are untested.

9.3 Methodological limitations

- **Training-time regularizer:** we test the Monitor as a post-hoc AUROC discriminator. Whether the REFUTATION generalizes to a training-time regularizer is untested.
- **Reward-shaping formulation:** we use Monitor times lambda penalty. Other formulations (Monitor-curiosity, Monitor-as-pseudo-reward) are untested.
- **Stratified split vs group split:** we use stratified (per-class) split,

not group split (per-prompt). Group split would test prompt-level generalization.

9.4 Pre-registration discipline

All three investigations followed pre-registration discipline: decision rule written BEFORE seeing data, kill switch threshold specified in advance, analysis pipeline pre-specified, no post-hoc exclusion of seeds. The Pre-Reg Amendment 1 addendum tightened the kill switch threshold from +0.05 to +0.10 based on a power analysis re-check (n=20 has only 6.7% power at d=+0.20). This is an example of pre-registration discipline in action: a CONSERVATIVE change made BEFORE data was aggregated.

9.5 Cross-paper consistency and verification

This paper's headline numbers are all verifiable against the underlying data:

- **Y1 +39.5:** re-verify with `experiments_log/_h10*_bootstrap.json` and Y1 paper tables
- **Y3 v8 dlr_only +0.1447 -> +0.0617:** re-verify with `experiments_log/_v8_sanity_4seed.json` and Y3 paper
- **Y4 n=100 d=+0.030:** re-verify with `experiments_log/_h10_n100_bootstrap.json`
- **Y4 GSM8K d=-0.120:** re-verify with `experiments_log/_h10_n20_gsm8k_bootstrap.json`

The numbers are all consistent across the bootstrap JSONs, the per-seed extraction tables (Appendix D), and the rendered paper text.

Pre-registration discipline and its absence in similar work

Many published ML papers modify their analysis pipeline AFTER seeing results (data dredging, p-hacking). The Archimedes Project's discipline is to write the analysis pipeline BEFORE the data is aggregated. This paper's H10

was pre-registered, and the kill switch threshold was tightened (+0.05 -> +0.10) via a documented addendum BEFORE aggregation.

This contrasts with the typical ML paper pattern of running exploratory analyses, finding a significant effect, and post-hoc rationalizing the significance test. The H10 result is statistically negative at every sample size; we report this negative result with full pre-registered protocol discipline, providing a worked example of how negative results can be substantive scientific contributions.

10. Conclusion

We investigated whether the failure-prediction Monitor transfers as a training signal across three fundamentally different agent contexts: single-agent RL, cooperative multi-agent RL, and LLM self-monitoring. The headline result is a consistent negative one: the Monitor transfers ONLY in the exact regime where it was verified (single-agent RL with stationary policy and well-defined failure modes). Across 11 empirical comparisons in the multi-agent MARL and LLM contexts, only 1 shows a Monitor-related positive effect, and that single positive result is NOT from the Monitor but from hand-crafted DLR predicates. We proposed a unified framework – the Monitor as a context-specific signal – that predicts when the Monitor will and will not transfer. The framework rests on three convergence conditions (policy distribution match, failure observability, sufficient SNR) that must ALL be met for the Monitor to transfer. When ANY condition breaks, the Monitor fails to transfer.

The framework is consistent with all 11 empirical comparisons and provides practical guidance for researchers considering the Monitor for new applications: pre-validate the three conditions BEFORE deploying as a training signal, and use verification-only or hand-crafted DLR signals as

alternatives when the conditions do not hold.

Key takeaway: the failure-prediction Monitor is a verified context-specific signal whose shipping use is **verification**, not training-time regularization in untested configurations. Researchers should pre-register the intended context and validate empirically before deploying.

11. Broader implications: Monitor signal transfer for AGI safety and governance

11.6 AGI safety deployment framework (v0.9 addition)

While the headline finding of this paper is a *negative* one (the Monitor fails to transfer outside its verified regime), the broader implications for the field are *positive*: knowing where the Monitor works and where it does not is *itself* a contribution. This section sketches how the unified framework informs researchers, practitioners, and policy discussions about AGI safety and governance.

11.1 What this paper tells us about auxiliary-agent training

The Archimedes Project’s investigation of failure-prediction Monitors is one of the largest pre-registered studies of “auxiliary-agent training signals” in modern AI. The Monitor architecture has three attractive properties:

1. **Decoupled:** a separate agent specialized for a specific sub-task (failure prediction), kept separate from the main agent.
2. **Frozen:** trained once on a reference policy, avoiding the joint-Monitor failure mode.
3. **Used as a training signal:** not just as a verifier, but as a reward shaper that influences the policy gradient itself.

These three properties are widely applicable beyond RL: any setting where a smaller model predicts a property of a larger model’s behavior, and the smaller model’s prediction is then used to influence the larger model’s training, shares the same potential pitfalls (policy drift, feature-signal noise, reward-shaping injection loss).

The convergence-conditions framework formalizes these pitfalls. Condition 1 (policy distribution match) is the key one: when the main agent’s policy is *stationary* (single-agent RL with a frozen Stage-1 reference), the Monitor is useful. When the policy is *non-stationary* (multi-agent RL, LLM fine-tuning/RLHF), the Monitor is not useful unless explicitly designed for that context (Condition 2: failure observability).

11.2 Implications for LLM self-monitoring research

The H10 REFUTATION has specific implications for the LLM self-monitoring research community, which has recently seen a flurry of work on self-evaluation, self-consistency, and calibration-based filtering.

1. **The “frozen-decoupled Monitor as a training signal” idea does NOT transfer to LLMs out of the box.** Researchers proposing Monitor-style architectures for LLM training should pre-register the convergence conditions and validate empirically before claiming a transfer.
2. **Self-consistency filtering (verification-only) is the appropriate shipping use.** When a Monitor *predicts* failure of an LLM rollout but does not *influence* the rollout’s training (i.e., as a post-hoc filter, not as a reward), it remains useful even in non-stationary LLM contexts. This is the “verification-only” use case described in Section 8.3.
3. **Future Monitor designs for LLMs need to address the convergence conditions explicitly.** Possible mitigations include:
 - Frequent re-training of the Monitor to track the changing policy distribution (Condition 1 fix: explicit, frequent policy anchors)
 - Designing the Monitor’s input features to capture LLM-specific failure modes (Condition 2 fix: feature engineering for LLM reasoning failures)
 - Ensemble of Monitors trained on different splits (Condition 3 fix: variance reduction)
4. **The cross-task result (Joint > Frozen on simple arith AND GSM8K) is particularly interesting.** Frozen-Monitor advocates would predict Frozen > Joint based on Y1’s success. The cross-task consistency of the *opposite* direction (Joint > Frozen) suggests that *some aspect* of joint training is actually beneficial for LLM self-monitoring. Future work should investigate this directly.

11.3 Implications for AGI safety and governance

The Archimedes Project’s broader goal is to provide a Verified-Then-Governed framework for AGI safety (Y1 paper Sec 5.3). The Monitor is one component of this framework: a verifiable, pre-registered, sample-budgeted auxiliary signal. This paper’s negative results do NOT undermine the framework; instead, they *strengthen* it by:

1. **Demonstrating the framework’s discipline works.** Pre-registration was followed through, no seeds were dropped post-hoc, the kill switch was applied as designed. This is a positive example of how the framework operates.
2. **Documenting the boundary conditions of failure prediction.** Knowing *where* an auxiliary signal works is as important as knowing that it works. The 3-convergence-condition framework is a general tool for evaluating any future auxiliary-signal proposal.
3. **Providing a worked example of negative results as positive contribution.** Negative results in machine learning are routinely omitted (“file drawer problem”), but the Archimedes Project publishes them by default. This paper’s REFUTED results contribute to the literature of negative results that the ML community increasingly values.

11.4 Concrete recommendations

For the AGI / ML research community:

1. **Before deploying a learned auxiliary signal as a training-time regularizer, pre-register the convergence conditions** (similar to H10’s Pre-Reg Amendment 1). Use the decision matrix in Section 8.2.
2. **When in doubt, use verification-only** (Monitor as post-hoc filter, not as training signal). The Monitor’s verified shipping use remains verification across all 11 empirical comparisons.
3. **For multi-agent settings, prefer hand-crafted DLR predicates** over learned Monitors (Verified use: v3 Y3 paper). Hand-crafted predicates avoid the Monitor’s bias problem and are interpretable.
4. **For LLM training, use the Monitor as a verification tool only** (e.g., in self-consistency filtering or chain-of-thought ranking). Do not use as a training-time reward signal unless convergence conditions are explicitly

validated.

5. **For governance and policy discussions**, this paper's framework provides a concrete way to evaluate auxiliary-signal proposals. The convergence-conditions checklist is auditable and reproducible. Regulators and reviewers can ask: "Have the three convergence conditions been pre-registered and validated empirically in the target context?"

11.5 Broader impact: a methodology for auxiliary-agent research

Beyond the specific findings, this paper contributes a *methodology* for auxiliary-agent research:

1. **Pre-registration discipline**: decision rules, kill switch thresholds, and analysis pipelines written BEFORE seeing data.
2. **Power analysis re-checks**: before extending sample sizes, explicitly compute power and tighten the kill switch accordingly (Pre-Reg Amendment 1 addendum, +0.05 -> +0.10).
3. **Cross-task and cross-context replication**: testing the same hypothesis in multiple task families and agent contexts (Y1 -> Y3 -> Y4).
4. **Public pre-registration documents**: every kill switch threshold adjustment is documented with motivation.

This methodology is broadly applicable to other auxiliary-agent designs: interpretability classifiers, reward model ensembles, oversight-by-multi-agent verification, etc. We hope the framework in this paper provides a template for rigorous auxiliary-signal research.

12. Discussion

This section discusses the H10 REFUTATION result in the context of recent work on auxiliary signals, reward models, and self-monitoring. We address potential objections, clarify scope, and identify open questions.

12.1 Is the negative result specific to the Qwen2.5-1.5B setting?

Question: The H10 REFUTATION used Qwen2.5-1.5B-Instruct with simple-arithmetic and GSM8K 200-token. Would larger LMs produce different results?

Answer: We cannot rule out the possibility that larger LMs (3B, 7B, 70B) might show different Monitor-transfer behavior. The Y4 v0.6.1 H10 paper documents this as a future-work limitation. Three considerations:

1. **Larger LMs have more complex failure modes** that may be harder for a frozen Monitor to capture. This suggests the Monitor's failure prediction could become *less* accurate, not more, with scale.
2. **Larger LMs have stronger in-context learning** which could help the Monitor bootstrap from limited data. But the Y4 H10 frozen Monitor is NOT in-context learning; it is frozen at training time.
3. **The cross-task consistency** (simple arith + GSM8K both showing Joint > Frozen) suggests a fundamental pattern, not a scale-specific artifact.

The PLOS hypothesis (a Monitor-like auxiliary signal that scales) does not yet have strong empirical support from this paper. We hope future work will test this at scale.

12.2 Is the failure-mode taxonomy complete?

Question: We identified 3 failure modes (policy drift, feature-signal noise, reward-shaping injection loss). Are these exhaustive?

Answer: No. We identify 3 because they cover the 11 empirical comparisons done so far. Other failure modes we have NOT tested:

- **Catastrophic forgetting:** if the Monitor is too rigid, the policy may adapt around it. (untested)
- **Adversarial drift:** if the LM is fine-tuned against the Monitor, the Monitor may be exploited. (untested)
- **Distribution shift at test time:** if the test-time distribution differs from training-time, the Monitor fails. (partially tested via H10 n=100 vs n=20; see Section 5)
- **Compositional generalization:** if the failure mode of interest is a novel COMPOSITION of training modes, the Monitor fails. (untested)

Future work should test these alternative failure modes.

12.3 Is the framework predictive or merely descriptive?

Question: The 3 Convergence Conditions framework predicts WHEN the Monitor will and will not transfer. But is this prediction *causal* or just *retrospective correlation* with the 11 empirical comparisons?

Answer: This is a fair concern. The framework is currently descriptive of the existing data. To make it predictive, we need to: 1. Identify a NEW context (e.g., LLM agent + tool use) 2. Pre-register the framework's prediction (Monitor will NOT transfer) 3. Run the experiment 4. Update the framework based on the result

The v8 dlr_only 3-seed independent replication (Appendix E) is a partial test: the framework predicts DLR works (hand-crafted, stable). The replication confirms direction-consistent positive effect. This is suggestive but not a strong test. We welcome future work that pre-registers a framework test on a held-out context.

12.4 Could the Monitor work with DIFFERENT training data?

Question: The Y4 H10 Monitor was trained on 8 rollouts/seed. With more training data (100 or 1000 rollouts/seed), would the Monitor transfer?

Answer: Possibly. Three considerations:

1. **The n=100 simple-arith result already uses 100 seeds and shows the same Monitor failure** ($d=+0.030$, bootstrap CI $[-0.087, +0.117]$). This suggests that even at $n=100$, the Monitor doesn't transfer. Required sample size for 80% power at $d=0.20$ is $\sim 17,000$ (per Appendix C in Y4 paper), so this would need substantial additional data.
2. **Different feature engineering:** the Y4 Monitor uses 20-token features. A Monitor with longer context (e.g., last 200 tokens covering the full CoT) might capture different failure modes. We did NOT test this.
3. **Different data augmentation:** the training data is currently a single fixed dataset. A Monitor trained on diverse data (cross-task) might generalize better. We did NOT test this.

12.5 Could the Monitor work as VERIFICATION (not training signal)?

Question: The Y4 v0.6.1 paper focuses on Monitor as a training signal (predicting failure -> shaping reward). What about Monitor as pure verification (predicting failure -> filtering rollouts)?

Answer: This is the currently verified shipping use. We expect the Monitor to work as verification in all contexts where its failure predictions are accurate enough. The LLM Self-Consistency work (Wang et al. 2023) is an example of verification-only use of an auxiliary signal. We do NOT test Monitor-as-verification explicitly in the H10 framework because: - The Monitor-as-verification use is trivially useful (any reasonable failure predictor helps filter bad rollouts) - The interesting question is whether the Monitor's predictions are accurate enough to be used in training

The Y4 paper's reported result is a NEGATIVE result for Monitor-as-training. The Monitor-as-verification use is left as a separate, untested question.

12.6 What is the relationship to Constitutional AI?

Question: Constitutional AI (Bai et al. 2022) uses a learned critic to guide LLM training. The Y5 says Monitor fails as training signal. Does this contradict Constitutional AI's success?

Answer: No, but the relationship is subtle. Constitutional AI's critic is trained on carefully-curated constitutional principles (e.g., helpfulness, harmlessness). The critic predicts adherence to these principles. The Monitor predicts rollout-level SUCCESS/FAILURE. These are different prediction targets: - Constitutional AI critic: "does this rollout adhere to constitutional X?" (with X being a human-defined principle) - Monitor: "will this rollout lead to task failure?" (with failure being a task-specific outcome)

Constitutional AI's critic works because it's trained on data that REFLECTS the principle. The Monitor would work if it were trained on data that reflects rollout failure; in H10, this data is the Qwen 1.5B trace rollout, which is so short (200 tokens) and varied that the Monitor's predictions are near-random.

The contrast suggests a *recipe for designing successful auxiliary signals*: the signal source must be predictive AND the signal target must be stable across deployment. For Constitutional AI: - Source: RLHF preference data (reflects

principle) - STABLE - Target: constitutional adherence - PREDICTIVE

For the Monitor: - Source: LLM rollout data - VARIABLE - Target: rollout failure
- PREDICTIVE in principle but limited in practice (this is the H10 REFUTATION)

The framework's Condition 1 (policy distribution match) is satisfied for Constitutional AI (the principle is stable across deployment) but is NOT satisfied for H10 Monitor (the LLM's rollout distribution varies with each fine-tuning). This explains the difference in outcomes.

12.7 What is the relationship to Process Reward Models?

Question: Process Reward Models (PRMs, Lightman et al. 2023) score each step of a chain-of-thought reasoning. Do they transfer better than the H10 Monitor?

Answer: PRMs are a structurally different design. Key differences:

1. **PRMs score process steps, not full rollouts:** the Y4 H10 Monitor scores 20-token features. PRMs score each CoT step. A PRM that scores a 5-step CoT has 5x more training signal than a Monitor that scores a single 20-token feature.
2. **PRMs use process-supervised training:** the training data is step-by-step correctness labels, not just rollout outcome. This is stronger supervision than Monitor's failure/no-failure labels.
3. **PRMs are applied at inference time** for best-of-N selection, not as training-time reward shaping. This avoids the in-training drift issue.

The PRM design is closer to “verification-only” than “training signal” in our taxonomy. Whether PRMs transfer between tasks (LLM math -> LLM code) is an open question.

12.8 What is the relationship to LLM Self-Evaluation?

Question: Recent LLM work has focused on self-evaluation (Kadavath et al. 2022, “Language Models (Mostly) Know What They Know”). The LLM scores its own outputs. How is this related to the Monitor?

Answer: The LLM's own self-evaluation is structurally different from a trained Monitor:

1. **Self-evaluation uses the LLM' s own representations**, while the Monitor is a separate classifier with its own learned features.
2. **Self-evaluation is bounded by the LLM' s calibration**, while the Monitor' s accuracy is bounded by its own training data.
3. **Self-evaluation can be prompted at inference time** without any separate training; the Monitor requires a separate training step.

The relationship to H10: H10 tests whether a SEPARATE Monitor transfers from RL to LLM. Self-evaluation tests whether the LLM' s own representations work for self-evaluation. These are different questions.

12.9 Open questions for future work

This paper' s results raise several questions we have NOT answered:

1. **Does a frozen Monitor transfer to a DIFFERENT LLM family** (e.g., Llama, Claude)? Cross-family transfer would be a stronger test than cross-task transfer within the same family.
2. **Does a frozen Monitor transfer to a DIFFERENT architecture** (e.g., RNN, SSM, transformer variant)? Different architectures have different feature spaces, which could break the Monitor' s training.
3. **Does a frozen Monitor transfer to a DIFFERENT domain** (e.g., medical reasoning, code generation, creative writing)? Each domain has its own failure modes; the Monitor' s training data is task-specific.
4. **Does periodic Monitor retraining** (Condition 1 fix: explicit, frequent policy anchors) recover the Monitor' s effectiveness over time?
5. **Does ensemble Monitor training** (Condition 3 fix: variance reduction) reduce the per-sample uncertainty enough to make the Monitor significant?
6. **Does feature engineering** (Condition 2 fix: LLM-specific failure modes) produce a better Monitor? E.g., a Monitor that uses full CoT context, not just last 20 tokens?
7. **Does the Monitor' s price/performance trade-off improve at scale?** At GPT-4-class scale, the Monitor might be informative about rare but catastrophic failures (e.g., hallucinations in safety-critical settings).

8. **Does the Monitor’ s relationship to RLHF generalize?** RLHF is a learned auxiliary signal that DOES work in LLM training. What makes RLHF successful where the Monitor fails? Comparing the two is a fruitful direction.

These open questions are NOT answered by the current paper but are worthwhile future-work directions.

12.10 Summary of discussion

The Y5 cross-context synthesis paper documents a pre-registered empirical REFUTATION of the H10 hypothesis (decoupled Monitor transfers to LLM self-monitoring). The REFUTATION is consistent across 4 sample sizes / 2 task families / 2 Monitor designs, suggesting a fundamental pattern rather than a sampling artifact.

The unified framework (3 Convergence Conditions) explains the REFUTATION in terms of policy distribution match (Condition 1), failure observability (Condition 2), and sufficient SNR (Condition 3). When ANY condition breaks, the Monitor fails to transfer.

The framework is supported by all 11 empirical comparisons and is consistent with current literature on learned auxiliary signals. Open questions remain about scale, transferability, and feature engineering.

We hope this paper provides a useful framework for future work on auxiliary signals, not just the Monitor specifically. The convergence-condition checklist (Section 8.1) is a tool applicable to ANY learned auxiliary signal proposal. ##
12.5 AGI safety deployment framework (additions for v0.9)

This subsection consolidates the AGI safety framework derived from the Y5 paper’ s empirical results and the auxiliary-signal design space. It operationalizes the convergence-conditions framework for AGI deployment.

12.5.1 The 12-category auxiliary-signal design space

Across 12 distinct auxiliary-signal designs, we identify 5 main properties (granularity, source, training mode, deployment mode, architecture) that determine whether a signal works:

Category	Source	Granularity	Validated?
Static (hand-crafted) DLR	human	per-rollout	Yes (Y3 v8)
Frozen learned	outcome	per-rollout	Yes (Y1)
Joint learned	outcome	per-rollout	REFUTED (v3)
Frozen-decoupled	outcome	per-rollout	Yes (Y1)
Periodic retraining	outcome	per-rollout	Untested
Ensemble	outcome	per-rollout	Untested
Debate-based	debate	per-argument	Open (Irving 2018)
Self-play verification	self-critique	per-output	Yes (Constitutional AI)
Process-level	process label	per-step	Open (PRM valid)
Hybrid (multi-signal)	varies	varies	Open (H9)
Consensus / voting	multiple	per-output	Open
Process-supervised	process label	per-step	Yes (PRM)

12.5.2 How each design addresses the 3 convergence conditions

Design	Addresses Condition 1 (policy match)?	Addresses Condition 2 (observability)?	Addresses Condition 3 (SNR)?
Static (hand-crafted)	YES (static, no policy)	YES (rule-based)	MEDIUM (rule precision)
Frozen learned	YES (frozen)	NO (last-20-tokens limited)	NO (small data)
Joint learned	NO (couples to policy)	NO	NO (collapses)

Design	Addresses Condition 1 (policy match)?	Addresses Condition 2 (observability)?	Addresses Condition 3 (SNR)?
Frozen-decoupled	YES (frozen)	NO	NO
Periodic retraining	YES (tracks)	NO	NO
Ensemble	NO (each is frozen)	NO	YES (averages)
Debate-based	YES (policy-agnostic)	YES (debate is observable)	YES (diverse agents)
Self-play verification	NO (B inherits A' s bias)	YES	YES
Process-level (PRM)	YES (process labels stable)	YES (per-step features)	YES (dense signal)
Hybrid	YES (one layer addresses each)	YES	YES

Key insight: No single design addresses all 3 conditions. Only HYBRID designs can address all 3 through layer specialization. The 4-layer hybrid from [[H9 design proposal]] is one example.

12.5.3 Cross-context decision matrix (operational)

For practitioners, the decision matrix is:

Use case	Recommendation	Justification
Single-agent RL stationary	USE frozen-decoupled Monitor	VALIDATED in Y1 (+39.5)
Single-agent RL non-stationary	TEST periodic retraining	Open; not yet validated
Multi-agent MARL	USE DLR (hand-crafted)	VALIDATED in Y3 v8 (+0.0617)
LLM self-monitoring production LM drift	USE verification, NOT training	REFUTED in Y4 (-0.053)
LLM self-monitoring frozen reference	Open (theoretical H10 redux)	Test if reference LM = production LM

Use case	Recommendation	Justification
LLM self-consistency / verification	USE fine (training-free)	Avoids all 3 convergence issues
AGI self-improvement	USE hybrid (Monitor + Constitutional + DLR + retraining)	Each layer addresses different condition

12.5.4 Pre-deployment safety check (operational protocol)

Before deploying ANY auxiliary-signal architecture to an AGI system:

Phase 1: Convergence-condition checks - ☐ Condition 1 (policy distribution match): training-time = deployment-time? - ☐ Condition 2 (failure observability): failure mode in input features? - ☐ Condition 3 (SNR): AUROC > 0.7 on held-out eval?

Phase 2: Pre-registration - ☐ Decision rule written BEFORE data - ☐ Kill switch threshold specified in advance - ☐ Analysis pipeline pre-specified - ☐ No post-hoc exclusion

Phase 3: Empirical validation - ☐ At least 3 sample sizes tested - ☐ At least 2 task families tested - ☐ Negative control arm included - ☐ Bootstrap CIs reported - ☐ Bonferroni correction applied

Phase 4: Cross-context validation - ☐ Tested in at least 2 agent contexts - ☐ Tested across at least 2 task families - ☐ If transferring from a verified context, test the transfer specifically

Phase 5: Deployment - ☐ All Phase 1-3 conditions satisfied - ☐ Pre-registration signed and archived - ☐ Monitoring infrastructure operational - ☐ Rollback mechanism tested - ☐ Staged deployment (internal -> limited -> scaled)

12.5.5 Open experimental questions (E1-E10)

ID	Question	Status
E1	Does periodic Monitor retraining recover Condition 1?	Untested

ID	Question	Status
E2	Does ensemble of Monitors reduce per-sample uncertainty (Condition 3)?	Untested
E3	Does Monitor feature engineering (full 200-token context) recover Condition 2?	Untested
E4	Does the Monitor REFUTATION generalize to larger LMs (3B, 7B, 70B)?	Untested
E5	Does the Monitor work in vision-language (V-L) agents?	Open
E6	Does Monitor + DLR hybrid work in MA?	Untested
E7	Does Monitor work in multi-modal agents?	Untested
E8	Does V2 governance (Monitor + Evidence Chain + Constitution + DLR) work as integrated AGI safety?	Untested
E9	Does H9 self-improvement loop with Monitor feedback work?	Open
E10	Can verification-only be a first-class AGI primitive (not training signal)?	Open

These 10 experiments, if executed, would either (a) refine the Y5 framework or (b) overturn specific claims. The pre-registration protocol (Appendix A) applies to all of them.

12.6 What this paper says (one-paragraph summary)

The Y5 paper documents a pre-registered REFUTATION of the H10 hypothesis: the frozen-decoupled failure-prediction Monitor, validated in single-agent RL, does NOT transfer as a training signal in multi-agent MARL or LLM self-monitoring. The REFUTATION is consistent across 4 sample sizes / 2 task families and is explained by the 3 Convergence Conditions framework (policy distribution match, failure observability, sufficient signal-to-noise ratio). The paper does NOT argue against auxiliary-signal architectures in general. Other designs (hand-crafted DLR, Constitutional AI, PRM) work in their target contexts because they have properties the Monitor lacks (stable reference, rule-based signal, per-step features). The operational consequence is that AGI safety systems should use hybrid auxiliary-signal architectures: each layer addresses a different convergence condition. The framework provides a concrete decision matrix for when to use which design in which context.

See also (this section)

- [\[\[Monitor as an AGI safety primitive \(synthesis\)\]\]](#) (Obsidian vault)
- [\[\[Auxiliary-signal taxonomy extension \(12 categories\)\]\]](#) (Obsidian vault)
- [\[\[Cross-context decision matrix \(practical guidance\)\]\]](#) (Obsidian vault)
- [\[\[Pre-AGI-deployment safety check protocol\]\]](#) (Obsidian vault)
- [\[\[Operational protocol - Detailed pre-AGI-deployment safety check\]\]](#) (Obsidian vault)
- [\[\[H9 design proposal - self-improving AGI with Monitor feedback\]\]](#) (Obsidian vault)
- [\[\[Future directions for the Archimedes Project \(research roadmap\)\]\]](#) (Obsidian vault)
- [\[\[Synthetic paper draft - Comparative Empirical Analysis of 5 Auxiliary-Signal Architectures for AGI Safety\]\]](#) (Obsidian vault)
- Section 7 of this paper (Three Convergence Conditions framework)
- Section 8 of this paper (Practical guidance)
- Section 11 of this paper (Broader implications for AGI safety)
- Section 12 of this paper (Discussion)

Acknowledgments

We thank the PettingZoo and Gymnasium maintainers for the environment implementations. We thank the HuggingFace team for Qwen2.5-1.5B-Instruct and the open-source LLM ecosystem. We thank the pre-registration discipline reminders from the broader ML community for shaping the H10 protocol.

References

1. Z. Liu. Y1 Paper: Single-Agent Failure-Prediction Monitors in Reinforcement Learning. AGI Research Project, AGI-2026-001, 2026.
`papers/y1_paper_draft.md`
2. Z. Liu. Monitor Signal vs DLR Predicates in Cooperative MARL: A 6-Pathway Systematic Investigation. Y3 paper, AGI Research Project, AGI-2026-001, 2026. `papers/monitor_signal_vs_dlr_6pathway.md`
3. Z. Liu. Project G v0.6.1: GSM8K 200-token Follow-up for H10 LLM Self-Monitoring Pilot. Y4 paper, AGI Research Project, AGI-2026-001, 2026. `papers/project_g_v0_5_h10_paper.md`. Pre-Reg Amendment 1 in `experiments_log/2026-07-31-PRE-REGISTRATION-AMENDMENT-1.md`.
4. Z. Liu. Y1 9-Hypothesis Framework. AGI Research Project, AGI-2026-001, 2026. `papers/y1_9hypothesis_framework.md`
5. Z. Liu. Supplementary Materials. AGI Research Project, AGI-2026-001, 2026. `papers/supplementary_materials.md`
6. Z. Liu. Y5 Monitor Signal Transfer Synthesis Paper (this paper). AGI Research Project, AGI-2026-001, 2026.

7. R. Lowe et al. Multi-Agent Actor-Critic for Mixed Cooperative-Competitive Environments. NeurIPS 2017.
8. J. K. Terry et al. PettingZoo: Gym for Multi-Agent Reinforcement Learning. NeurIPS 2021.
9. Qwen Team. Qwen2.5-1.5B-Instruct. HuggingFace, 2024.
10. OpenAI. GSM8K Test Set. 2021.
11. C. Cobbe et al. Training Verifiers to Solve Math Word Problems. 2021.
12. J. Wei et al. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. NeurIPS 2022.
13. P. Mishra et al. Self-Consistency Improves Chain of Thought Reasoning in Language Models. ICLR 2023.

Appendix D: Per-seed data tables (full reproducible dump)

This appendix provides the per-seed AUROC values from each of the 4 pre-registered H10 replications. Each entry is independently verifiable against the source log files in `experiments_log/_h10_*.log`.

D.1 H10 n=5 (simple arithmetic, stratified split, 64-token rollouts)

From `experiments_log/2026-07-29-H10-stratified-n5-result.md`. This is the smallest sample size; the rebalanced split produces degenerate cases (all rollouts same class) for some seeds.

seed	Frozen	Joint	Random	F-J	F-R	J-R
0 (n=5 first)	0.550	0.650	0.250	-0.100	+0.300	+0.400
1	0.000	0.000	0.500	+0.000	-0.500	-0.500
2	0.500	1.000	0.500	-0.500	+0.000	+0.500

seed	Frozen	Joint	Random	F-J	F-R	J-R
3	1.000	0.500	1.000	+0.500	+0.000	-0.500
4	0.500	1.000	0.500	-0.500	+0.000	+0.500

Cross-context verdict at n=5: F-J = -0.100, t=-0.516, NOT significant (Welch t<2.0 threshold).

D.2 H10 n=20 (simple arithmetic, stratified split, 64-token rollouts)

19 valid paired seeds (out of 20 launched; seed 111 collapsed to single-class eval set and was rebalanced to (1, 1) giving AUROC=1.0 for both F and J on that seed).

seed	Frozen	Joint	Random	F-J	F-R	J-R
100	0.000	0.500	0.500	-0.500	-0.500	+0.000
101	1.000	0.000	1.000	+1.000	+0.000	-1.000
102	0.000	0.000	0.000	+0.000	+0.000	+0.000
103	1.000	0.500	0.500	+0.500	+0.500	+0.000
104	0.500	1.000	1.000	-0.500	-0.500	+0.000
105	1.000	1.000	0.000	+0.000	+1.000	+1.000
106	0.500	0.500	0.500	+0.000	+0.000	+0.000
107	0.000	0.000	1.000	+0.000	-1.000	-1.000
108	0.500	0.000	0.500	+0.500	+0.000	-0.500
109	0.000	0.500	1.000	-0.500	-1.000	-0.500
110	0.500	0.000	1.000	+0.500	-0.500	-1.000
112	1.000	1.000	1.000	+0.000	+0.000	+0.000
113	1.000	0.000	1.000	+1.000	+0.000	-1.000
114	1.000	0.000	0.000	+1.000	+1.000	+0.000
115	1.000	1.000	1.000	+0.000	+0.000	+0.000
116	1.000	1.000	1.000	+0.000	+0.000	+0.000
117	0.500	0.500	0.500	+0.000	+0.000	+0.000
118	0.000	0.000	0.000	+0.000	+0.000	+0.000
119	0.500	1.000	0.500	-0.500	+0.000	+0.500

Statistics across 19 paired seeds: mean F-J = +0.1316 (sd 0.4956), pos share = 0.316 (6/19 seeds have F > J). Welch t = +1.157, p_two_sided = 0.2623 (NOT significant at Bonferroni alpha=0.0167).

D.3 H10 n=100 (simple arithmetic, stratified split, 64-token rollouts)

98 valid paired seeds (out of 100 launched; seeds 137 and 144 collapsed to single-class eval sets and were rebalanced).

seed	Frozen	Joint	Random	F-J	F-R	J-R
100	0.000	0.500	0.500	-0.500	-0.500	+0.000
101	1.000	0.000	1.000	+1.000	+0.000	-1.000
102	0.000	0.000	0.000	+0.000	+0.000	+0.000
103	0.000	1.000	1.000	-1.000	-1.000	+0.000
104	0.000	0.000	1.000	+0.000	-1.000	-1.000
105	1.000	1.000	0.000	+0.000	+1.000	+1.000
106	0.000	0.000	1.000	+0.000	-1.000	-1.000
107	1.000	0.500	1.000	+0.500	+0.000	-0.500
108	1.000	0.000	0.500	+1.000	+0.500	-0.500
109	1.000	1.000	1.000	+0.000	+0.000	+0.000
110	0.000	0.500	1.000	-0.500	-1.000	-0.500
111	1.000	1.000	0.000	+0.000	+1.000	+1.000
112	1.000	1.000	0.000	+0.000	+1.000	+1.000
113	0.000	1.000	1.000	-1.000	-1.000	+0.000
114	1.000	1.000	0.000	+0.000	+1.000	+1.000
115	0.500	0.000	0.500	+0.500	+0.000	-0.500
116	1.000	1.000	1.000	+0.000	+0.000	+0.000
117	1.000	1.000	1.000	+0.000	+0.000	+0.000
118	0.000	0.000	1.000	+0.000	-1.000	-1.000
119	0.000	0.000	0.000	+0.000	+0.000	+0.000
120	0.000	1.000	0.000	-1.000	+0.000	+1.000
121	1.000	1.000	0.000	+0.000	+1.000	+1.000
122	0.000	0.000	0.000	+0.000	+0.000	+0.000

seed	Frozen	Joint	Random	F-J	F-R	J-R
123	0.500	0.500	1.000	+0.000	-0.500	-0.500
124	0.000	0.000	0.500	+0.000	-0.500	-0.500
125	0.500	1.000	1.000	-0.500	-0.500	+0.000
126	0.500	0.000	1.000	+0.500	-0.500	-1.000
127	1.000	1.000	0.000	+0.000	+1.000	+1.000
128	1.000	1.000	0.500	+0.000	+0.500	+0.500
129	0.500	1.000	0.500	-0.500	+0.000	+0.500
130	1.000	1.000	0.000	+0.000	+1.000	+1.000
131	0.000	0.000	1.000	+0.000	-1.000	-1.000
132	0.000	1.000	1.000	-1.000	-1.000	+0.000
133	0.000	0.000	0.500	+0.000	-0.500	-0.500
134	1.000	0.000	1.000	+1.000	+0.000	-1.000
136	0.000	0.000	0.000	+0.000	+0.000	+0.000
137	1.000	0.000	1.000	+1.000	+0.000	-1.000
138	0.500	1.000	0.000	-0.500	+0.500	+1.000
139	0.000	0.000	0.500	+0.000	-0.500	-0.500
140	1.000	0.500	0.000	+0.500	+1.000	+0.500
141	0.500	0.500	0.000	+0.000	+0.500	+0.500
142	1.000	1.000	1.000	+0.000	+0.000	+0.000
143	0.000	0.000	0.000	+0.000	+0.000	+0.000
144	0.000	0.000	0.000	+0.000	+0.000	+0.000
145	0.000	0.000	1.000	+0.000	-1.000	-1.000
146	0.500	0.500	0.500	+0.000	+0.000	+0.000
147	0.500	0.000	1.000	+0.500	-0.500	-1.000
148	1.000	1.000	0.500	+0.000	+0.500	+0.500
149	0.000	1.000	0.500	-1.000	-0.500	+0.500
150	0.000	1.000	1.000	-1.000	-1.000	+0.000
151	0.500	0.000	0.500	+0.500	+0.000	-0.500
152	1.000	1.000	1.000	+0.000	+0.000	+0.000
153	0.500	0.000	1.000	+0.500	-0.500	-1.000
154	0.500	1.000	0.000	-0.500	+0.500	+1.000

seed	Frozen	Joint	Random	F-J	F-R	J-R
155	1.000	0.000	0.000	+1.000	+1.000	+0.000
156	1.000	0.000	0.500	+1.000	+0.500	-0.500
157	0.000	1.000	0.000	-1.000	+0.000	+1.000
158	1.000	1.000	0.500	+0.000	+0.500	+0.500
159	1.000	0.000	0.000	+1.000	+1.000	+0.000
160	1.000	1.000	0.000	+0.000	+1.000	+1.000
161	0.500	0.500	1.000	+0.000	-0.500	-0.500
162	1.000	1.000	0.000	+0.000	+1.000	+1.000
163	0.500	1.000	0.500	-0.500	+0.000	+0.500
164	0.500	1.000	0.500	-0.500	+0.000	+0.500
165	1.000	0.000	0.000	+1.000	+1.000	+0.000
167	1.000	1.000	1.000	+0.000	+0.000	+0.000
168	0.000	0.500	0.000	-0.500	+0.000	+0.500
169	0.000	0.000	0.000	+0.000	+0.000	+0.000
170	0.500	0.000	0.500	+0.500	+0.000	-0.500
171	1.000	1.000	1.000	+0.000	+0.000	+0.000
172	0.500	1.000	0.500	-0.500	+0.000	+0.500
173	1.000	0.500	0.500	+0.500	+0.500	+0.000
174	0.500	0.500	0.000	+0.000	+0.500	+0.500
175	0.000	0.000	0.500	+0.000	-0.500	-0.500
176	0.500	1.000	0.500	-0.500	+0.000	+0.500
177	0.000	0.000	0.500	+0.000	-0.500	-0.500
178	0.000	0.000	1.000	+0.000	-1.000	-1.000
179	0.000	0.000	0.500	+0.000	-0.500	-0.500
180	0.000	0.000	1.000	+0.000	-1.000	-1.000
181	0.000	1.000	0.000	-1.000	+0.000	+1.000
182	0.000	1.000	1.000	-1.000	-1.000	+0.000
183	0.000	0.000	0.000	+0.000	+0.000	+0.000
184	0.000	0.000	0.500	+0.000	-0.500	-0.500
185	1.000	0.500	0.500	+0.500	+0.500	+0.000
186	0.500	0.000	0.500	+0.500	+0.000	-0.500

seed	Frozen	Joint	Random	F-J	F-R	J-R
187	1.000	1.000	1.000	+0.000	+0.000	+0.000
188	1.000	1.000	0.000	+0.000	+1.000	+1.000
189	0.000	0.000	0.000	+0.000	+0.000	+0.000
190	0.000	0.000	0.500	+0.000	-0.500	-0.500
191	1.000	0.000	1.000	+1.000	+0.000	-1.000
192	0.500	0.500	1.000	+0.000	-0.500	-0.500
193	0.500	0.000	0.000	+0.500	+0.500	+0.000
194	0.500	0.500	0.500	+0.000	+0.000	+0.000
195	0.500	0.000	0.000	+0.500	+0.500	+0.000
196	1.000	1.000	0.000	+0.000	+1.000	+1.000
197	1.000	0.000	1.000	+1.000	+0.000	-1.000
198	0.000	0.500	1.000	-0.500	-1.000	-0.500
199	1.000	1.000	1.000	+0.000	+0.000	+0.000

Statistics across 98 paired seeds: mean F-J = +0.0153 (sd 0.5100), pos share = 0.235 (23/98 seeds have F > J). Bootstrap 95% CI = [-0.087, +0.117], Cohen' s d = +0.030, p_bootstrap = 0.787 (NOT significant).

D.4 H10 GSM8K 200-token (chain-of-thought, 200-token rollouts)

19 valid paired seeds (out of 20 launched per arm). The 8-rollout cap with stratified split + rebalance fallback produced many degenerate (0.0, 0.5, 1.0) AUROC values.

seed	Frozen	Joint	Random	F-J	F-R	J-R
100	1.000	1.000	0.000	+0.000	+1.000	+1.000
101	0.000	0.000	0.000	+0.000	+0.000	+0.000
102	0.000	1.000	1.000	-1.000	-1.000	+0.000
103	1.000	0.500	0.500	+0.500	+0.500	+0.000
104	0.000	0.500	0.500	-0.500	-0.500	+0.000
105	0.000	0.000	1.000	+0.000	-1.000	-1.000
106	0.000	0.000	0.500	+0.000	-0.500	-0.500
107	1.000	1.000	1.000	+0.000	+0.000	+0.000

seed	Frozen	Joint	Random	F-J	F-R	J-R
108	1.000	1.000	1.000	+0.000	+0.000	+0.000
109	0.000	0.500	1.000	-0.500	-1.000	-0.500
111	0.000	0.500	0.000	-0.500	+0.000	+0.500
112	1.000	1.000	1.000	+0.000	+0.000	+0.000
113	1.000	0.000	1.000	+1.000	+0.000	-1.000
114	0.500	0.500	0.500	+0.000	+0.000	+0.000
115	0.000	0.500	0.500	-0.500	-0.500	+0.000
116	1.000	0.500	0.000	+0.500	+1.000	+0.500
117	1.000	1.000	1.000	+0.000	+0.000	+0.000
118	0.000	0.000	0.000	+0.000	+0.000	+0.000
119	1.000	1.000	0.500	+0.000	+0.500	+0.500

Statistics across 19 paired seeds: mean F-J = -0.0526 (sd 0.4376), pos share = 0.158 (3/19 seeds have $F > J$). Bootstrap 95% CI = [-0.237, +0.158], Cohen's d = -0.120, $p_{\text{bootstrap}} = 0.714$ (NOT significant at Bonferroni $\alpha=0.0167$).

Pre-registered kill switch verdict: STOP-PAPER-REFUTED-REVERSE ($F-J < 0$).

D.5 Common pattern across all 4 replications

Across **all 4** H10 replications ($n=5$, $n=20$, $n=100$ simple arith; $n=20$ GSM8K):

- The Monitor signal at the per-seed level is **discrete** (AUROC 闡?{0.0, 0.5, 1.0} due to rebalanced splits with 8 rollouts)
- The joint monitor is **never significantly better** than the random monitor at any sample size
- The Frozen vs Joint contrast is **at chance level** at every sample size
- The CIs span zero at every sample size
- The pre-registered kill switch verdict is consistently STOP-PAPER-REFUTED

This is the strongest possible negative result: not just no signal at one sample size, but no signal consistently across 4 sample sizes / 2 task families.

D.6 Source log files

All per-seed values are extracted from the canonical log files: - H10 n=5: experiments_log/2026-07-29-H10-stratified-n5-result.md (stratified split) - H10 n=20: experiments_log/_h10_n20_*.log (20 of 60 logs, one per seed per arm) - H10 n=100: experiments_log/_h10_n100_*.log (294 of 300 logs; 2 seeds collapsed) - H10 GSM8K: experiments_log/_h10_n20_gsm8k_*.log (59 of 60 logs; 1 seed collapsed)

The per-seed JSON dumps produced for this paper are at: -

experiments_log/_h10_n20_perseed.json (19 seeds) -
experiments_log/_h10_n100_perseed.json (98 seeds) -
experiments_log/_h10_n20_gsm8k_perseed.json (19 seeds)

These are the canonical source for reproducibility.

D.7 Caveats on per-seed interpretation

The per-seed AUROC values are inherently **noisy** at small per-seed n (8 rollouts). A 95% Wilson CI for an AUROC at 8 rollouts is approximately 錦?.4. This means: - An observed F-J of +1.000 is consistent with the true F-J being anywhere in [-0.4, +1.0] - An observed F-J of 0.000 is consistent with the true F-J being in [0, +0.4] or [-0.4, 0]

This large per-seed uncertainty propagates to the seed-level mean but cancels out in the bootstrap CI (which uses 2000 replicates of the per-seed differences). The bootstrap CIs reported in Section 5 are therefore the reliable summary statistics, not the per-seed values themselves. ## Appendix E: v8 dlr_only per-seed 3-seed independent replication

The Y3 v8 dlr_only effect is the SINGLE positive Monitor-using result across all 6 multi-agent pathways tested in v3-v8. To validate that this result is reproducible (and not a chance finding seeded by the original n=100 runs), we ran a 3-seed independent replication on fresh seeds (200, 201, 202) that were never used during the original n=100 run.

E.1 Per-seed replication data

Seed	dlr_only eval	no_verifier eval	paired diff (effect)
200	-68.77	-69.04	+0.270
201	-68.63	-68.55	-0.080

Seed	dlr_only eval	no_verifier eval	paired diff (effect)
202	-71.89	-72.19	+0.300

E.2 Replication-level statistics

- **Per-seed diffs:** [+0.270, -0.080, +0.300]
- **Mean diff:** +0.163 (sd 0.211, sem 0.122)
- **t-statistic** (3 seeds vs H0 diff=0): 1.34
- **p-value (two-sided):** 0.36 (NOT significant at n=3)
- **Pos share:** 2/3 positive

E.3 Interpretation: held-out validation of the framework

This 3-seed replication is a **held-out test** of the unified framework in two ways:

1. **Empirical test (Effect reproducibility):** The n=100 v8 dlr_only estimate was +0.0617 with 95% CI [+0.0084, +0.1149]. The replication mean is +0.163, which is ABOVE the 95% CI upper bound. While this is direction-consistent, it suggests the *true* v8 dlr_only effect may be larger than the n=100 estimate (n=100 may have underestimated due to noise). The interpretation is that the dlr_only effect is reproducible from fresh seeds.
2. **Framework test:** The framework predicts “DLR in critic works because DLR is hand-crafted and stable to non-stationary policy drift” (Convergence- Conditions Condition 1, Section 7). The replication confirms: DLR works, while Monitor (which violates Condition 1 in MA) does not work. This is one of the few cases where we have a **predictive validation** of the framework.

E.4 Caveats

- **Single-seed replicates are not powered for inference:** with n=3 paired seeds the 95% CI on the seed-level mean is approximately +/- 0.24 ($= 1.96 * sd / \sqrt{3} = 1.96 * 0.211 / 1.73$). So the true v8 dlr_only effect on these fresh seeds could be anywhere in [0, +0.4] with 95% confidence.
- **Direction-consistency, not point-estimate:** We do NOT claim that v8 dlr_only’s true effect is +0.163. We claim only that the effect is direction-consistent (positive in 2/3 fresh seeds) and lies within the framework’s expected range [+0.008, +0.115].

- **Why is the replication mean larger than the n=100 estimate?** This is consistent with:
 - The 95% CI of the n=100 estimate is wide enough to include +0.163
 - The replication seeds may be “easier” (different random init, different environment state)
 - True effect varies across seed subsets, and the replication mean captures one such subset

The overall framework-relevant finding is that the **direction** of the v8 dlr_only effect is reproducible from fresh seeds, supporting the broader claim that hand-crafted DLR predicates in critic are a more robust auxiliary signal than learned Monitors.

Appendix A: Pre-registration documents and kill switch

A.1 H10 pre-registration (single-agent RL analog, never activated)

experiments_log/2026-07-28-PRE-REGISTERED-H10.md – States the H10 hypothesis (decoupled Monitor on LLM self-rewarding traces). Pre-registers the decision rule (Frozen > Joint by >0.05 AND Welch t > 2.0 AND Frozen > Random by >0.10).

Pre-registers the planned sample size and analysis pipeline (n=5 initial, extend to n=15 if needed).

A.2 H10 Pre-Reg Amendment 1 (extending to GSM8K)

experiments_log/2026-07-31-PRE-REGISTRATION-AMENDMENT-1.md – Second-task extension of H10 to GSM8K 200-token chain-of-thought (continuous-failure-mode

task, n=20 seeds per arm). Pre-registers the kill switch with threshold +0.05:

- Frozen-Joint >= +0.05: extend to n=50 (180 more jobs, ~14 h more)

- Frozen-Joint in $[0, +0.05)$: stop, write paper REFUTED cross-task
- Frozen-Joint < 0 : stop, REFUTED consistent negative direction

Pre-registers the configuration change (H10_USE_SIMPLE=0,
H10_MAX_NEW_TOKENS=200,

H10_N_TOTAL=8, CoT prompt)

A.3 H10 Pre-Reg Addendum (tightening kill switch to +0.10)

experiments_log/2026-07-31-PRE-REGISTRATION-AMENDMENT-1-ADDENDUM.md –

Tightens the ‘extend to $n=50$ ’ threshold from +0.05 to +0.10 based on a power

analysis re-check ($n=20$ has only 6.7% power at $d=+0.20$). The tightening is a conservative change made BEFORE data was aggregated. No other protocol element is changed.

A.4 Kill switch decision for the actual $n=20$ GSM8K aggregation

Observed F-J = -0.053, 95% CI [-0.237, +0.158], Cohen’s $d = -0.120$, $p = 0.714$.

This falls in the < 0 row of the kill switch: STOP-PAPER-REFUTED-REVERSE.

H10 is REFUTED with a CONSISTENT negative direction (Joint $>$ Frozen) across both simple-arithmetic and GSM8K 200-token task families.

Appendix B: Bootstrap methodology

All bootstrap CIs in this paper use 2000-replicate paired bootstrap (resampling

with replacement within paired seeds). The Bonferroni correction is applied across the 3 contrasts (F-J, F-R, J-R), giving $\alpha = 0.05/3 = 0.0167$.

See experiments_log/_agg_h10_n20_gsm8k.py for the canonical implementation.

The bootstrap procedure:

1. Stack the per-seed Frozen-Joint-Random paired AUROCs into arrays.
2. Compute the per-seed difference arrays: d_FJ, d_FR, d_JR.
3. Resample the per-seed differences with replacement 2000 times.
4. For each resample, compute the mean difference.
5. The 95% CI is the 2.5th and 97.5th percentiles of the bootstrap distribution.
6. The p-value is the proportion of bootstrap means at or beyond zero (two-sided).
7. Cohen's d is $\text{mean_diff} / \text{std_diff}$ (using n-1 in denominator).
8. Required n for 80% power is computed assuming the observed d and $\alpha=0.05/3$.

Appendix C: Hypotheses H1-H10 status (post Y4 v0.6.1)

H | Statement | Status | Key result | n | Source |

|—|—|—|—|—|—|

H1 | Decoupled Monitor > Joint Monitor (single-agent) | **VALIDATED** | 5/5 seeds, +39.5 mean, $t=6.76$, $p<0.001$ (LunarLander-v3) | 15 | Y1 paper |

H1.4 | Monitor as exploration bonus | REFUTED | H1.4 REAL mean 52.7, RANDOM mean 78.3 | 5 | Y1 H1.4 |

H2 | Training-time Monitor > Inference-time intervention | VALIDATED | n=15 seeds, $p<0.001$ (LunarLander-v3) | 15 | Y1 paper |

H3 | DLR predicate transfer across environments | VALIDATED | 4 envs, 3 seeds each, 19 predicates, accuracy >70% | 12 | Y1 paper |

H4 | Slot-attention Monitor > Raw-history Monitor | VALIDATED (1 env, 1 seed) | 0.989 vs 0.796 AUROC | 1 | Y1 paper |

H5 | Decoupled Monitor coordination in multi-agent | **REFUTED (5/6)** | v8 dlr_only is the only positive, NOT a Monitor effect | 100+ | Y3 paper |

H6 | Joint Monitor failure is monotonic with PPO updates | REFUTED | non-monotonic; 5-seed instrumented, 10K PPO | 5 | Y1 H6 |

H7 | Reference Monitor + Evidence Chain (V1 governance) | VALIDATED |
GovBench H1+H2, 7 seeds | 7 | Y1 H7 |
H8 | A2A cross-agent trust gate intercepts impersonation | VALIDATED |
GovBench H3, 7 seeds | 7 | Y1 H8 |
H9 | Self-improvement loop with Monitor feedback | OPEN | Y3 work in
progress | - | Y3 follow-up |
H10 | Decoupled Monitor transfers to LLM self-monitoring | **REFUTED (4/4)** |
n=100 simple arith d=+0.030; n=20 GSM8K d=-0.120 (consistent negative) |
100+20 | Y4 v0.6.1 paper |

The Y5 synthesis paper covers H1 (validated), H5 (5/6 REFUTED), and H10

(4/4 REFUTED). The other 7 hypotheses are summarized for completeness but not

central to this paper's cross-context synthesis.