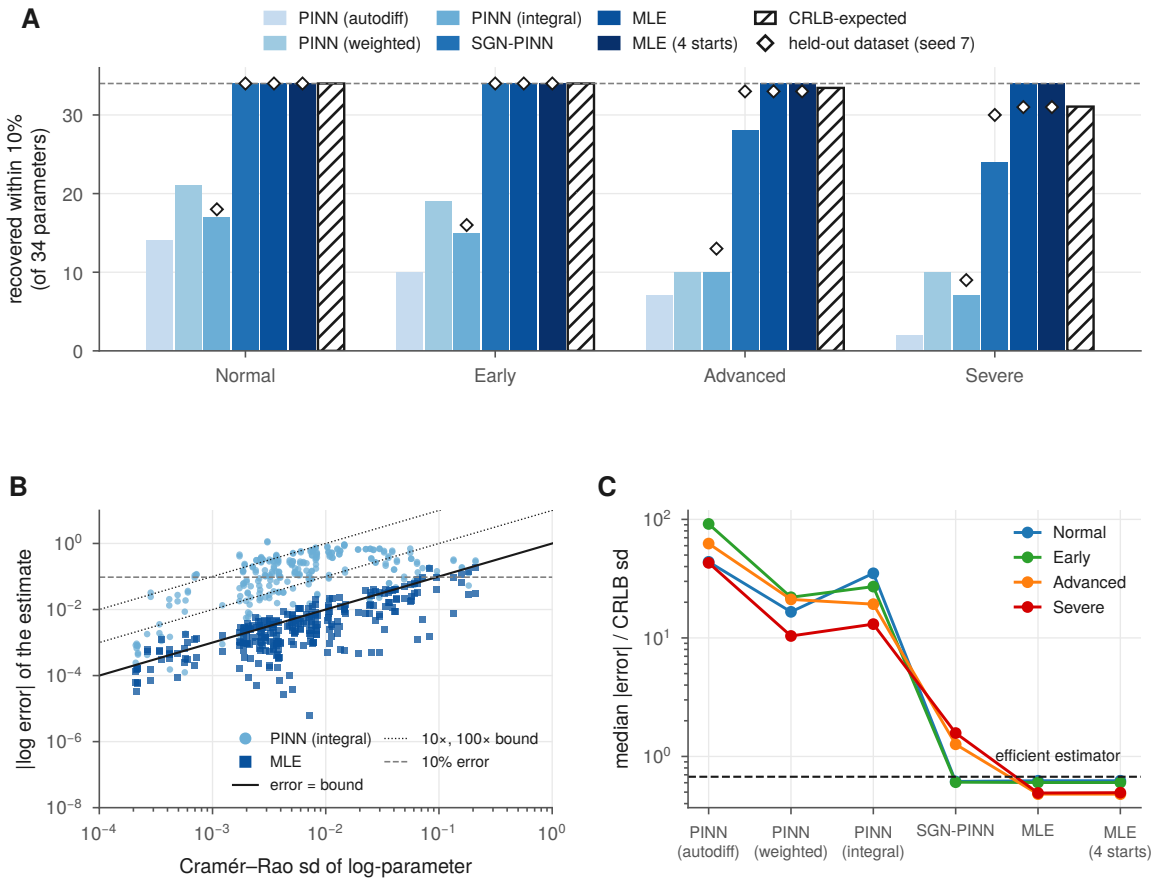
A
PINN (autodiff)
PINN (weighted)
PINN (integral)
SGN-PINN
MLE
MLE (4 starts)
CRLB-expected
held-out dataset (seed 7)
recovered within 10%
(of 34 parameters)
0
10
20
30
Normal
Early
Advanced
Severe
B
|log error| of the estimate
Cramér–Rao sd of log-parameter
PINN (integral)
MLE
error = bound
10×, 100× bound
10% error
C
median |error| / CRLB sd
Normal
Early
Advanced
Severe
efficient estimator
PINN (autodiff)
PINN (weighted)
PINN (integral)
SGN-PINN
MLE
MLE (4 starts)