

Tensor model of the psyche

based on social evidence and resource constraints

Anton Kolonin

Telegram/GitHub/Gmail: [akolonin](#)




<https://agirussia.org>

General Intelligence:

Reaching complex goals **in different** complex environments, **using limited resources**

Ben Goertzel + Pei Wang + Shane Legg + Marcus Hutter

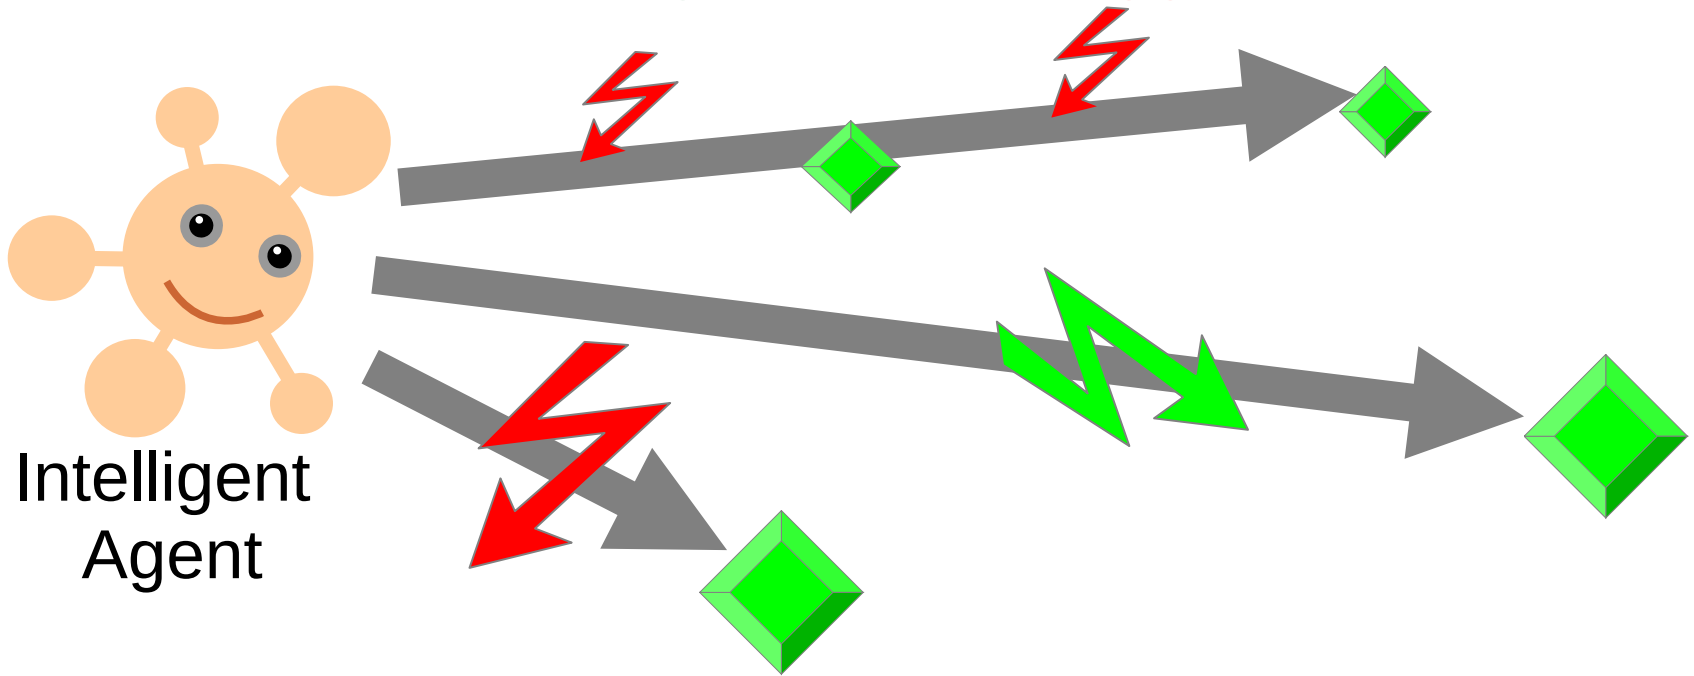


General Intelligence:


Reaching complex goals in different complex environments, using limited resources by means of complex actions

Goals / Needs

Actions

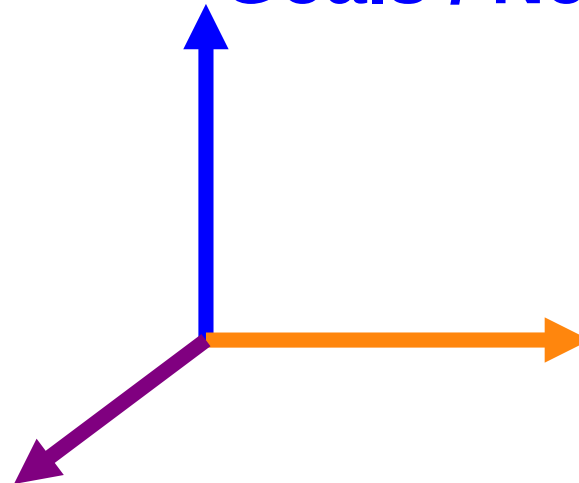

Signals from Environment / Sensations

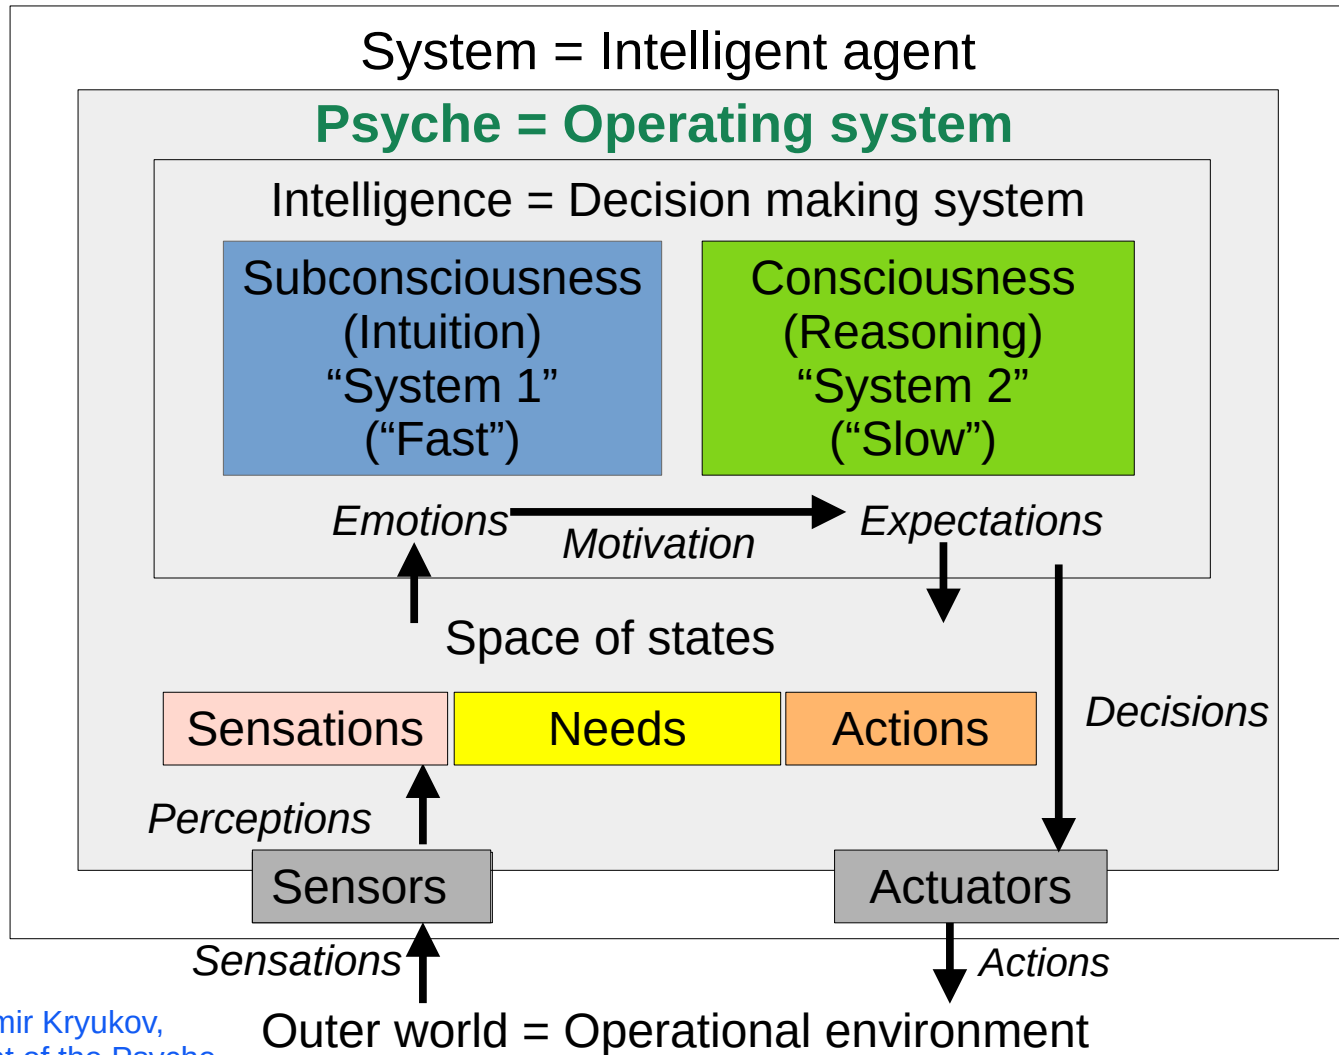

Psyche = Operating system

Intelligence = Decision making system


Models s ("invariants") of states with utilities U and probabilities P of transitions

$$U(\{s_t\}_{t \in [-T, -1]}, s'_0) = L(x \cdot (y_t - y_{t-1}), (s'_t - s_t), E(a_{t-1})) \quad s'_t = \operatorname{argmax}_s (U(\{s_t\}_{t \in [-T, t-1]}, s'_t), P(\{s_t\}_{t \in [-T, t-1]}, s'_t))$$

↑ Experiential learning

↓ Decision making

Space of states and episodic memory ("precedents")

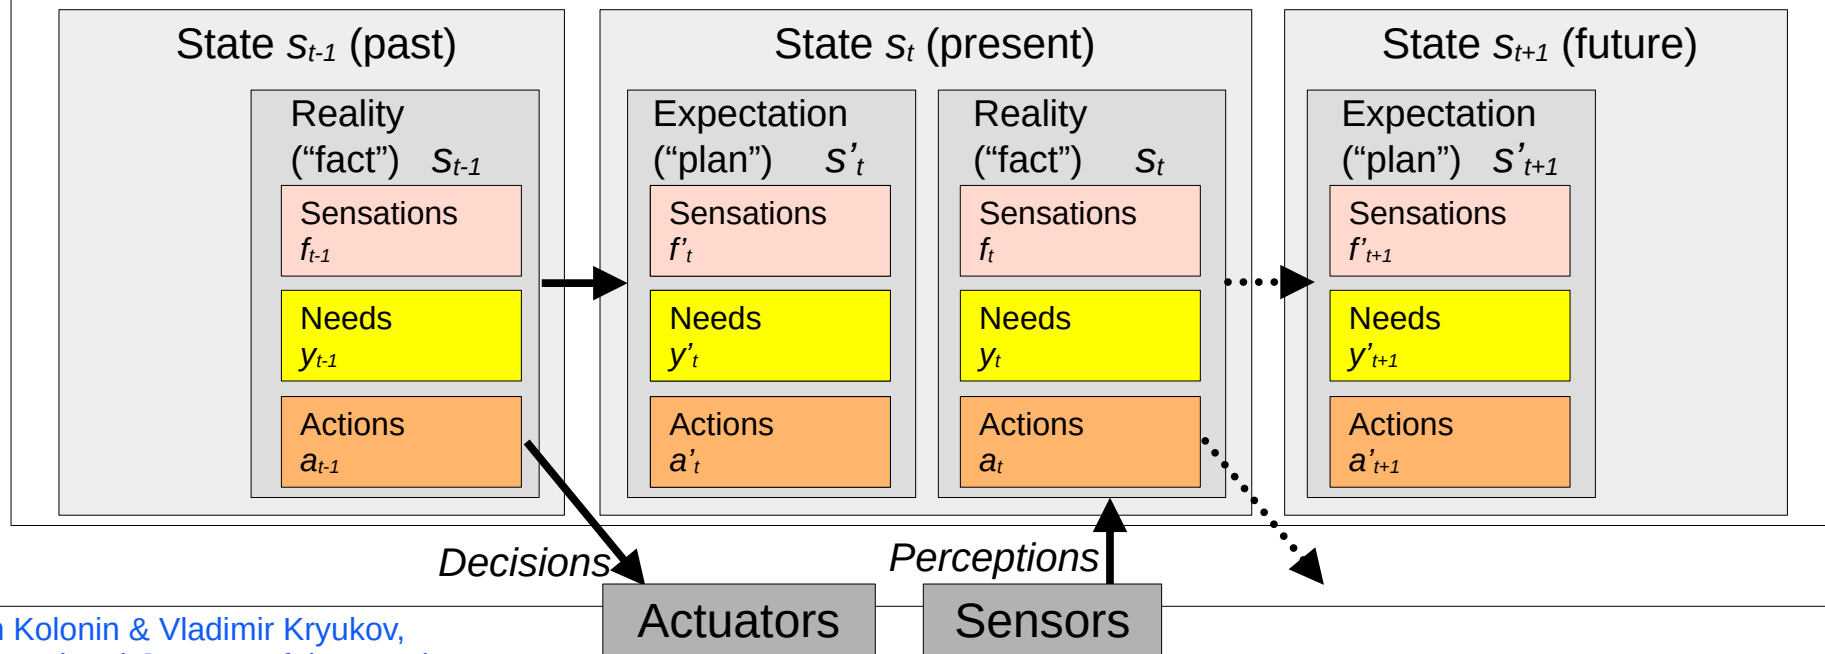

Psyche = Operating system

Intelligence = Decision making system

Models s ("invariants") of states with utilities U and probabilities P of transitions

$$U(\{s_t\}_{t \in \{-T, -1\}}, s'_0) = L(x \cdot (y_t - y_{t-1}), (s'_t - s_t), E(a_{t-1})) \quad s'_t = \operatorname{argmax}_s (U(\{s_t\}_{t \in \{-T, t-1\}}, s'_t), P(\{s_t\}_{t \in \{-T, t-1\}}, s'_t))$$

↑ Experiential learning

↓ Decision making

Space of states and episodic memory ("precedents")

State s_{t-1} (past)

Reality
("fact") s_{t-1}

Sensations
 f_{t-1}

Needs
 y_{t-1}

Actions
 a_{t-1}

State s_t (present)

Expectation
("plan") s'_t

Sensations
 f'_t

Needs
 y'_t

Actions
 a'_t

Reality
("fact") s_t

Sensations
 f_t

Needs
 y_t

Actions
 a_t

State s_{t+1} (future)

Expectation
("plan") s'_{t+1}

Sensations
 f'_{t+1}

Needs
 y'_{t+1}

Actions
 a'_{t+1}

Decisions

Perceptions

Actuators

Sensors

$x \cdot y_t$ — "motivation vector"


V. F. Petrenko and A. P. Suprun, "Goal oriented systems, evolution, and the subjective aspect in systemology," Tr. Inst. Sist. em. Analiza RAN 62 (1) (2012)

Copyright © 2026 Anton Kolonin, Aigents®

E.E. Vityaev, A.V. Demin, Cognitive architecture based on the functional systems theory, 2018
<https://doi.org/10.1016/j.procs.2018.11.072>


Decision making as operational risk management

S_t	S'_{t+1}	S'_{t+1}			U	P	$\Sigma U*P$
		a'	y'	f'			
S_1	S'_2	a'_1	y'_1	...	1.0	0.5	<u>0.7</u>
S_1	S'_3	a'_1	y'_2	...	0.4	0.5	
S_1	S'_4	a'_2	y'_3	...	1.0	0.8	<u>0.8</u>
S_1	S'_5	a'_2	y'_4	...	0.0	0.2	
S_1	S'_6	a'_3	y'_5	...	0.6	1.0	<u>0.6</u>
S_1	S'_7	a'_4	y'_6	...	0.0	1.0	<u>0.0</u>

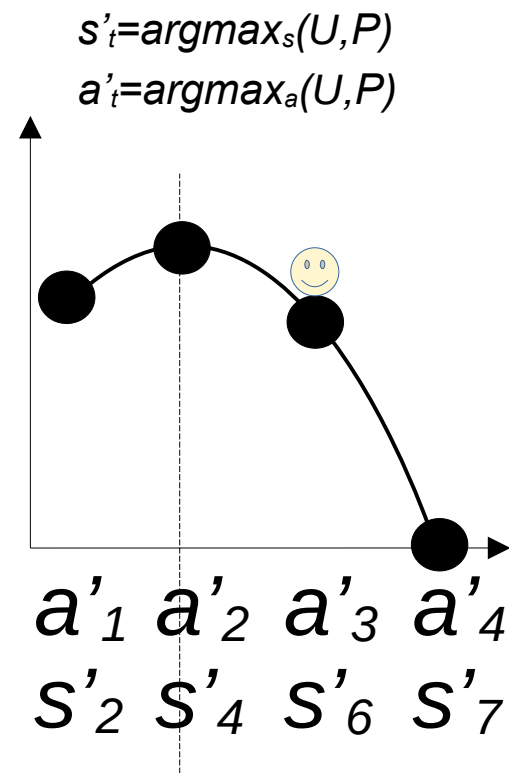



 Tversky & Kahneman:
 most people choose a'_3 и s'_6
 ("smaller profit with
 greater reliability")

Hierarchy of values/goals/subgoals/tasks/subtasks

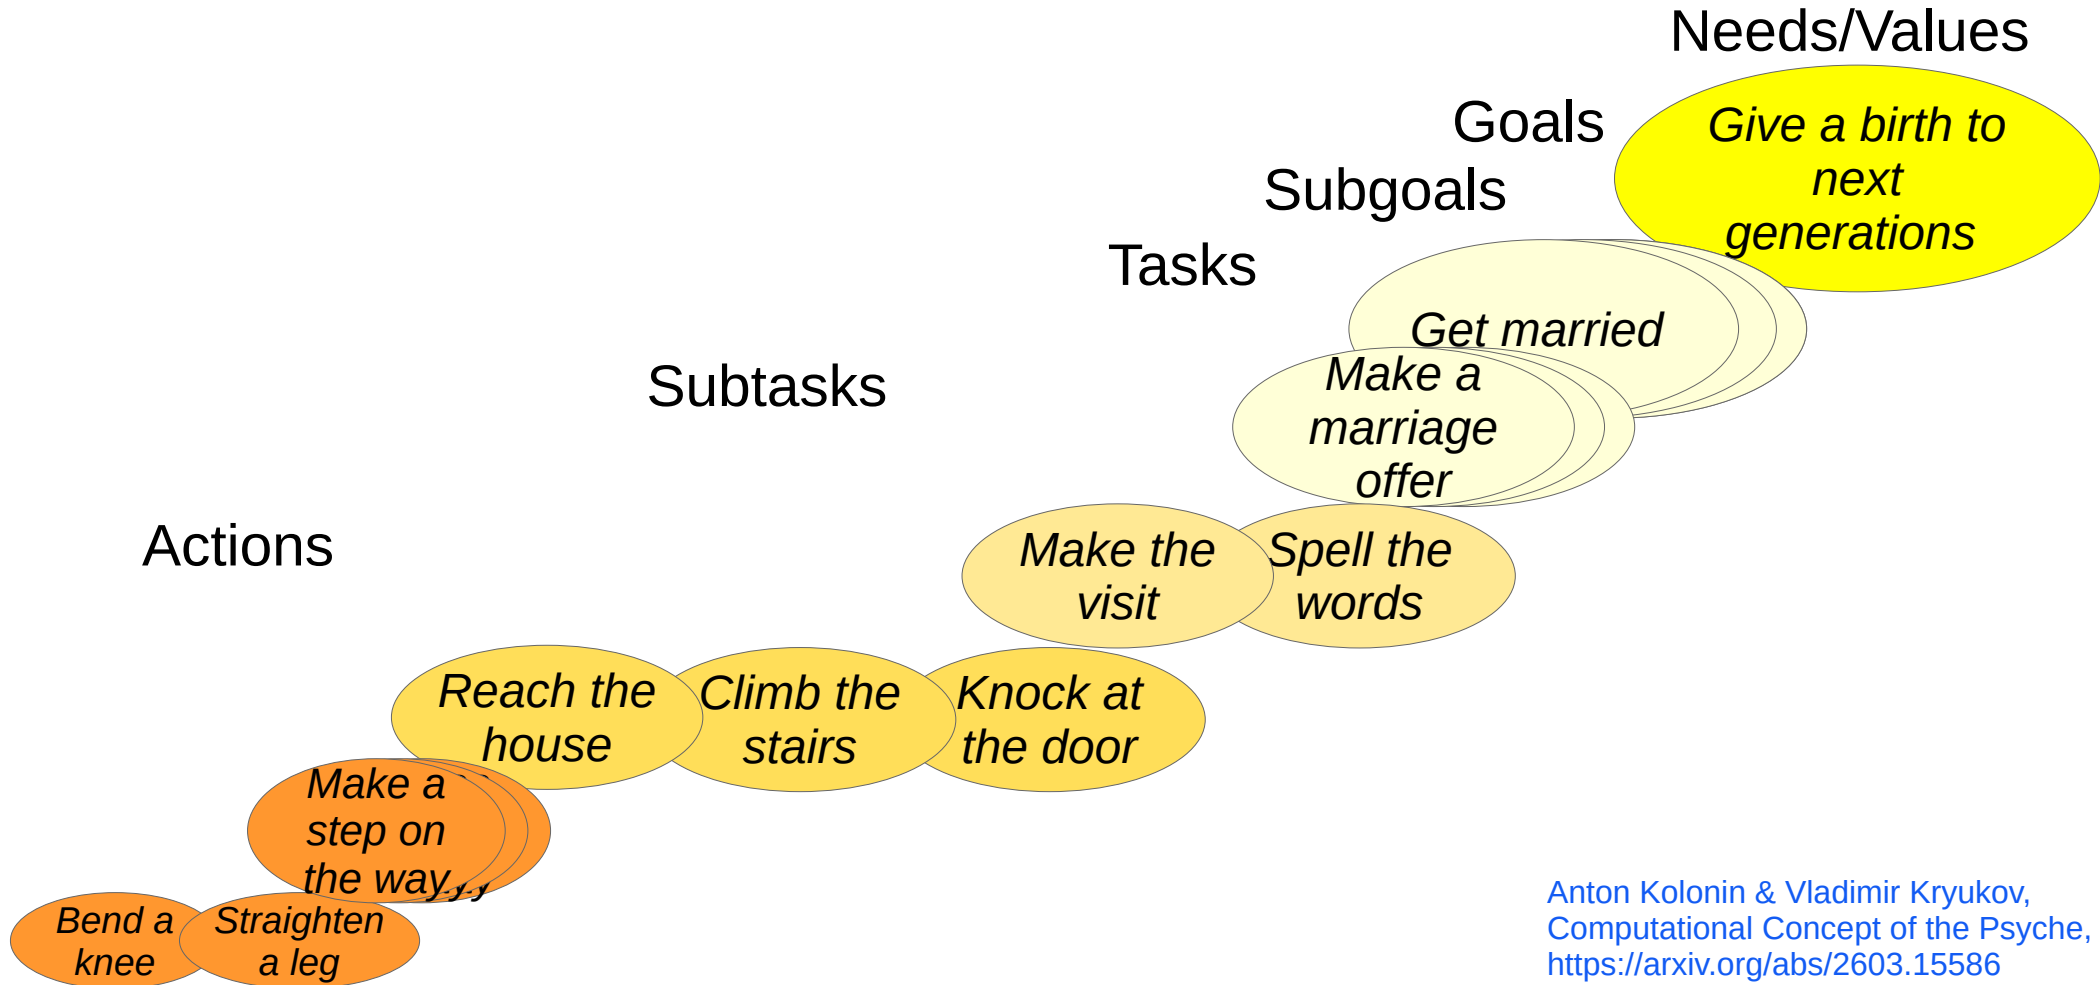

Anton Kolonin & Vladimir Kryukov,
Computational Concept of the Psyche,
<https://arxiv.org/abs/2603.15586>

Functional equivalence of ~~neural network~~ tensor and (hyper)graph models

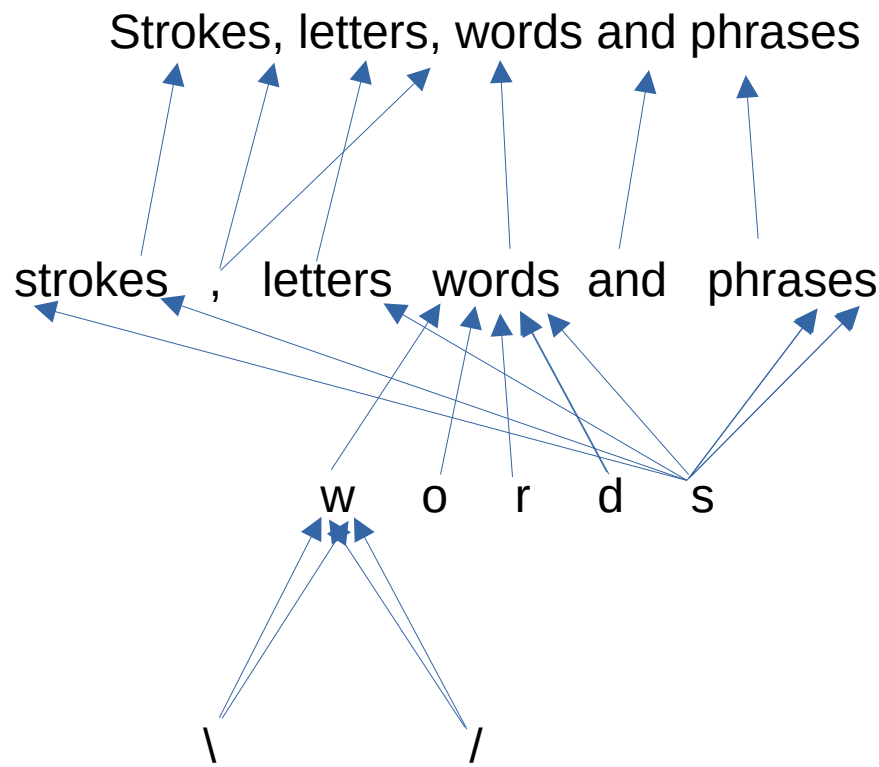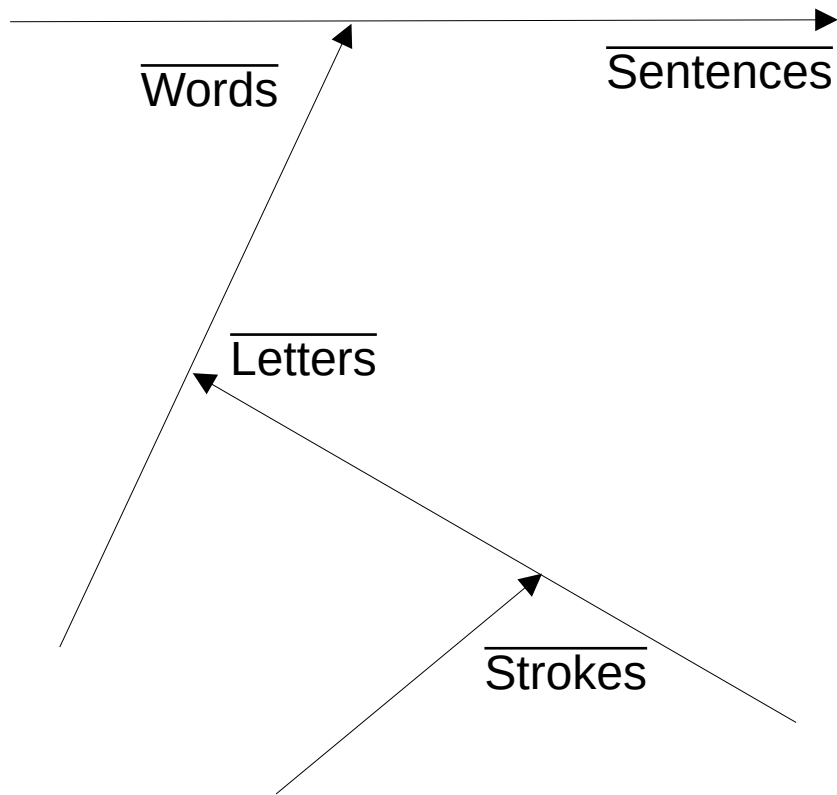

Pedro Domingos, Tensor Logic: The Language of AI

<https://arxiv.org/pdf/2510.12269>


Copyright © 2026 Anton Kolonin, Aigents®

Graph vertex - dimension

Hyper-graph edge - vector

Hyper-graph - tensor space


Neuro-Symbolic Integration for Interpretable AI

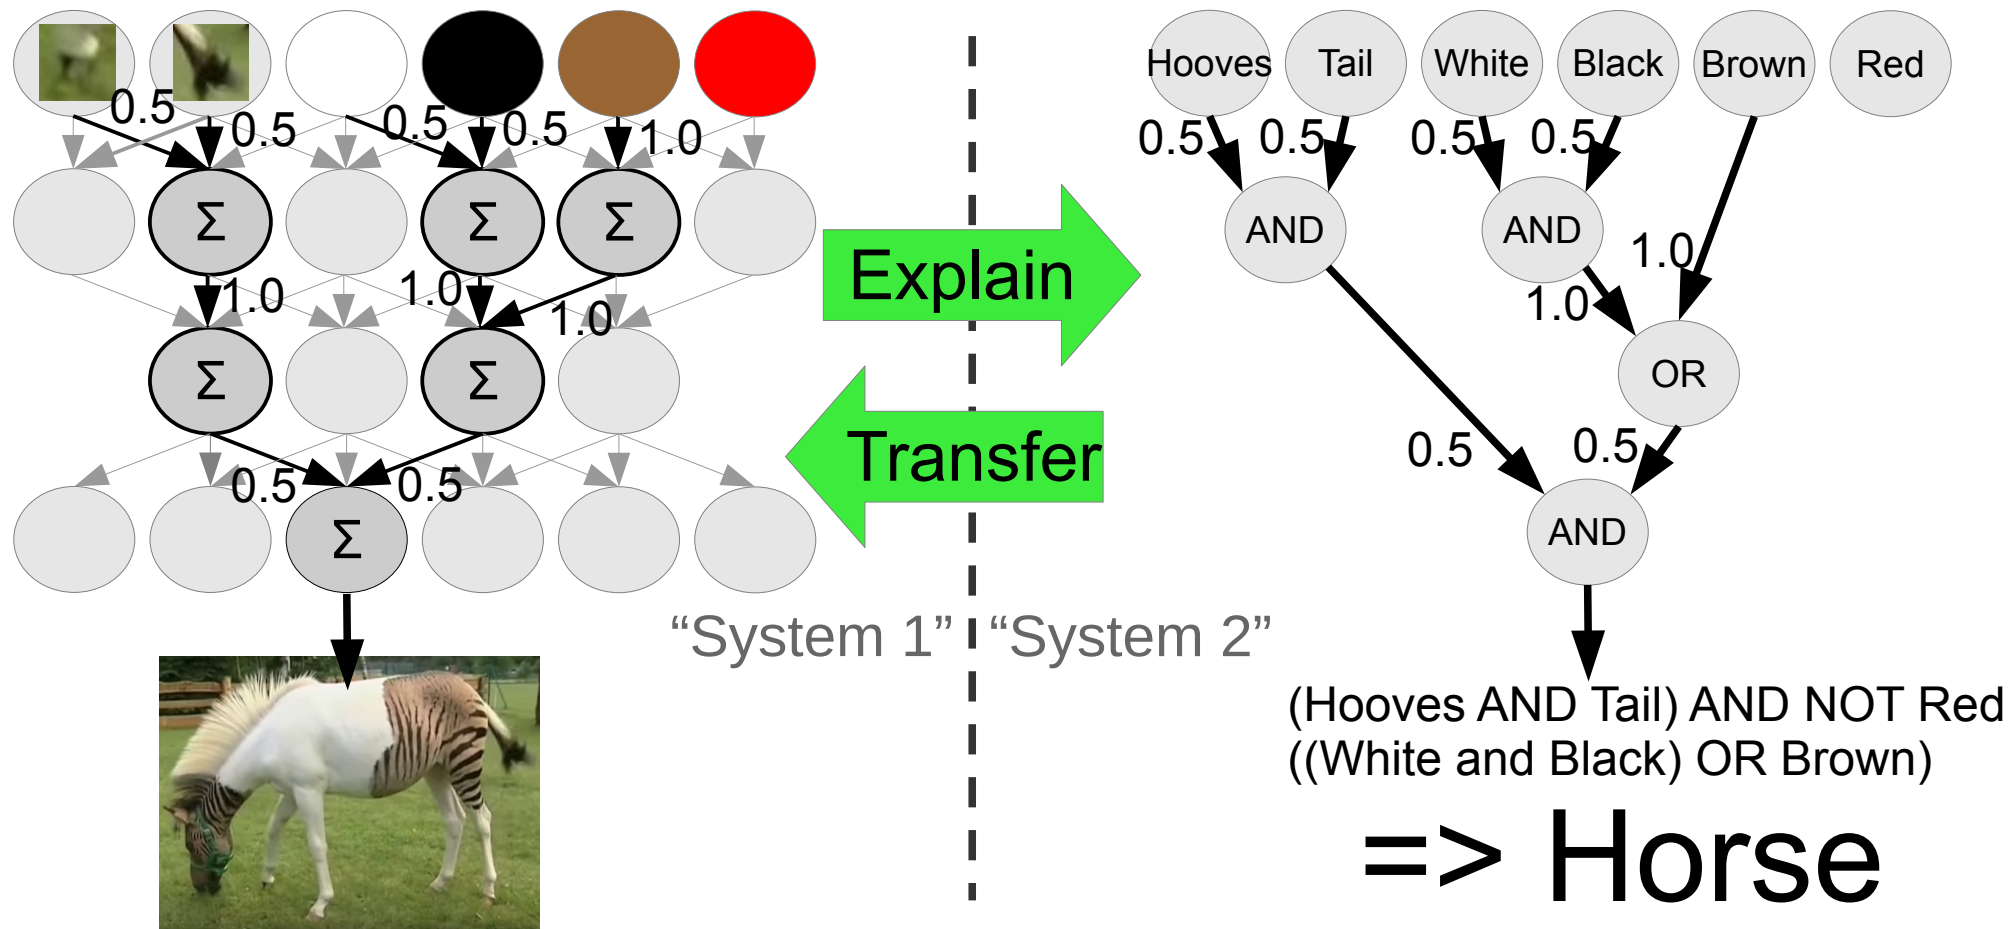

Typed tensor logic for different kinds of AI-s (logical, sub-symbolic, probabilistic/non-axiomatic)

Truth-Value Tensor
(NARS/PLN/.../ours)

Property **0.0123456**
=750/60750

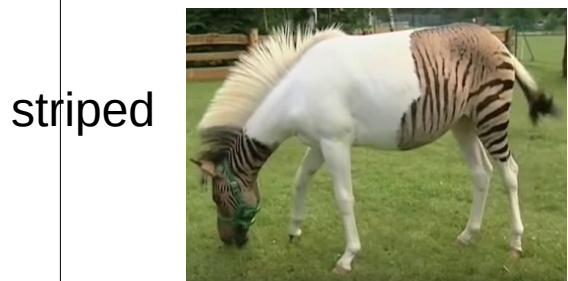


striped
horse
Subject

Life-long learning?

Numerical Tensor
(ANN/Bayesian Logic)

Property **~0.01**

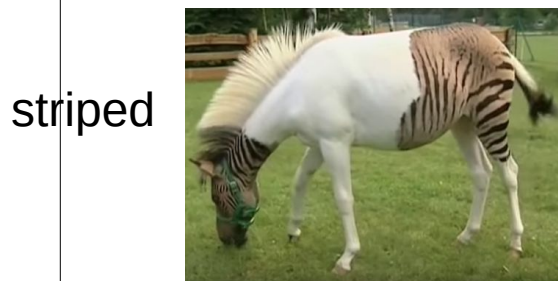

striped
horse
Subject

Boolean Tensor
(Boolean Logic)

Property **False**



striped
horse
Subject

Pei Wang: Non-Axiomatic Logic
<https://www.worldscientific.com/worldscibooks/10.1142/14486>

Pedro Domingos, Tensor Logic: The Language of AI
<https://arxiv.org/pdf/2510.12269>


Problem of dimensionality (reduction) and discreteness (increase)

“What You Need is What you See”



Problem of dimensionality (reduction) and discreteness (increase)

Re-defining environment in Atari Breakout

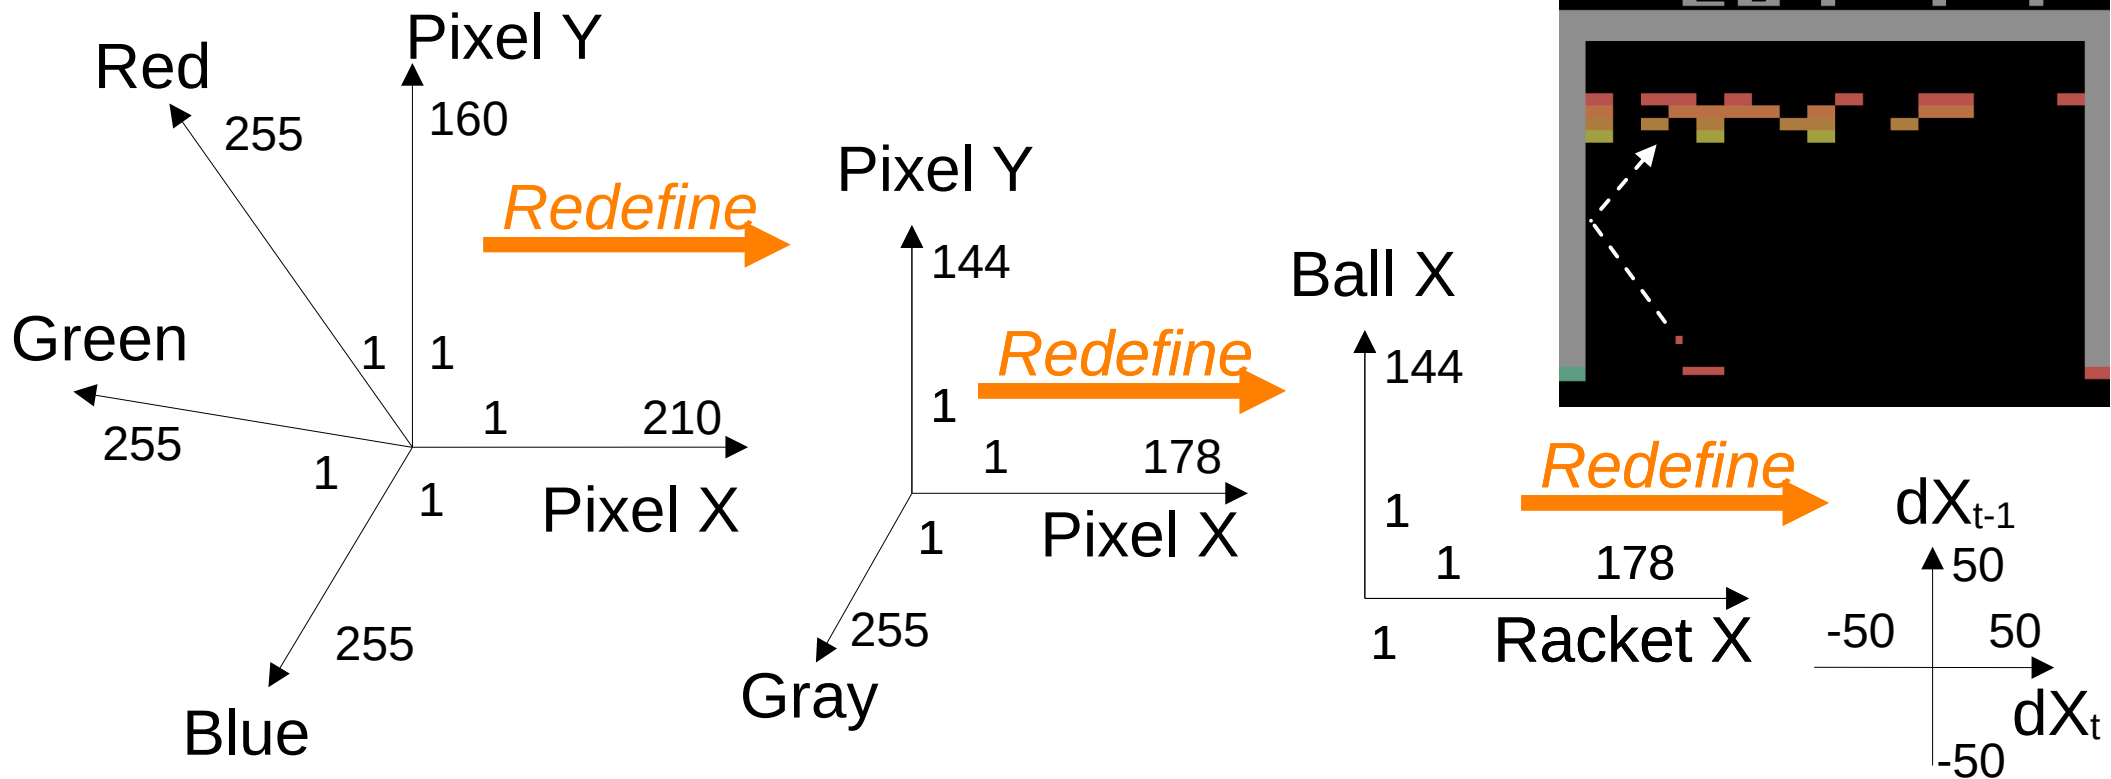


Interpretable representation learning for 3D multi-piece intracellular structures using point clouds

<https://www.nature.com/articles/s41592-025-02729-9>

Copyright © 2026 Anton Kolonin, Aigents®


Unsupervised tokenization study: language lexicon as a compression dictionary

English, Train: Brown, Test: Brown 1000

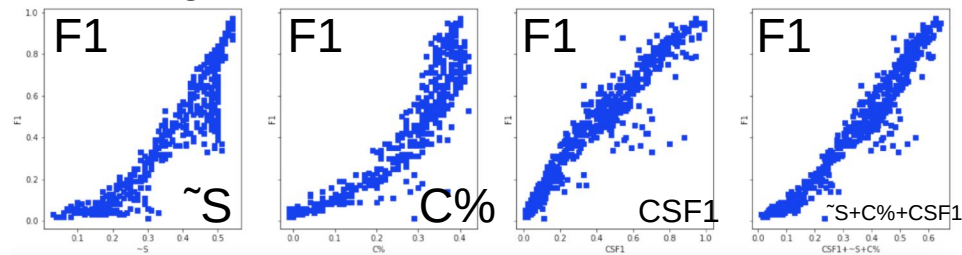


https://github.com/aigents/pygents/blob/main/notebooks/nlp/english/en_tokenizer_auto.ipynb

English, Train: Brown, Test: MagicData 100

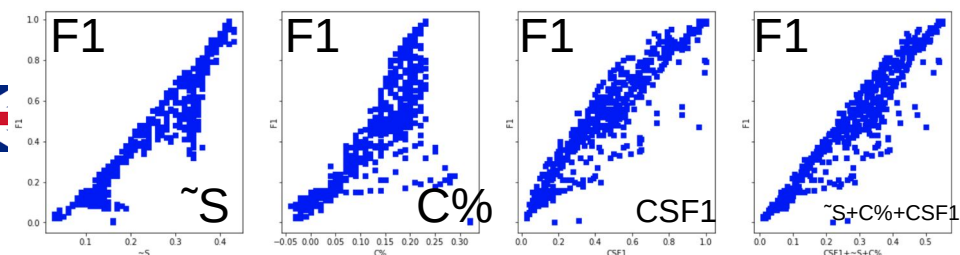


Russian, Train: RusAge, Test: RusAge 1000

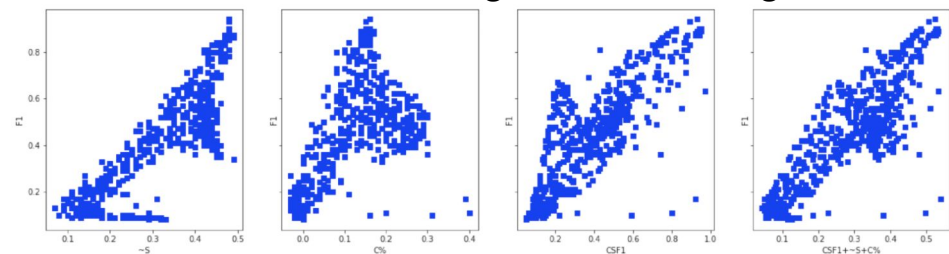


https://github.com/aigents/pygents/blob/main/notebooks/nlp/russian/ru_tokenizer_auto.ipynb


Russian, Train: Brown, Test: MagicData 100

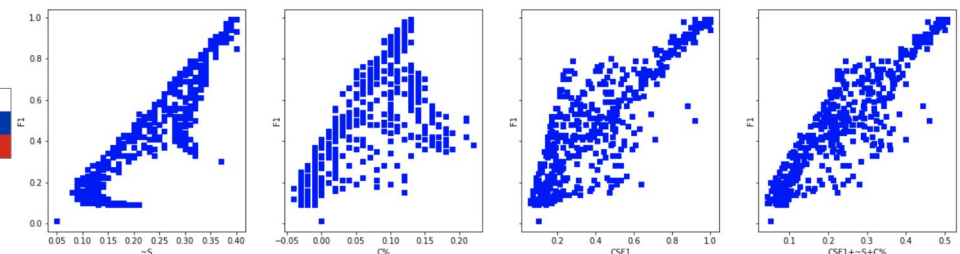

Chinese, Train: CLUE News, Test: CLUE News 1000

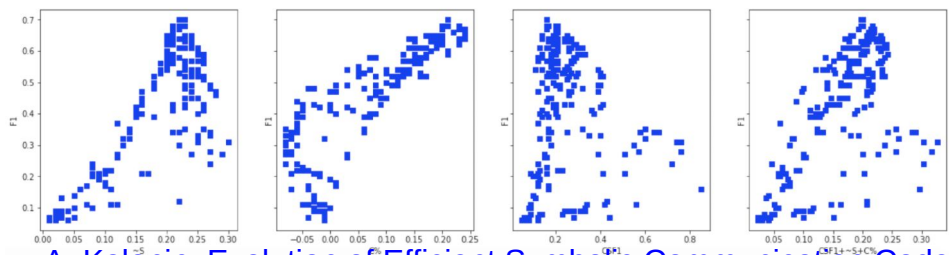

Chinese, Train: Brown, Test: MagicData 100

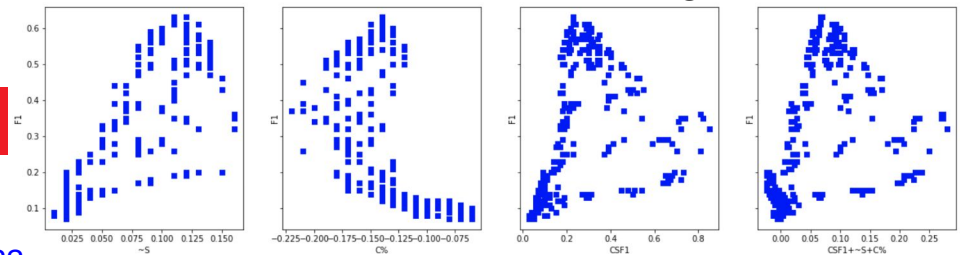


A. Kolonin, Evolution of Efficient Symbolic Communication Codes, 2023

https://link.springer.com/chapter/10.1007/978-3-031-44865-2_1

Copyright © 2026 Anton Kolonin, Aigents®

Experiential learning study

Virtual gaming environment: OpenAI Gym (Atari Breakout)

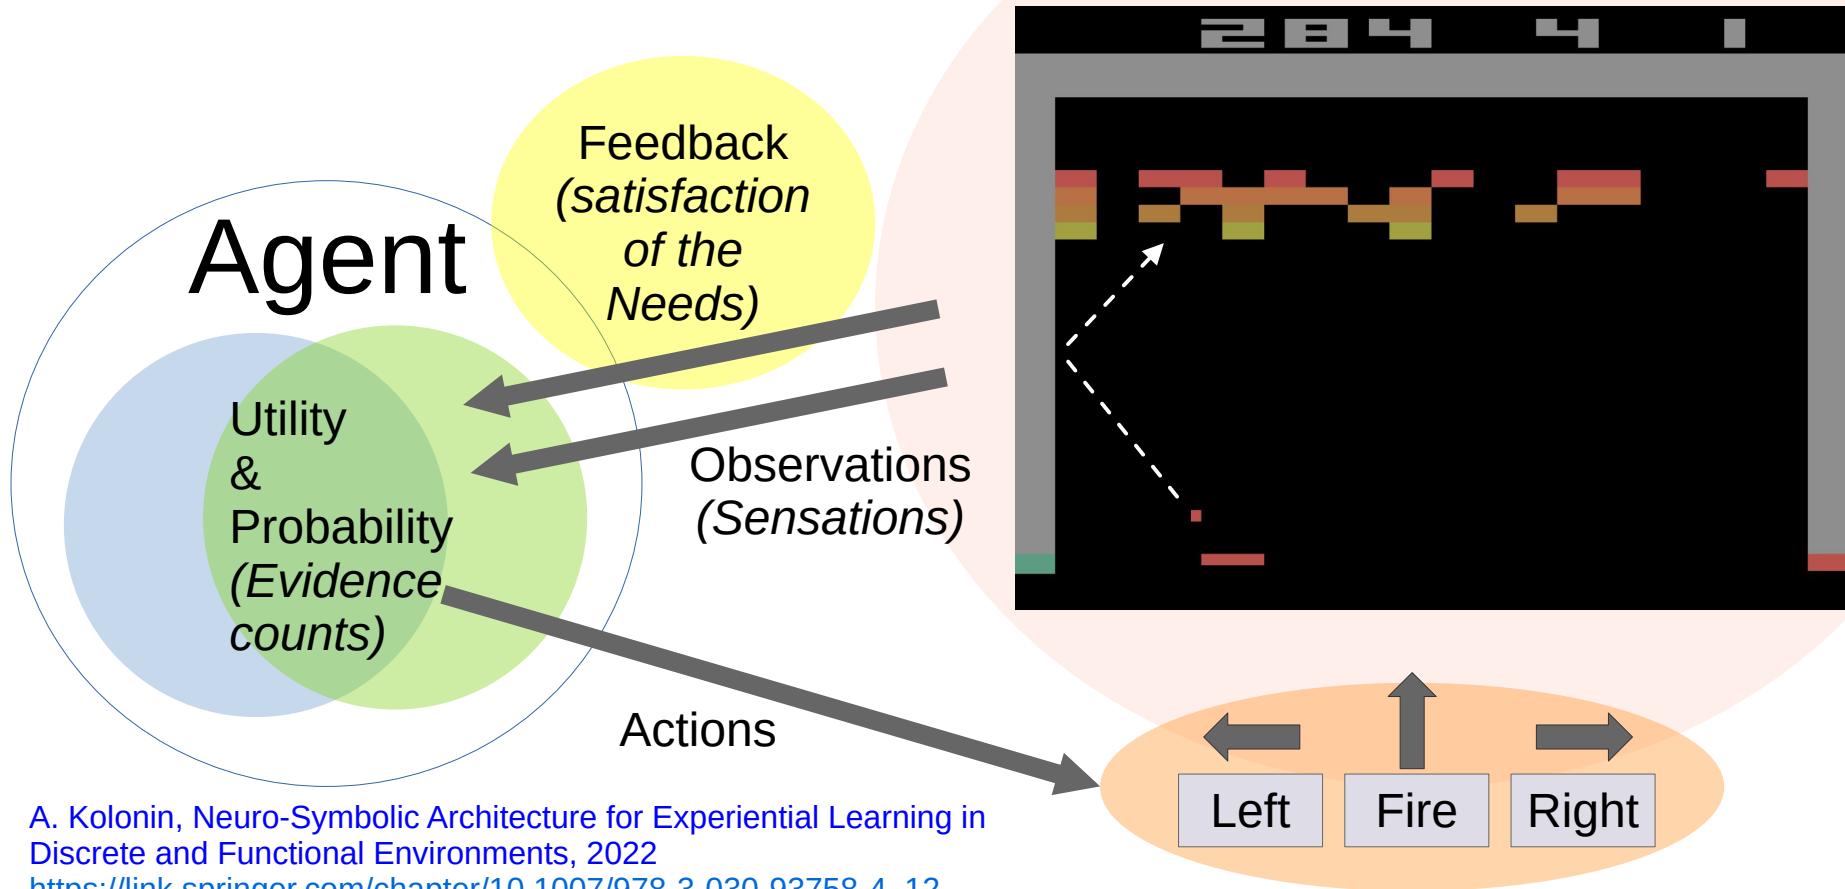

A. Kolonin, Neuro-Symbolic Architecture for Experiential Learning in Discrete and Functional Environments, 2022


https://link.springer.com/chapter/10.1007/978-3-030-93758-4_12

Copyright © 2026 Anton Kolonin, Aigents®


Experiential learning and decision making based on transitions between state series and “global feedback”

Invariants

with accumulated
Utility and Probability
(*Evidence counts*)

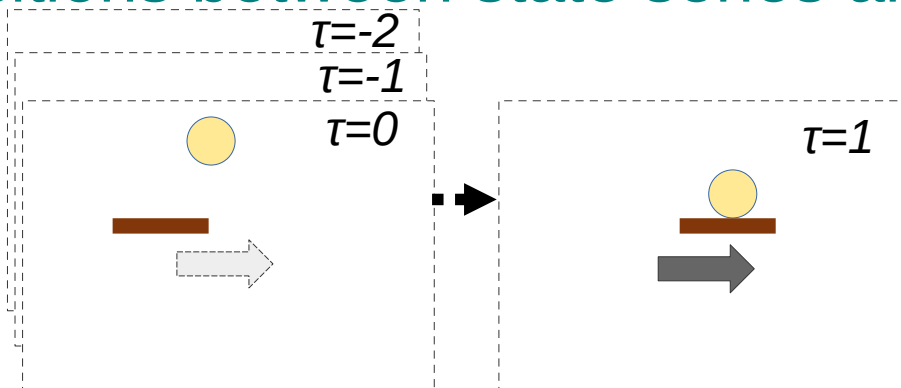


Precedents

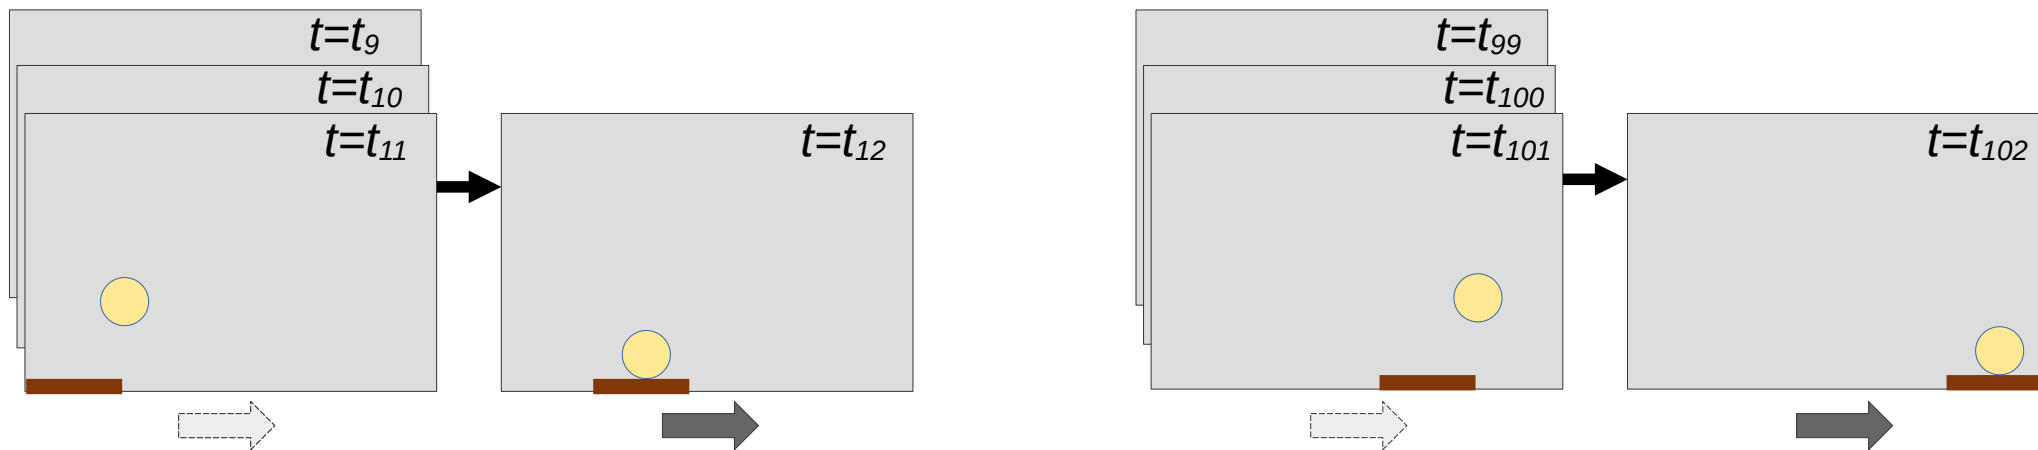



A. Kolonin, Neuro-Symbolic Architecture for Experiential Learning in
Discrete and Functional Environments, 2022

https://link.springer.com/chapter/10.1007/978-3-030-93758-4_12


Experiential learning - playing “Pong” (Pixels)

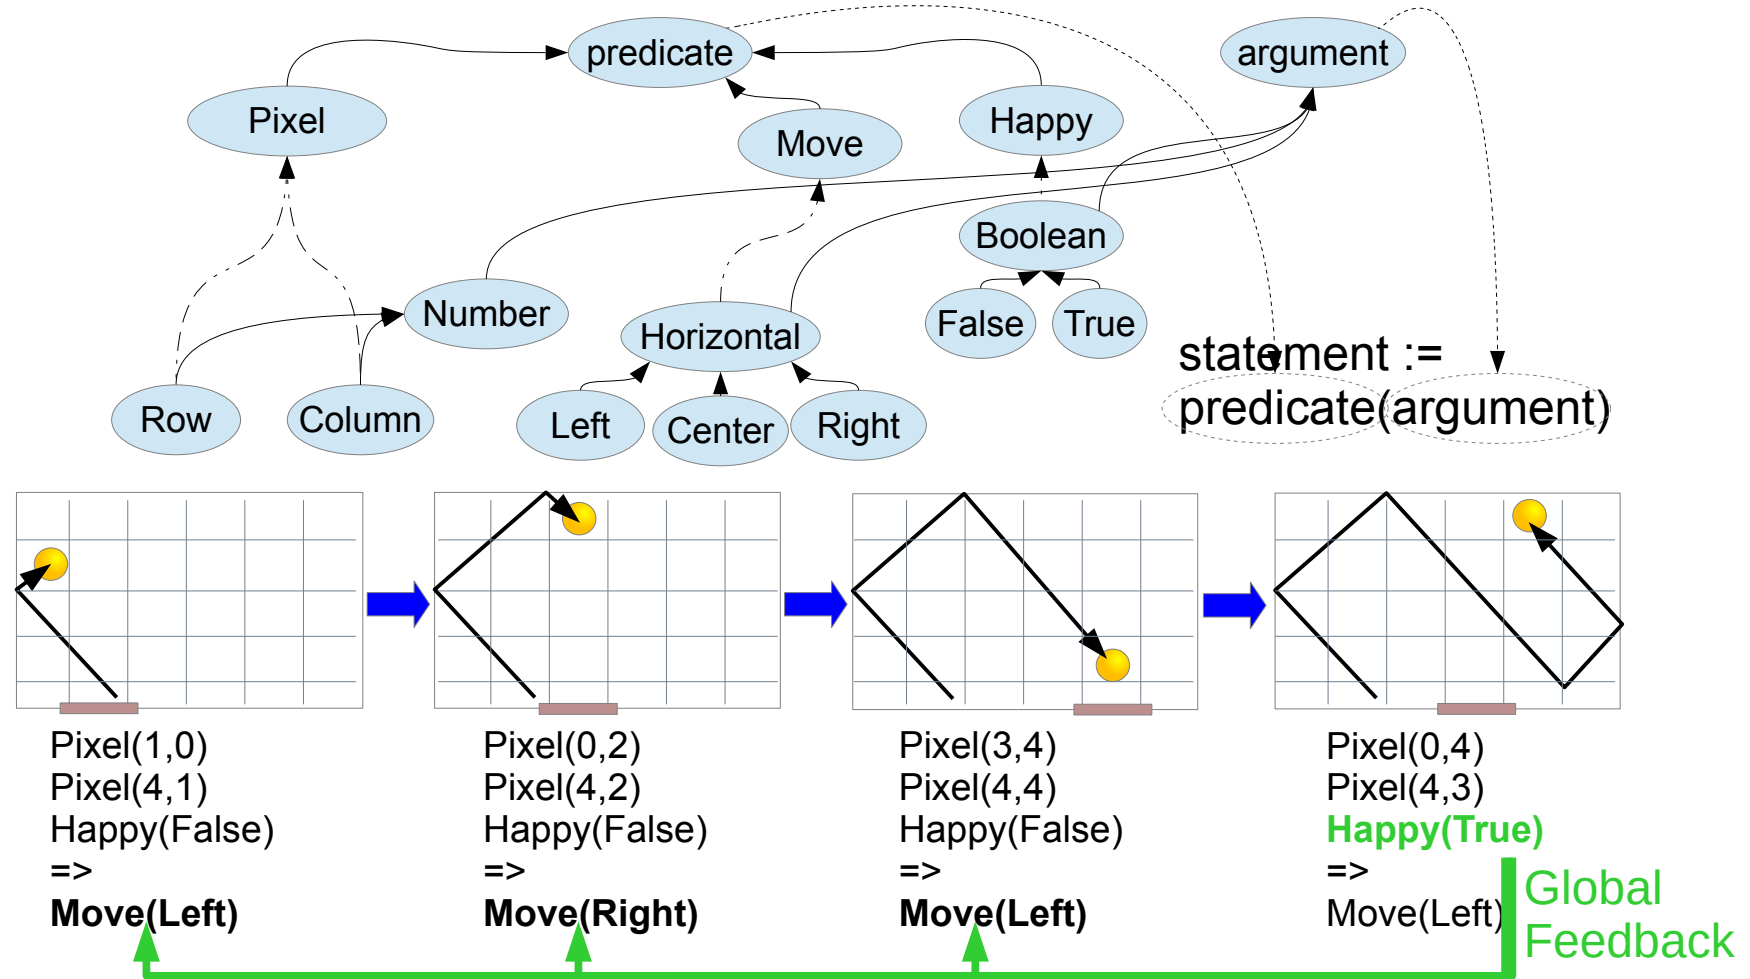


Experiential learning - playing “Pong” (Objects)

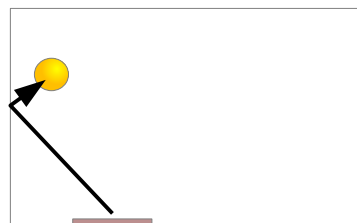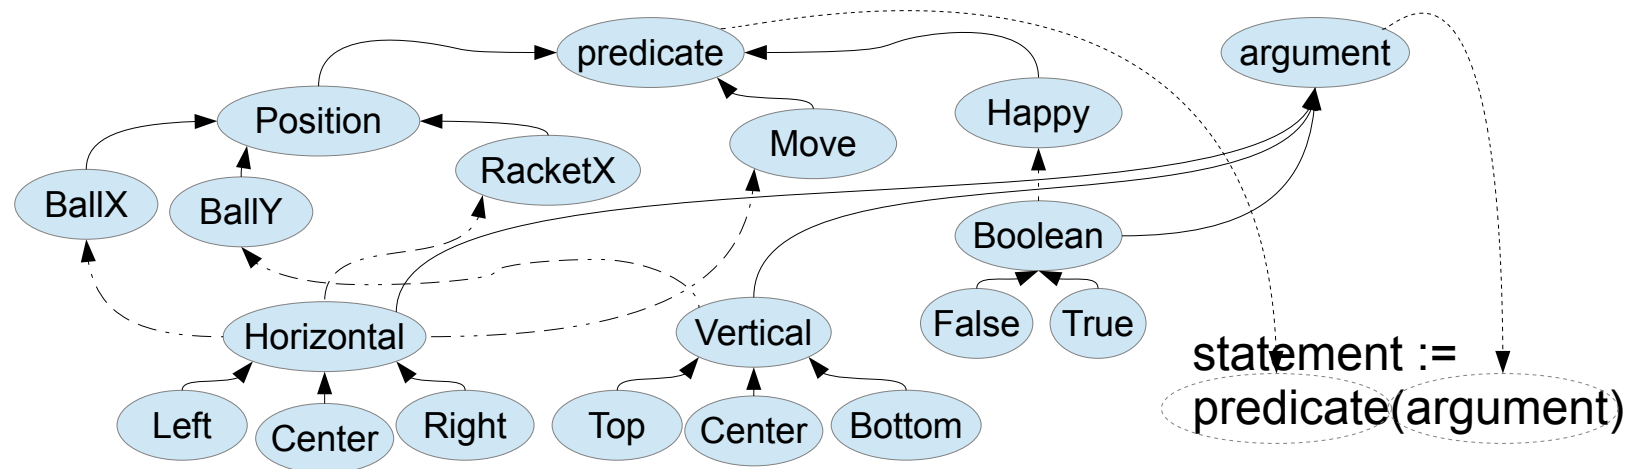


BallY(Top)
BallX(Left)
RacketX(Left)
Happy(False)
=> **Move(Left)**

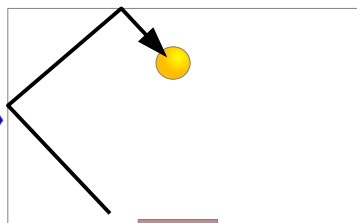

BallY(Top)
BallX(Center)
RacketX(Center)
Happy(False)
=> **Move(Right)**

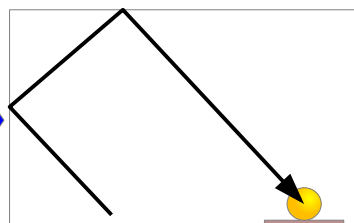


BallY(Bottom)
BallX(Right)
RacketX(Right)
Happy(False)
=> **Move(Right)**

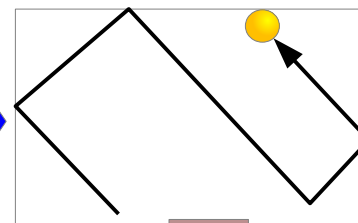


BallY(Bottom)
BallX(Right)
RacketX(Right)
Happy(True)
=> **Move(Left)**

Global
Feedback

Reinforcement learning – experiential learning and decision making based on transitions between state series and “global feedback”

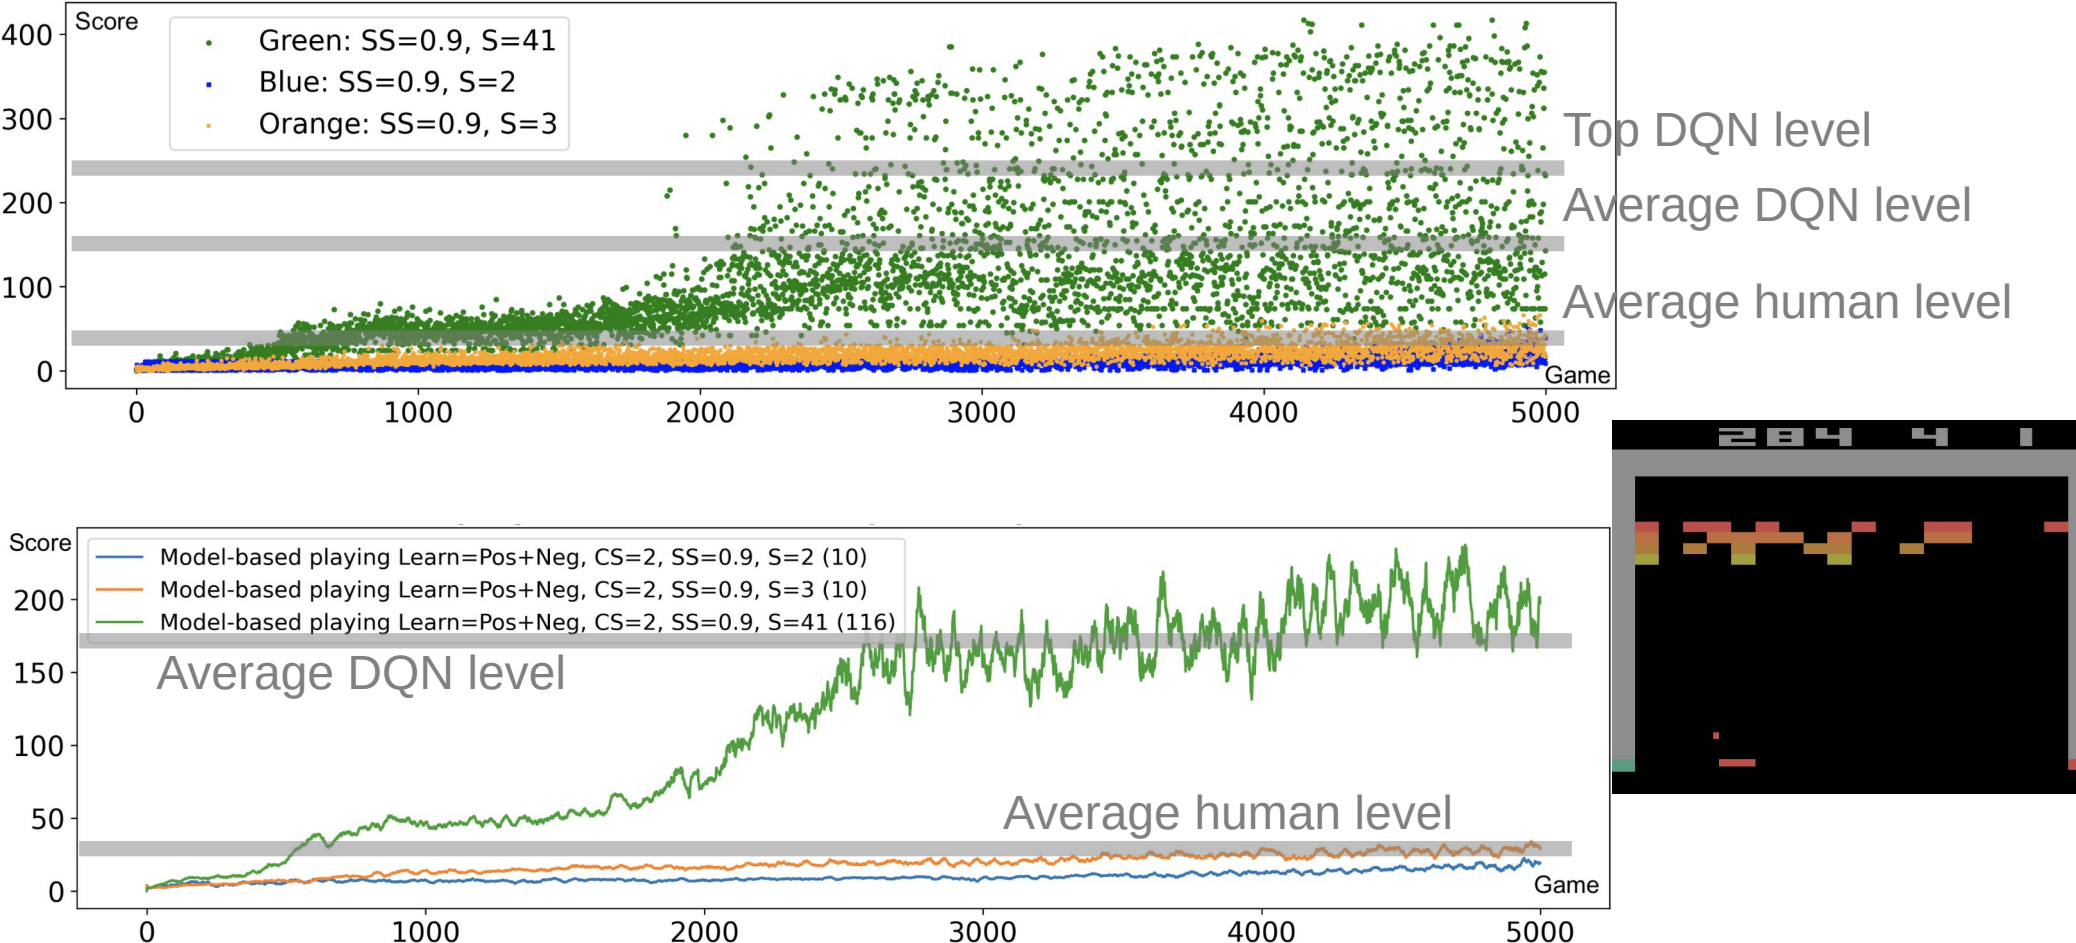


Cognitive architecture and behavioral model based on social evidence and resource constraints

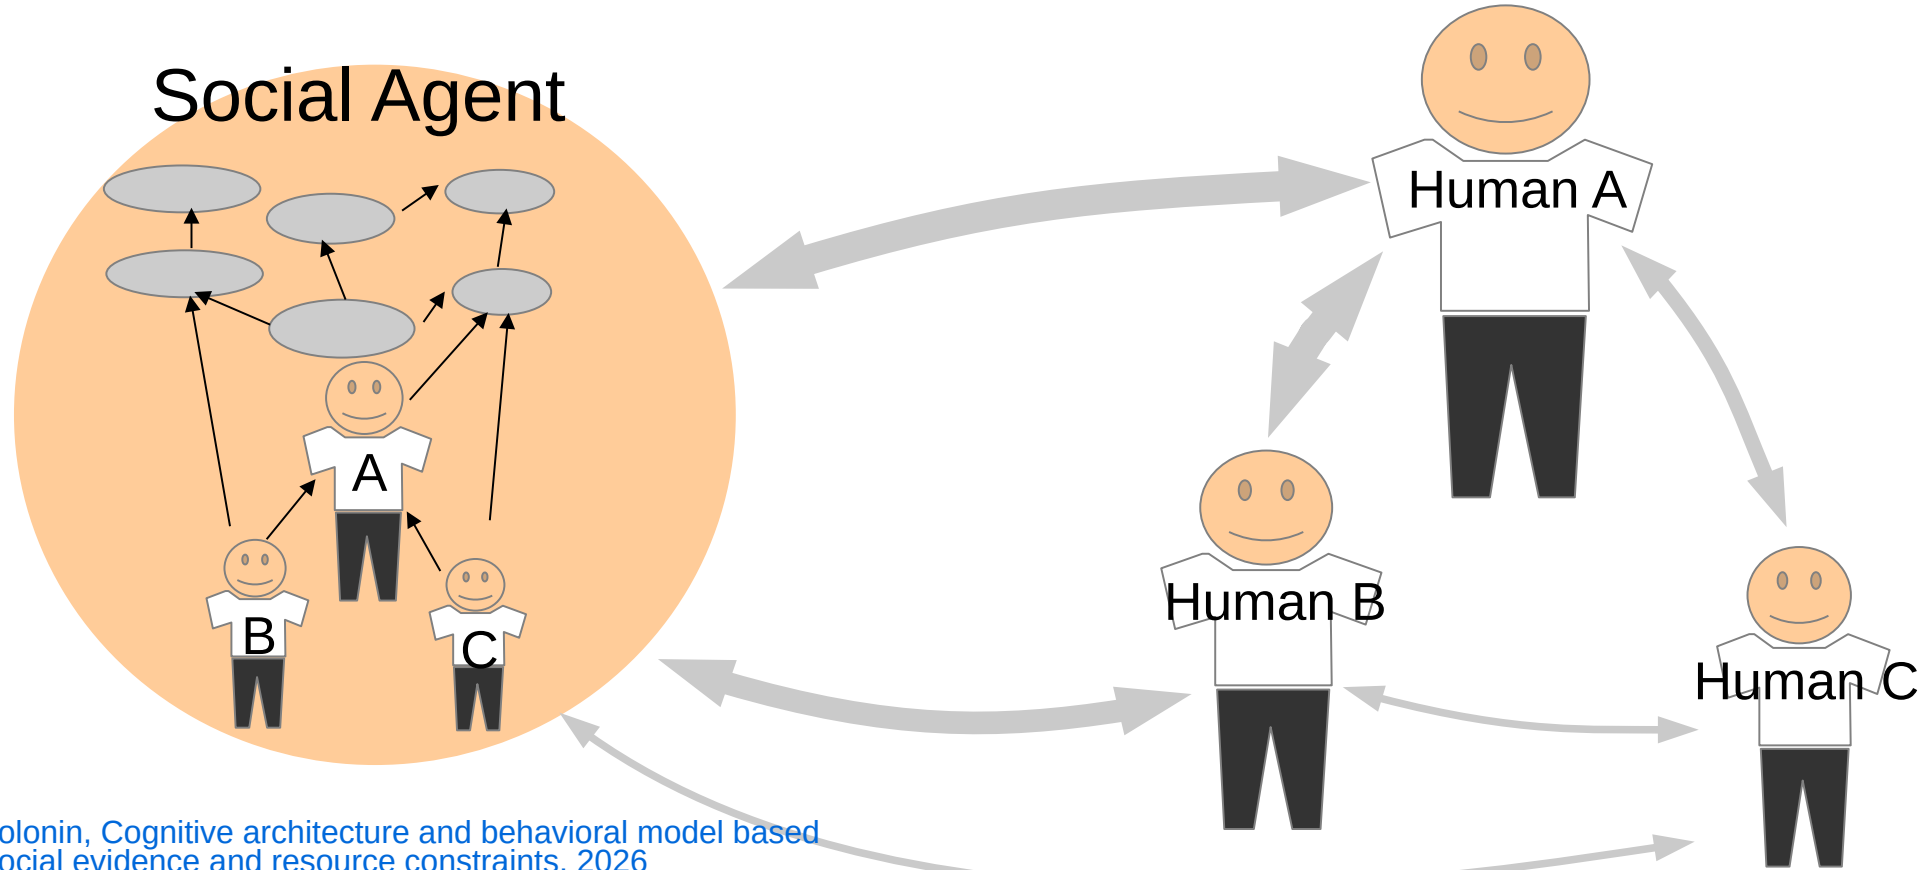

A. Kolonin, Cognitive architecture and behavioral model based on social evidence and resource constraints, 2026
<https://link.springer.com/article/10.1186/s40708-026-00294-1>


Copyright © 2026 Anton Kolonin, Aigents®

Cognitive architecture and behavioral model based on social evidence and resource constraints

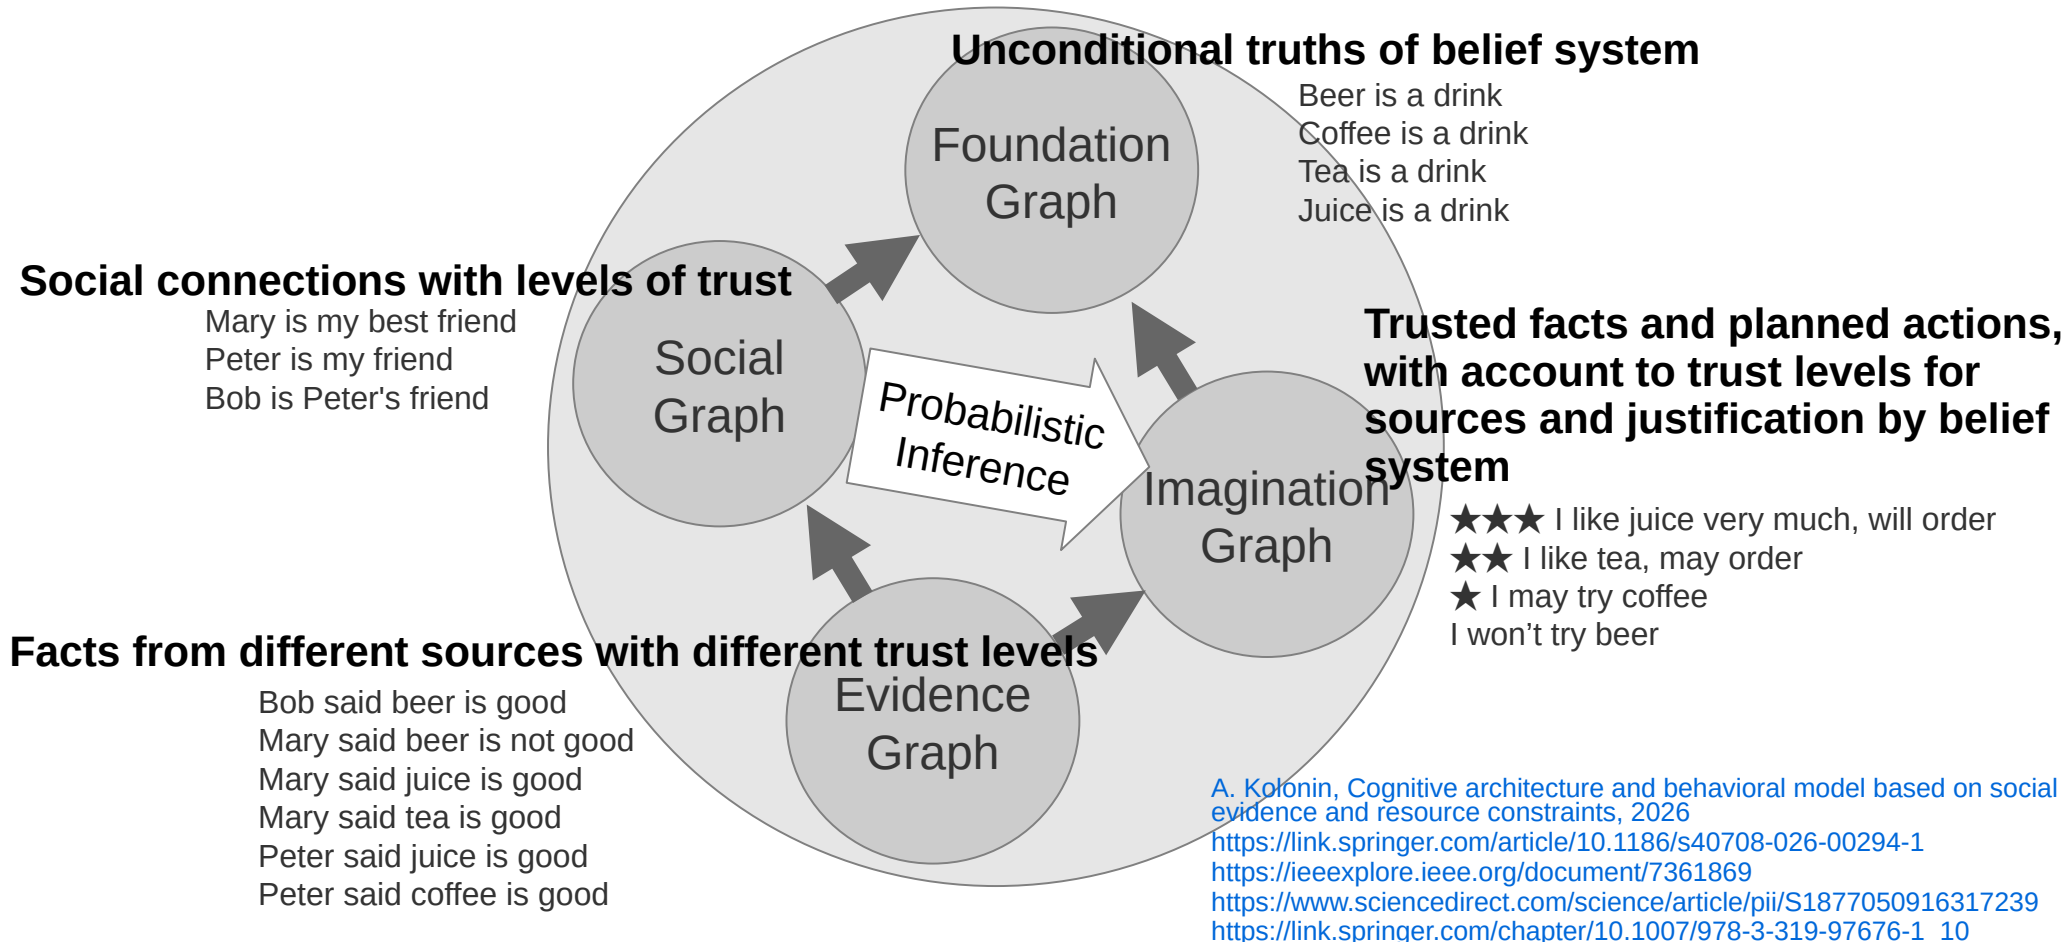

A. Kolonin, Cognitive architecture and behavioral model based on social evidence and resource constraints, 2026
<https://link.springer.com/article/10.1186/s40708-026-00294-1>
<https://ieeexplore.ieee.org/document/7361869>
<https://www.sciencedirect.com/science/article/pii/S1877050916317239>
https://link.springer.com/chapter/10.1007/978-3-319-97676-1_10


Cognitive architecture and behavioral model based on social evidence and resource constraints

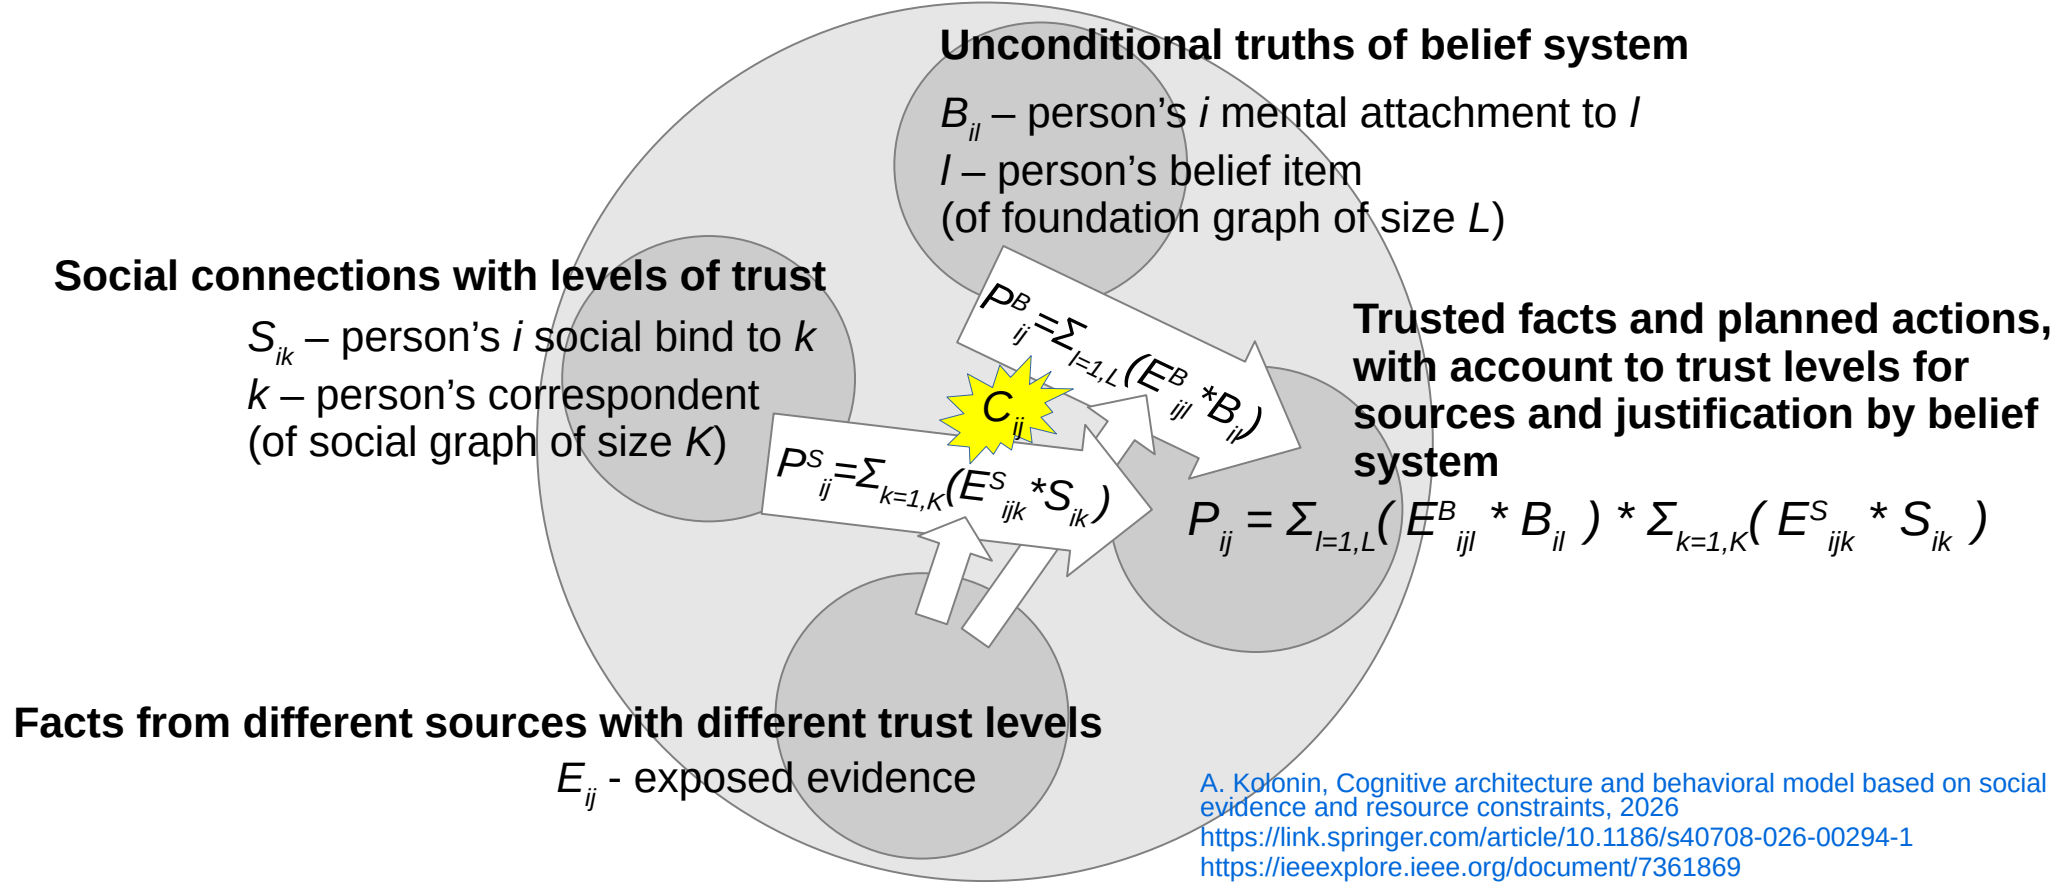

A. Kolonin, Cognitive architecture and behavioral model based on social evidence and resource constraints, 2026
<https://link.springer.com/article/10.1186/s40708-026-00294-1>
<https://ieeexplore.ieee.org/document/7361869>
<https://www.sciencedirect.com/science/article/pii/S1877050916317239>
https://link.springer.com/chapter/10.1007/978-3-319-97676-1_10

Cognitive architecture and behavioral model based on social evidence and resource constraints

Is helping to predict social dynamics

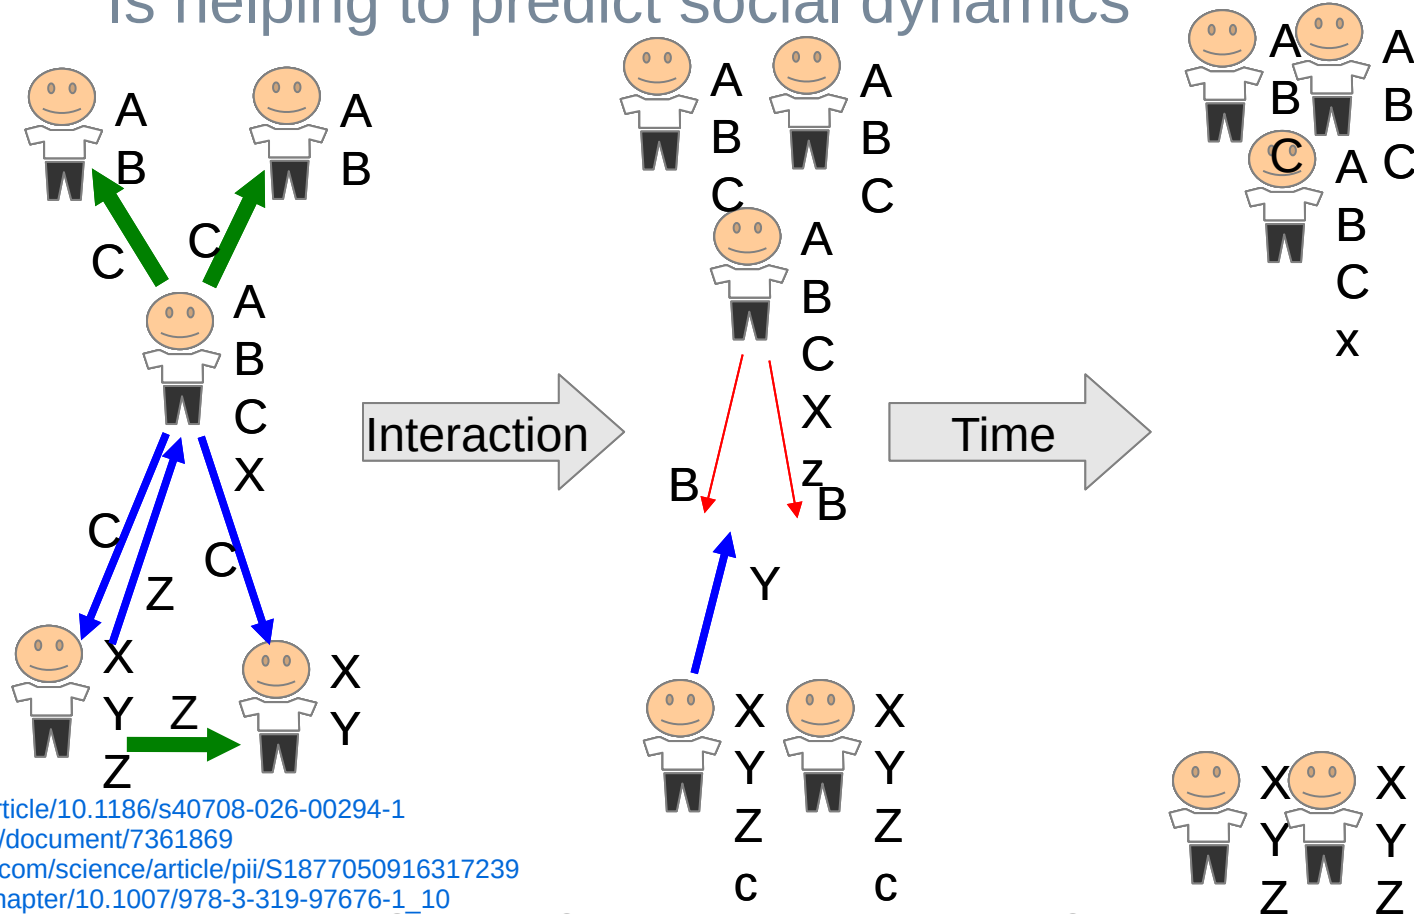


<https://link.springer.com/article/10.1186/s40708-026-00294-1>

<https://ieeexplore.ieee.org/document/7361869>

<https://www.sciencedirect.com/science/article/pii/S1877050916317239>

https://link.springer.com/chapter/10.1007/978-3-319-97676-1_10

Simulation: socially limited, cognitively capable community

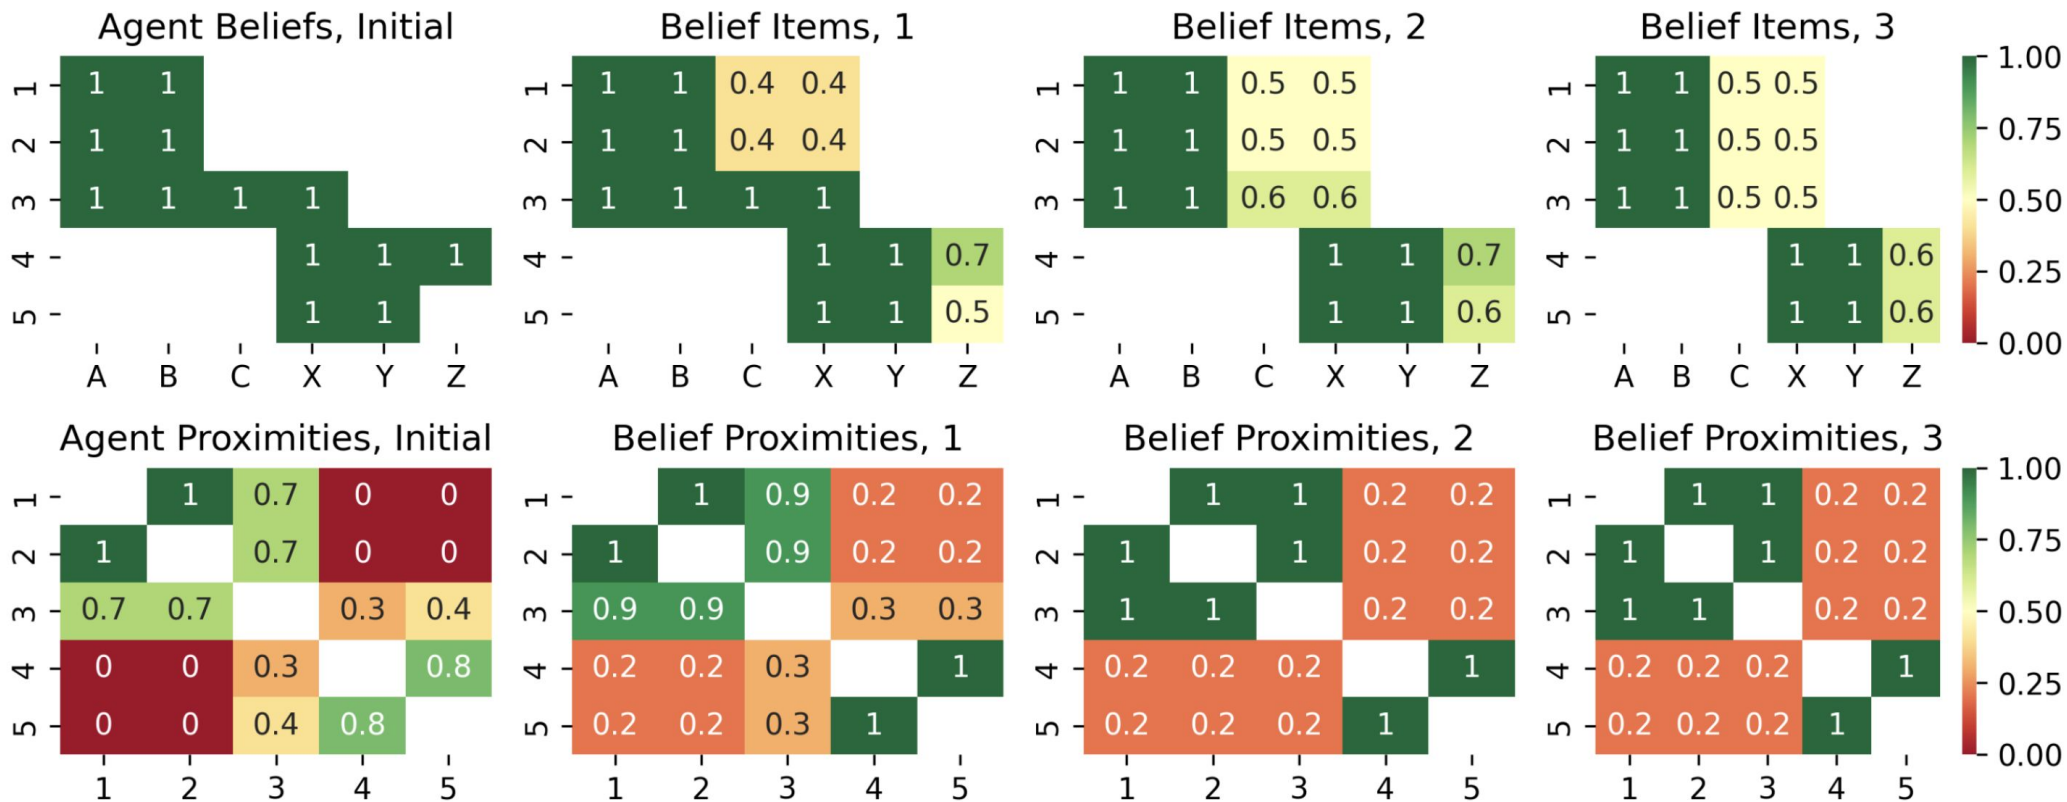

Results of three rounds of multi-agent simulation with the forgetting threshold peer threshold = 0.5, the social relationship threshold forgetting threshold = 0.0 (limiting social connections K without constraint on belief capacity L). Top row: values of belief items A, B, C, X, Y, Z for five agents 1, 2, 3, 4, 5. Bottom row: social proximity matrices between agents, estimated as the cosine similarity of their beliefs. From left to right: the initial state before the simulation, and then the updated states of beliefs and proximities after three subsequent rounds of multi-agent communication.

Thank you for attention! Questions?

Anton Kolonin

Telegram/GitHub/Gmail: [akolonin](#)

Full version of the
presentation video



Our latest paper

