


A)

```
#include <iostream>
using namespace std;
int main()
{
    double a, c, b, summa, proizved, sred;
    cin >> a >> b >> c;
    summa = a + b + c;
    proizved = a * b * c;
    sred = (a + b + c)/3;
    cout << summa << " " << proizved << " " << sred;
}
```

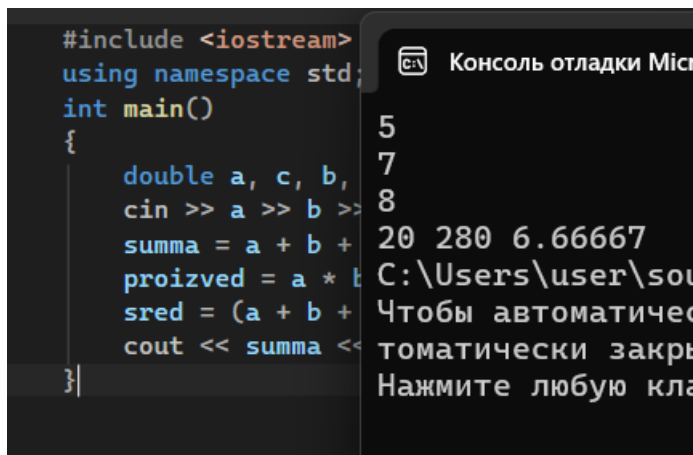

The screenshot shows a C++ program in a code editor on the left and its execution in a Windows Debug Console on the right. The code calculates the sum, product, and average of three numbers. The console shows the input values 5, 7, and 8, followed by the calculated results: 20 280 6.66667. The console window title is 'Консоль отладки Microsoft Visual Studio'.


```
#include <iostream>
using namespace std;
int main()
{
    double a, c, b, summa, proizved, sred;
    cin >> a >> b >> c;
    summa = a + b + c;
    proizved = a * b * c;
    sred = (a + b + c)/3;
    cout << summa << " " << proizved << " " << sred;
}
```

Консоль отладки Microsoft Visual Studio

5
7
8
20 280 6.66667
C:\Users\user\source\...
Чтобы автоматически закрыть программу, нажмите любую клавишу.

B)

```
#include <iostream>
#include <cmath>
using namespace std;
int main()
{
    double Ax, Ay, Bx, By, dlina;
    cin >> Ax >> Ay >> Bx >> By;
    dlina = sqrt(pow(Bx - Ax, 2) + pow(By - Ay, 2));
    cout << dlina;
}
```

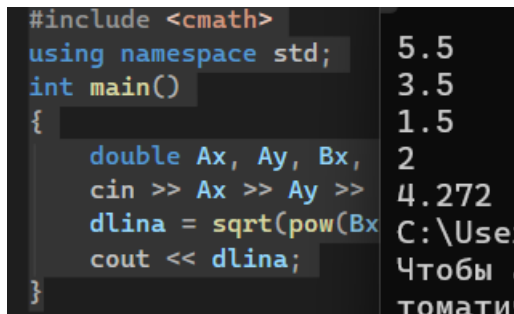

The screenshot shows a C++ program in a code editor on the left and its execution in a Windows Debug Console on the right. The code calculates the distance between two points (Ax, Ay) and (Bx, By). The console shows the input values 5.5, 3.5, 1.5, and 2, followed by the calculated distance: 4.272. The console window title is 'Консоль отладки Microsoft Visual Studio'.

```
#include <cmath>
using namespace std;
int main()
{
    double Ax, Ay, Bx, By, dlina;
    cin >> Ax >> Ay >> Bx >> By;
    dlina = sqrt(pow(Bx - Ax, 2) + pow(By - Ay, 2));
    cout << dlina;
}
```

Консоль отладки Microsoft Visual Studio

5.5
3.5
1.5
2
4.272
C:\Users\user\source\...
Чтобы автоматически закрыть программу, нажмите любую клавишу.

C)

```


#include <iostream>
#include <random>
using namespace std;
int main()
{
    int a, num1, num2;
    a = 100 + rand() % 900;
    cout << a << "\n";

    num1 = a/100;
    a -= num1 * 100;

    num2 = a / 10;
    a -= num2 * 10;

    cout << num1 << ", " << num2 << ", " << a;
}

```

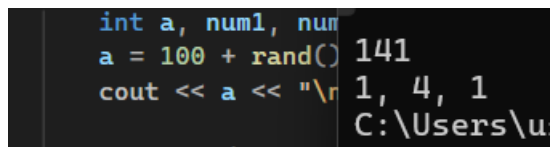

The screenshot shows a terminal window with the following output:

```

int a, num1, num2
a = 100 + rand() % 900
cout << a << "\n"
141
1, 4, 1
C:\Users\u

```

The output displays the value of 'a' as 141, followed by its components: 1 (hundreds), 4 (tens), and 1 (ones).