


Задание 4

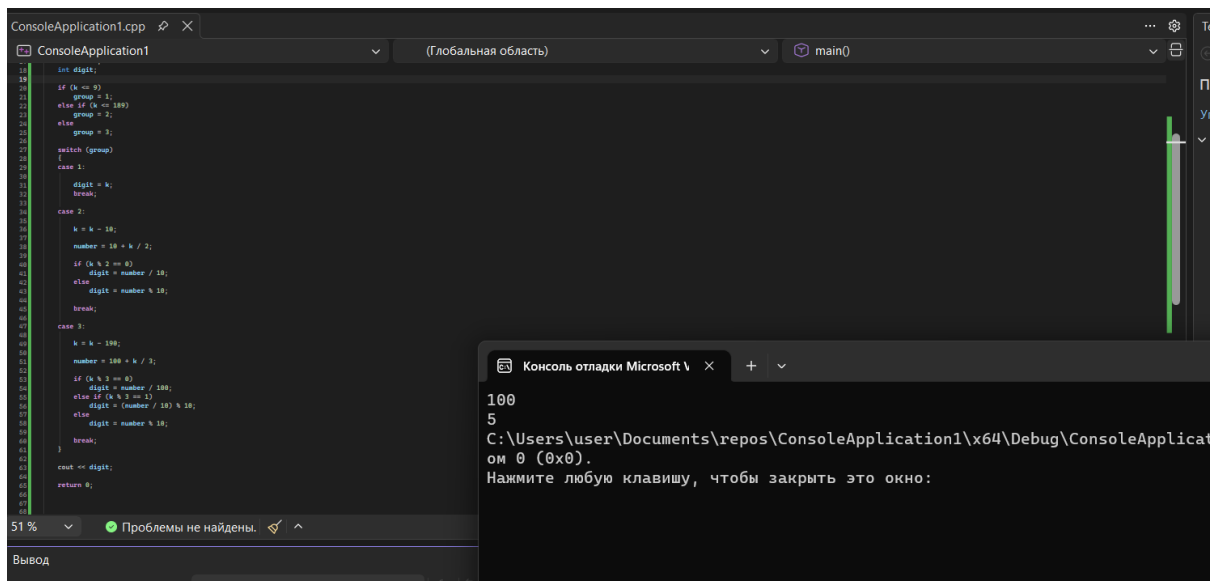

The screenshot shows a C++ IDE with a file named `ConsoleApplication1.cpp`. The code defines a function `int digit;` and a `switch` statement that processes a number based on its value. The `switch` statement has three cases: `case 1`, `case 2`, and `case 3`. Each case performs a series of calculations and updates the `digit` variable. The `switch` statement is followed by a `cout` statement that prints the value of `digit` and a `return` statement that returns `0`.

```
int digit;
if (n <= 9)
    group = 1;
else if (n <= 100)
    group = 2;
else
    group = 3;
switch (group)
{
    case 1:
        digit = n;
        break;
    case 2:
        k = n - 10;
        number = 10 + k / 2;
        if (k % 2 == 0)
            digit = number / 10;
        else
            digit = number % 10;
        break;
    case 3:
        k = n - 100;
        number = 100 + k / 3;
        if (k % 3 == 0)
            digit = number / 100;
        else if (k % 3 == 1)
            digit = (number / 10) % 10;
        else
            digit = number % 10;
        break;
}
cout << digit;
return 0;
```

The debug console shows the output of the program:

```
100
5
C:\Users\user\Documents\repos\ConsoleApplication1\x64\Debug\ConsoleApplication1.exe
ом 0 (0x0).
Нажмите любую клавишу, чтобы закрыть это окно:
```