


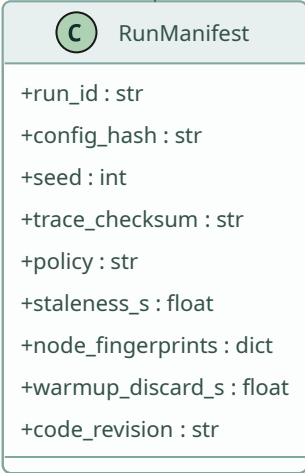
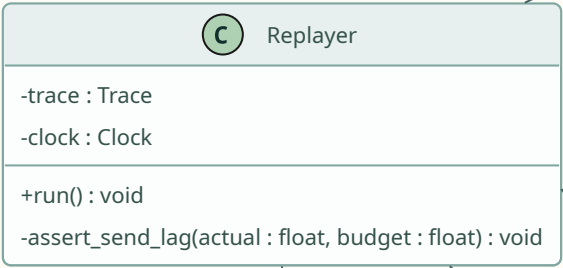
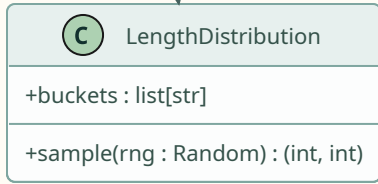
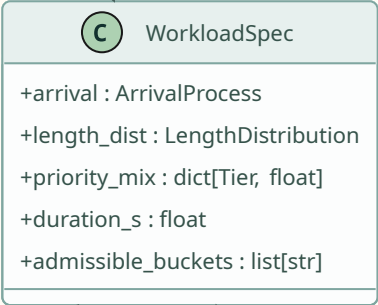


Replay — open loop, no runtime randomness (F-17, F-20)








Trace generation — offline, deterministic (F-16)

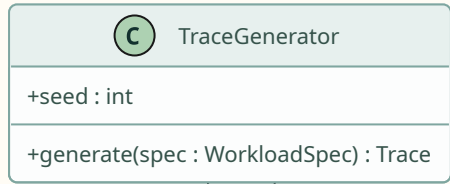

Open loop. Release times come from the trace, not from completions, so a slow pool cannot silently throttle the offered load — the coordinated-omission failure mode. A send-lag assertion turns violation into a failed run rather than a quiet bias.

Emitted for every run. This is what makes "reproducible from a single config file plus a seed" (F-20) checkable rather than merely claimed.

Records and analysis (F-18, F-19)

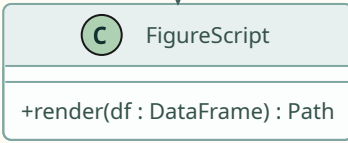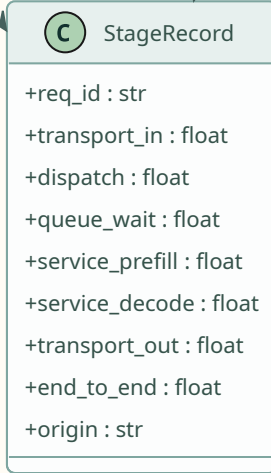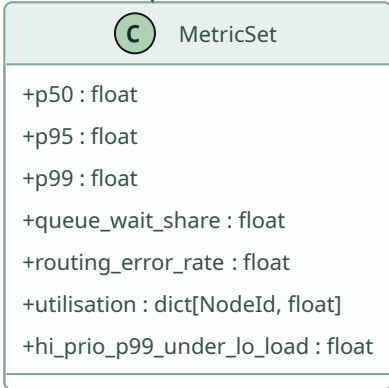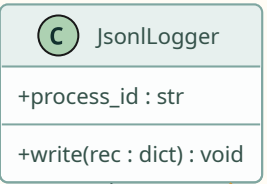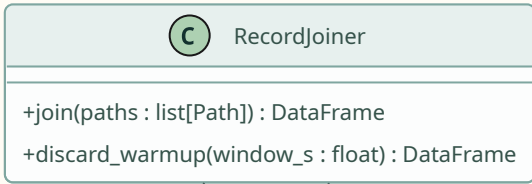

One JSONL file per process. No timestamp is ever subtracted across machines: each process reports only durations whose endpoints it observed itself, and the stages are reassembled offline by joining on req_id (F-18).