

# Sense and Sensibility Wordcloud

Andrew Innes

November 1, 2017

## Abstract

In this article we construct a wordcloud, using the tidytext R package, for Jane Austen's *Sense and Sensibility*.

*Sense and Sensibility* is a novel by Jane Austen, published in 1811<sup>1</sup>. Below we construct a wordcloud for the most common words appearing in the novel.

## 1 The Jane Austen Package

There is a relatively new package for R, *janeaustenr*, that gives one access to all of the novels written by Jane Austen (Silge and Robinson, 2017). One first has to install this package and bring it in with `library`. You may then call the following function and store the result. The result will be a data frame.

```
library(janeaustenr)
sns<-austen_books()
```

This dataframe has two columns, one for each line in Austen's novels, and one for indicating which book the line is from. Let's first filter, using `dplyr`, so that we have only the lines from *Sense and Sensibility*:

```
library(dplyr)
sns<-sns%>%
  filter(book == 'Sense & Sensibility')
head(sns)

## # A tibble: 6 x 2
##           text                book
##           <chr>            <fctr>
## 1 SENSE AND SENSIBILITY Sense & Sensibility
## 2                      Sense & Sensibility
## 3      by Jane Austen Sense & Sensibility
## 4                      Sense & Sensibility
## 5              (1811) Sense & Sensibility
## 6                      Sense & Sensibility
```

---

<sup>1</sup>The novel was published anonymously.

Now we are ready for some data cleaning.

## 2 Some Data Cleaning

We would like to remove all of the ‘Chapter’ lines. We can use dplyr again, along with the package stringr.

```
library(stringr)
sns<-sns%>%
  filter(!str_detect(sns$text, '^CHAPTER'))
```

Next, we would like to remove the front matter. By inspection, we have determined that the front matter ends on line 11. Therefore we can redefine sns to begin on line 12:

```
sns<-sns[12:12574,]
```

## 3 The Wordcloud

To make the wordcloud, we first have to break up the lines into words. We can use a function from the tidytext package for this:

```
library(tidytext)
words_df<-sns%>%
  unnest_tokens(word, text)

words_df

## # A tibble: 119,850 x 2
##       book      word
##       <fctr>   <chr>
## 1 Sense & Sensibility the
## 2 Sense & Sensibility family
## 3 Sense & Sensibility of
## 4 Sense & Sensibility dashwood
## 5 Sense & Sensibility had
## 6 Sense & Sensibility long
## 7 Sense & Sensibility been
## 8 Sense & Sensibility settled
## 9 Sense & Sensibility in
## 10 Sense & Sensibility sussex
## # ... with 119,840 more rows
```

We can remove the common, unimportant words with the stop\_words data frame and some dplyr:

```

words_df<-words_df%>%
  filter(!(word %in% stop_words$word))

words_df

## # A tibble: 36,225 x 2
##       book      word
##   <fctr>   <chr>
## 1 Sense & Sensibility family
## 2 Sense & Sensibility dashwood
## 3 Sense & Sensibility settled
## 4 Sense & Sensibility sussex
## 5 Sense & Sensibility estate
## 6 Sense & Sensibility residence
## 7 Sense & Sensibility norland
## 8 Sense & Sensibility park
## 9 Sense & Sensibility centre
## 10 Sense & Sensibility property
## # ... with 36,215 more rows

```

Now, we need to calculate the frequencies of the words in the novel. Again, we can use standard dplyr techniques for this:

```

word_freq<-words_df%>%
  group_by(word)%>%
  summarize(count=n())


word_freq

## # A tibble: 5,844 x 2
##       word count
##   <chr>   <int>
## 1      1      1
## 2     200      1
## 3    70001      1
## 4 abandoned      1
## 5 abatement      1
## 6 abbeyland      1
## 7    abhor      1
## 8  abhorred      2
## 9 abhorrence      4
## 10 abilities      9
## # ... with 5,834 more rows

```

Finally, it's time to generate the wordcloud:

```
library(wordcloud)
wordcloud(word_freq$word, word_freq$count, min.freq = 25)
```

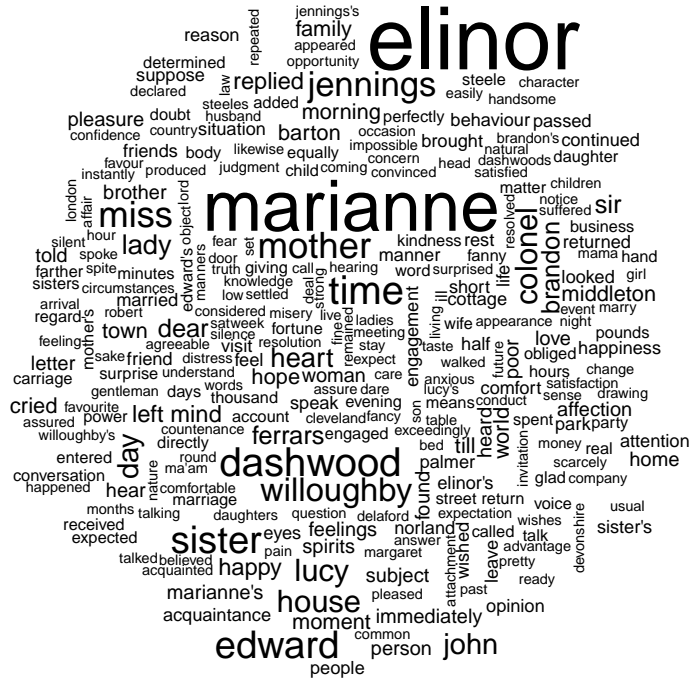

## References

- Feinerer, I. and Hornik, K. (2017). *tm: Text Mining Package*. R package version 0.7-1.
- Fellows, I. (2014). *wordcloud: Word Clouds*. R package version 2.5.
- Robinson, D. and Silge, J. (2017). *tidytext: Text Mining using 'dplyr', 'ggplot2', and Other Tidy Tools*. R package version 0.1.4.
- Silge, J. (2017). *janeaustenr: Jane Austen's Complete Novels*. R package version 0.1.5.

- Silge, J. and Robinson, D. (2017). *Text Mining with R: A Tidy Approach*. O'Reilly Media.
- Wickham, H. (2017). *stringr: Simple, Consistent Wrappers for Common String Operations*. R package version 1.2.0.
- Wickham, H., Francois, R., Henry, L., and Miller, K. (2017). *dplyr: A Grammar of Data Manipulation*. R package version 0.7.2.
- Wickham, H. and Grolemund, G. (2017). *R for Data Science: Import, Tidy, Transform, and Model Data*. O'Reilly Media.