

VERBOSITY $\neq$ VERACITY: DEMYSTIFY VERBOSITY COMPENSATION BEHAVIOR OF LARGE LANGUAGE MODELS

Yusen Zhang, Sarkar Snigdha Sarathi Das, Rui Zhang

Department of Computer Science and Engineering, Penn State University
{yfz5488, sfd5525, rmz5227}@psu.edu

ABSTRACT

When unsure about an answer, humans often respond with more words than necessary, hoping that part of the response will be correct. We observe a similar behavior in large language models (LLMs), which we term “Verbosity Compensation” (VC). VC is harmful because it confuses the user understanding, leading to low efficiency, and influences the LLM services by increasing the latency and cost of generating useless tokens. In this paper, we present the first work that defines and analyzes Verbosity Compensation, explores its causes, and proposes a simple mitigating approach. We define Verbosity Compensation as the behavior of generating responses that can be compressed without information loss when prompted to write concisely. Our experiments, conducted on five datasets of knowledge and reasoning-based QA tasks with 14 newly developed LLMs, reveal three conclusions. 1) We reveal a pervasive presence of Verbosity Compensation across all models and all datasets. Notably, GPT-4 exhibits a VC frequency of 50.40%. 2) We reveal the large performance gap between verbose and concise responses, with a notable difference of 27.61% on the Qasper dataset. We also demonstrate that this difference does not naturally diminish as LLM capability increases. Both 1) and 2) highlight the urgent need to mitigate the frequency of VC behavior and disentangle verbosity with veracity. We propose a simple yet effective cascade algorithm that replaces the verbose responses with the other model-generated responses. The results show that our approach effectively alleviates the VC of the Mistral model from 63.81% to 16.16% on the Qasper dataset. 3) We also find that verbose responses exhibit higher uncertainty across all five datasets, suggesting a strong connection between verbosity and model uncertainty. Our dataset and code are available at <https://github.com/psunlpgroup/VerbosityLLM>.

1 INTRODUCTION

Throw everything at the wall and see what sticks.

— American Proverb

“Verbosity compensation” (VC) refers to a situation where someone is using excessively wordy language, attempting to make up for a lack of substance or clear communication by trying to appear more knowledgeable or persuasive, even if they are not adding significant meaning to the message. VC is widely studied in linguistic (Juola, 2008), education (Strunk Jr & White, 2007; Demir, 2019), and psychology (Brookshire & McNeil, 2014). Interestingly, we find that LLMs also exhibit Verbosity Compensation behaviors. Figure 1 shows a motivating example. In the first response, LLM generates a concise answer that is correct with low uncertainty. In the second and third responses, LLM tries to guess the correct answer by repeating the question, and producing ambiguity, leading to a verbose response with low performance and high uncertainty.

In LLMs, the verbosity compensation behaviors are harmful. The reasons are twofold. First, for the users, the responses with verbosity compensation will lead to confusion and inefficiency (Fowler, 1927; Oppenheimer, 2006). Second, for the servers, the verbosity leads to unnecessary higher costs and higher latency. Besides, the performance of the model should not correlated to the length or

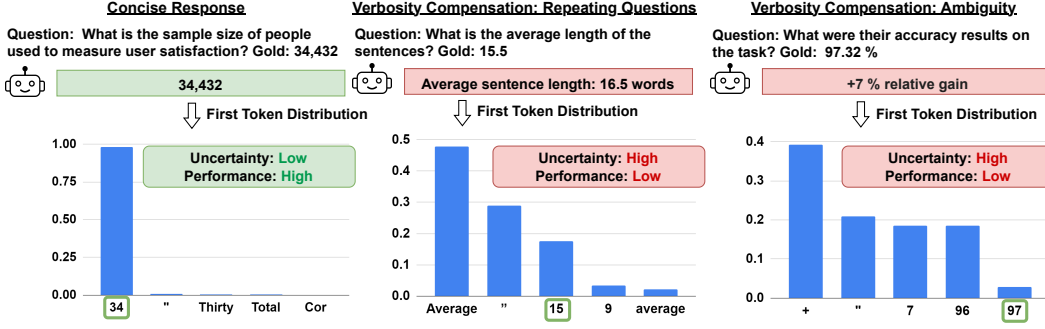


Figure 1: An illustration of comparison between concise and verbose responses. In the first response, LLM generates a concise answer, while in the second and third responses, LLM performs repeating, and ambiguity, leading to a verbose response with low performance and high uncertainty.

format of responses because diverse users favor different lengths of responses. If verbose responses attain higher or lower performance than concise responses, verbosity compensation also leads to bias of users of different length preferences.

In this paper, we present the first study that defines, analyzes, and mitigates VC behavior. First, we define Verbosity Compensation (VC) as the behavior of generating responses that can be compressed without information loss when prompted to write concisely. To analyze the VC behavior systematically, we propose a benchmark by unifying four existing long-context question-answering datasets, and a reasoning-based language understanding dataset. We benchmark 14 newly proposed LLMs on five datasets and conduct a comprehensive analysis of the results. Next, we demystify the VC behavior in steps.

We first obtain a fine-grained understanding of this behavior by manually inspecting the model-generated results and summarizing the pattern of VC by classifying them. Although we find that different models and datasets exhibit diverse distribution over types of VC behavior, we can categorize VC into five distinct types, including repeating questions, enumerating, ambiguity, verbose details, and verbose format. Next, we combine all these verbosity types and produce statistics of the frequency of LLM-generating VC responses, **the result reveals a pervasive presence of verbosity compensation (VC) across all models and all datasets**. Notably, GPT-4 exhibits a VC frequency of 50.40%. The high-frequency result amplifies the harmful influence of verbose responses. We further analyze the impact of VC on model performance. We define metrics that compute the difference between verbose and concise responses and apply these metrics to models. Our results indicate that verbose responses exhibit significantly different compared to concise ones, with a notable drop of 27.61% on the Qasper dataset, **highlighting the urgent need to disentangle verbosity with veracity**.

Next, we investigate the underlying causes of VC. We use perplexity and Laplacian scores for open and closed-source models to measure the uncertainty of model responses. We find that verbose responses exhibit higher uncertainty across all five datasets, suggesting **a strong connection between verbosity and model uncertainty**. Last but not least, to mitigate VC in LLMs, we propose a simple yet effective cascade algorithm that replaces verbose responses with responses of larger LLMs. Experiments demonstrate the efficacy of our cascade algorithm through tests on three model combinations: Gemma to Gemini, Mistral to GPT-4, and Llama to Claude. The results show that our approach effectively alleviates the VC of the Mistral model from 63.81% to 16.16% on the Qasper dataset. We also modify the cascade algorithm for model routing and obtain significant improvement over the random selecting baseline.

To summarize, our contribution is threefold:

- We define the verbosity compensation behavior of LLMs and propose a benchmark for evaluating the verbosity compensation phenomenon. We found LLMs suffer from significant verbosity.
- We conduct a comprehensive analysis of the verbosity compensation and connect verbosity compensation behavior to 1) model performance and 2) model uncertainty.

- We propose a simple but effective cascade approach to mitigate verbosity compensation in LLMs, and our extensive experiments show it is highly effective.

2 RELATED WORK

Verbosity in LLM Responses Recently work has focused on the verbosity of LLM-generated content and its implications. Concise thoughts (Nayab et al., 2024) use prompts to constraint the length of Chain-of-thought reasoning and generate more concise responses with better performance. Ivgi et al. (2024) investigate the fallback behavior of LLM-generated responses when facing uncertainty. They found that the more advanced an LLM is, its fallback behavior shifts from sequence repetitions to degenerate text to hallucinations. Singhal et al. (2023) investigate the correlation between generated length and reinforcement learning from human feedback (RLHF) techniques, discovering that optimizing for response length is a significant factor behind RLHF. Saito et al. (2023) find that LLMs sometimes prefer more verbose answers even if they have similar qualities. Zheng et al. (2023) attack this by asking LLMs to evaluate longer and longer responses and observe if the performance increases. By contrast, Huang et al. (2024) find that GPT-4 prefers short responses in faithfulness and coverage when it comes to summarization. Unlike these works, we discover the connection between performance and verbosity compensation behavior in both CoT and general QA settings and connect verbosity to uncertainty. Besides, we use the cascading model to mitigate verbosity while they use prompt engineering.

Uncertainty Quantification of LLMs With the thriving of Large Language Models (LLMs), researchers have begun exploring uncertainty quantification in LLM responses (Geng et al., 2023). For white-box models, researcher have focused on unsupervised methods including entropy (Malinin & Gales, 2020), similarity (Fomicheva et al., 2020; Lin et al., 2022), semantic (Kuhn et al., 2023; Duan et al., 2023), and logits (Kadavath et al., 2022; Chen et al., 2024), whereas for black models, the uncertainty evaluation is based on multiple sampled output of the LLMs (Malinin & Gales, 2020; Lin et al., 2023; Manakul et al., 2023) However, these works aim to improve the evaluation metrics for LLM uncertainty while we focus on connecting uncertainty with verbosity compensation behavior.

Optimisation of LLM API Calls Recently, researchers have proposed to reduce the cost of leveraging a pool of LLMs (Wang et al., 2024). Some of the works train a model to predict the success rate of large or small LLMs (Ding et al., 2024) and route to the cheapest one that can succeed (Šakota et al., 2024; Lu et al., 2024). Different from routing algorithms that only pick one LLM, FragulGPT (Chen et al., 2023) use a cascade algorithm to visit LLMs from weak to strong and use an LLM evaluator to judge if the response is good enough to use (Madaan et al., 2023). Ramírez et al. (2024) leverage the uncertainty of the prediction as the evaluator to evaluate both cascading and routing structures. Similarly, Gupta et al. (2024) inspect the bias of sequential uncertainty and propose to use token-level uncertainty as criteria. Our work, by contrast, aims at mitigating verbosity compensation which has not explored before, and our evaluator is the verbosity of the response in the cascade algorithm.

3 VERBOSITY COMPENSATION

In this section, we first introduce the definition and quantification of verbosity compensation, and then we propose the metrics for evaluating the correlation between verbosity compensation and performance, uncertainty, and alleviating it with LLM routing.

3.1 VERBOSITY COMPENSATION OF LLMs

We first formalize the task as follows. A dataset $\mathcal{D}$ consists of multiple data samples where each consists of a source text x , a query q , and a ground truth y . A large language model $LLM(*)$ consumes the concatenation of x, q and an instruction I to produce the response r . For instruction I , we always ask LLM to generate as concisely as possible so that the model is instructed not to generate verbose responses. We call these tasks Concise Question Answering (CQA). Since the LLMs have maximum context window sizes L_c , we truncate the source to accommodate diverse context limits (details in A.4).

We define a response r to be verbose if and only if it can be further compressed with fewer tokens while keeping the same meaning. To detect whether the response r is verbose or not, we also use a verbosity detector $V(x, y, r)$ which returns one if the response is verbose and vice versa. Based on the detector, verbosity compensation behavior for an LLM is defined as a triple (x, y, r) where $V(x, y, r) = 1$ to describe the behavior of generating a result that is more verbose than required. To quantify the frequency of verbosity compensation behavior, we define it as the ratio of verbose responses in each dataset $\sum_{(x,y) \in \mathcal{D}} V(x, y, r) / |\mathcal{D}|$.

3.2 PERFORMANCE AND VERBOSITY COMPENSATION

A key bias of verbosity compensation is that the performance of the verbose responses is different from the concise ones. To quantify this behavior, we propose two evaluation metrics. One is performance difference (Δ), defined as the average score of the concise responses minus the average score of the verbose responses.

$$\Delta(\mathcal{D}) = \frac{\sum_{(x,y) \in \mathcal{D}} V(x, y, r) \times \text{recall}(y, r)}{\sum_{(x,y) \in \mathcal{D}} V(x, y, r)} - \frac{\sum_{(x,y) \in \mathcal{D}} (1 - V(x, y, r)) \times \text{recall}(y, r)}{\sum_{(x,y) \in \mathcal{D}} (1 - V(x, y, r))}$$

Where r is the response generated by LLM and $\text{recall}(y, r)$ is defined as $|r \cap y| / |y|$. This metric computes the difference between concise and verbose responses of a model over a dataset. If verbosity compensation has no influence on the performance, the Δ should be 0. An LLM should show zero Δ because verbosity and performance are naturally independent and thus have no relation with each other. However, if Δ is positive, then it demonstrates that verbosity responses lead to the performance drop for this model on the dataset, and vice versa. To remove the influence of the length difference between verbose and concise responses, we use recall as the scoring function. Compared with precision or F1 scores, scores are higher for verbose responses (or Δ will be smaller) because verbose responses usually contain more tokens than concise ones.

A main problem of Δ is that the recall difference between verbose and concise responses is twisted by the absolute performance of the LLMs. According to the definition, a dataset with lower performance naturally has a smaller space for performance difference. An extreme case is that the performance is zero on a dataset and the maximum Δ is zero as well. This impedes the fair comparison between datasets and models because they have diverse absolute performances. Thus, we propose relative performance difference

$$\delta(\mathcal{D}) = \Delta(\mathcal{D}) / \frac{\sum_{(x,y) \in \mathcal{D}} \text{recall}(y, r)}{\sum_{(x,y) \in \mathcal{D}} 1}$$

δ can be seen as the Δ if the absolute performance of the LLMs is scaled to the same number. We use this to compare the influence of performance across datasets and LLMs.

3.3 VERBOSITY COMPENSATION AND UNCERTAINTY

For humans, verbosity compensation usually happens when we feel uncertain about the answers to questions. Thus, for the LLMs, it is natural to speculate verbosity compensation of LLMs is also related to the uncertainty of the model. To test this hypothesis, we evaluate the uncertainty of the LLMs with the tool proposed by Fadeeva et al. (2023). First, we split the samples according to the detector V (length of response in our setting). Then, we quantify the uncertainty of each split. For open-sourced models, we use perplexity (Fomicheva et al., 2020) for evaluation, and for the close-sourced model, we use the sum of eigenvalues (Lin et al., 2023) of the graph laplacian as the metrics.

Algorithm 1 Cascade Model Selection Algorithm.

Input: A list of LLMs M , A sample (x, y, q) , instruction I_w , a verbosity detector $V(\cdot)$.

Output: A response r .

```

order  $M$  by model capability from weak to strong
for LLM in  $M$  do
   $r \leftarrow \text{LLM}(x \oplus q \oplus I_w)$ 
  if  $V(x, y, r)$  is false then
    break
  end if
end for
return  $r$ 

```

3.4 ALLEVIATING VERBOSITY COMPENSATION WITH CASCADE MODEL SELECTION

Although it is difficult to ask a single LLM to generate a concise but correct answer, the verbosity compensation behavior can be mitigated by an ensemble of multiple models. To this end, we propose a **Cascade Model Selection** algorithm (CaSel) to increase the chance of getting concise responses. The algorithm is simple and straightforward (Algorithm 1). Given a list of LLMs from weak to strong, we first ask the weak model to generate a response with r token. At any time if we detect $V(x, y, r) = 1$, we stop the generation of the current sample and redo the generation by a stronger model and repeat the process. With the power of diverse LLM, the algorithm can finally obtain a response with less verbosity and better performance.

4 EXPERIMENT SETUP

4.1 DATASET CONSTRUCTION

The principles of constructing datasets are twofold. First, the *quality* of samples needs to be high. The questions are picked from existing human-annotated datasets, with clear answers. We also filter out Yes/No, True/False, or multi-choice questions to ensure the answer cannot be simply chosen from a set of candidate answers. Second, the dataset should be *challenging* enough for LLMs with moderate performance levels. Otherwise, if the performance is close to 100 percent, the model is too certain about the answer and the phenomena is difficult to observe. Noting that most of the benchmark datasets LLMs already obtain performance higher than 90%, we craft two types of datasets to pose challenges to the model, including knowledge-based and reasoning-based question answering.

Knowledge-based Question Answering. This category contains the QA datasets which aim at extracting knowledge from the given source text which is long (Bai et al., 2023) or in particular position (Liu et al., 2024). Firstly, we use long-context question-answering tasks whose difficulty resides in picking out useful information across long context and gathering them to answer the question. The distractor paragraphs will also incorporate the difficulty of recognizing the needed information. Specifically, we collect the three long-form question-answering datasets as our evaluation benchmark for long-context QA. These datasets display three levels of lengths, including short (**Qasper**), medium (**LongBench**), and long (**NarrativeQA**). Qasper (Dasigi et al., 2021) is a question-answering dataset over NLP papers. It also contains extractive, abstractive, yes/no, and unanswerable questions. The average length of the source text is 4119.85 words. We also incorporate three datasets from LongBench (Bai et al., 2023) to form a new dataset. We directly name it LongBench. It includes HotpotQA (Yang et al., 2018), MuSiQue (Trivedi et al., 2022), and 2WikiMultiHopQA (Ho et al., 2020). The average length of the source text is 9522.36 words. NarrativeQA (Kočíský et al., 2018) is a QA dataset over entire books or movie transcripts. The answers can be abstract or extractive, yes/no, and unanswerable, and the average length is 70340.45 words.

LLMs are proven to show difficulties in understanding the information in the middle of the context (Liu et al., 2024), known as lost-in-the-middle. We pick the most challenging split of the dataset in the original work, where the gold answer is in the middle of 30 documents for a QA pair in the Natural Questions dataset. We call this **NaturalQuestions_30 (NQ30)** dataset. The average length of input of NQ30 is 3602.13. More details for dataset construction can be found in Appendix A.1.

Reasoning-based Question Answering. We modify the multi-choice answering samples in **MMLU** (Hendrycks et al., 2021b;a) so that the options work as hints to the question. In this way, the model needs to generate the answer based on the hint rather than picking out the correct option, increasing the difficulty because of the flexibility of open-ended question answers.

For all these five datasets, to avoid the influence of gold length y and easiness of measuring the verbosity, we only pick the samples where the gold answer contains less than n words. We manually inspect the samples and find that when $n = 4$, the answers are concise without descriptive context, and any answer longer than gold length is verbose. Thus, we set $n = 4$ for all datasets.

For each dataset, if the number of sample is longer than 500, we randomly pick 500 samples from them. Otherwise, we keep the entire dataset. Finally, there are 449 samples in LongBench, 410 samples in NQ30 and 500 samples in Qasper, NarrativeQA, and MMLU.

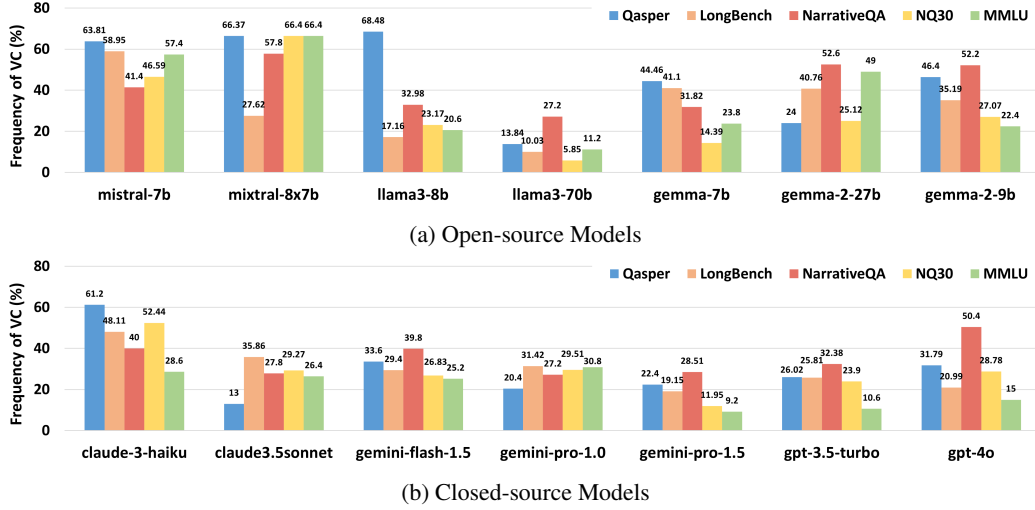


Figure 2: Frequency of Verbosity Compensation. All models exhibit intensive verbosity compensation behavior. Among them, llama3-70b has the lowest frequency on average.

Metrics. We report recall when measuring verbosity compensation behavior and use F1 score for evaluation of the cascade model performance (Bai et al., 2023).

4.2 MODELS

We use 14 LLMs in total across all experiments including both open-source and closed-source models in 6 families: GPT, Claude, Gemini, Llama, Gemma, Mistral. Details can be found in Appendix A.2. For each model, in addition to the prompt that introduce the task, we also ask them to “generate as concise as possible, use a single phrase if possible”. Since we constraint that all samples of the datasets contain only one to three tokens, we define $V(x, y, r)$ as $|r| > 3$. Also, we select 30 samples from each dataset and conduct human inspections, finding that any response that is longer can be regarded as verbose.

5 RESULT AND ANALYSIS

In this section, we analyze verbosity compensation and its connection with performance and uncertainty. Then, we evaluate the proposed cascade algorithm.

5.1 VERBOSITY COMPENSATION

Frequency of Verbosity Compensation Behaviors. Figure 2 shows the frequency of each model on each dataset. As shown in the table, all the models display verbosity compensation behavior on all datasets. On average, 74.19% of the responses are verbose for mistral-7b. The best model is llama3-70b which only contains 13.62% verbose responses. Furthermore, the frequency of VC averaged on seven open-source models is 39.80% which is significantly higher than closed-source models 28.96%.

Five Types of Verbosity Compensation Behaviors. After showing verbosity happens frequently in LLMs, we further conduct a human annotation to inspect verbose response patterns and classify them into five types. Specifically, we choose six combinations of model and dataset (Table 1) and pick out the samples with verbose responses that are not fully correct ($\text{recall} \neq 1$, $V(x, y, r) = 1$). By checking all these samples, we classify verbosity compensation behavior into five types (Table 1): Ambiguity indicates not answering precisely; repeating question indicates repeating the tokens in the question or providing unrelated information; enumerating shows answering multiple answers in a row trying to cover the correct answer; verbose detail/format means generating more detailed explanations

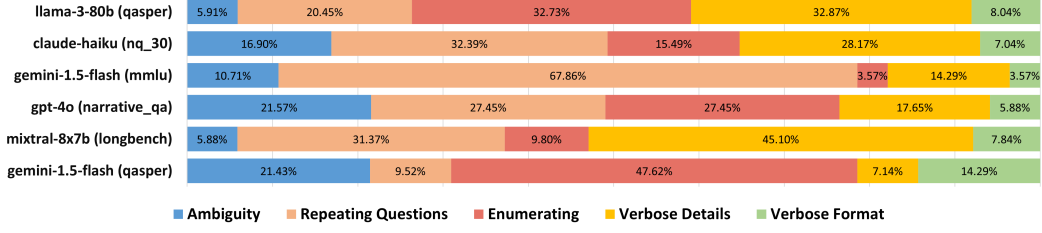


Figure 3: Human annotation of five types of verbosity compensation behavior on five datasets. Different models and datasets show diverse patterns of verbosity types.

Table 1: Examples of five verbosity compensation types.

Dataset	Question	Gold	Model Prediction	Type
Qasper	What is the size of the dataset?	3029	It is very large	Ambiguity
Longbench	Which genus has more species, Dracula or Pistacia?	Dracula	Pistacia has more species	Repeat
NarrativeQA	What costumes are the teenagers forced to wear?	Bunny costumes	Pig , donkey , rabbit	Enumerate
NQ30	who ran the fastest 40 yard dash in the nfl	Jakeem Grant	Chris Johnson 4.24 seconds	Detail
NarrativeQA	What types of activities occur in ...?	alleged phenomena	" Disappearances folklore "	Format

Table 2: Overall recall comparison between verbose and concise responses. **Bold/Underline** indicate the largest positive/negative performance gap between verbose and concise responses. The verbose responses obtain a significantly different performance than the concise ones, demonstrating the strong relationship between verbosity and performance.

	L_c	Short (Qasper)				Medium (LongBench)				Long (NarrativeQA)			
		concise	verbose	Δ	Avg.	concise	verbose	Δ	Avg.	concise	verbose	Δ	Avg.
mistral-7b	8k	66.29	42.85	+ 23.44	51.33	47.78	31.49	+16.29	38.18	26.96	26.09	+ 0.88	25.70
mixtral-8x7b	8k	69.60	48.20	+ 21.40	55.40	39.79	42.80	-3.01	39.93	37.99	25.20	+ 12.79	30.60
llama3-8b	8k	58.99	54.60	+ 4.39	55.98	39.71	28.27	+11.44	37.75	33.11	15.20	+ 17.91	27.20
llama3-70b	8k	55.79	28.19	+ 27.61	51.97	49.46	32.64	+16.82	47.77	37.91	25.00	+ 12.91	34.40
gemma-7b	4k	50.70	33.69	+ 17.01	43.13	33.28	15.17	+18.11	25.84	15.82	3.40	+ 12.42	11.87
gemma-2-27b	8k	61.89	40.76	+ 21.12	56.82	52.01	29.69	+22.31	42.91	43.88	22.43	+ 21.45	32.60
gemma-2-9b	8k	61.94	49.96	+ 11.98	56.38	47.48	41.24	+6.24	45.29	36.61	21.84	+ 14.77	28.90
claude-3-haiku	200k	70.70	56.10	+ 14.60	61.77	48.86	58.01	-9.15	53.26	55.67	36.25	+ 19.42	47.90
claude-3.5-sonnet	200k	63.22	37.05	+ 26.17	59.82	59.43	51.97	+7.47	56.76	55.96	56.12	- 0.16	56.00
gemini-flash-1.5	1m	64.73	41.09	+ 23.64	56.79	59.15	56.06	+3.09	58.24	36.05	45.48	- 9.43	39.80
gemini-pro-1.0	32k	58.70	35.05	+ 23.65	53.87	47.77	43.07	+4.70	46.29	24.31	29.41	- 5.10	25.70
gemini-pro-1.5	2m	62.37	45.16	+ 17.20	58.51	62.79	54.07	+8.72	61.12	37.32	39.29	- 1.96	37.88
gpt-3.5-turbo	16k	63.50	37.27	+ 26.24	56.68	51.41	42.51	+8.90	49.11	41.34	24.85	+ 16.48	36.00
gpt-4o	128k	70.22	43.90	+ 26.31	61.85	68.30	59.13	+9.16	66.37	63.51	44.64	+ 18.87	54.00
Avg. of Models		62.76	42.42	+ 20.34	55.74	50.52	41.87	+8.65	47.77	39.03	29.66	+ 9.37	34.90

or format symbols. Then, we annotate the verbosity compensation behaviors and obtain statistics in diverse settings. As shown in Figure 3, the ratio distribution of five types of behavior varies across different models and datasets. Furthermore, the main type of gemini-1.5-flash is repeat questions on MMLU dataset (67.86%), and enumerating on Qasper dataset (47.62%). In contrast, llama-3-80b mainly produces verbose details on the Qasper dataset (32.87%). This shows that different datasets or models have a significantly different distribution of the main type of verbosity behavior.

5.2 VERBOSITY COMPENSATION AND PERFORMANCE

Verbose and concise responses exhibit significantly different performance. As shown in Table 2 and Table 3, the performance difference ($\Delta \neq 0$) exists on most of the datasets and tasks, including both knowledge/reasoning-based tasks. This demonstrates that when the model performs verbosity compensation, the performance also change significantly. Among them, most of the datasets and models show lower performance on verbose samples (marked in red). For instance, llama3-70b shows 27.61% performance gap on Qasper dataset. As shown in the last column of Table 3, gemini-pro-1.0 exhibits the lowest Δ on average (7.92), and gemma-2-27b exhibits the highest (19.15). However, *all models cannot disentangle performance with verbosity ($\Delta = 0$), highlighting the urgent need to disentangle verbosity with veracity.*

Table 3: Overall recall comparison between verbose and concise responses. **Bold/Underline** indicate the largest positive/negative performance gap between verbose and concise responses. Similar to Table 2, the verbose responses obtain a significantly different performance than the concise ones.

	L_c	Lost-in-the-Middle (NQ30)				MMLU (Mixed)				All
		concise	verbose	Δ	Avg.	concise	verbose	Δ	Avg.	Δ
mistral-7b	8k	50.76	39.27	+ 11.49	45.41	66.90	45.76	+ 21.14	54.77	14.65
mistral-8x7b	8k	63.74	51.05	+ 12.69	55.32	63.74	51.05	+ 12.69	55.32	11.31
llama3-8b	8k	50.32	40.18	+ 10.14	47.97	58.40	44.82	+ 13.57	55.60	11.49
llama3-70b	8k	51.27	47.92	+ 3.36	51.08	61.64	55.06	+ 6.58	60.90	13.46
gemma-7b	4k	41.24	29.94	+ 11.30	39.61	45.60	44.05	+ 1.56	45.23	12.08
gemma-2-27b	8k	57.27	43.85	+ 13.42	53.90	77.39	59.97	+ 17.42	68.85	19.15
gemma-2-9b	8k	56.86	46.10	+ 10.76	53.94	68.51	44.49	+ 24.02	63.13	13.55
claude-3-haiku	200k	60.43	45.12	+ 15.31	52.40	65.64	65.50	+ 0.14	65.60	8.06
claude-3.5-sonnet	200k	55.57	59.03	- 3.45	56.59	72.96	56.69	+ 16.27	68.67	9.26
gemini-flash-1.5	1m	54.50	48.03	+ 6.47	52.76	65.95	45.11	+ 20.85	60.70	8.92
gemini-pro-1.0	32k	50.92	45.87	+ 5.05	49.43	57.42	46.10	+ 11.31	53.93	7.92
gemini-pro-1.5	2m	55.10	43.54	+ 11.56	53.72	61.99	55.07	+ 6.91	61.35	8.49
gpt-3.5-turbo	16k	53.21	41.33	+ 11.88	50.37	73.04	60.69	+ 12.35	71.73	15.17
gpt-4o	128k	62.73	52.26	+ 10.47	59.72	81.25	68.44	+ 12.81	79.33	15.52
Avg		54.57	45.25	+ 9.32	51.59	65.75	53.06	+ 12.69	61.79	12.07

Correlation with Model Capability. We investigate the influence of model capability on the performance difference between verbose and concise responses δ . We explore two types of model capabilities. One is general capability, represented by the arena score of ChatBot Arena (Chiang et al., 2024). We leverage the scores on the leaderboard¹(ELO) as the measurement of general capability. The other one is the capability of consuming lengthy input. For this, we investigate the influence of the size of the window context. We define the log context window size as $\log(L_c/1000)$ where L_c is the context window size.

Table 4: Correlation between model capability and δ .

Dataset	ELO	Log Len
Qasper	0.09	-0.26
LongBench	-0.34	-0.53
NarrativeQA	-0.33	-0.61
MMLU	-0.05	0.13
NQ14	0.06	0.02

Table 4 shows the correlation on five datasets. Each number in the table is computed based on the 14 data points of 14 LLMs on the corresponding dataset. As shown in the table, for Qasper, LongBench, and NarrativeQA dataset, a strong negative correlation is observed. This indicates that when modeling capability increases, the δ decreases accordingly. In contrast, for MMLU and NQ30 datasets, no obvious correlation is observed. The results show that training a stronger model will help with avoiding the influence of VC on performance for long context questions answering tasks. However, it is not helpful for MMLU and NQ30 datasets. In other words, *simply training a stronger model or extending context window cannot successfully disentangle VC and performance.*

Verbosity compensation behavior of Chain-of-Thought reasoning. We further conduct an experiment to demonstrate VC also happens in Chain-of-Thought (CoT) settings. To this end, we pick 100 samples from two datasets including MMLU and Qasper, and instruct the models to generate a Chain-of-thought prompt. Also, we ask the model to generate as concisely as possibility where each step contains less than 10 tokens. If any step violates this constraint, we regard this response as verbose. Thus, the verbosity evaluator V is set as $\mathbb{1}(\bigvee_{s \in S} |s| > 10)$. Based on the definition, we do not restrict the number of steps of Chain-of-Thought reasoning, a short response can be verbose as well if the length of a single step is too long.

Table 5 shows the comparison between the concise and verbose responses of two models on two datasets. All settings display significant Δ . For gpt-turbo-3.5, the recall gap can be as large as 24.54% on MMLU dataset. *This shows that verbosity compensation can also happen in generating longer responses, such as Chain-of-Thought reasoning samples.*

¹<https://lmarena.ai/>

Table 5: Recall difference of Chain-of-Thought generation. Both models perform worse when they generate verbose answers, demonstrating VC also happens on CoT settings.

	L_c	Qasper				MMLU			
		concise	verbose	Δ	Avg.	concise	verbose	Δ	Avg.
gemma-2-9b	8k	35.82	22.73	13.09	30.12	60.63	50.00	10.62	58.42
gpt-3.5-turbo	16k	69.05	47.81	21.24	61.06	80.95	56.41	24.54	68.32

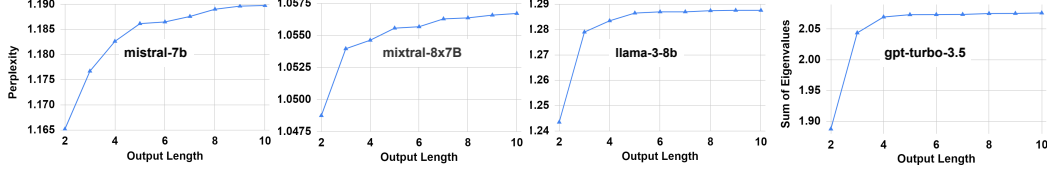


Figure 4: Uncertainty quantification of three open-sourced and one close-sourced models. The scores are averaged across all five datasets. The uncertainty increases with the increasing length of the generated output for all models.

Table 6: Frequency of Verbosity Compensation using diverse cascade models. A $\rightarrow$ B indicates combining two models using a cascade algorithm. All settings greatly reduce the frequency of VC compared with both strong and weak models.

	Qasper	LongB	NQA	NQ30	MMLU	Avg.
mistral-7b	63.81	58.95	41.40	46.59	57.40	74.19
gpt-4o	31.79	20.99	50.40	28.78	15.00	29.39
mistral $\rightarrow$ gpt	16.60	14.48	21.00	18.54	10.20	16.16
llama3-8b	68.48	17.16	32.98	23.17	20.60	32.48
claude-3.5-sonnet	13.00	35.86	27.80	29.27	26.40	26.47
llama $\rightarrow$ claude	8.20	11.80	14.60	11.71	7.80	10.82
gemma-2-9b	46.40	35.19	52.20	27.07	22.40	36.65
gemini-pro-1.5	22.40	19.15	28.51	11.95	9.20	18.24
gemma $\rightarrow$ gemini	15.80	11.14	18.20	8.29	4.60	11.61

5.3 UNCERTAINTY AND VERBOSITY COMPENSATION

Uncertainty Evaluation. The results are shown in Figure 4. As shown in the figure, all four models show larger uncertainty when the length of the responses increases. Especially, when the length is around three tokens, the uncertainty increases shapely. These results demonstrate that 1) when LLMs generate longer responses, they are more uncertain about the sample, and 2) *when verbosity compensation happens ($V(x, y, r) = 1$), LLMs usually are more uncertain about the sample than generating concise results.*

Uncertainty and Length of Response r . Next, we further explore the reason why the uncertainty and verbosity are connected. To achieve this, we conduct a qualitative study and plot the distribution of the softmax score of the first tokens of confident and uncertain responses in Figure 1. As can be seen, for the uncertain response, the probability distribution is more flattened, and the tokens carrying much information do not stand out (ranked high) among the candidates. The model selects the one without critical information but is safer to generate, repeating the question or being off-topic and verbose. Besides, these tokens usually cannot end a sentence grammatically, such as “Avergae” or “+”, the model needs to continue generations making the response longer.

5.4 CASCADE MODEL SELECTION FOR MITIGATING VERBOSITY COMPENSATION

Reducing Frequency of Verbosity Compensation. Table 6 shows the comparison of using the proposed algorithm. As shown in the table, comparing the cascading algorithm and individual models,

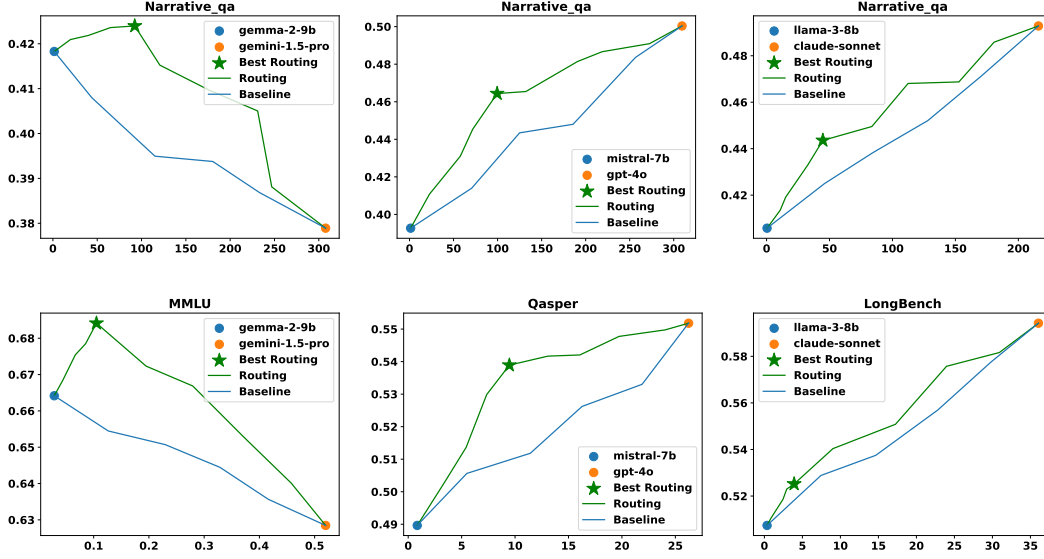


Figure 5: Routing performance of diverse models and datasets. X-axis (unit 10^{-3} dollars) is the average cost of running one sample. The Y-axis is the F-1 score averaged across the samples on one dataset. Routing performance (green line) is higher than the linear combination of the baseline models (blue line) with all datasets and models.

the frequency of VC decreases greatly for all settings. For instance, Mistral $\rightarrow$ GPT decreases the frequency from 63.81% (Mistral) and 31.79% (GPT) to 16.60%. It worth noting that, applying the algorithm greatly reduce the frequency of VC on both weak model and strong models.

Using Cascade Model Selection for LLM Routing. Model routing aims to send the sample to the proper model among a diverse collection of LLMs to generate the result so that under the same amount of API cost, the performance is better than other baselines, such as randomly choosing which model to use. We develop an LLM routing algorithm by modifying the proposed model selection algorithm. Different from model selection, we define two numbers p_c and p_v as the possibility of selecting a stronger model for concise and verbose responses. In this way, the cost is controllable to fulfill the diverse budget needs of users. Details are in Algorithm 3. Figure 5 shows the performance of the different datasets with three routing settings: Mistral 7b $\rightarrow$ GPT-4o, Gemma2 9b $\rightarrow$ Gemini-1.5-pro, and LLaMA-3-8b $\rightarrow$ Claude-3.5-sonnet. We run each p_v, p_c setting ten times and compute the average to obtain the green lines and we run ten times that we randomly choose a weaker or stronger model with different probability to draw the blue line serving as the baseline. Specifically, for the stars in each figure, $p_v = 1$ and $p_c = 0$, degenerate to the proposed model selection algorithm. As shown, the performance of routing is better than the baselines for all models, datasets, and settings. Furthermore, the routing results from Gemma-2 to Gemini-1.5 are better than the individual performance of both models. This indicates that *the routing algorithm improves the performance for all settings and can surpass the performance of stronger models with less cost.*

6 CONCLUSION

In this paper, we systematically analyze the verbosity compensation behavior of LLM responses. We first classify verbosity into five types and find all the models display high frequency on verbosity responses. We further explore the reason behind and find uncertainty highly likely connected to the phenomenon. We also propose a cascade model selection algorithm to mitigate it. Intensive experiments show that LLMs suffer from verbosity compensation and the proposed simple approach mitigates the verbosity compensation effectively.

REPRODUCIBILITY STATEMENT

We will provide a GitHub repository that includes the dataset of five datasets, code for running 14 LLMs, and the predicted results for the use of studies. We also include the prompt, settings, and implementation details in appendix for the reproduction. The tools for evaluating uncertainty is open-sourced, thus can be used freely as well.

REFERENCES

- AI Anthropic. The claude 3 model family: Opus, sonnet, haiku. *Claude-3 Model Card*, 2024.
- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. Longbench: A bilingual, multitask benchmark for long context understanding. *arXiv preprint arXiv:2308.14508*, 2023.
- Robert H Brookshire and Malcolm R McNeil. *Introduction to neurogenic communication disorders*. Elsevier Health Sciences, 2014.
- Chao Chen, Kai Liu, Ze Chen, Yi Gu, Yue Wu, Mingyuan Tao, Zhihang Fu, and Jieping Ye. Inside: Lms’ internal states retain the power of hallucination detection. *arXiv preprint arXiv:2402.03744*, 2024.
- Lingjiao Chen, Matei Zaharia, and James Zou. Frugalgpt: How to use large language models while reducing cost and improving performance. *arXiv preprint arXiv:2305.05176*, 2023.
- Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anastasios Nikolas Angelopoulos, Tianle Li, Dacheng Li, Hao Zhang, Banghua Zhu, Michael Jordan, Joseph E Gonzalez, et al. Chatbot arena: An open platform for evaluating llms by human preference. *arXiv preprint arXiv:2403.04132*, 2024.
- Pradeep Dasigi, Kyle Lo, Iz Beltagy, Arman Cohan, Noah A. Smith, and Matt Gardner. A dataset of information-seeking questions and answers anchored in research papers. In Kristina Toutanova, Anna Rumshisky, Luke Zettlemoyer, Dilek Hakkani-Tur, Iz Beltagy, Steven Bethard, Ryan Cotterell, Tanmoy Chakraborty, and Yichao Zhou (eds.), *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 4599–4610, Online, June 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.naacl-main.365. URL <https://aclanthology.org/2021.naacl-main.365>.
- Cüneyt Demir. Writing intelligible english prose: conciseness vs. verbosity. *Söylem Filoloji Dergisi*, 4(2):482–505, 2019.
- Dujian Ding, Ankur Mallick, Chi Wang, Robert Sim, Subhabrata Mukherjee, Victor Ruhle, Laks VS Lakshmanan, and Ahmed Hassan Awadallah. Hybrid llm: Cost-efficient and quality-aware query routing. *arXiv preprint arXiv:2404.14618*, 2024.
- Jinhao Duan, Hao Cheng, Shiqi Wang, Chenan Wang, Alex Zavalny, Renjing Xu, Bhavya Kailkhura, and Kaidi Xu. Shifting attention to relevance: Towards the uncertainty estimation of large language models. *arXiv preprint arXiv:2307.01379*, 2023.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Ekaterina Fadeeva, Roman Vashurin, Akim Tsvigun, Artem Vazhentsev, Sergey Petrakov, Kirill Fedyanin, Daniil Vasilev, Elizaveta Goncharova, Alexander Panchenko, Maxim Panov, Timothy Baldwin, and Artem Shelmanov. LM-polygraph: Uncertainty estimation for language models. In Yansong Feng and Els Lefever (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 446–461, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-demo.41. URL <https://aclanthology.org/2023.emnlp-demo.41>.

- Marina Fomicheva, Shuo Sun, Lisa Yankovskaya, Frédéric Blain, Francisco Guzmán, Mark Fishel, Nikolaos Aletras, Vishrav Chaudhary, and Lucia Specia. Unsupervised quality estimation for neural machine translation. *Transactions of the Association for Computational Linguistics*, 8: 539–555, 2020.
- Henry Watson Fowler. *A dictionary of modern English usage*. Clarendon Press, 1927.
- Jiahui Geng, Fengyu Cai, Yuxia Wang, Heinz Koepl, Preslav Nakov, and Iryna Gurevych. A survey of language model confidence estimation and calibration. *arXiv preprint arXiv:2311.08298*, 2023.
- Neha Gupta, Harikrishna Narasimhan, Wittawat Jitkittum, Ankit Singh Rawat, Aditya Krishna Menon, and Sanjiv Kumar. Language model cascades: Token-level uncertainty and beyond. *arXiv preprint arXiv:2404.10136*, 2024.
- Dan Hendrycks, Collin Burns, Steven Basart, Andrew Critch, Jerry Li, Dawn Song, and Jacob Steinhardt. Aligning ai with shared human values. *Proceedings of the International Conference on Learning Representations (ICLR)*, 2021a.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *Proceedings of the International Conference on Learning Representations (ICLR)*, 2021b.
- Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop QA dataset for comprehensive evaluation of reasoning steps. In Donia Scott, Nuria Bel, and Chengqing Zong (eds.), *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 6609–6625, Barcelona, Spain (Online), December 2020. International Committee on Computational Linguistics. doi: 10.18653/v1/2020.coling-main.580. URL <https://aclanthology.org/2020.coling-main.580>.
- Kung-Hsiang Huang, Philippe Laban, Alexander Fabbri, Prafulla Kumar Choubey, Shafiq Joty, Caiming Xiong, and Chien-Sheng Wu. Embrace divergence for richer insights: A multi-document summarization benchmark and a case study on summarizing diverse information from news articles. In Kevin Duh, Helena Gomez, and Steven Bethard (eds.), *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pp. 570–593, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-long.32. URL <https://aclanthology.org/2024.naacl-long.32>.
- Maor Ivgi, Ori Yoran, Jonathan Berant, and Mor Geva. From loops to oops: Fallback behaviors of language models under uncertainty. *arXiv preprint arXiv:2407.06071*, 2024.
- Patrick Juola. Assessing linguistic complexity. *Language Complexity: Typology, Contact, Change*. John Benjamins Press, Amsterdam, Netherlands, 2008.
- Saurav Kadavath, Tom Conerly, Amanda Askell, Tom Henighan, Dawn Drain, Ethan Perez, Nicholas Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli Tran-Johnson, et al. Language models (mostly) know what they know. *arXiv preprint arXiv:2207.05221*, 2022.
- Tomáš Kočiský, Jonathan Schwarz, Phil Blunsom, Chris Dyer, Karl Moritz Hermann, Gábor Melis, and Edward Grefenstette. The NarrativeQA reading comprehension challenge. *Transactions of the Association for Computational Linguistics*, 6:317–328, 2018. doi: 10.1162/tac1_a.00023. URL <https://aclanthology.org/Q18-1023>.
- Lorenz Kuhn, Yarin Gal, and Sebastian Farquhar. Semantic uncertainty: Linguistic invariances for uncertainty estimation in natural language generation. *arXiv preprint arXiv:2302.09664*, 2023.
- Zhen Lin, Shubhendu Trivedi, and Jimeng Sun. Generating with confidence: Uncertainty quantification for black-box large language models. *arXiv preprint arXiv:2305.19187*, 2023.
- Zi Lin, Jeremiah Zhe Liu, and Jingbo Shang. Towards collaborative neural-symbolic graph semantic parsing via uncertainty. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio (eds.), *Findings of the Association for Computational Linguistics: ACL 2022*, pp. 4160–4173, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.findings-acl.328. URL <https://aclanthology.org/2022.findings-acl.328>.

- Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. Lost in the middle: How language models use long contexts. *Transactions of the Association for Computational Linguistics*, 12:157–173, 2024. doi: 10.1162/tacl.a.00638. URL <https://aclanthology.org/2024.tacl-1.9>.
- Keming Lu, Hongyi Yuan, Runji Lin, Junyang Lin, Zheng Yuan, Chang Zhou, and Jingren Zhou. Routing to the expert: Efficient reward-guided ensemble of large language models. In Kevin Duh, Helena Gomez, and Steven Bethard (eds.), *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pp. 1964–1974, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-long.109. URL <https://aclanthology.org/2024.naacl-long.109>.
- Aman Madaan, Pranjal Aggarwal, Ankit Anand, Srividya Pranavi Potharaju, Swaroop Mishra, Pei Zhou, Aditya Gupta, Dheeraj Rajagopal, Karthik Kappaganthu, Yiming Yang, et al. Automix: Automatically mixing language models. *arXiv preprint arXiv:2310.12963*, 2023.
- Andrey Malinin and Mark Gales. Uncertainty estimation in autoregressive structured prediction. *arXiv preprint arXiv:2002.07650*, 2020.
- Potsawee Manakul, Adian Liusie, and Mark JF Gales. Selfcheckgpt: Zero-resource black-box hallucination detection for generative large language models. *arXiv preprint arXiv:2303.08896*, 2023.
- Sania Nayab, Giulio Rossolini, Giorgio Buttazzo, Nicolamaria Manes, and Fabrizio Giacomelli. Concise thoughts: Impact of output length on llm reasoning and cost. *arXiv preprint arXiv:2407.19825*, 2024.
- Daniel M Oppenheimer. Consequences of erudite vernacular utilized irrespective of necessity: Problems with using long words needlessly. *Applied Cognitive Psychology: The Official Journal of the Society for Applied Research in Memory and Cognition*, 20(2):139–156, 2006.
- Guillem Ramírez, Alexandra Birch, and Ivan Titov. Optimising calls to large language models with uncertainty-based two-tier selection. *arXiv preprint arXiv:2405.02134*, 2024.
- Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lillicrap, Jean-baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv preprint arXiv:2403.05530*, 2024.
- Keita Saito, Akifumi Wachi, Koki Wataoka, and Youhei Akimoto. Verbosity bias in preference labeling by large language models. *arXiv preprint arXiv:2310.10076*, 2023.
- Marija Šakota, Maxime Peyrard, and Robert West. Fly-swat or cannon? cost-effective language model choice via meta-modeling. In *Proceedings of the 17th ACM International Conference on Web Search and Data Mining*, pp. 606–615, 2024.
- Uri Shaham, Elad Segal, Maor Ivgi, Avia Efrat, Ori Yoran, Adi Haviv, Ankit Gupta, Wenhan Xiong, Mor Geva, Jonathan Berant, and Omer Levy. SCROLLS: Standardized CompaRison over long language sequences. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pp. 12007–12021, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics. URL <https://aclanthology.org/2022.emnlp-main.823>.
- Prasann Singhal, Tanya Goyal, Jiacheng Xu, and Greg Durrett. A long way to go: Investigating length correlations in rlhf. *arXiv preprint arXiv:2310.03716*, 2023.
- William Strunk Jr and Elwyn Brooks White. *The elements of style illustrated*. Penguin, 2007.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.

- Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, et al. Gemma: Open models based on gemini research and technology. *arXiv preprint arXiv:2403.08295*, 2024a.
- Gemma Team, Morgane Riviere, Shreya Pathak, Pier Giuseppe Sessa, Cassidy Hardin, Surya Bhupatiraju, Léonard Hussenot, Thomas Mesnard, Bobak Shahriari, Alexandre Ramé, et al. Gemma 2: Improving open language models at a practical size. *arXiv preprint arXiv:2408.00118*, 2024b.
- Harsh Trivedi, Niranjan Balasubramanian, Tushar Khot, and Ashish Sabharwal. MuSiQue: Multihop questions via single-hop question composition. *Transactions of the Association for Computational Linguistics*, 10:539–554, 2022. doi: 10.1162/tacl.a.00475. URL <https://aclanthology.org/2022.tacl-1.31>.
- Can Wang, Bolin Zhang, Dianbo Sui, Zhiying Tum, Xiaoyu Liu, and Jiabao Kang. A survey on effective invocation methods of massive llm services. *arXiv preprint arXiv:2402.03408*, 2024.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In Ellen Riloff, David Chiang, Julia Hockenmaier, and Jun’ichi Tsujii (eds.), *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 2369–2380, Brussels, Belgium, October-November 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1259. URL <https://aclanthology.org/D18-1259>.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in Neural Information Processing Systems*, 36:46595–46623, 2023.

A IMPLEMENTATION DETAILS

A.1 DETAILS OF DATASET CONSTRUCTION

Firstly, we use long-context question-answering tasks whose difficulty resides in picking out useful information across long context and gathering them to answer the question. The distractor paragraphs will also incorporate the difficulty of recognizing the needed information. **Qasper (short)** (Dasigi et al., 2021) is a question answering dataset over NLP papers. It also contains extractive, abstractive, yes/no, and unanswerable questions. The average length of the source text is 4119.85 words. We also incorporate three datasets from **LongBench (medium)** (Bai et al., 2023) to form a new datasets. HotpotQA (Yang et al., 2018) is a Wikipedia-based multi-hop QA dataset. It requires reasoning across multiple passages to find the answer. MuSiQue (Trivedi et al., 2022) is a multi-hop QA dataset. It is much more difficult than HotpotQA as it contains more hops in one sample, unanswerable questions, and harder distracting content. 2WikiMultihopQA (Ho et al., 2020) It consists of up to 5-hop questions that are synthesized through manually designed templates. The average length of the source text is 9522.36 words. Different from the previous datasets, **NarrativeQA (long)** (Kočíský et al., 2018) is a QA dataset over entire books or movie transcripts. The answers can be abstract or extractive, yes/no, and unanswerable, and the average length is 70340.45 words. Both Qasper and NarrativeQA datasets in our benchmark are extracted from SCROLLS dataset (Shaham et al., 2022). **NaturalQuestions.30 (NQ30)**. LLMs are proven to show difficulties in understanding the information in the middle of the context (Liu et al., 2024), known as lost-in-the-middle. We pick the most challenging split of the dataset in the original work, where the gold answer is in the middle of 30 documents for a QA pair in the Natural Question dataset. We call this NQ30 dataset. The average length of input of NQ30 is 3602.13.

A.2 DETAILS OF LARGE LANGUAGE MODELS

We include 2 models from Mistral AI², among them, **mistral-7b** is its first proposed dense model while **mixtral-8x7b** enhances the 7b model by incorporating a sparse mixture of experts. Gemini (Team et al., 2023; Reid et al., 2024) is a family of LLMs proposed by Google from which three versions of LLMs are selected, including **gemini-pro-1.0**, **gemini-flash-1.5**, and **gemini-flash-1.5**. Built from the research and technology used to create Gemini models, Gemma (Team et al., 2024a;b) is a family of lightweight, open models. We include **gemma-7b**, **gemma-2-9b**, and **gemma-2-27b** for experiments. LLaMA 3 (Dubey et al., 2024) is a family of LLMs with dense Transformer structure. We include **llama-3-8b** and **llama-3-70b** for experiments. Claude (Anthropic, 2024) is a family of large language models developed by Anthropic. We include two models in ascending order of capability: **claude-3-haiku**, **claude-3.5-sonnet**. We also include two versions of GPT models³, including **gpt-3.5-turbo** and **gpt-4o** in experiments.

A.3 EXPERIMENT DETAILS

During experiments, we use the default parameters of all 14 LLMs. We run gemma, llama, and mistral models from Huggingface⁴ on 8 A100 GPUs. For gpt, claude, and gemini models, we run with the official API from the official website. For all datasets, we use the same prompt show in Table 7.

A.4 INPUT CHUNKING ALGORITHM

Before we feed the input into the model, we first chunk the source so that the model can consume it. As shown in Algorithm 2, we first split the source into sentences and feed as many sentences as possible to LLMs.

²<https://docs.mistral.ai/getting-started/models/>

³<https://openai.com/>

⁴<https://huggingface.co/>

Table 7: Prompt of all models on all datasets.

You are given an article and a question.
 Answer the question as concisely as you can, using a single phrase if possible. Article:
 {Source Documents}
 Question:
 {Question q }
 Using a single phrase rather than a sentence. Please answer in 3 words.
 Do not repeat any question-related information or explain the answer.
 The answer is:

Table 8: The full name and the cost of tokens for each model. The unit of input/output cost is dollar per one million tokens.

	Input Cost	Output Cost	Model Full Name
mistral-7b	0.17	0.2	mistralai/Mistral-7B-Instruct-v0.3
mistral-8x7b	0.24	0.24	mistralai/Mistral-8x7B-Instruct-v0.1
llama3-8b	0.05	0.08	meta-llama/Meta-Llama-3-8B-Instruct
llama3-70b	0.59	0.79	meta-llama/Meta-Llama-3-70B-Instruct
gemma-7b	0.07	0.07	google/gemma-7b-it
gemma-2-27b	0.8	0.8	google/gemma-2-27b-it
gemma-2-9b	0.2	0.2	google/gemma-2-9b-it
claude-3-haiku	0.25	1.25	claude-3-haiku-20240307
claude-3.5-sonnet	3	15	claude-3.5-sonnet-20240620
gemini-flash-1.5	0.35	1.05	gemini-1.5-flash
gemini-pro-1.0	0.5	1.5	gemini-1.0-pro
gemini-pro-1.5	3.5	10.5	gemini-1.5-pro
gpt-3.5-turbo	0.5	1.5	gpt-3.5-turbo-0125
gpt-4o	5	15	gpt-4o-2024-05-13

Algorithm 2 Input Chunking Algorithm.

Input: Source input x , query q , LLM window size k , instruction I_w .
Output: A chunk c that LLM can consume.
 Split the source x into sentences $\{s_1, s_2, \dots, s_n\}$
 Initialize $c \leftarrow$ empty string
 Initialize length budgets $B \leftarrow k - \text{count_token}(q) - \text{count_token}(I_w)$.
for s in $s_1, s_2, \dots, s_n$ **do**
 if $\text{count_token}(c) + \text{count_token}(s) \geq B$ **then**
 break
 end if
 $c \leftarrow c \oplus s$ // $\oplus$ indicates concatenating two strings with a blank.
end for
return c

A.5 LLM ROUTING ALGORITHM

Algorithm 3 shows the pseudo-code of LLM Routing. Different from the cascade algorithm for mitigating VC, this algorithm contains two probabilities that are used to control the budget of a single call. The algorithm mimics the real cost by counting tokens in the input and output, timing by the cost per token. We collect the cost of each model from website⁵ and use it collected cost to ensure the fairness of comparison. The full name of all models and the price we use in LLM routing algorithm is shown in Table 8.

⁵<https://artificialanalysis.ai/models>

Table 9: Frequency of Verbosity Compensation. All models have verbosity compensation behavior. Among them, llama3-70b has the lowest frequency on average.

	L	Qasper	LongB	NQA	NQ30	MMLU	Avg.
mistral-7b	8k	63.81	58.95	14.20	46.59	57.40	74.19
mistral-8x7b	8k	66.37	4.38	57.80	66.40	66.40	52.27
llama3-8b	8k	68.48	17.16	32.98	23.17	20.60	32.48
llama3-70b	8k	13.84	10.03	27.20	5.85	11.20	13.62
gemma-7b	4k	44.46	41.10	31.82	14.39	23.80	31.11
gemma-2-27b	8k	24.00	40.76	52.60	25.12	49.00	38.30
gemma-2-9b	8k	46.40	35.19	52.20	27.07	22.40	36.65
claude-3-haiku	200k	61.20	48.11	40.00	52.44	28.60	46.07
claude-3.5-sonnet	200k	13.00	35.86	27.80	29.27	26.40	26.47
gemini-flash-1.5	1m	33.60	29.40	39.80	26.83	25.20	30.97
gemini-pro-1.0	32k	20.40	31.42	27.20	29.51	30.80	27.87
gemini-pro-1.5	2m	22.40	19.15	28.51	11.95	9.20	18.24
gpt-3.5-turbo	16k	26.02	25.81	32.38	23.90	10.60	23.74
gpt-4o	128k	31.79	20.99	50.40	28.78	15.00	29.39
Avg		34.53	31.71	44.11	31.98	31.14	34.69

Algorithm 3 Cascade Model Selection Algorithm for LLM Routing.

Input: A list of LLMs M , A sample (x, y, q) , instruction I_w , a verbosity detector $V()$, possibility for routing on concise responses p_c , possibility for routing on verbose responses p_v .

Output: A response r .

order M by model capability from weak to strong

Set p_c to 1 if $p_v \neq 1$ {We ensure routing on verbose responses first.}

for LLM in M **do**

$r \leftarrow \text{LLM}(x \oplus q \oplus I_w)$

if $V(x, y, r)$ is false **then**

$prob \leftarrow$ A random number from 0 to 1

if $prob \geq p_c$ **then**

break {Do not route for concise responses with $1 - p_c$ probability}

end if

else

$prob \leftarrow$ A random number from 0 to 1

if $prob \geq p_v$ **then**

break {Do not route for verbose responses with $1 - p_v$ probability}

end if

end if

end for

return r

B DETAILS OF EXPERIMENTAL RESULTS

B.1 FREQUENCY OF VERBOSITY COMPENSATION

Table 9 shows the detail numbers of frequency of verbosity compensation behavior.

B.2 UNCERTAINTY VERSES LENGTH

Table 10 shows some examples of verbose and concise responses and the distribution of the first token.

B.3 MODEL CAPABILITY AND RELATIVE DELTA

Figure 6 plots the Correlation between model window size and δ , visualizing the negative correlation score in Table 4. The models with the stronger capability to consume lengthy input obtain lower relative delta, indicating verbosity compensation is better avoided. Also, the decreasing speed of the tendency line ranks as follows: Long (NarrativeQA), Medium (LongBench), and Short (Qasper).

Table 10: Distribution of the first token generated by llama-3-8b on Qasper dataset. When generating the verbose responses, the model is uncertain about the gold answer. Thus, starting with some commonly seen tokens. In contrast, the concise responses directly start with gold answers with high confidence.

Three Examples of Verbose Responses	
Question	What is the average length of the sentences?
Gold	15.5
Vanilla	Average sentence length: 16.5 words
Distribution	[[‘Average’, 0.47828879952430725], [‘’, 0.29009681940078735], [‘15’, 0.17595264315605164], [‘9’, 0.034647125750780106], [‘average’, 0.021014543250203133]]
Question	What were their accuracy results on the task?
Gold	97.32 %
Vanilla	+7 % relative gain
Distribution	[[‘+’, 0.39178282022476196], [‘’, 0.20970624685287476], [‘7’, 0.1850651204586029], [‘96’, 0.1850651204586029], [‘97’, 0.028380654752254486]]
Question	What’s the size of the previous largest OpenIE dataset?
Gold	3,200 sentences
Vanilla	“ 13 times larger ”
Distribution	[[‘’, 0.5911211967468262], [‘13’, 0.3585331439971924], [‘L’, 0.02022705413401127], [‘Three’, 0.01785031333565712], [‘3’, 0.012268329039216042]]
Three Examples of Concise Responses	
Question	What is the sample size of people used to measure user satisfaction?
Gold	34,432
Vanilla	34,432 users
Distribution	[[‘34’, 0.9797704219818115], [‘’, 0.008476674556732178], [‘Thirty’, 0.006601640954613686], [‘Total’, 0.004004097543656826], [‘Cor’, 0.0011471931356936693]]
Question	Which news organisations are the headlines sourced from?
Gold	BBC and CNN
Vanilla	BBC and CNN
Distribution	[[‘BBC’, 0.9247239232063293], [‘’, 0.04062953218817711], [‘B’, 0.027924243360757828], [‘B’, 0.003779135411605239], [‘C’, 0.0029431935399770737]]
Question	which datasets did they experiment with?
Gold	Europarl MultiUN
Vanilla	Europarl MultiUN
Distribution	[[‘Eu’, 0.9808066487312317], [‘Euro’, 0.009615491144359112], [‘Europ’, 0.0074885510839521885], [‘’, 0.0014745831722393632], [‘European’, 0.000614697695709765]]

This means that the effectiveness of the length capability on disentangling verbosity and performance is more significant when the task has a longer input.

B.4 TRUNCATION PRINCIPLE

We conducted an experiment on Qasper dataset with llama-3-8b and found that When the response is verbose, only keep the first 4 tokens, then stop the generation. The recall only drops from 44.93% to 43.13%. In other words, if the gold answer is not in the first 4 tokens, then the model is not likely to generate it in the rest of the tokens.

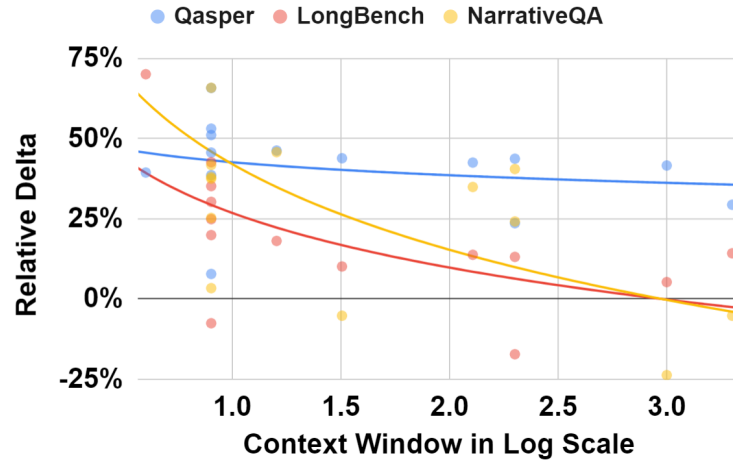


Figure 6: Correlation between model window size and δ . Results show that the model with a longer context window shows less δ on Qasper, LongBench, and NarrativeQA dataset.