PRIVACYTWIN · LEARN BY FOLLOWING REAL SCREENS

The full end-to-end screenshot walkthrough

42 actual screenshots. Every ReviewGuard scenario.

What to click, what it means, and what happened.

Start here if you want to understand the project before presenting it.

Captured 29 October 2026, 22:39 IST · separate synthetic workspace · no provider requests

What the project does

PrivacyTwin inspects columns in structured files, finds candidate personal data, links explicit purpose and retention declarations, and records human reviews. ReviewGuard checks whether the evidence behind an existing decision is still current after a change.

1. Upload → 2. Scan → 3. Inspect evidence → 4. Review → 5. Document → 6. Rescan → 7. Export

Two questions, two reviews

Classification: “What does this field represent?”
Metadata: “What purpose, retention and owner context has been declared and reviewed?”

A change to values may affect the first answer. A change to a declared purpose may affect the second. Keeping these dependencies separate is the signature behavior.

> All source values and reviewer actions shown here are synthetic demonstration data. Screenshots show actual calculated UI results. Persistent navigation and transient notifications are hidden only during focused captures to keep them from covering the evidence. No business results are edited. Optional AI controls are documented but no external-provider run is performed.

The main example

walkthrough_v1.csv has 20 records and four fields. walkthrough_v2.csv keeps the same headers and changes only employee_id to phone-shaped values. Both files are included in the walkthrough download. The later built-in CSV/SQLite examples add more sources; those totals are explained separately.

Contents

Follow A from top to bottom. Then use B to understand every change rule and C for evaluation, exports and error handling. Click a screenshot to inspect it at full resolution.

A · The main workflow

1. Start with an empty workspace
2. Choose a real input file
3. Registration produces a committed scan
4. Rules explain how findings are calculated
5. The checklist defines the required documentation
6. Read the field inventory
7. Open the evidence behind one candidate
8. Remove the header hint
9. Remove enough support and the scanner abstains
10. A human records a classification decision
11. Current and clear are different
12. A duration without a start trigger stays incomplete
13. Complete the declaration and inspect the review impact
14. Saving changes the metadata dependency
15. Complete reviews and documentation before calling a field ready
16. Replace values while keeping field identity
17. Only the affected classification review reopens
18. Compare actual old and new evidence
19. Read why a decision reopened
20. Readiness falls for a specific reason

B · All eight ReviewGuard scenarios

1. Change values, keep the header
2. Remove the declared purpose
3. Change a relied-on rule
4. Change an unrelated rule
5. Rescan identical data
6. Rename without a mapping
7. Change values, then restore them
8. Stay within the rate tolerance
9. Compare the complete challenge results

C · Evaluation, exports and extra cases

1. Read precision, recall and support
2. Measure what checksums contribute
3. Download evidence and gap reports
4. Open the final human-review report
5. Understand optional AI assistance
6. A stale review form cannot overwrite newer evidence
7. A failed scan preserves committed evidence
8. The same scanner also handles SQLite and mixed fields
9. A single field can contain several value types
10. A checksum is stronger evidence than shape alone
11. An unknown pattern stays unknown
12. Add a domain-specific rule
13. A rescan applies the saved rule

The words on the screen

Source	One registered CSV file or SQLite database. The app keeps a controlled local copy.
Field	One column in one exact source/table identity. A row is one record, not a field.
Candidate	A supported scanner interpretation that still needs context and human review.
Evidence / score	Detector observations and their weighted contributions. A score is not a probability.
Snapshot	An immutable record of aggregate evidence from a committed scan.
Declaration	Purpose, retention and other business context explicitly supplied by an owner.
Classification review	A human decision about what the field represents.
Metadata review	A separate human decision about the declared documentation.
Current	The saved decision's dependencies have not materially changed. Its outcome can still be unresolved.
Clear / unresolved / none	The review outcome: accepted, needs clarification, or no supported conclusion.
Reopened	Dependencies changed and the prior decision needs another look. This does not itself establish a violation.
Missing / unreviewed	The old field disappeared, or no human decision exists for the field/scope.
Ready	A present field with current clear reviews, complete configured metadata and current scan policy. A technical workflow status.
Gap	One missing configured documentation requirement. Multiple gaps can belong to one field.
Precision / recall / support	How many predicted positives were correct / how many labelled positives were found / how many positive labels were tested.

Most important distinction: current is freshness; clear is an outcome; complete is documentation; ready combines technical workflow conditions. None is a legal compliance certificate.

All eight ReviewGuard scenarios at a glance

The challenge starts with two fields and two saved reviews per field. A renamed field adds a fifth identity check. Each scenario runs independently in a disposable database.

Change	Classification	Metadata	Unrelated email reviews
Change values	Reopened	Current	Current
Remove purpose	Current	Reopened	Current
Change relevant rule	Reopened	Current	Current
Change unrelated rule	Current	Current	Current
Identical rescan	Current	Current	Current
Rename without mapping	Missing	Missing	Current; new field unreviewed
Restore original values	Still reopened	Current	Current
Rate change below tolerance	Current	Current	Current


Combined result on the reference policy: **33/33 expected states matched, 26 current states preserved, 0 false reopenings and 0 missed reopenings.** This is a scripted regression demonstration, not a measurement across all possible changes.

A · THE MAIN WORKFLOW

01 Start with an empty workspace

What to click: Open PrivacyTwin → Sources.

PrivacyTwin builds an inventory of fields, not just files. You supply synthetic CSV or SQLite data. No approvals or scan results exist until an action creates them.

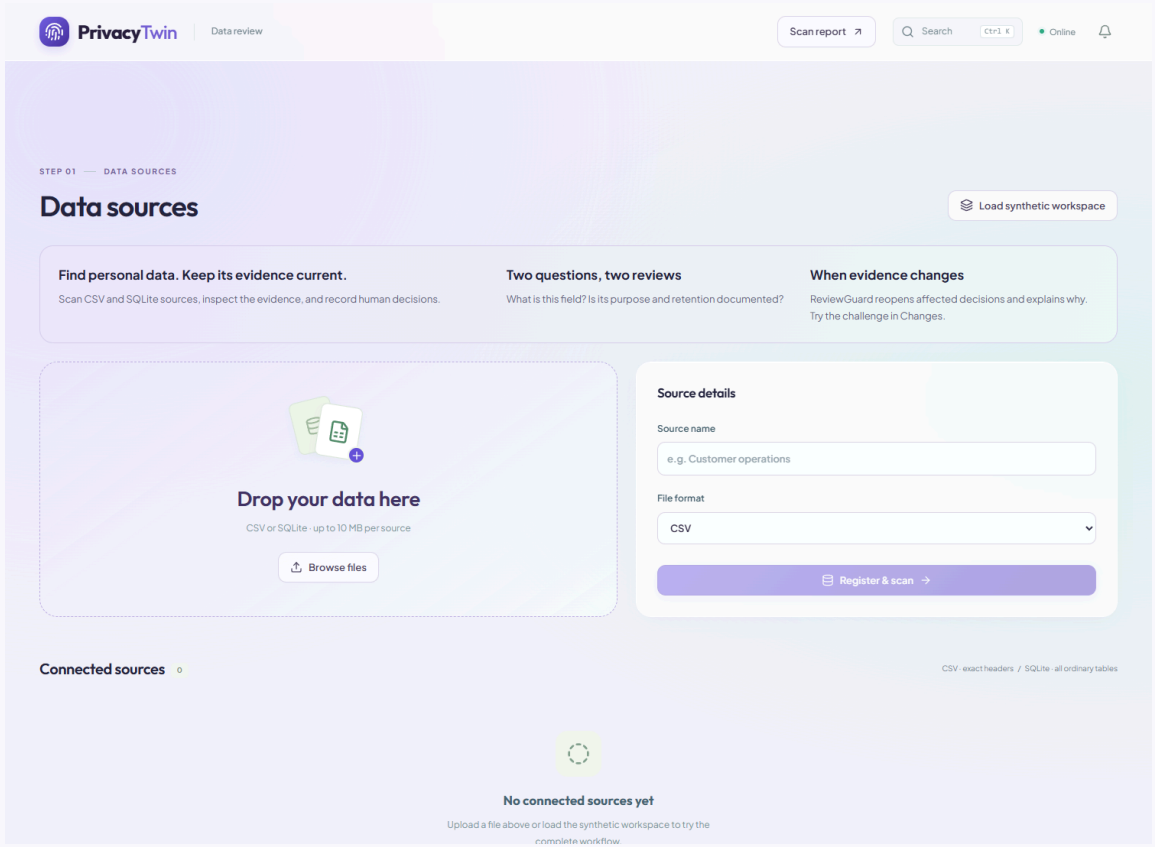

Screenshot 01 · Click the image to enlarge it in the HTML guide.


What happened: This isolated workspace has 0 sources and 0 discovered fields.

A · THE MAIN WORKFLOW

02 Choose a real input file

What to click: Sources → Upload source file → walkthrough_v1.csv → name it Learning walkthrough.

The sample contains 20 synthetic employees and four columns: employee_id, email, postal_code and age. Selecting a file is a draft; Register & scan commits the source and calculates evidence.

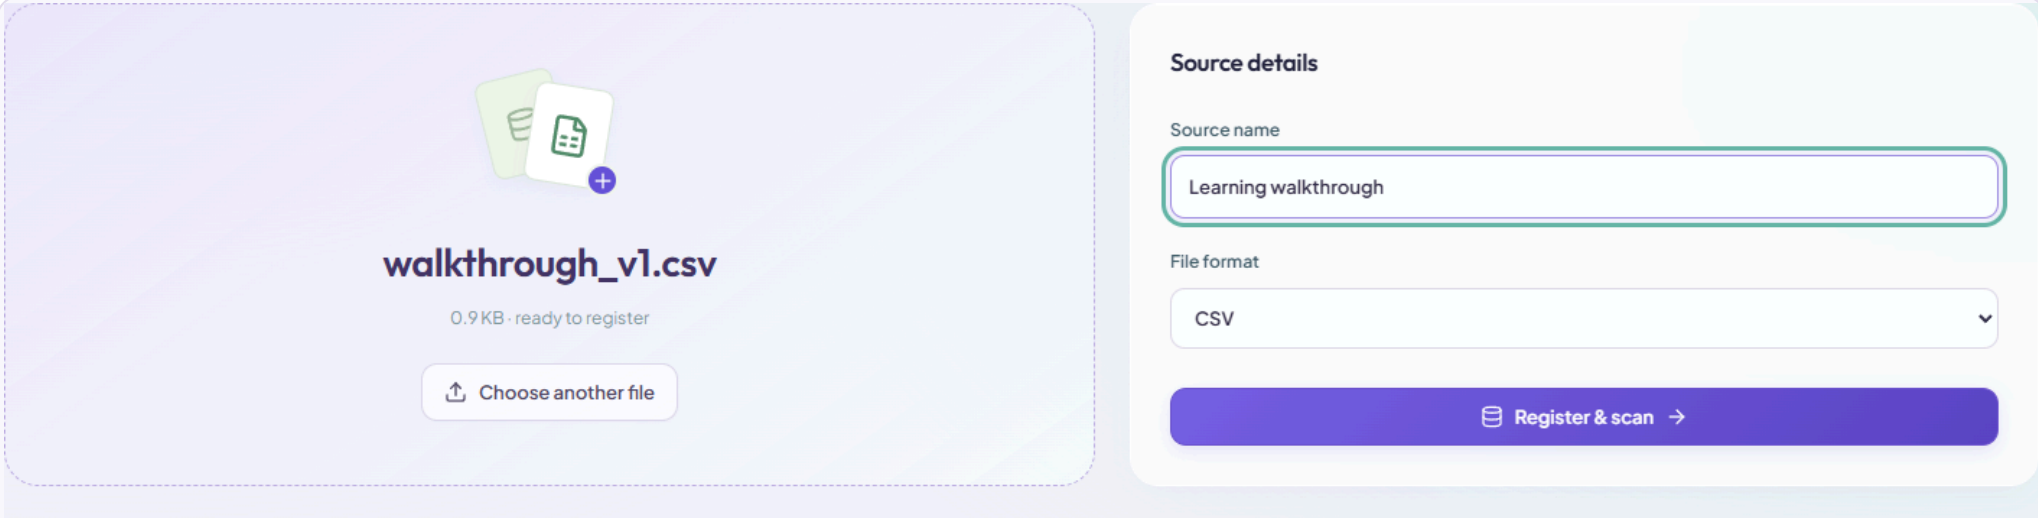

Screenshot 02 · Click the image to enlarge it in the HTML guide.


What happened: The chosen file is ready to register. It has not been scanned yet.

A · THE MAIN WORKFLOW

03 Registration produces a committed scan

What to click: Click Register & scan.

The scanner reads the actual source and stores aggregate counts and versioned evidence. It keeps a controlled local copy of the input. Twenty records produce four field profiles, not twenty findings.

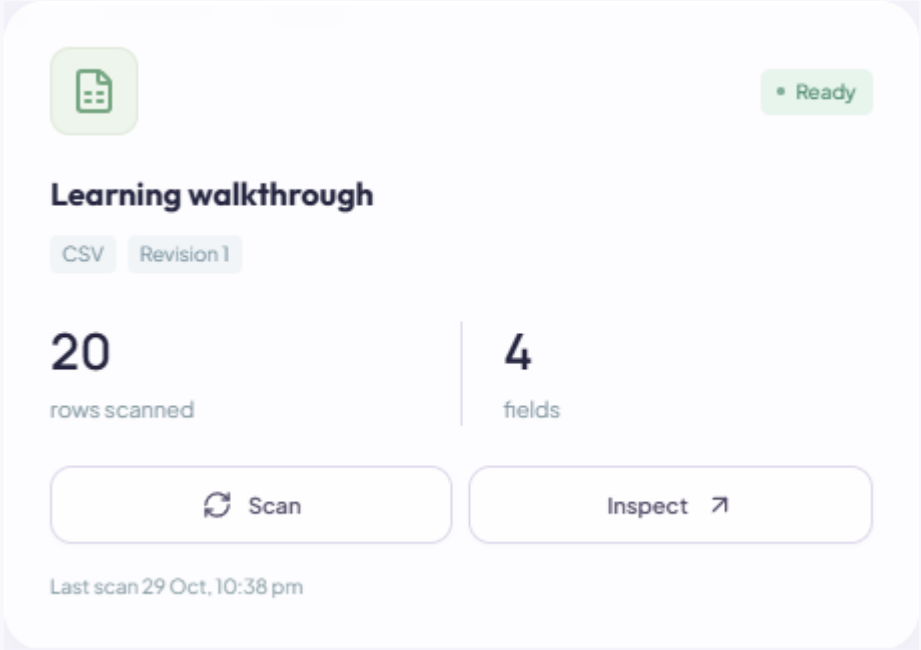

Screenshot 03 · Click the image to enlarge it in the HTML guide.


What happened: Observed: 1 CSV source, 20 rows, 4 discovered fields and no preloaded approvals.

A · THE MAIN WORKFLOW

04 Rules explain how findings are calculated

What to click: Rules / Configuration → inspect weights and thresholds.

The reference policy weights value patterns at 0.50, header hints at 0.20 and declared meaning at 0.30. A 0.25 acceptance threshold determines whether a candidate is suggested. These are configurable evidence weights, not probabilities.

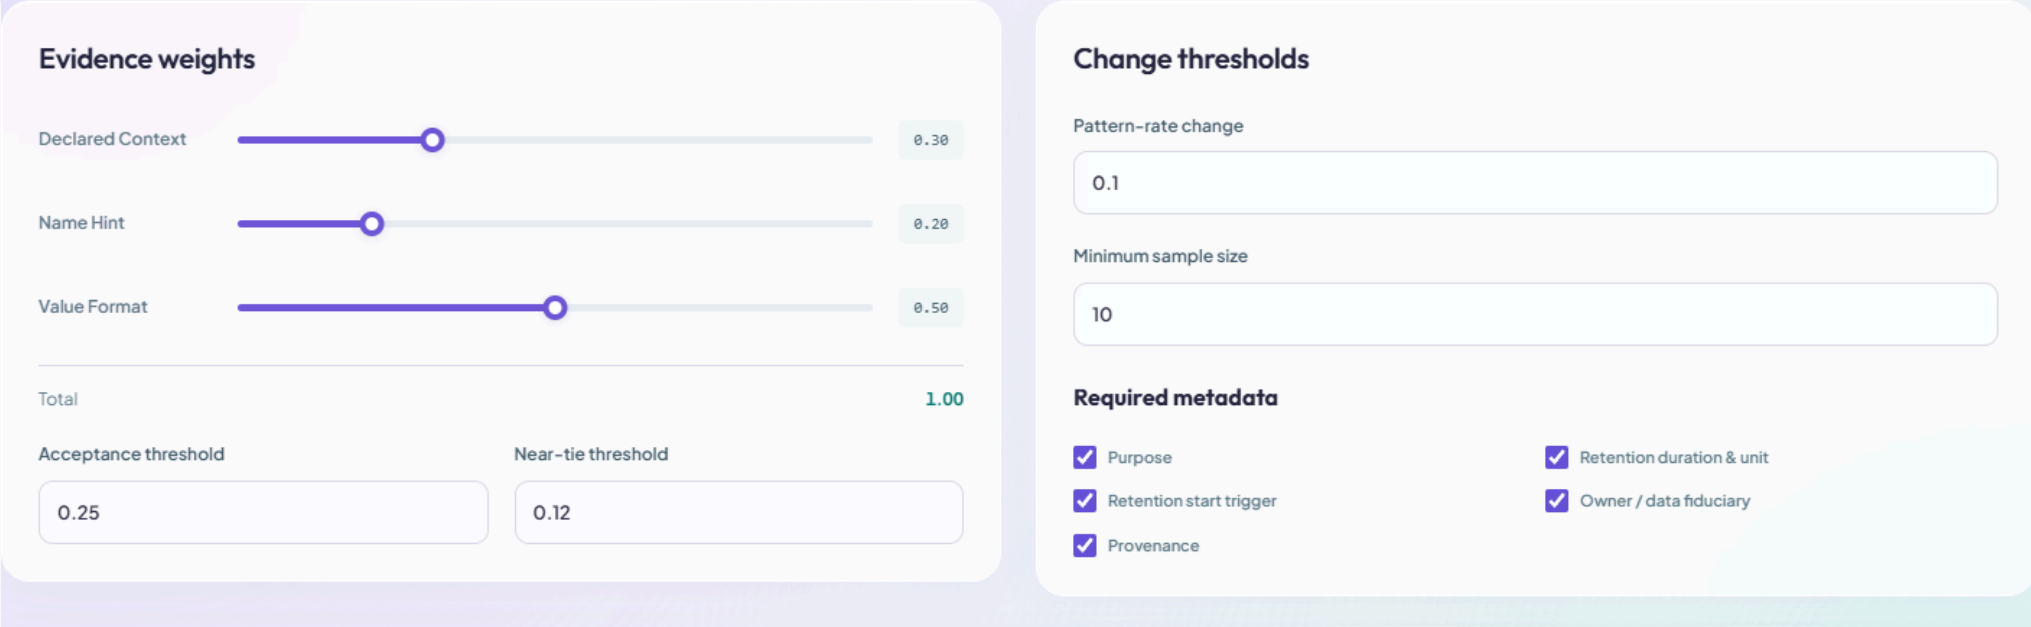

Screenshot 04 · Click the image to enlarge it in the HTML guide.

What happened: The walkthrough uses the saved reference policy. No configuration change is made here.


A · THE MAIN WORKFLOW

05

The checklist defines the required documentation

What to click: Configuration → Required metadata.

The checklist asks for purpose, retention duration/unit, a start trigger, an owner and provenance. Each is independently present or missing. A declaration can be complete without being a legal compliance finding.

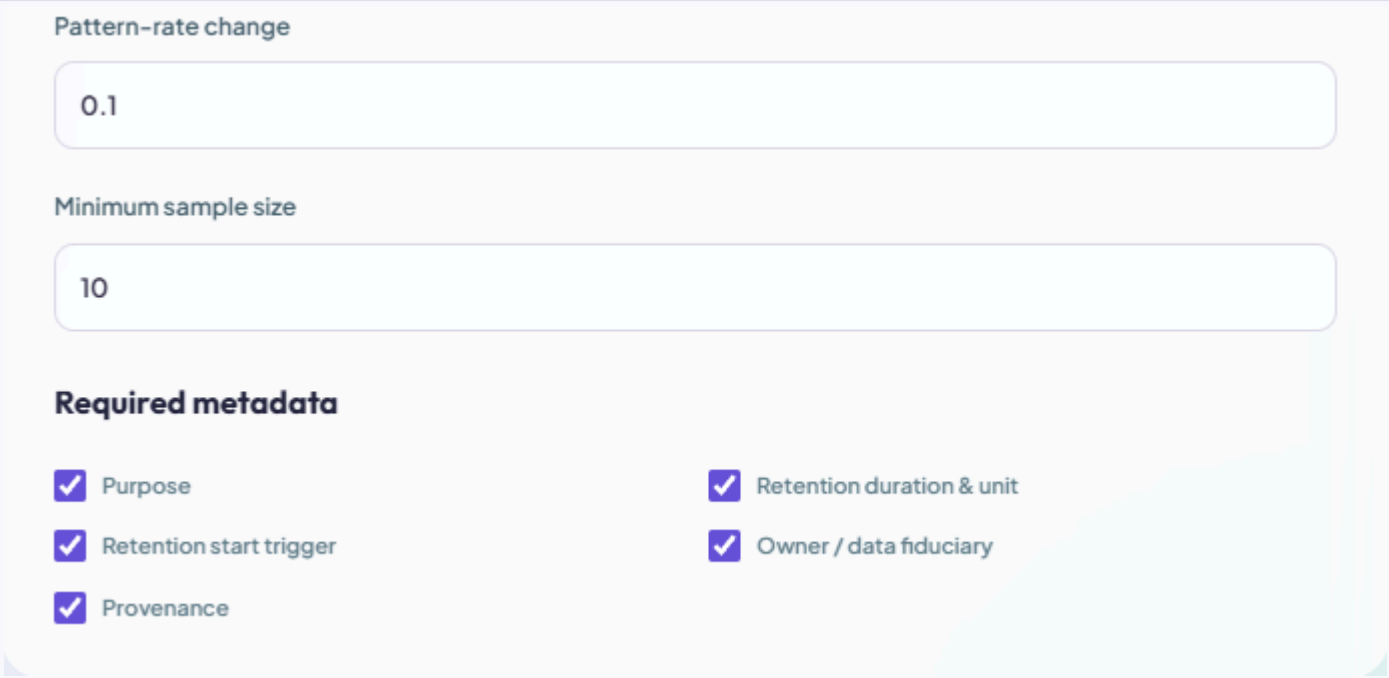

Screenshot 05 · Click the image to enlarge it in the HTML guide.

What happened: Five enabled requirements × four fields initially produce 20 metadata gaps.


A · THE MAIN WORKFLOW

06

Read the field inventory

What to click: Inventory → inspect the four rows.

employee_id is an Identity candidate, email is Contact, postal_code is Location and age is Demographic. The candidate is a scanner suggestion; the separate classification and metadata columns show human-review state.

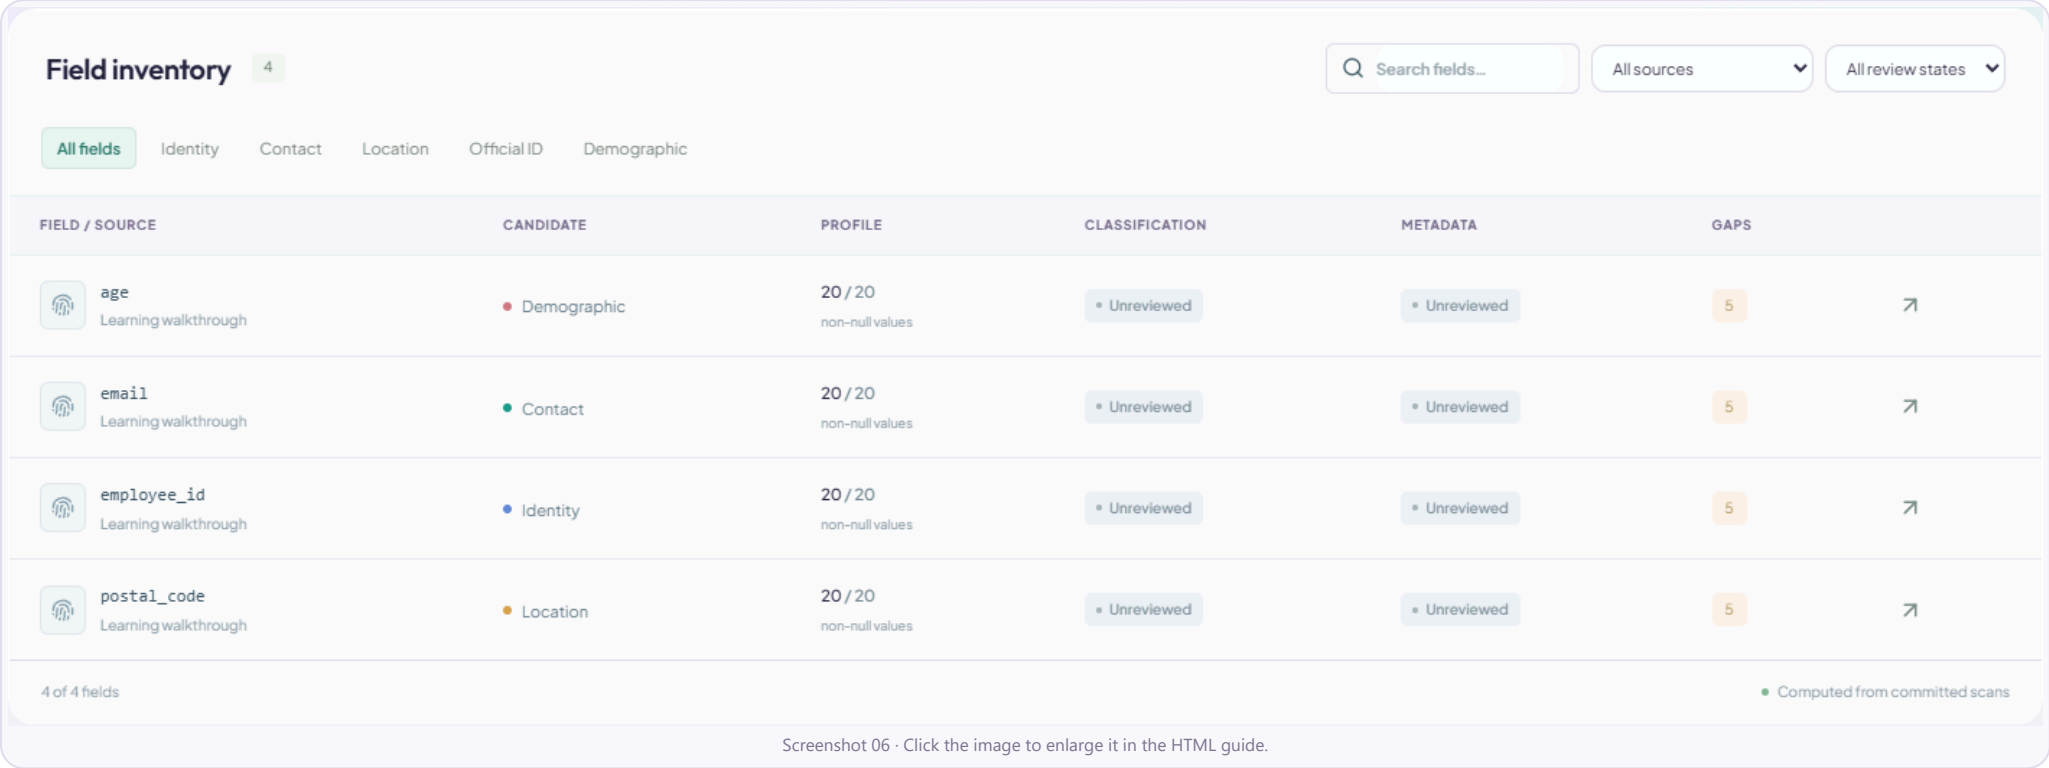

Screenshot 06 · Click the image to enlarge it in the HTML guide.


What happened: All four fields are unreviewed. Each has five missing metadata requirements.

A · THE MAIN WORKFLOW

07 Open the evidence behind one candidate

What to click: Inventory → employee_id → Evidence.

The internal-identifier rule matches all 20 non-empty values and the header provides a supporting hint. Grouped scoring yields 0.50 + 0.20 = 0.70. The interface shows counts and denominators, not raw rows.

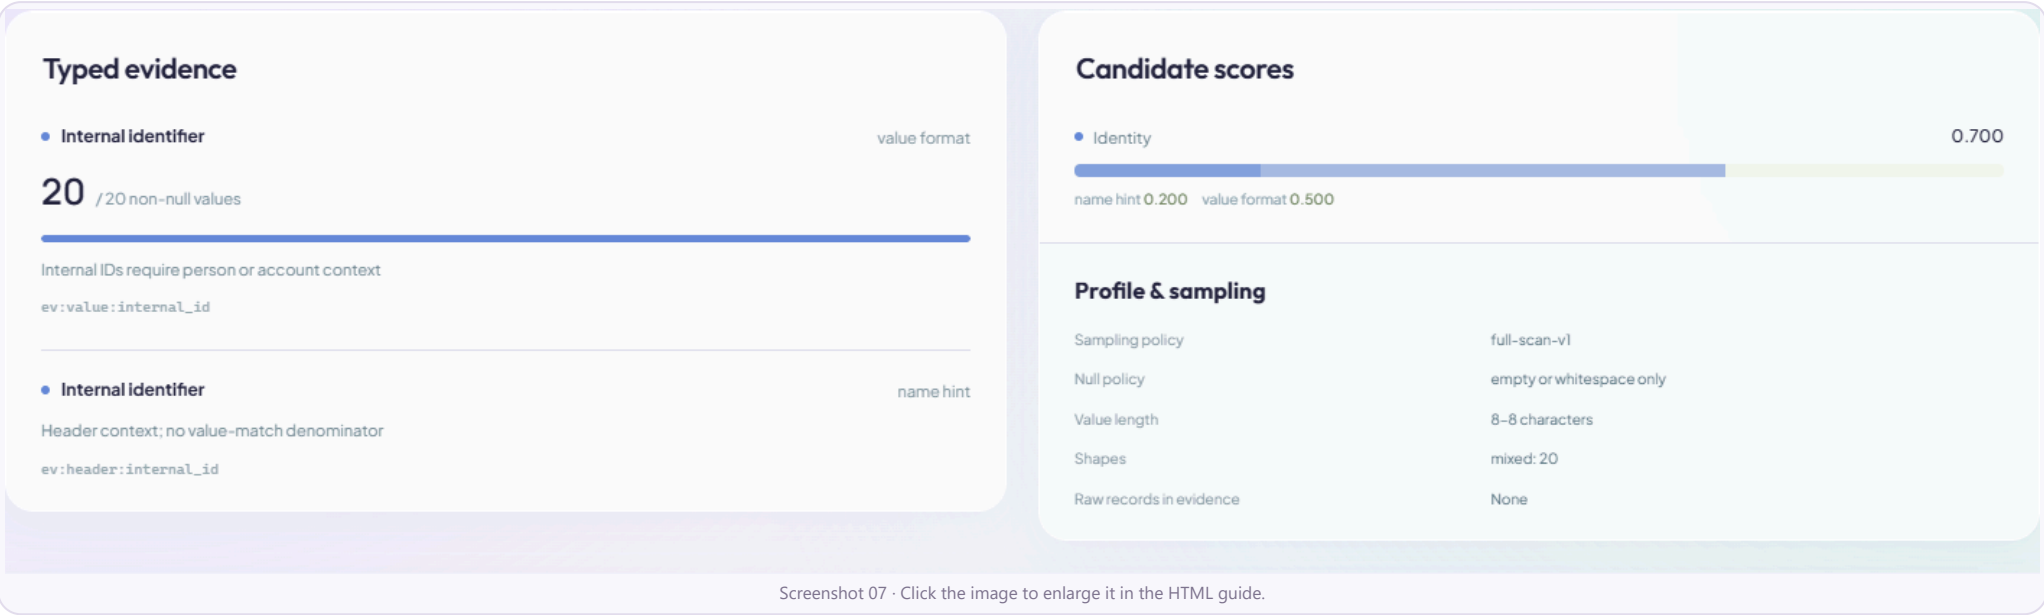

Screenshot 07 · Click the image to enlarge it in the HTML guide.

What happened: employee_id: Identity candidate, score 0.700, 20/20 identifier matches.


A · THE MAIN WORKFLOW

08

Remove the header hint

What to click: Evidence → What supports this finding? → uncheck Header hints → Compare evidence.

The identifier values still support Identity after the name hint is removed. The score falls from 0.700 to 0.500 and remains above 0.25. This is a temporary calculation; no policy, snapshot or review is changed.

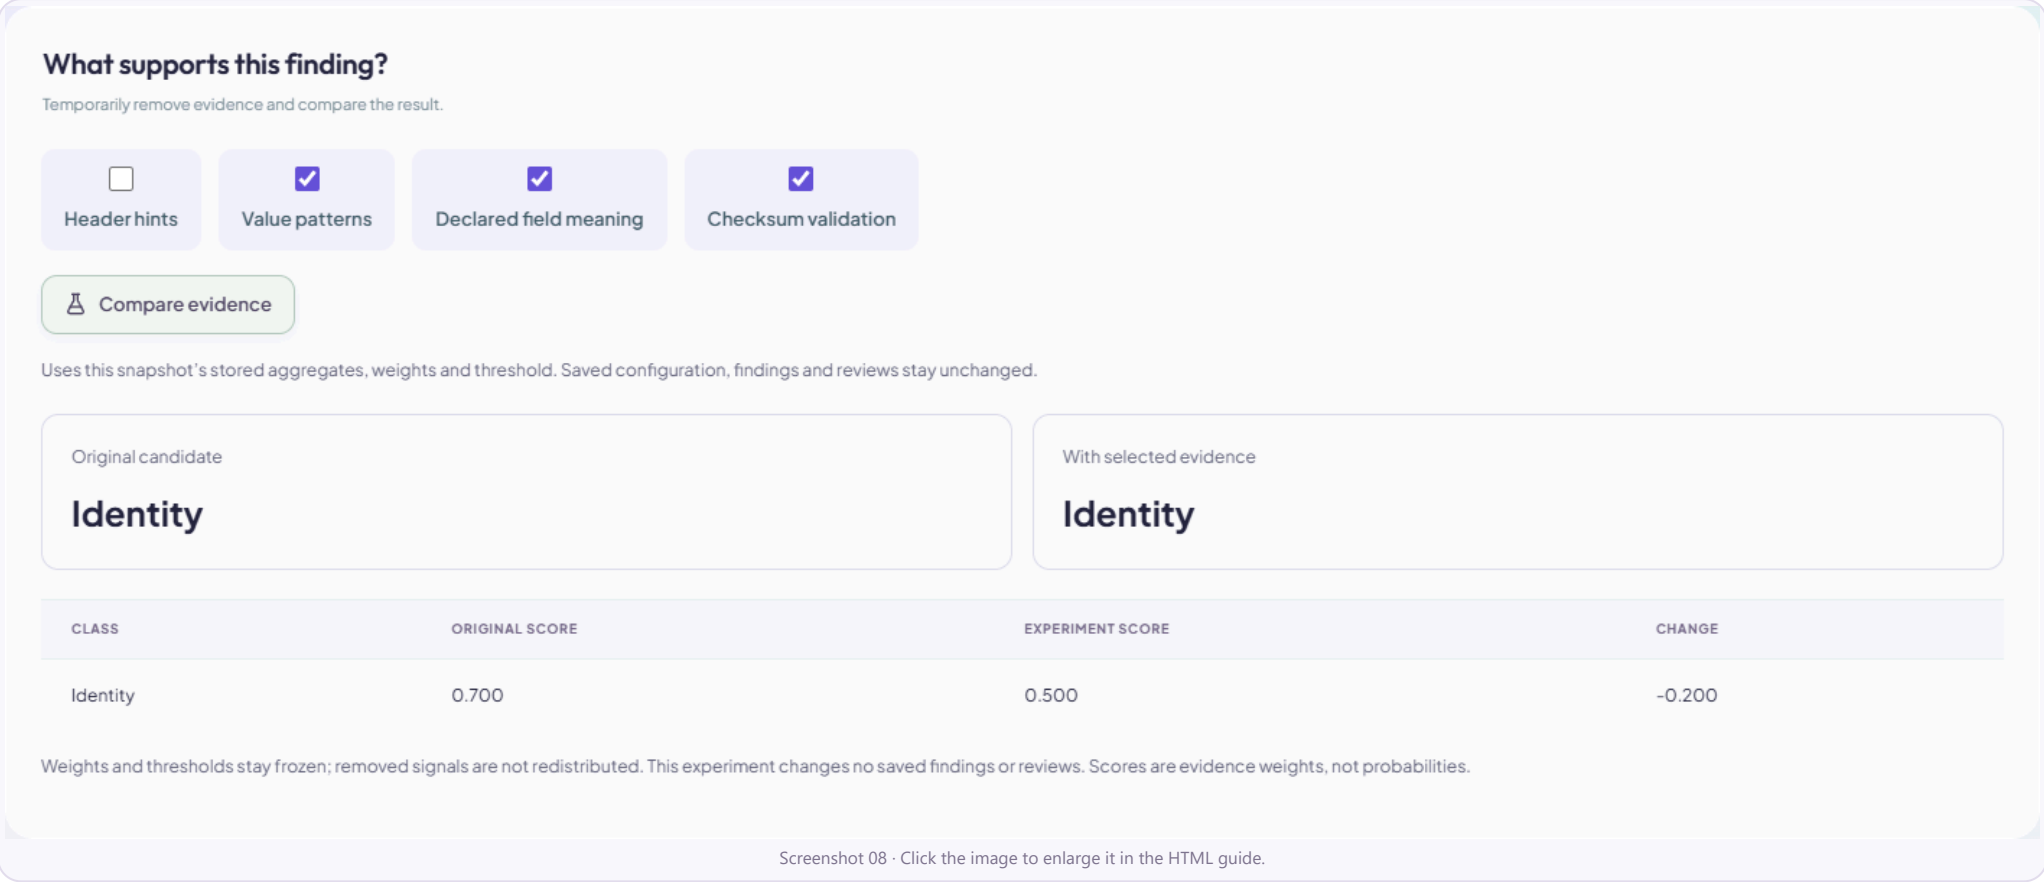

Screenshot 08 · Click the image to enlarge it in the HTML guide.

What happened: Original Identity 0.700 → experiment Identity 0.500.


A · THE MAIN WORKFLOW

09

Remove enough support and the scanner abstains

What to click: Also uncheck Value patterns → Compare evidence.

There is no declared meaning in this example. Removing headers and value patterns leaves no positive support. Abstained means there is insufficient evidence for a suggested class; it does not mean the field is safe or non-personal.

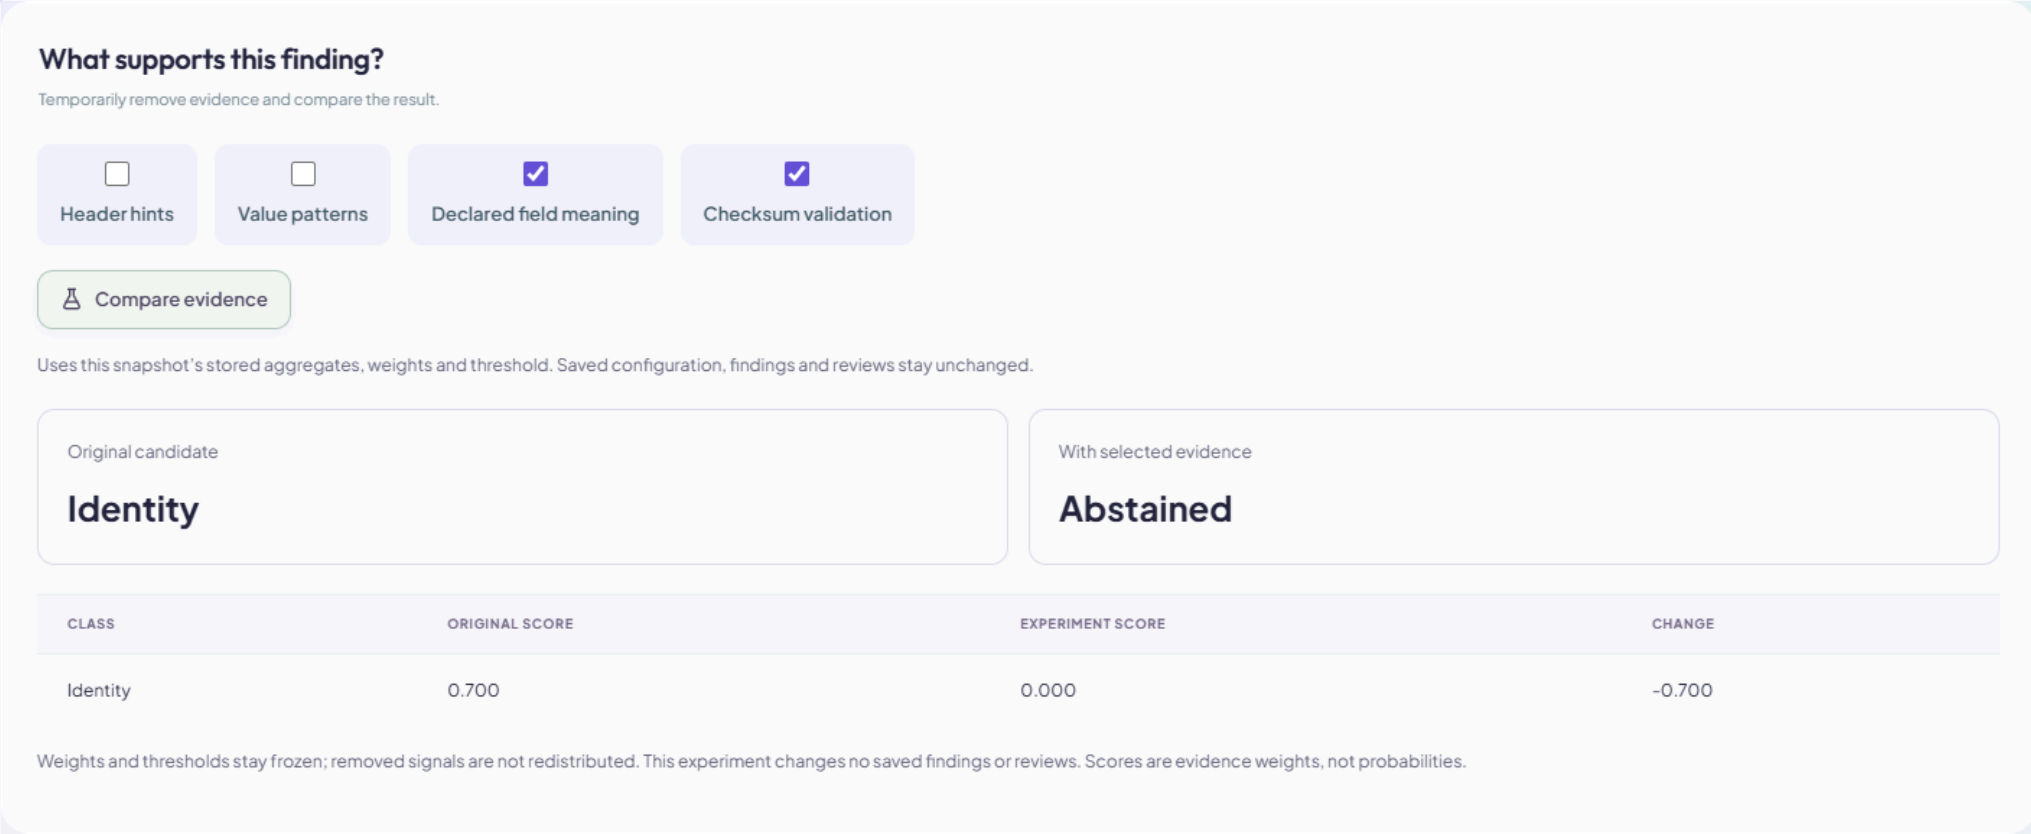

Screenshot 09 · Click the image to enlarge it in the HTML guide.

What happened: Original Identity → experiment Abstained. The saved finding remains Identity.


A · THE MAIN WORKFLOW

10

A human records a classification decision

What to click: Field → Review decision → Classification → enter reviewer and rationale.

The reviewer accepts an evidenced class and explains why. The saved decision records its original snapshot, policy and dependencies. This is a human judgement attached to evidence, not an automatic approval.

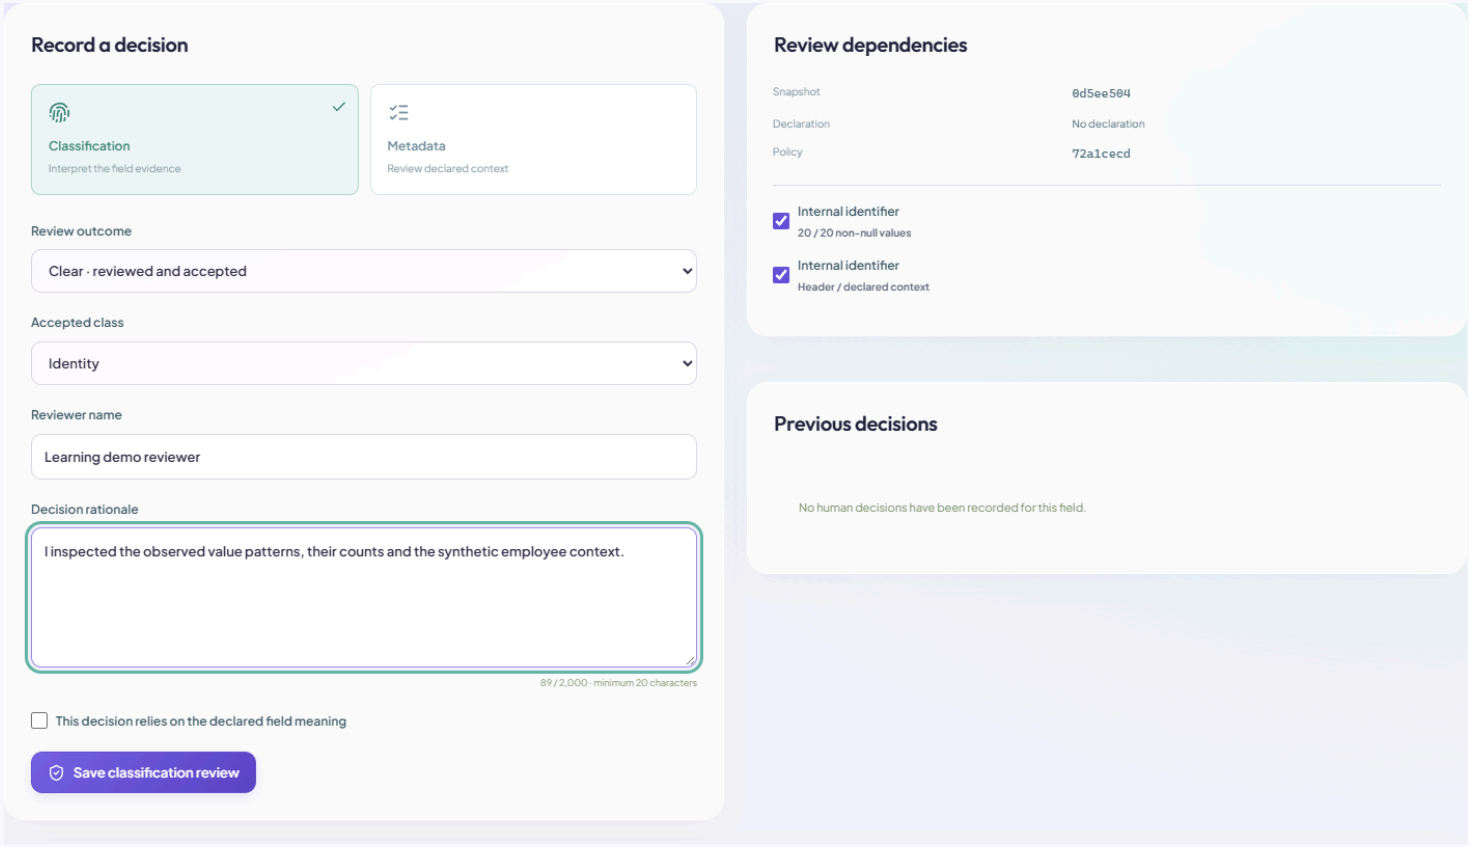

Screenshot 10 · Click the image to enlarge it in the HTML guide.


What happened: The form is ready to save Identity for employee_id.

A · THE MAIN WORKFLOW

11 Current and clear are different

What to click: Save classification → choose Metadata → mark Unresolved → save.

Current means the decision still matches its dependencies. An unresolved metadata decision can be current while saying that documentation is missing. Clear describes the review outcome; current describes freshness.

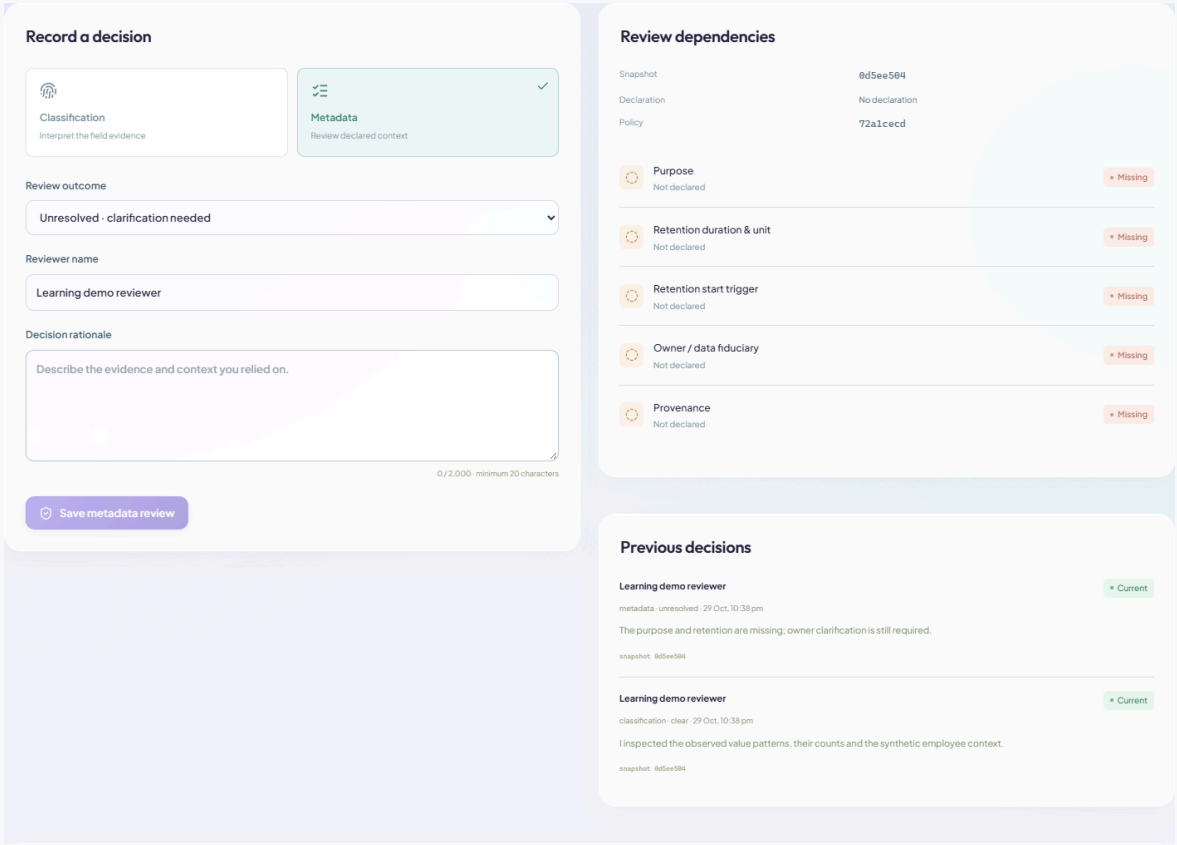

Screenshot 11 · Click the image to enlarge it in the HTML guide.

What happened: Classification: current / clear. Metadata: current / unresolved. Five documentation gaps remain for this field.


A · THE MAIN WORKFLOW

12

A duration without a start trigger stays incomplete

What to click: Declaration & preview → Entire table → enter purpose, 2 years, owner and provenance → Preview effect.

Two years from when? Leaving the start trigger blank leaves one requirement open for each field. A table declaration supplies a shared default to all four fields. A field-specific declaration would completely override that default.

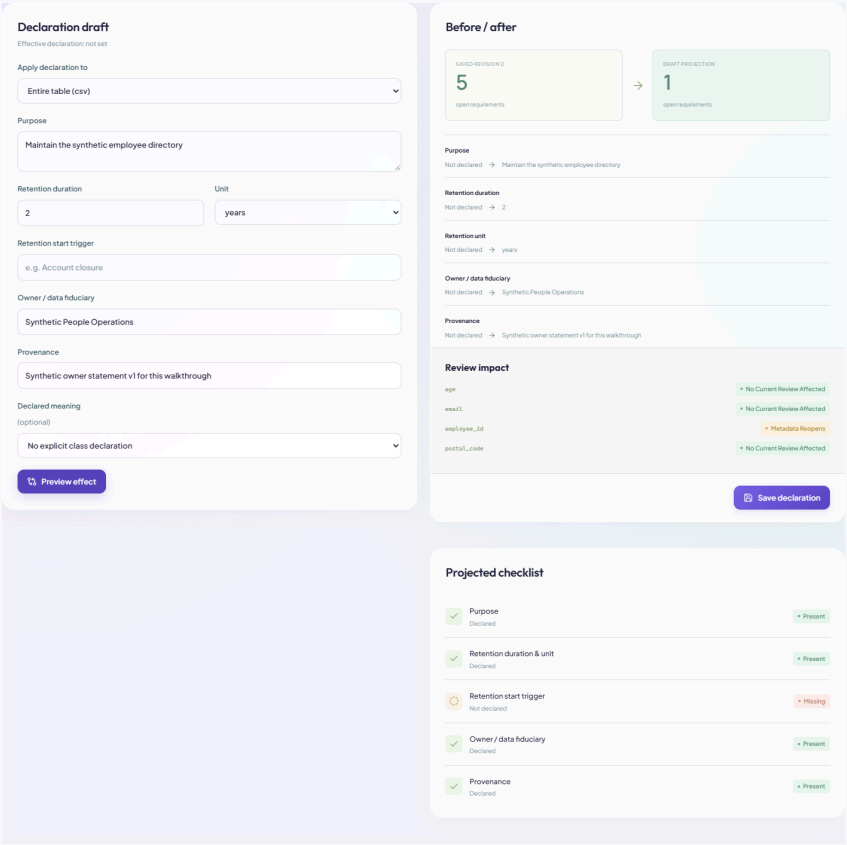

Screenshot 12 · Click the image to enlarge it in the HTML guide.

What happened: Preview: employee_id gaps 5 → 1. The database export before and after preview is identical.


A · THE MAIN WORKFLOW

13

Complete the declaration and inspect the review impact

What to click: Add Retention start trigger = End of employment → Preview effect.

The projected checklist is now complete. The preview identifies the metadata review affected by the proposed declaration change. Classification does not depend on purpose or retention in this example.

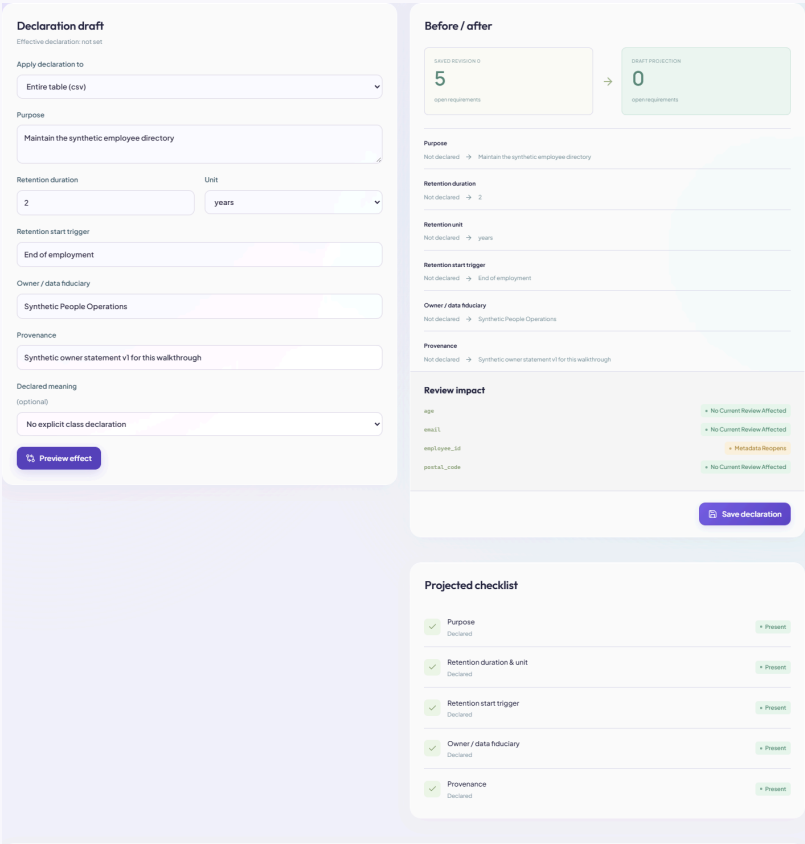

Screenshot 13 · Click the image to enlarge it in the HTML guide.


What happened: Preview: gaps 5 → 0 for employee_id. The employee_id metadata decision will reopen; its classification decision will stay current.

A · THE MAIN WORKFLOW

14 Saving changes the metadata dependency

What to click: Save declaration → Inventory.

The shared table declaration closes all 20 gaps. The previously saved employee_id metadata review reopens because its declaration changed. The classification review stays current. The other fields still need human reviews.

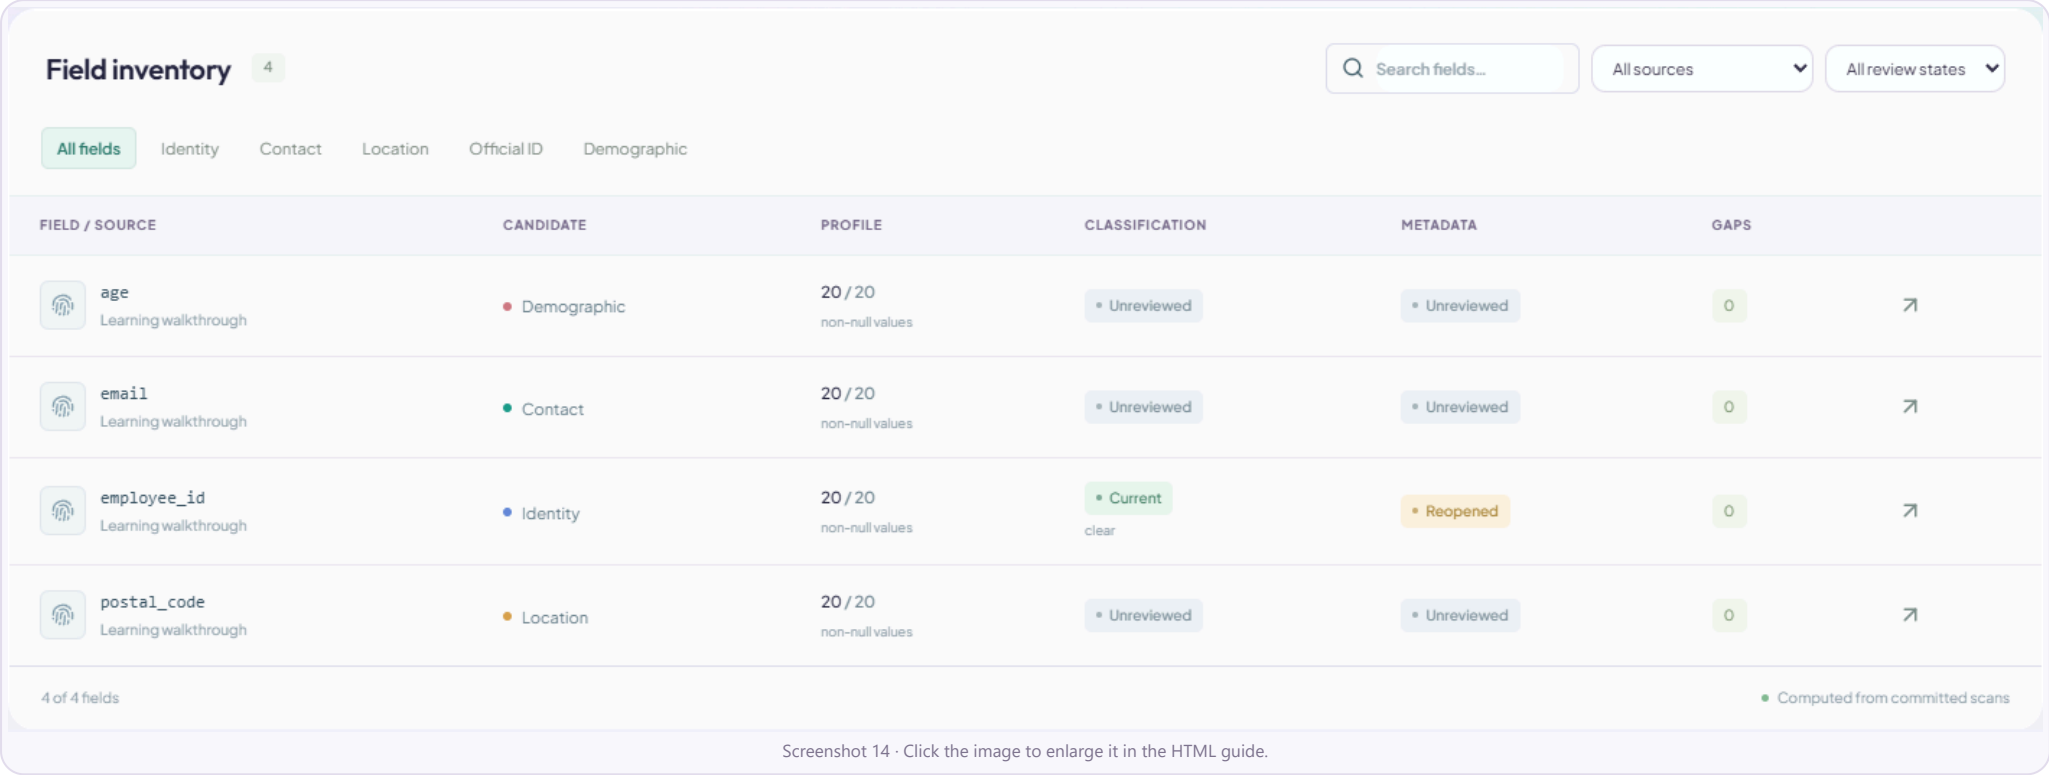

Screenshot 14 · Click the image to enlarge it in the HTML guide.

What happened: Four fields now have zero gaps. Exactly the saved metadata review reopens.


A · THE MAIN WORKFLOW

15

Complete reviews and documentation before calling a field ready

What to click: Review each field's classification and metadata → Results / Scan report.

All four fields now have current clear reviews and complete configured metadata. Ready describes this technical workflow state. It does not establish lawful purpose, lawful retention or legal compliance.

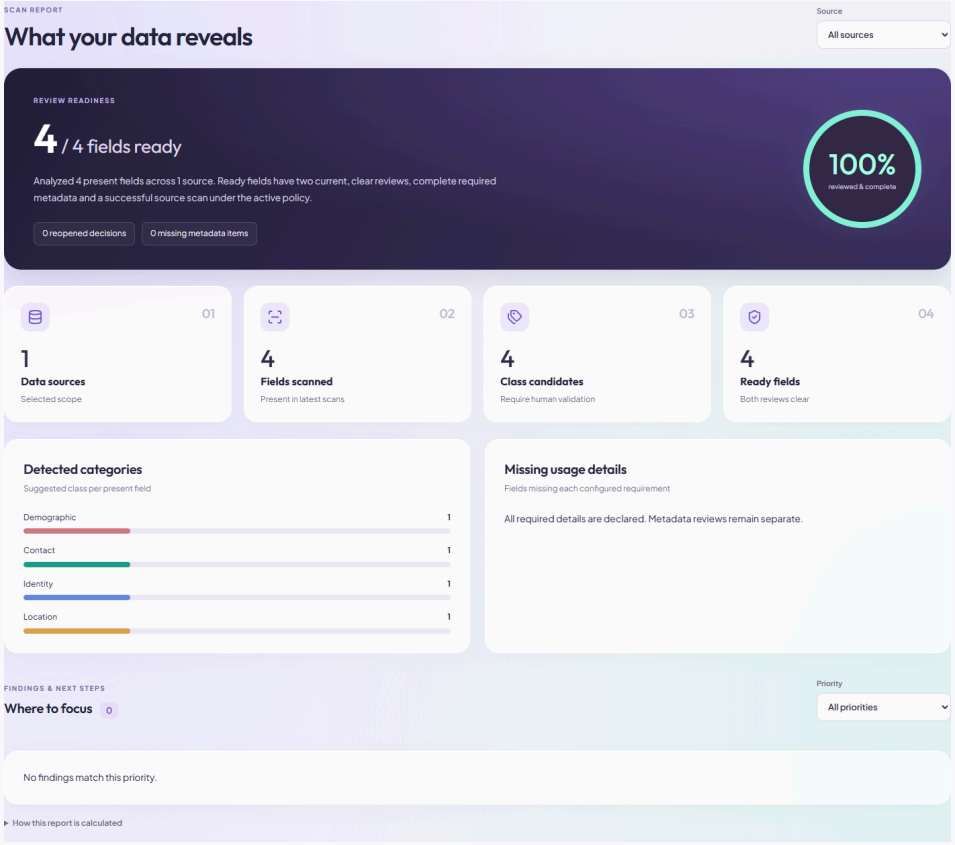

Screenshot 15 · Click the image to enlarge it in the HTML guide.


What happened: Observed: 4 of 4 fields ready, 0 metadata gaps, 0 reopened decisions.

A · THE MAIN WORKFLOW

16 Replace values while keeping field identity

What to click: Changes / ReviewGuard → Learning walkthrough → Replacement file = walkthrough_v2.csv.

V2 has the same headers and unchanged email, postal and age values. Only employee_id changes: internal IDs are replaced with mobile-shaped numbers. The exact field identity survives, so ReviewGuard can compare against its saved reviews.

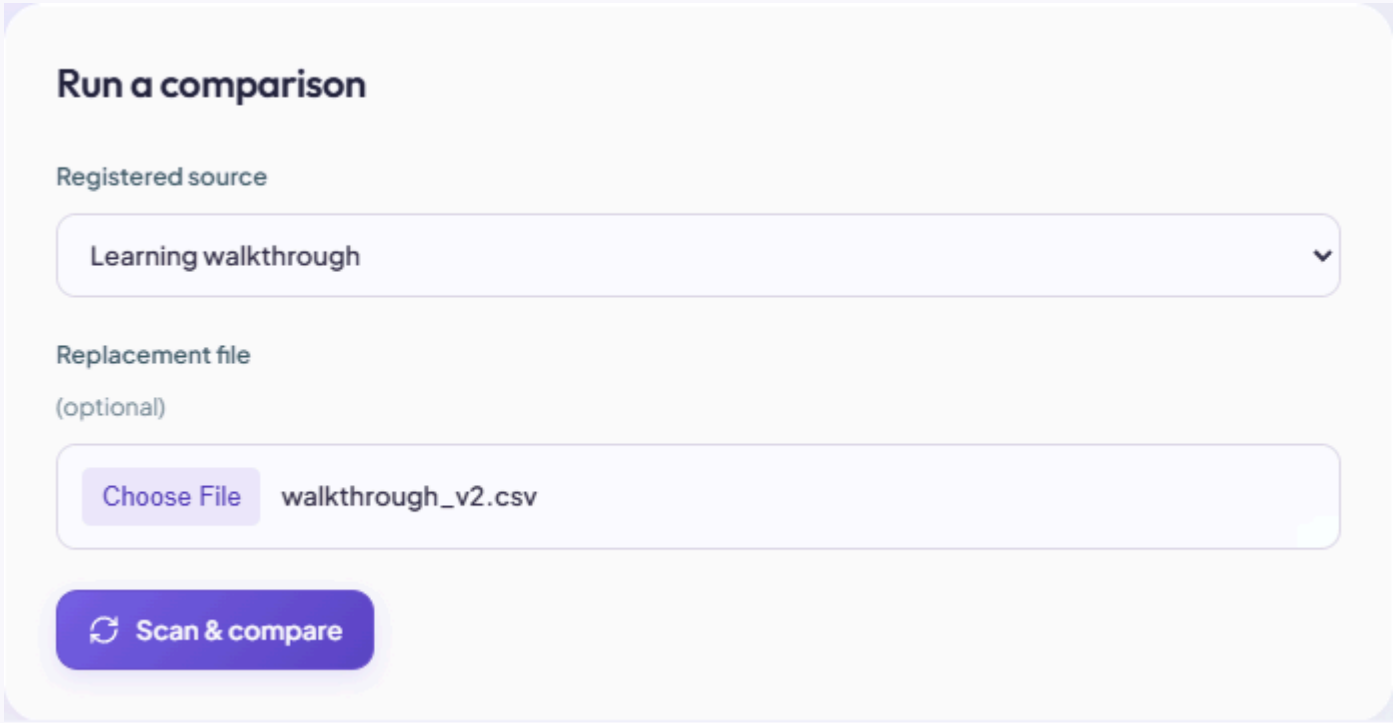

Screenshot 16 · Click the image to enlarge it in the HTML guide.


What happened: Replacement selected. No rescan has been committed yet.

A · THE MAIN WORKFLOW

17 Only the affected classification review reopens

What to click: Scan & compare → Inventory.

The new values support Contact despite the employee_id name. That changes the evidence behind the classification review. Its metadata declaration is unchanged, so that review stays current. Reviews on email, age and postal_code are preserved.

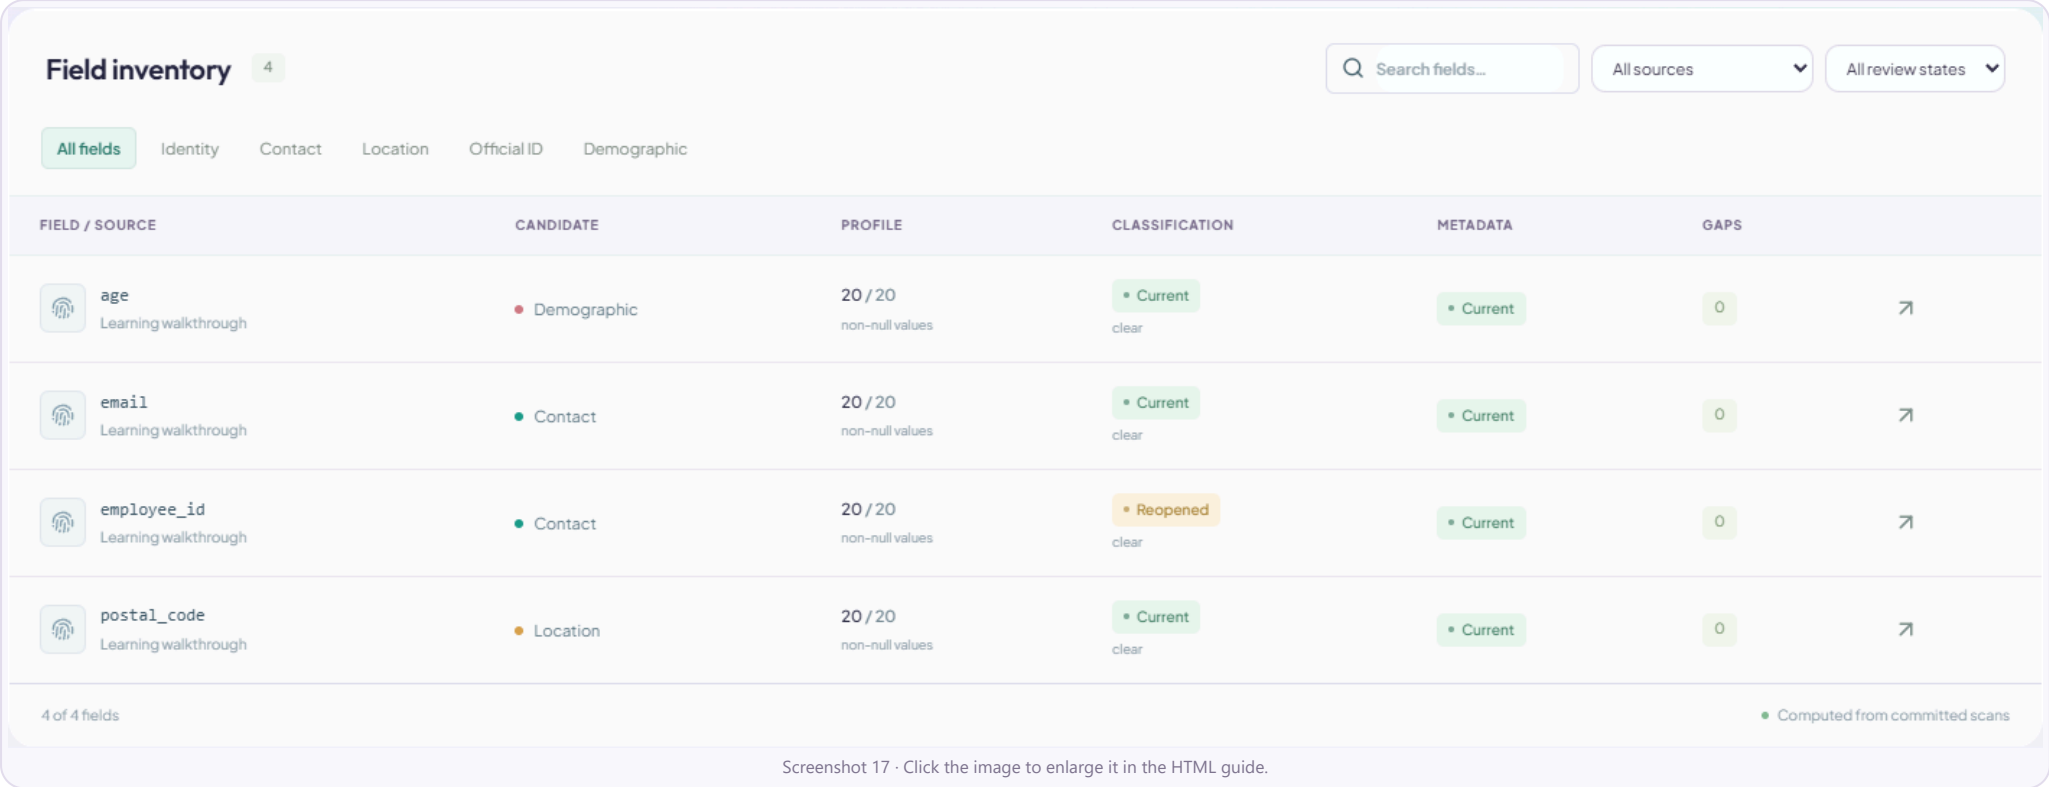

Screenshot 17 · Click the image to enlarge it in the HTML guide.


What happened: employee_id: Contact candidate, classification reopened, metadata current. One of eight saved scoped reviews reopens.

A · THE MAIN WORKFLOW

18 Compare actual old and new evidence

What to click: employee_id → Evidence → Snapshot comparison.

The previous snapshot has 20 internal-ID matches. The new snapshot has 20 Indian-mobile matches. Snapshots preserve the evidence that existed at scan time; opening an older snapshot does not restore its old approval.

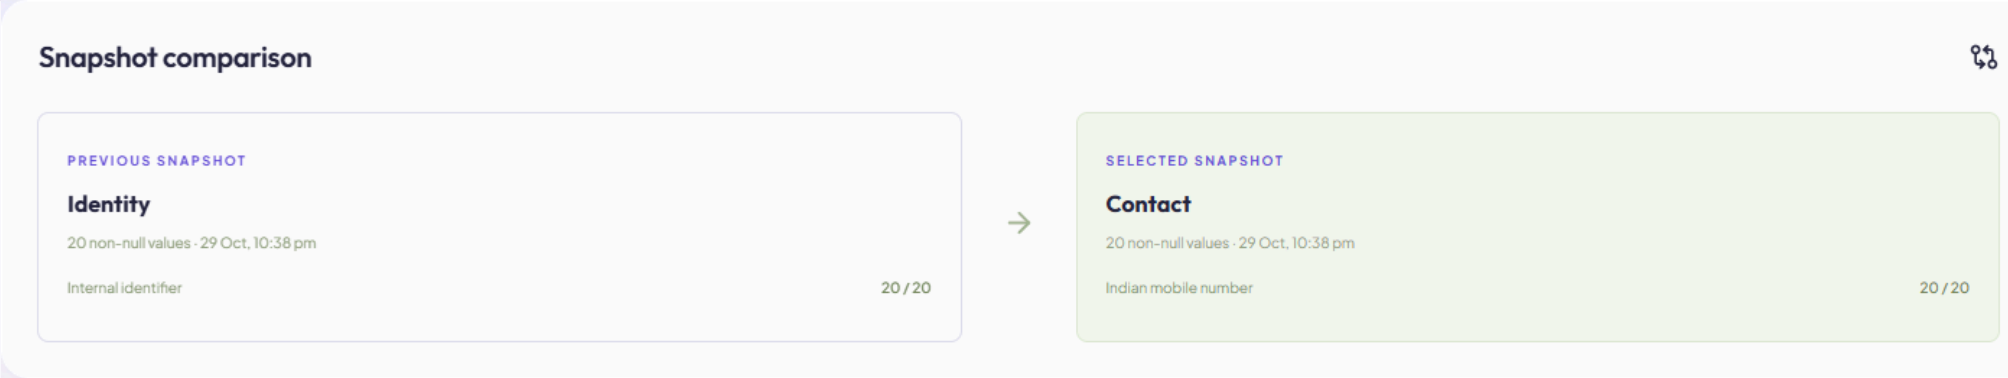

Screenshot 18 · Click the image to enlarge it in the HTML guide.

What happened: Previous Identity → selected Contact; both scans contain 20 non-empty values.


A · THE MAIN WORKFLOW

19

Read why a decision reopened

What to click: Field → Field history → expand changed dependencies.

History records the original decision and later state transitions. Changed candidate interpretations, relevant rules and detector counts explain this reopening. The original rationale and evidence reference remain attached to the review.

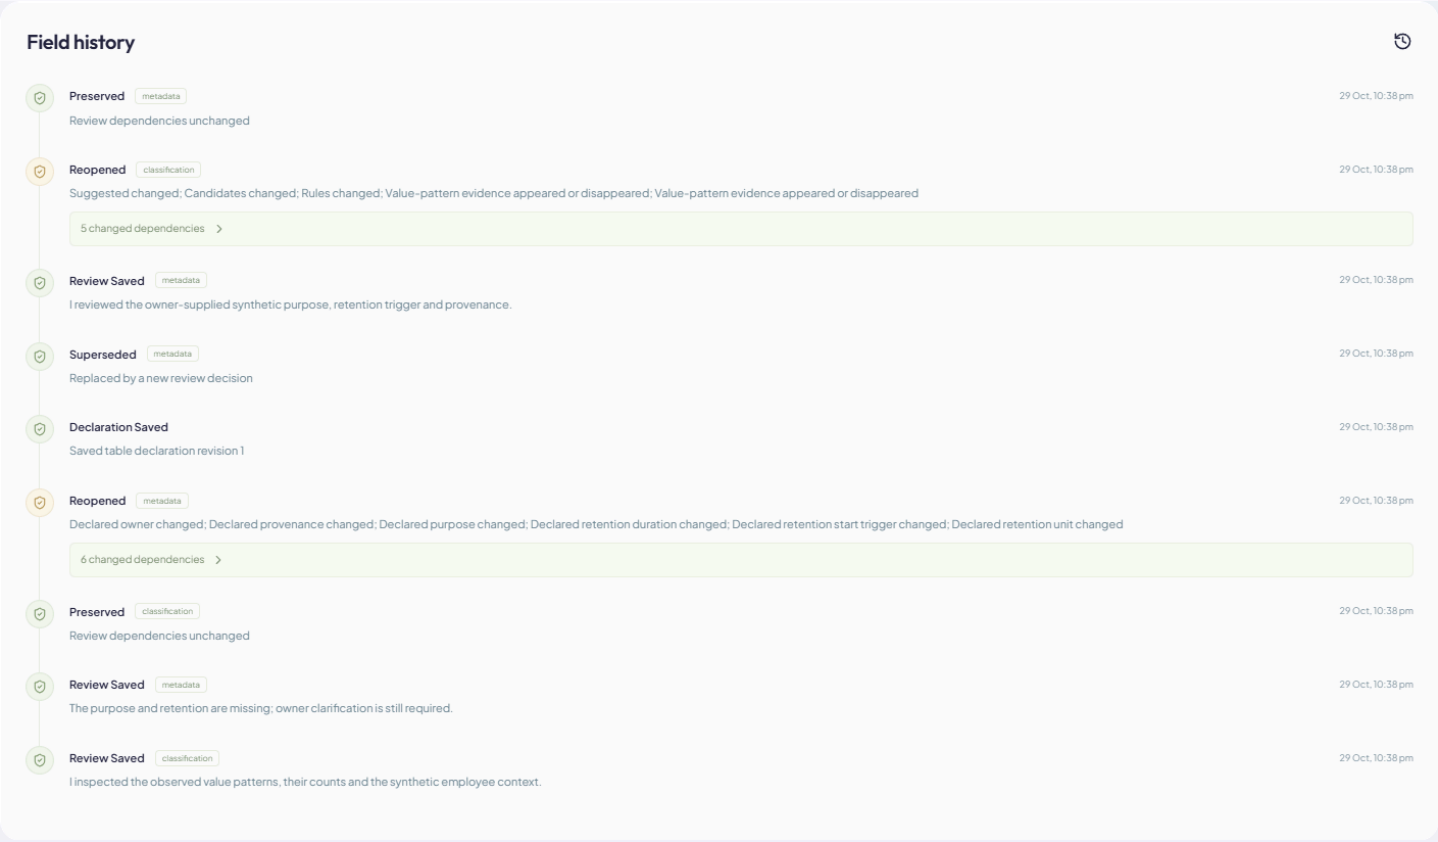

Screenshot 19 · Click the image to enlarge it in the HTML guide.


What happened: A classification reopening event includes explicit before/after dependencies.

A · THE MAIN WORKFLOW

20 Readiness falls for a specific reason

What to click: Results / Scan report after V2.

Three fields remain ready. employee_id needs a fresh classification decision because its evidence changed. Missing metadata and reopened reviews are different issues: this example has no metadata gaps.

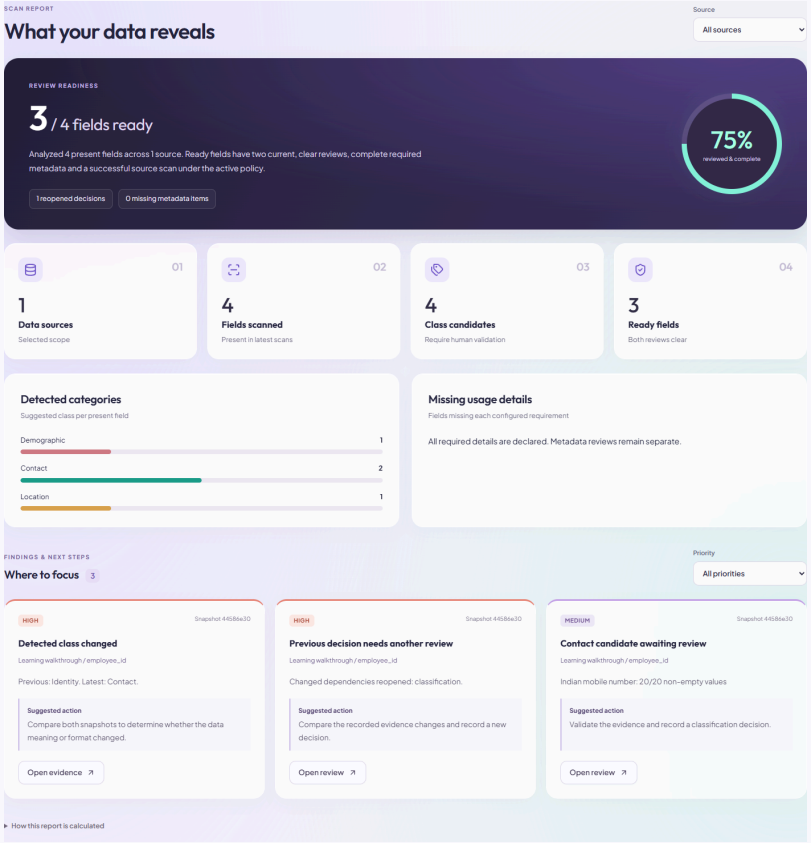

Screenshot 20 · Click the image to enlarge it in the HTML guide.


What happened: Observed: 3 of 4 fields ready; 1 reopened classification review; 0 metadata gaps.

B · ALL EIGHT REVIEWGUARD SCENARIOS

21 Change values, keep the header

What to click: Changes → Challenge ReviewGuard → Change values, keep the header → Run challenge.

Internal-ID values become phone-shaped values. Classification depends on that evidence and reopens. Metadata remains current because its declaration is unchanged. Both email reviews are unrelated and remain current.

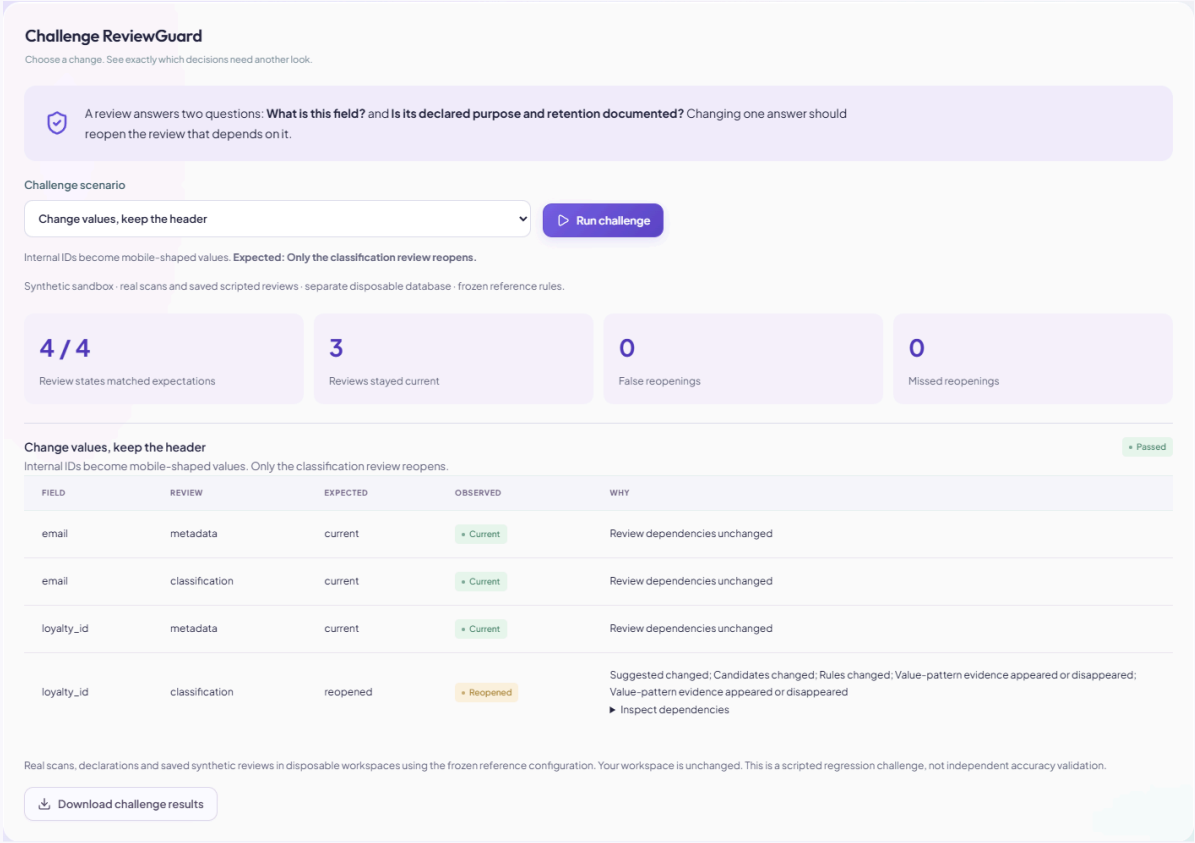

Screenshot 21 · Click the image to enlarge it in the HTML guide.


What happened: 4/4 expected review states matched: one classification reopened, three reviews current.

B · ALL EIGHT REVIEWGUARD SCENARIOS

22 Remove the declared purpose

What to click: Changes → Challenge ReviewGuard → Remove the declared purpose → Run challenge.

The synthetic owner removes the declared purpose. This changes the metadata dependency, so the metadata review reopens. The field's observed values and classification evidence stay the same.

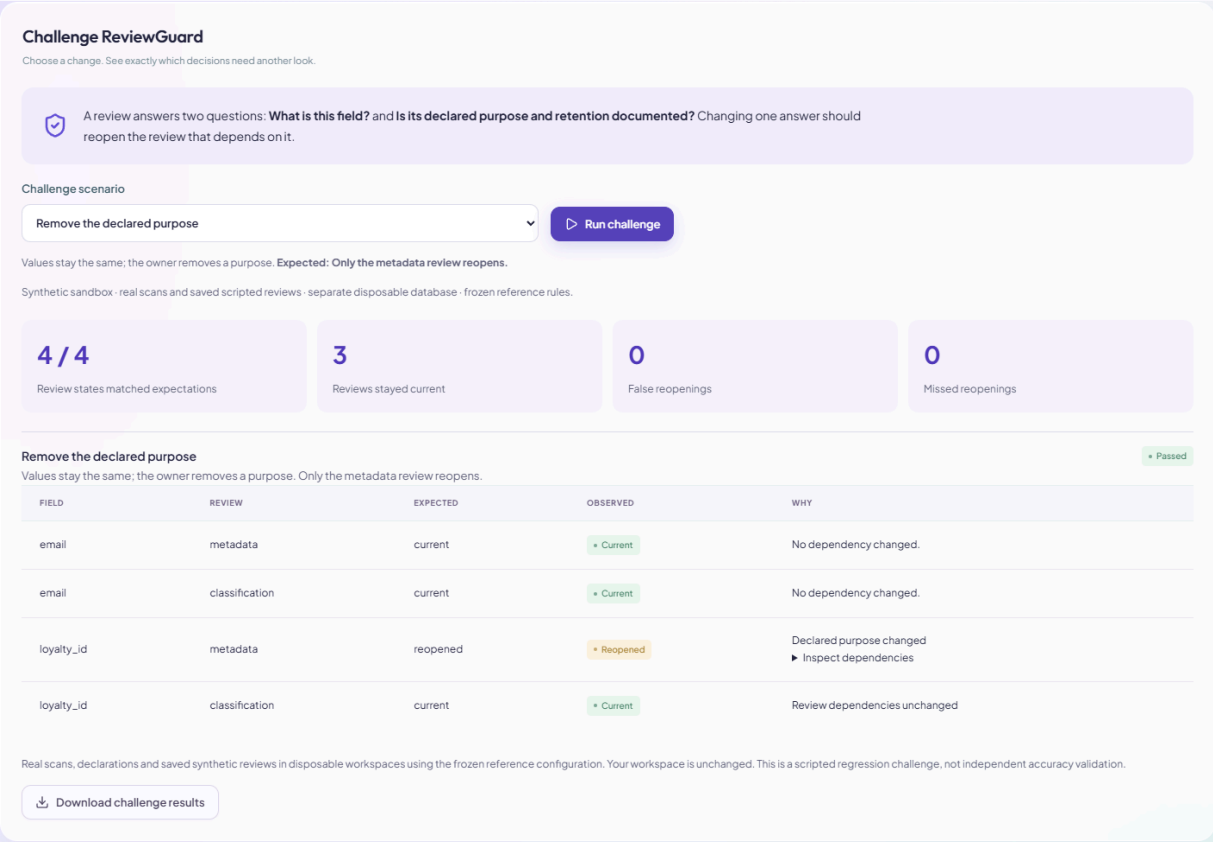


Screenshot 22 · Click the image to enlarge it in the HTML guide.

What happened: 4/4 matched: loyalty metadata reopened; loyalty classification and both email reviews current.

23 Change a relied-on rule

What to click: Changes → Challenge ReviewGuard → Change a relied-on rule → Run challenge.

The rule the classification relied on is edited so the original identifiers no longer satisfy it. Reusing the old classification decision would rely on changed logic. Metadata is unaffected.

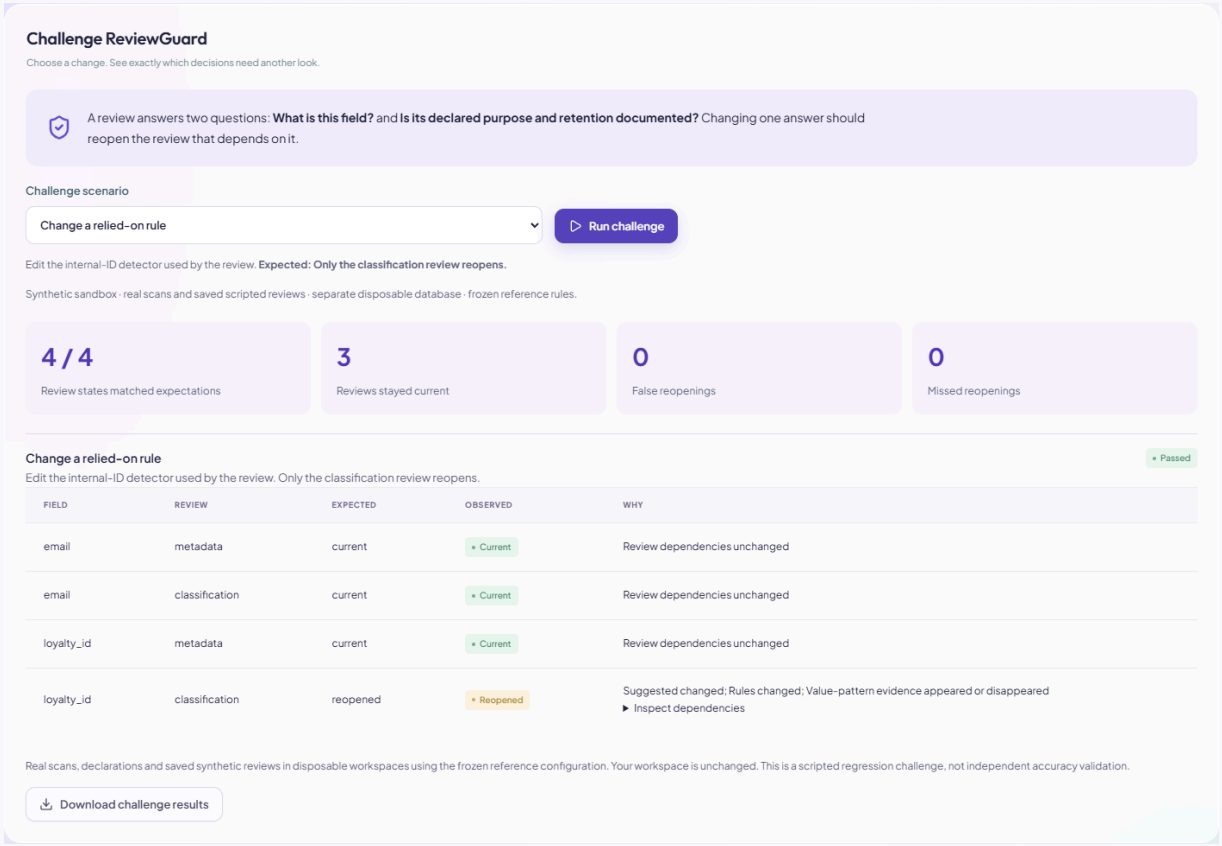

Screenshot 23 · Click the image to enlarge it in the HTML guide.


What happened: 4/4 matched: loyalty classification reopened; three other reviews current.

B · ALL EIGHT REVIEWGUARD SCENARIOS

24 Change an unrelated rule

What to click: Changes → Challenge ReviewGuard → Change an unrelated rule → Run challenge.

The birth-date detector is edited. Neither of these fields relied on that detector. A global policy version change alone should not reopen their classification or metadata reviews.

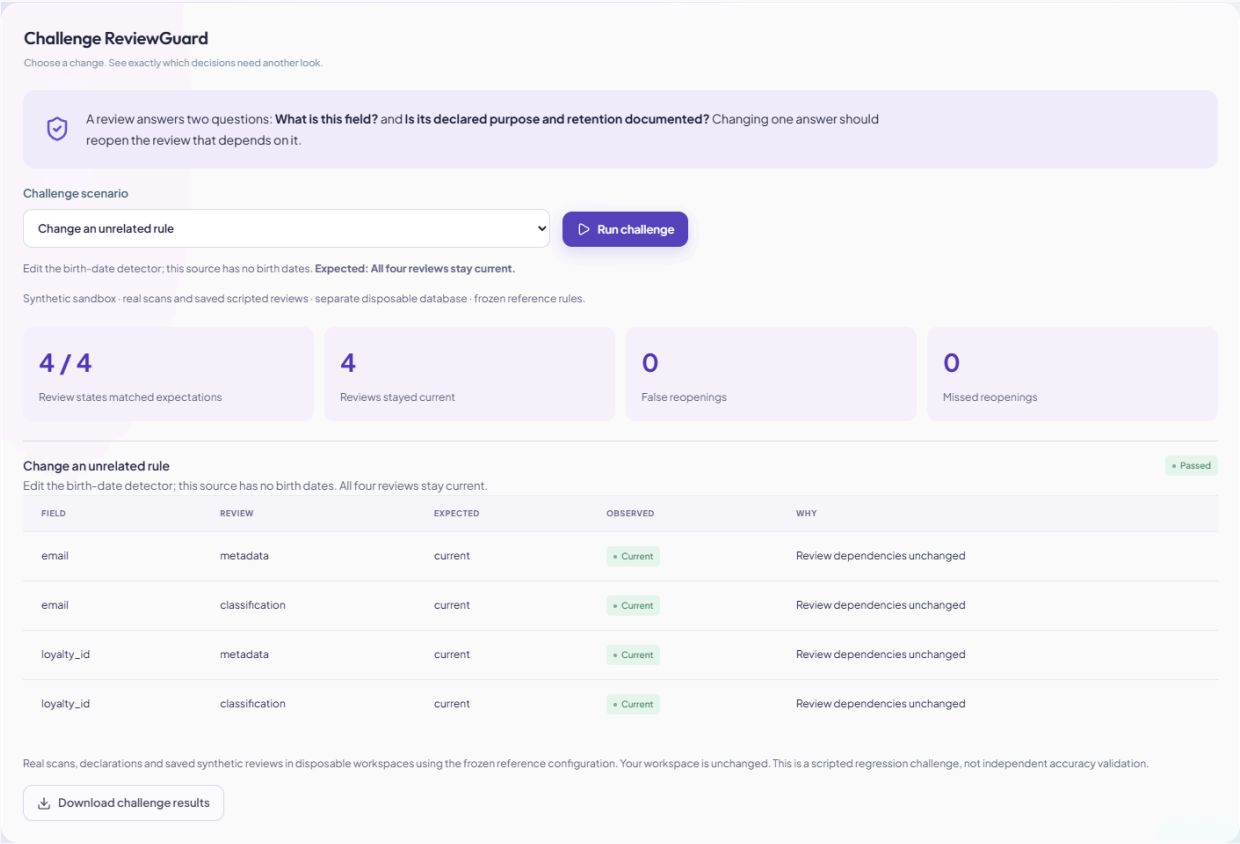

Screenshot 24 · Click the image to enlarge it in the HTML guide.

What happened: 4/4 matched: all four reviews remain current.


B · ALL EIGHT REVIEWGUARD SCENARIOS

25

Rescan identical data

What to click: Changes → Challenge ReviewGuard → Rescan identical data → Run challenge.

A rescan produces new scan identifiers and timestamps, but the semantic evidence is identical. Fresh timestamps alone do not invalidate a review.

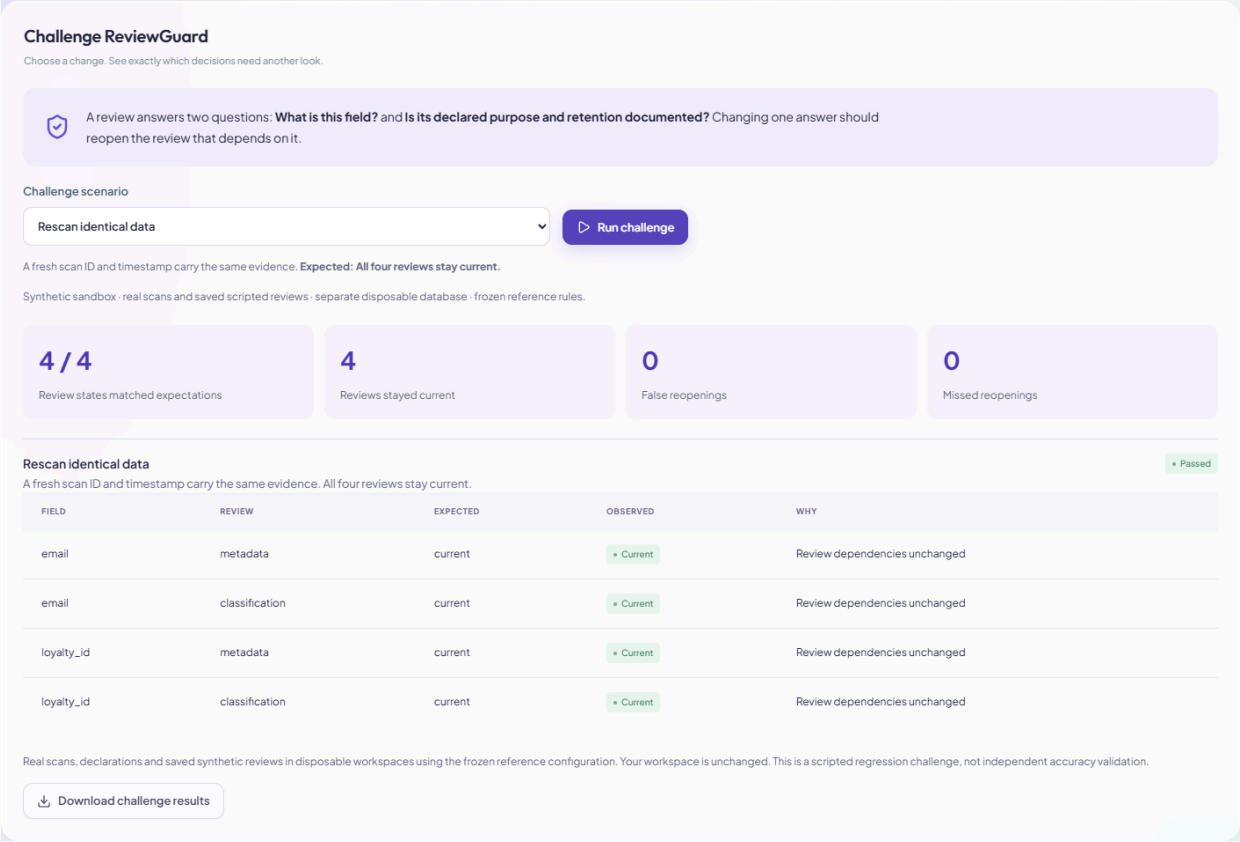

Screenshot 25 · Click the image to enlarge it in the HTML guide.


What happened: 4/4 matched: all four reviews remain current.

B · ALL EIGHT REVIEWGUARD SCENARIOS

26 Rename without a mapping

What to click: Changes → Challenge ReviewGuard → Rename without a mapping → Run challenge.

loyalty_id is replaced by member_reference without an explicit mapping. The old field becomes missing. The new name is a new field identity with no copied approvals. Unrelated email reviews stay current.

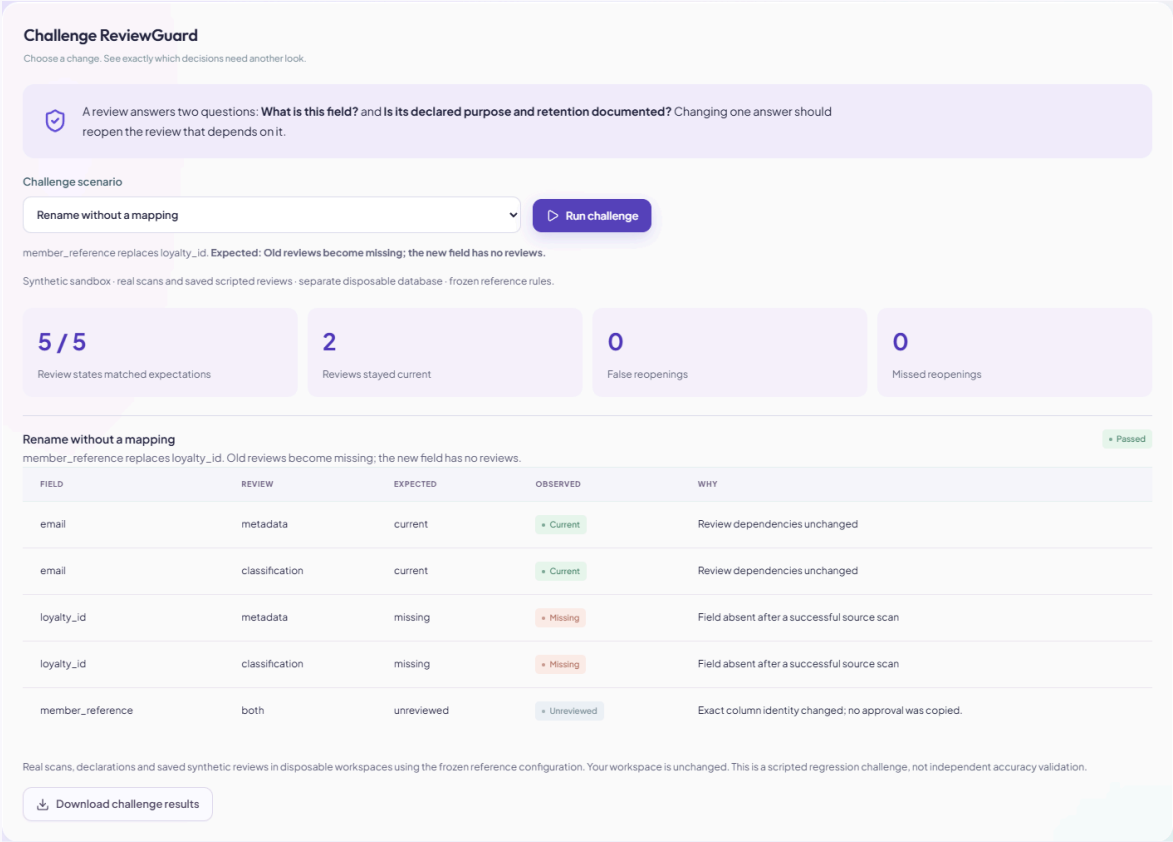

Screenshot 26 · Click the image to enlarge it in the HTML guide.


What happened: 5/5 matched: two old reviews missing, new field unreviewed, two email reviews current.

B · ALL EIGHT REVIEWGUARD SCENARIOS

27 Change values, then restore them

What to click: Changes → Challenge ReviewGuard → Change values, then restore them → Run challenge.

Values change and reopen classification, then the original values are restored. ReviewGuard does not silently reapprove a reopened decision. A human must inspect and save a fresh review. Metadata and unrelated email reviews remain current.

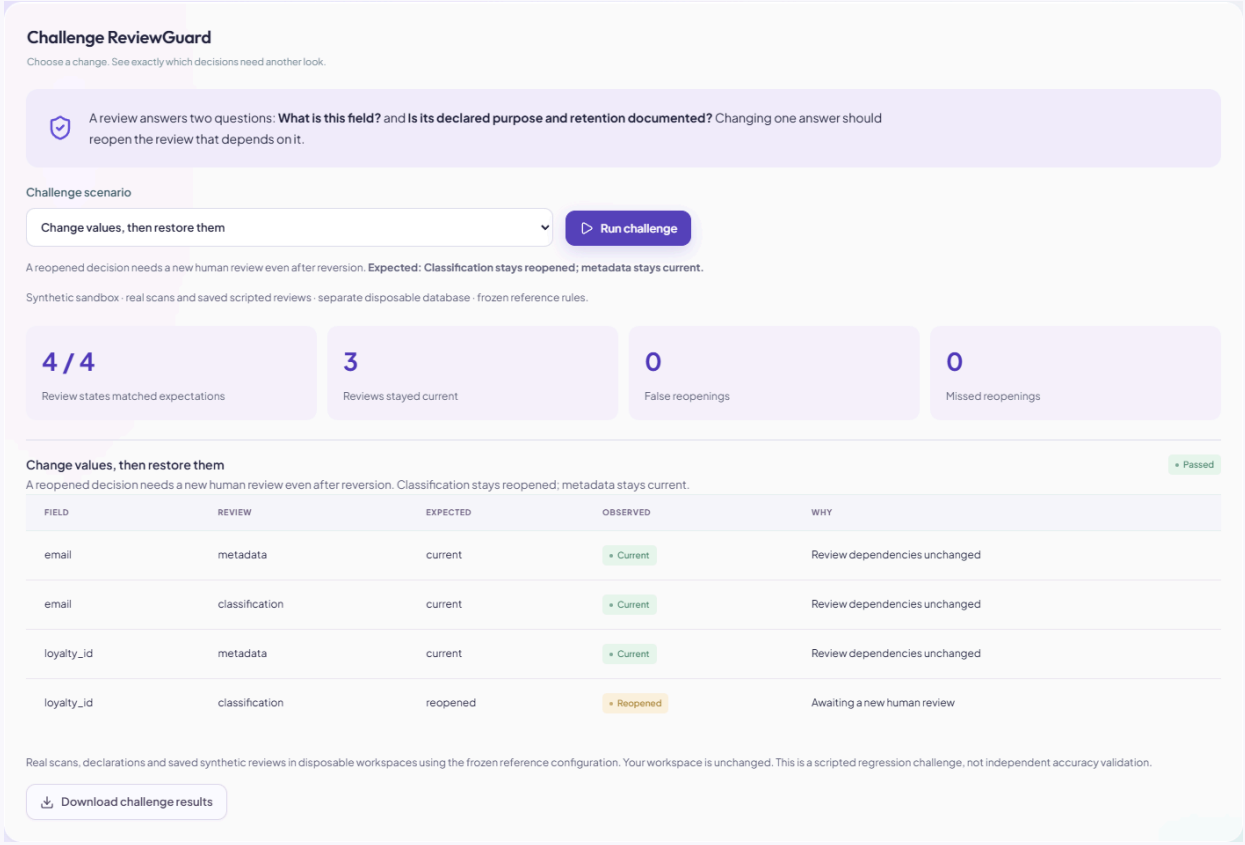

Screenshot 27 · Click the image to enlarge it in the HTML guide.


What happened: 4/4 matched: classification remains reopened after restoration; other reviews current.

B · ALL EIGHT REVIEWGUARD SCENARIOS

28 Stay within the rate tolerance

What to click: Changes → Challenge ReviewGuard → Stay within the rate tolerance → Run challenge.

One of 50 identifiers becomes unrecognised, reducing the match rate from 100% to 98%. There is no new competing candidate, the denominator is sufficient and the rate change stays below the reference tolerance of 10 percentage points.

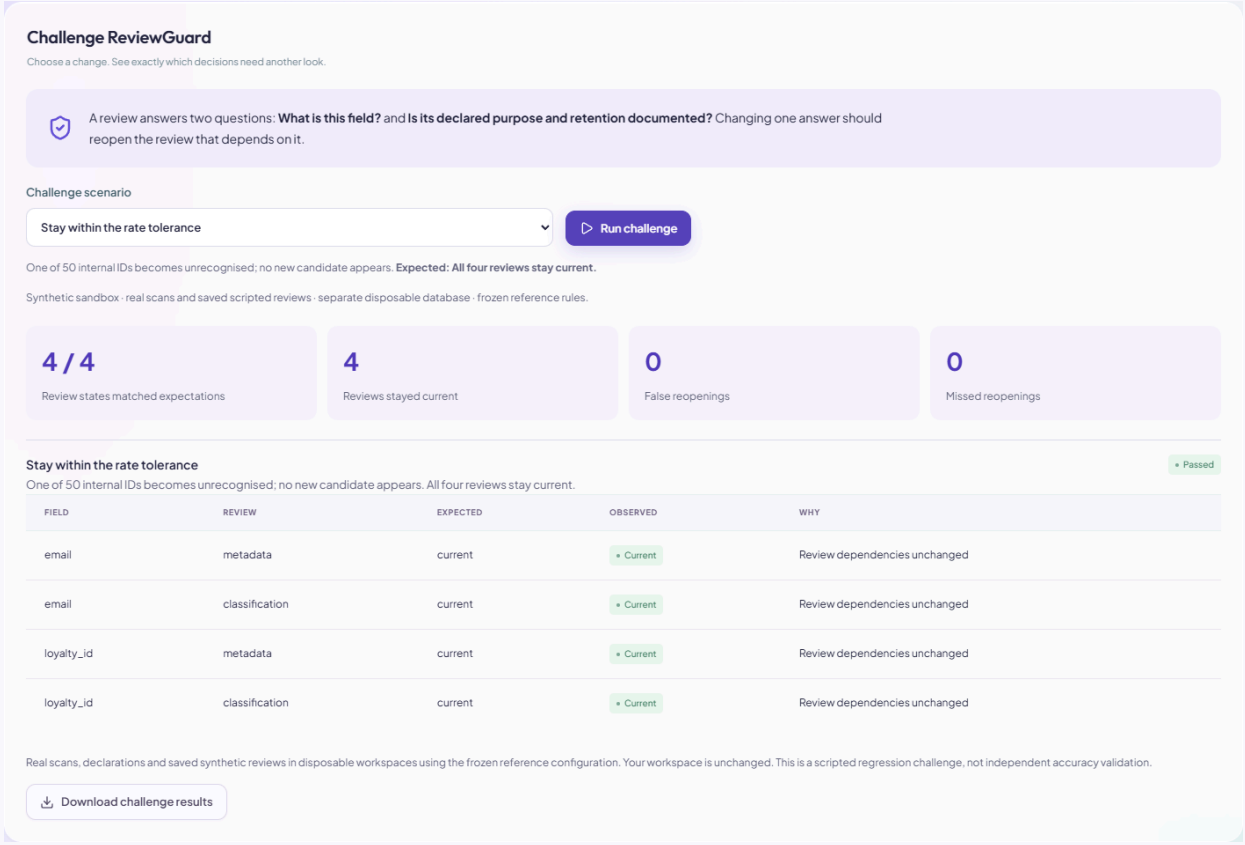

Screenshot 28 · Click the image to enlarge it in the HTML guide.

What happened: 4/4 matched: all reviews remain current. This is a configured tolerance, not a claim that every small change is harmless.


B · ALL EIGHT REVIEWGUARD SCENARIOS

29

Compare the complete challenge results

What to click: Select Run all 8 scenarios → Run challenge.

Each scenario runs real Service scans, declarations and scripted saved reviews inside a disposable workspace. Its fixed reference policy is separate from your workspace configuration. The results are regression checks, not an independent accuracy estimate.

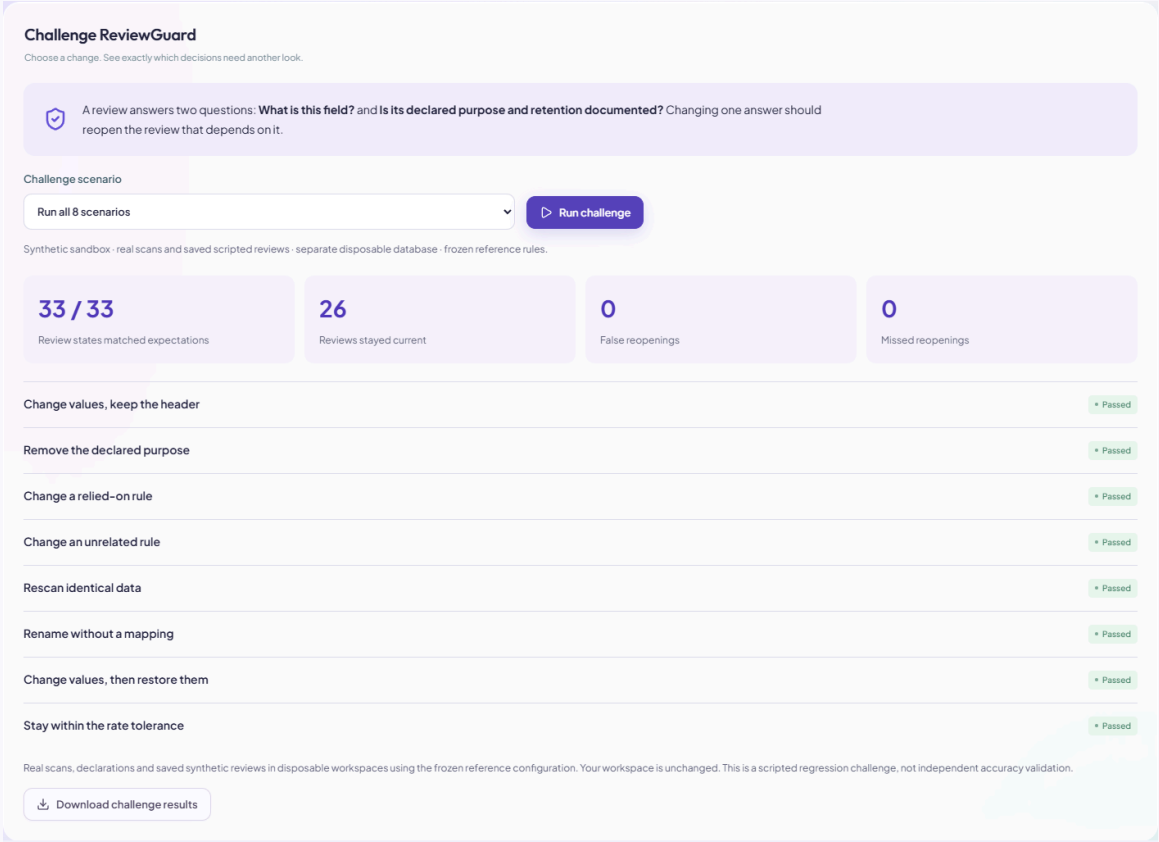

Screenshot 29 · Click the image to enlarge it in the HTML guide.


What happened: Observed: 33/33 states matched, 26 reviews stayed current, 0 false reopenings and 0 missed reopenings.

C · EVALUATION, EXPORTS AND EXTRA CASES

30 Read precision, recall and support

What to click: Results → Measured evaluation → Run evaluation.

Precision asks how many predicted positives were correct. Recall asks how many labelled positives were found. Support is the number of labelled positive fields. The bundled benchmark has just two positive fields per class; perfect scores here do not establish real-world accuracy.

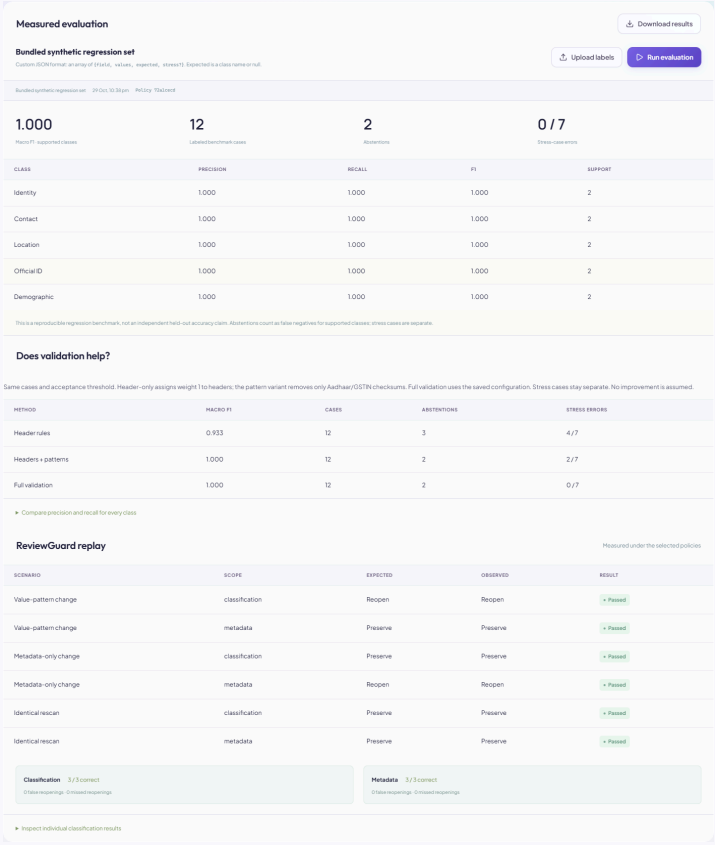

Screenshot 30 · Click the image to enlarge it in the HTML guide.

What happened: Observed: 12 benchmark fields, 7 separate stress fields. This is developer-authored synthetic regression data, not independent human-labelled validation.


C · EVALUATION, EXPORTS AND EXTRA CASES

31

Measure what checksums contribute

What to click: Measured evaluation → Does validation help?.

All variants use the same labelled fields. The header-only baseline assigns weight 1 to headers. The pattern baseline removes Aadhaar/GSTIN checksum checks. Full validation uses the saved configuration. Stress errors reveal differences hidden by the easy benchmark.

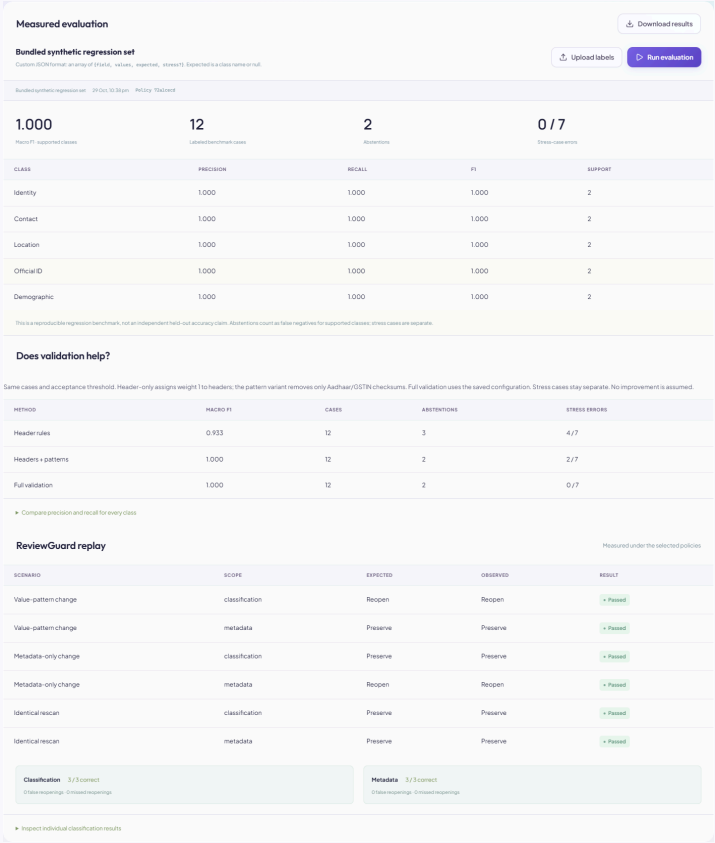

Screenshot 31 · Click the image to enlarge it in the HTML guide.


What happened: Measured stress errors: headers 4/7; headers + patterns 2/7; full validation 0/7. These are results on this small constructed set.

C · EVALUATION, EXPORTS AND EXTRA CASES

32 Download evidence and gap reports

What to click: Results → Exports.

Inventory CSV lists fields and scoped review states. Gaps CSV lists missing requirements. Passport JSON includes snapshots and dependencies. History preserves decisions and transitions. The ZIP combines these with a manifest and standalone verifier; raw source rows are excluded.

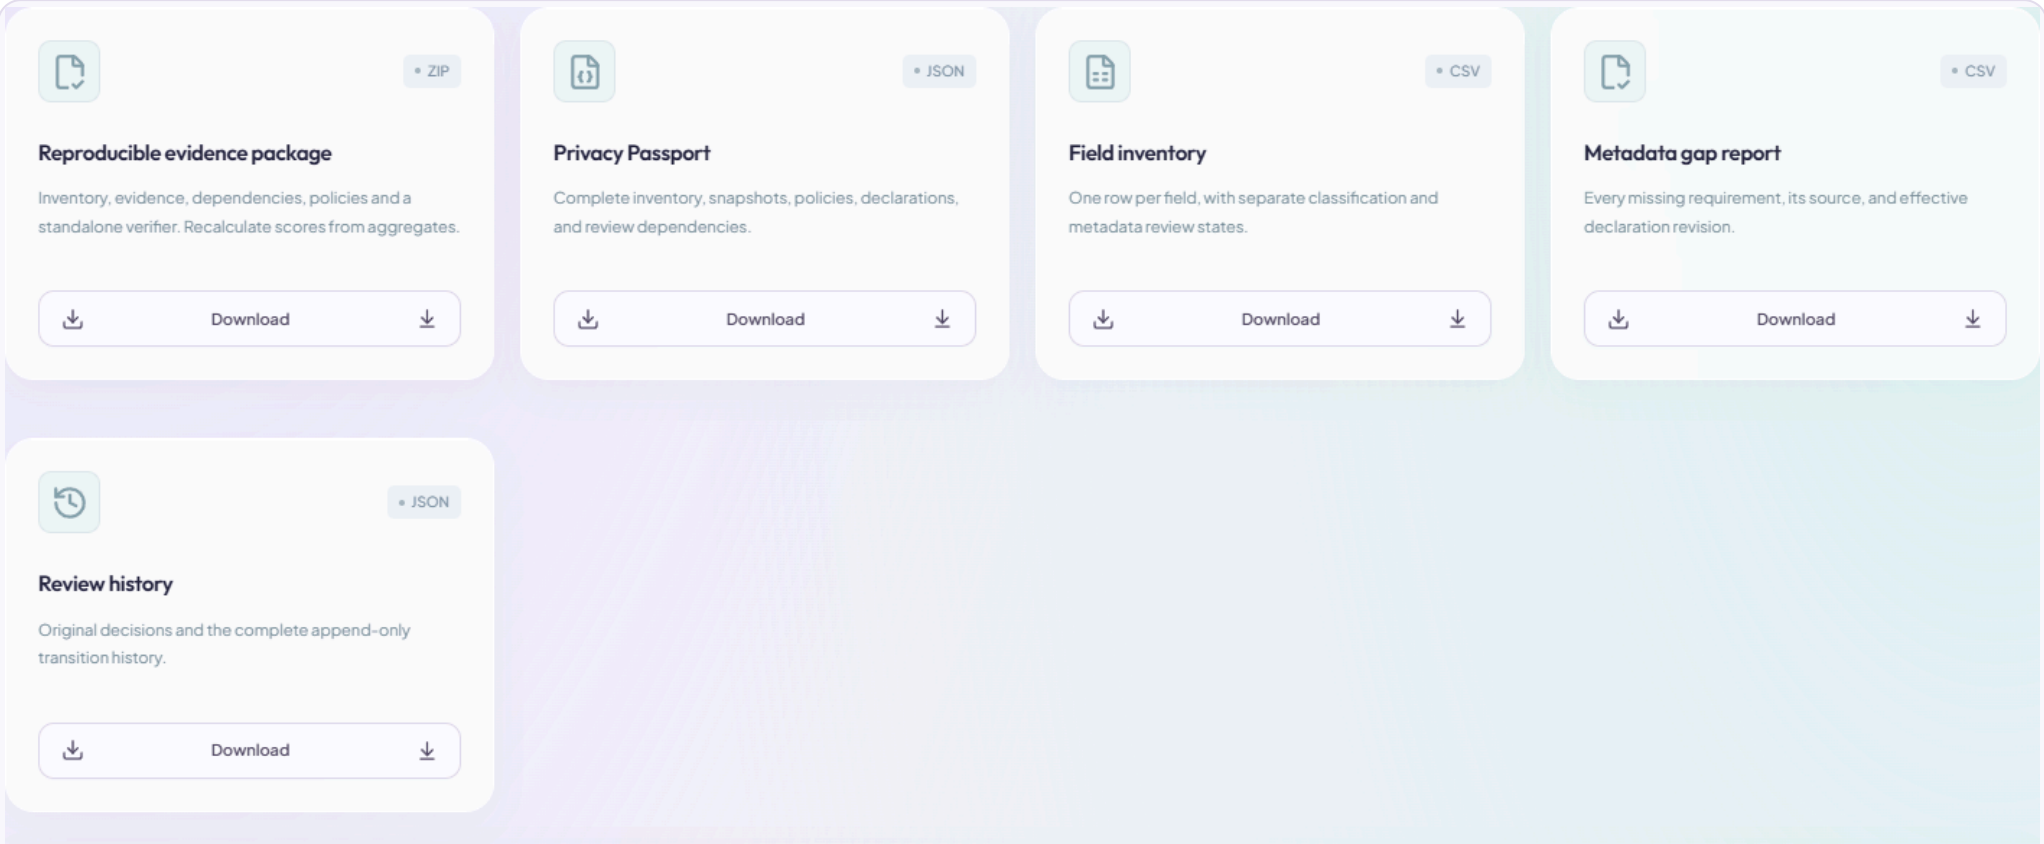

Screenshot 32 · Click the image to enlarge it in the HTML guide.


What happened: These exports reflect the current isolated walkthrough workspace, including the reopened employee_id review.

C · EVALUATION, EXPORTS AND EXTRA CASES

33 Open the final human-review report

What to click: Results → Final report · HTML / PDF → open the downloaded file.

The report contains actual field decisions, gaps, findings and AI provenance when present. Print / Save as PDF exports the report. A reopened review remains visible in the report; export does not approve it.

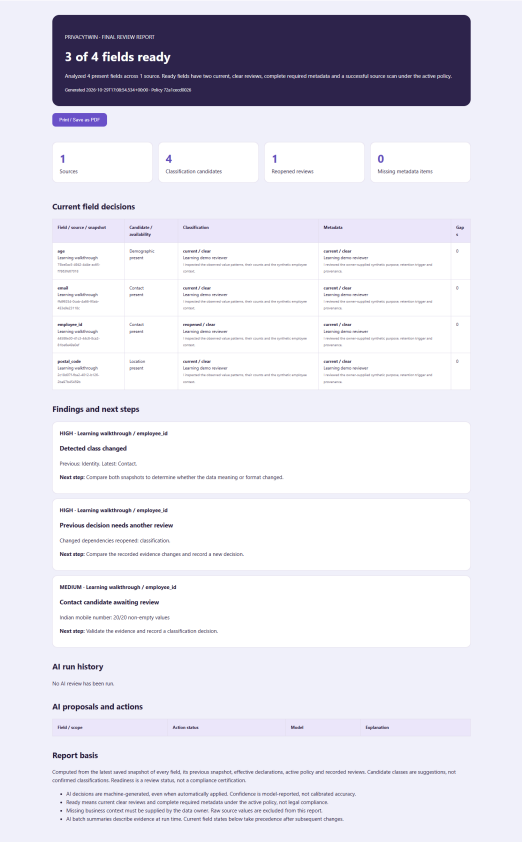

Screenshot 33 · Click the image to enlarge it in the HTML guide.

What happened: The report shows three ready fields and the reopened employee_id classification. No AI review was run.


C · EVALUATION, EXPORTS AND EXTRA CASES

34

Understand optional AI assistance

What to click: Results → AI review controls → inspect review mode, scopes and threshold.

Draft mode creates proposals for acceptance or rejection. Automatic mode can apply locally validated, sufficiently confident proposals while protecting current decisions. Pause, resume and cancel control a run; revoke supersedes an applied AI review. Model confidence is not calibrated accuracy. Missing owner declarations remain gaps.

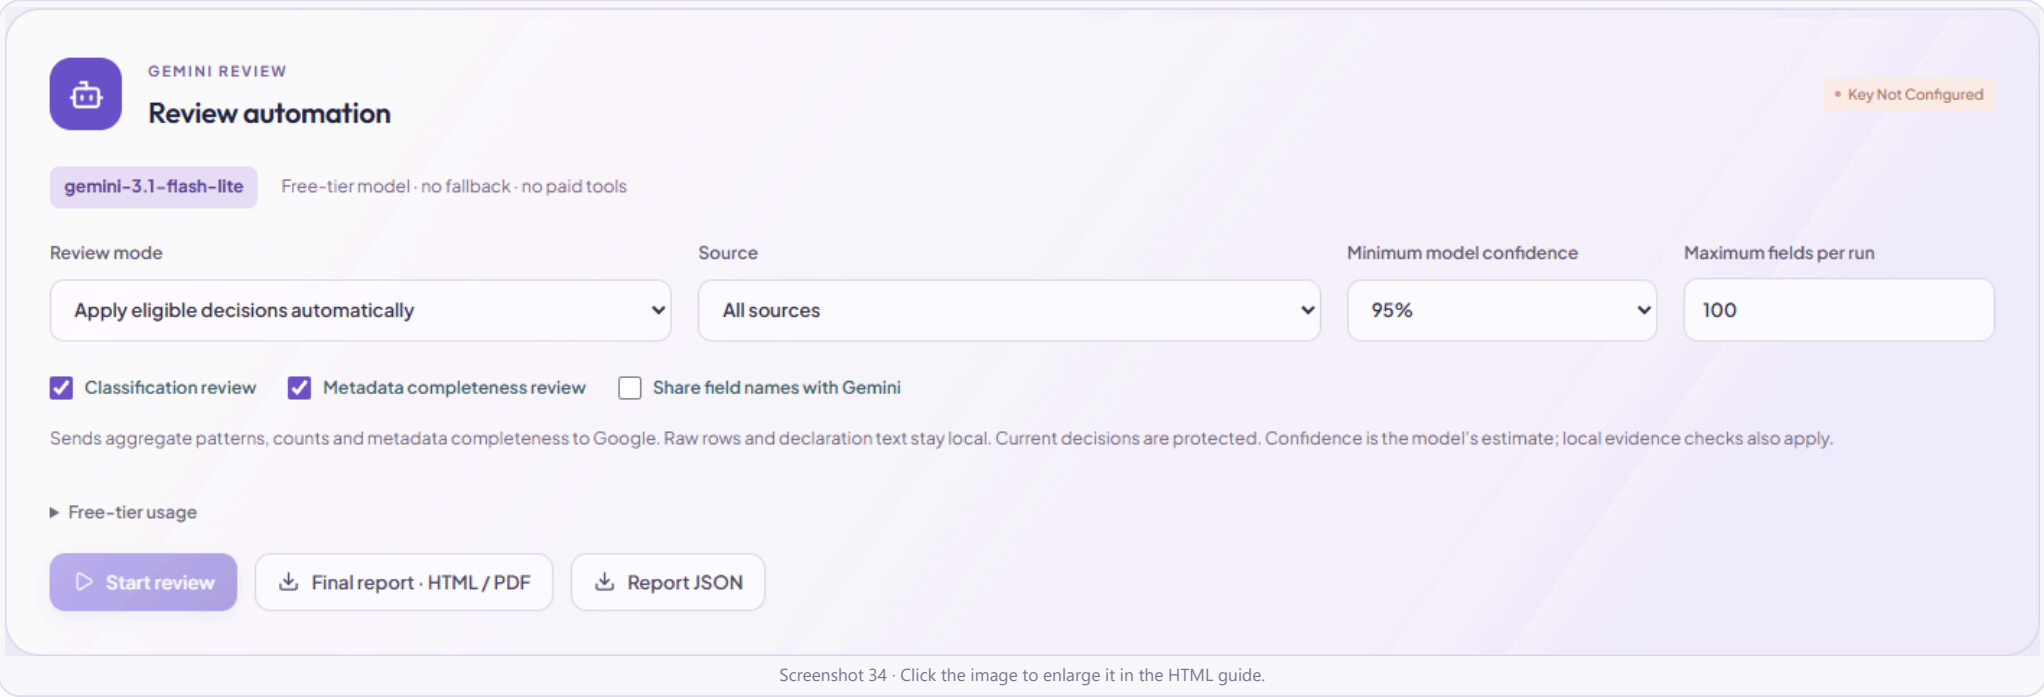

Screenshot 34 · Click the image to enlarge it in the HTML guide.


What happened: This screenshot shows idle controls only. No provider request, quota consumption or AI-generated decision is used in this walkthrough.

C · EVALUATION, EXPORTS AND EXTRA CASES

35 A stale review form cannot overwrite newer evidence

What to click: Open a review form → another scan changes its field → try Save classification review.

Another browser or action may change evidence while you are typing. Revision checks reject a save based on an old snapshot. The rationale is preserved. Reload data, inspect the changes, then explicitly choose Use latest evidence before saving.

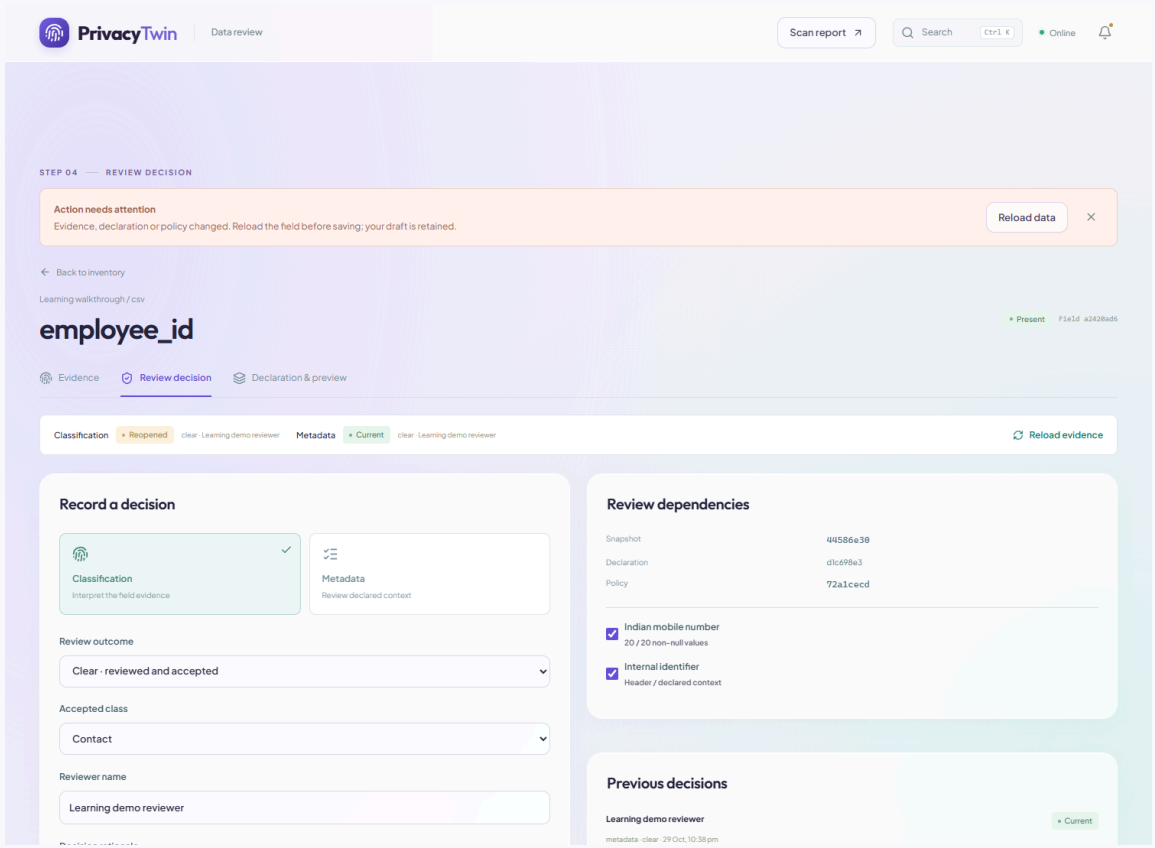

Screenshot 35 · Click the image to enlarge it in the HTML guide.


What happened: Observed: the stale save is rejected; the reviewer's rationale remains in the form.

C · EVALUATION, EXPORTS AND EXTRA CASES

36 A failed scan preserves committed evidence

What to click: Changes → select Learning walkthrough → upload a CSV with duplicate headers → Scan & compare.

Malformed replacement input is rejected instead of replacing the last valid inventory. The source is marked failed, and its prior committed snapshots and reviews remain available. Fix the input and rescan before treating the source as healthy.

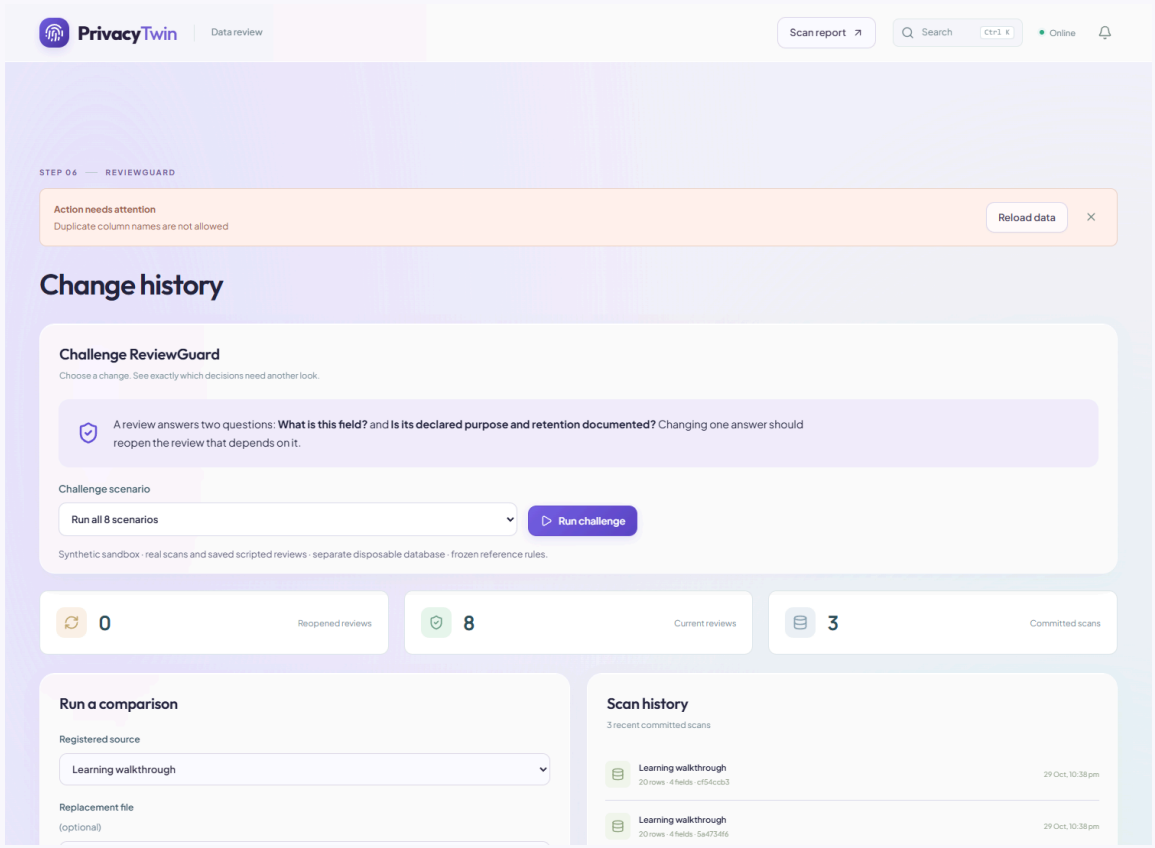

Screenshot 36 · Click the image to enlarge it in the HTML guide.

What happened: Observed: duplicate-header error. The previous four fields are preserved.


C · EVALUATION, EXPORTS AND EXTRA CASES

37

The same scanner also handles SQLite and mixed fields

What to click: Sources → Load synthetic workspace.

The built-in demo adds three generated CSVs and one SQLite database with two tables. They pass through ordinary scanning. This is additional data: the earlier four-field learning source remains, so combined workspace totals increase.

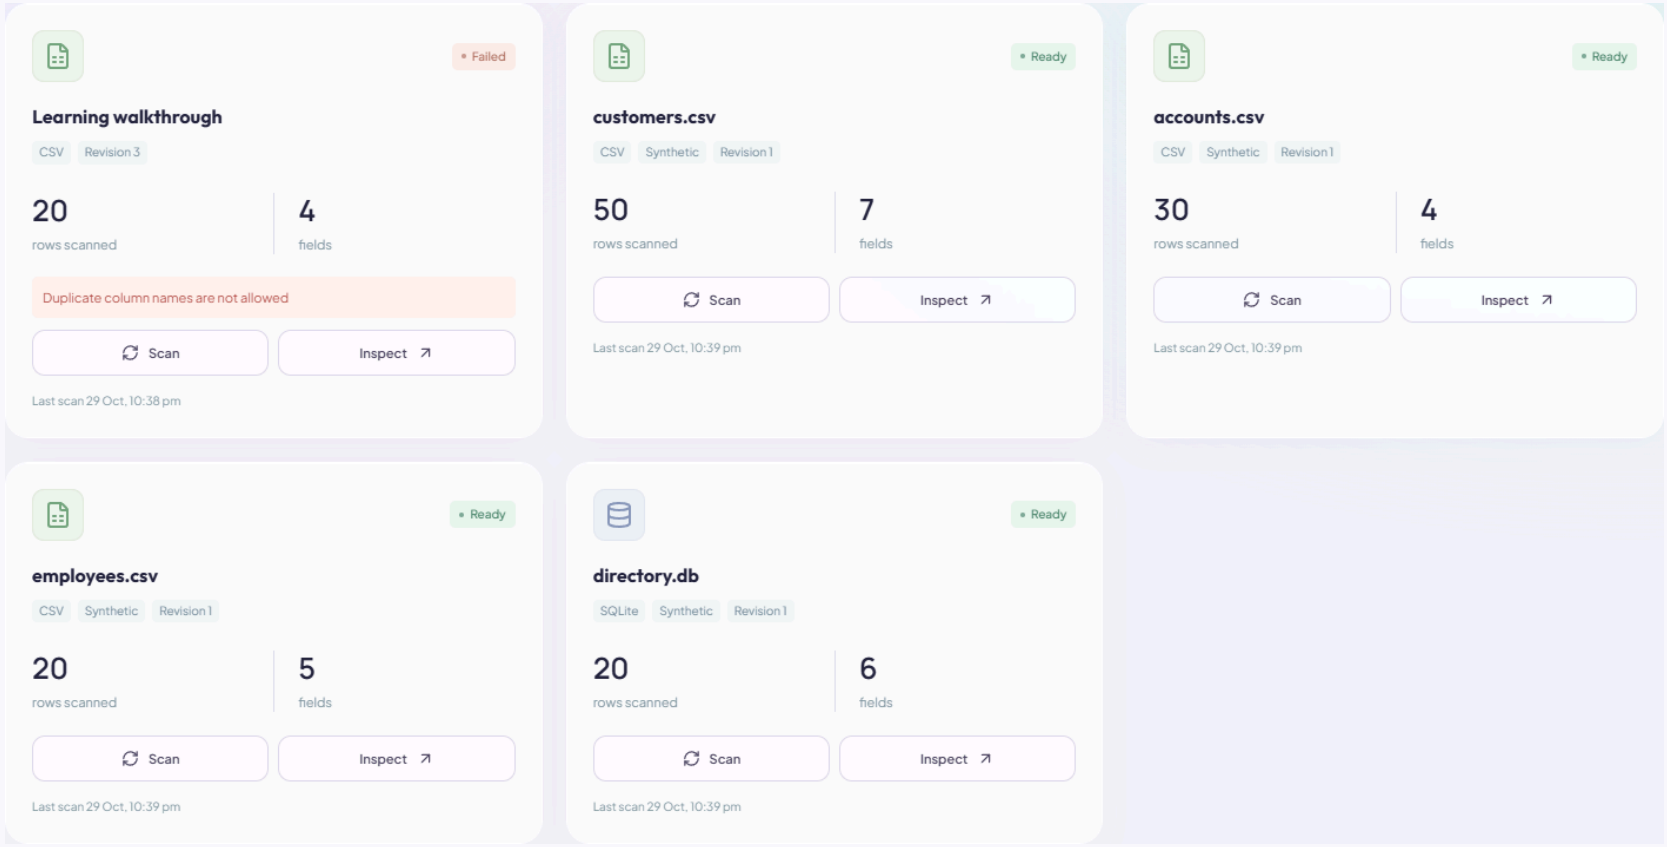

Screenshot 37 · Click the image to enlarge it in the HTML guide.


What happened: The workspace now contains the learning CSV plus four built-in synthetic sources. The SQLite source has contacts and offices tables.

C · EVALUATION, EXPORTS AND EXTRA CASES

38 A single field can contain several value types

What to click: Inventory → customers.csv / contact_value → Evidence.

A column does not always contain one uniform type. Here email and mobile detectors both contribute to the Contact class. The evidence retains their separate counts, while grouped scoring caps correlated evidence instead of adding every rule as independent support.

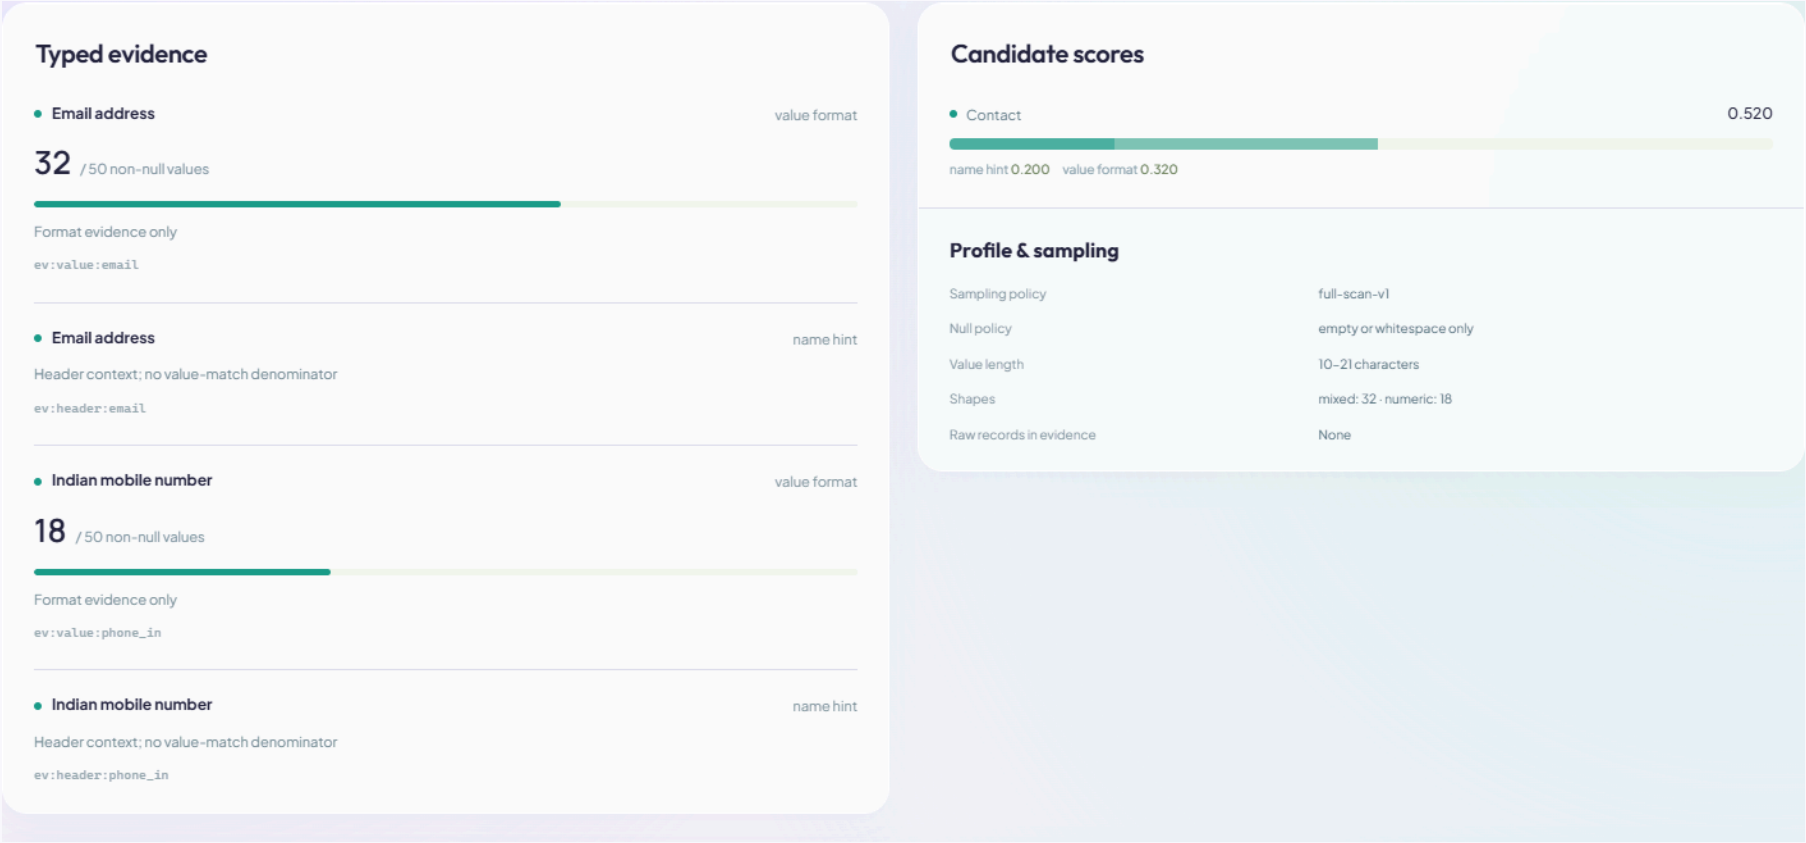

Screenshot 38 · Click the image to enlarge it in the HTML guide.

What happened: Measured on this synthetic source: 32/50 email matches and 18/50 mobile matches.


C · EVALUATION, EXPORTS AND EXTRA CASES

39

A checksum is stronger evidence than shape alone

What to click: customers.csv / ref_no → What supports this finding? → uncheck Checksum validation → Compare evidence.

A twelve-digit shape alone can create false positives. This synthetic field has 50 shape matches, of which 40 pass the configured Verhoeff check. Removing validation increases its evidence score. A checksum pass still does not prove issuance or identify a person.

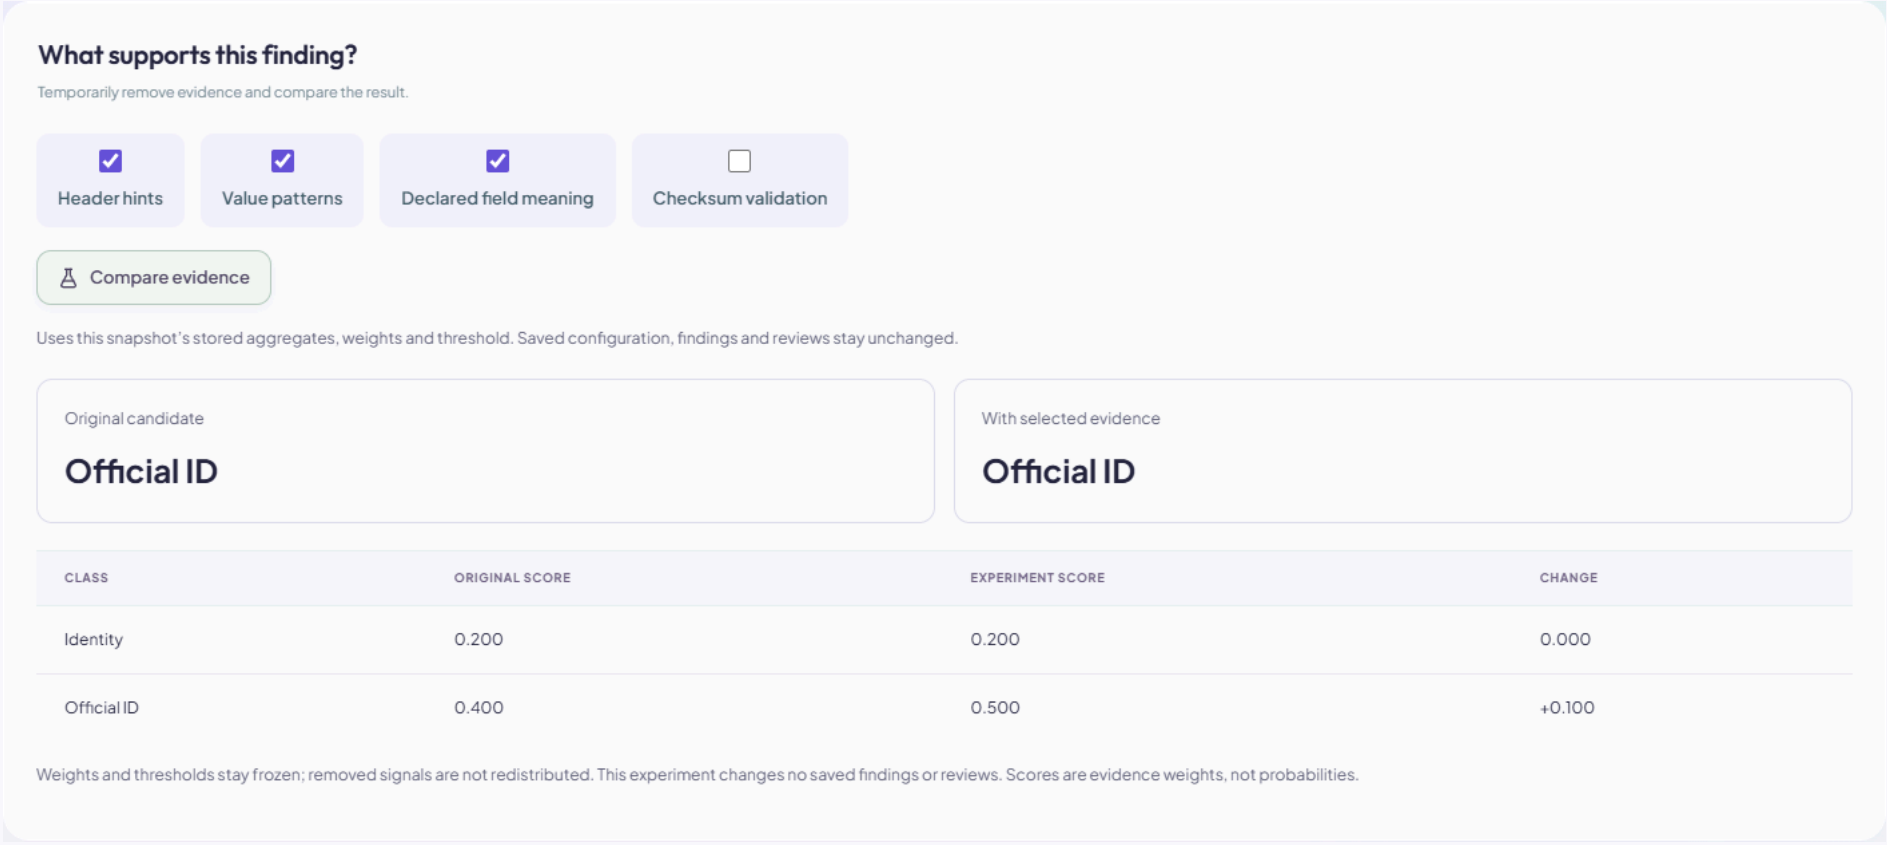

Screenshot 39 · Click the image to enlarge it in the HTML guide.


What happened: Official ID score 0.400 with checksum evidence → 0.500 using format matches alone.

C · EVALUATION, EXPORTS AND EXTRA CASES

40 An unknown pattern stays unknown

What to click: Upload codes.csv with ZX:1234 and ZX:5678 → Inventory → code.

The reference registry does not know this synthetic customer-code convention. The scanner leaves it without a suggested class. An owner or reviewer must supply context rather than treating every unfamiliar code as personal data.

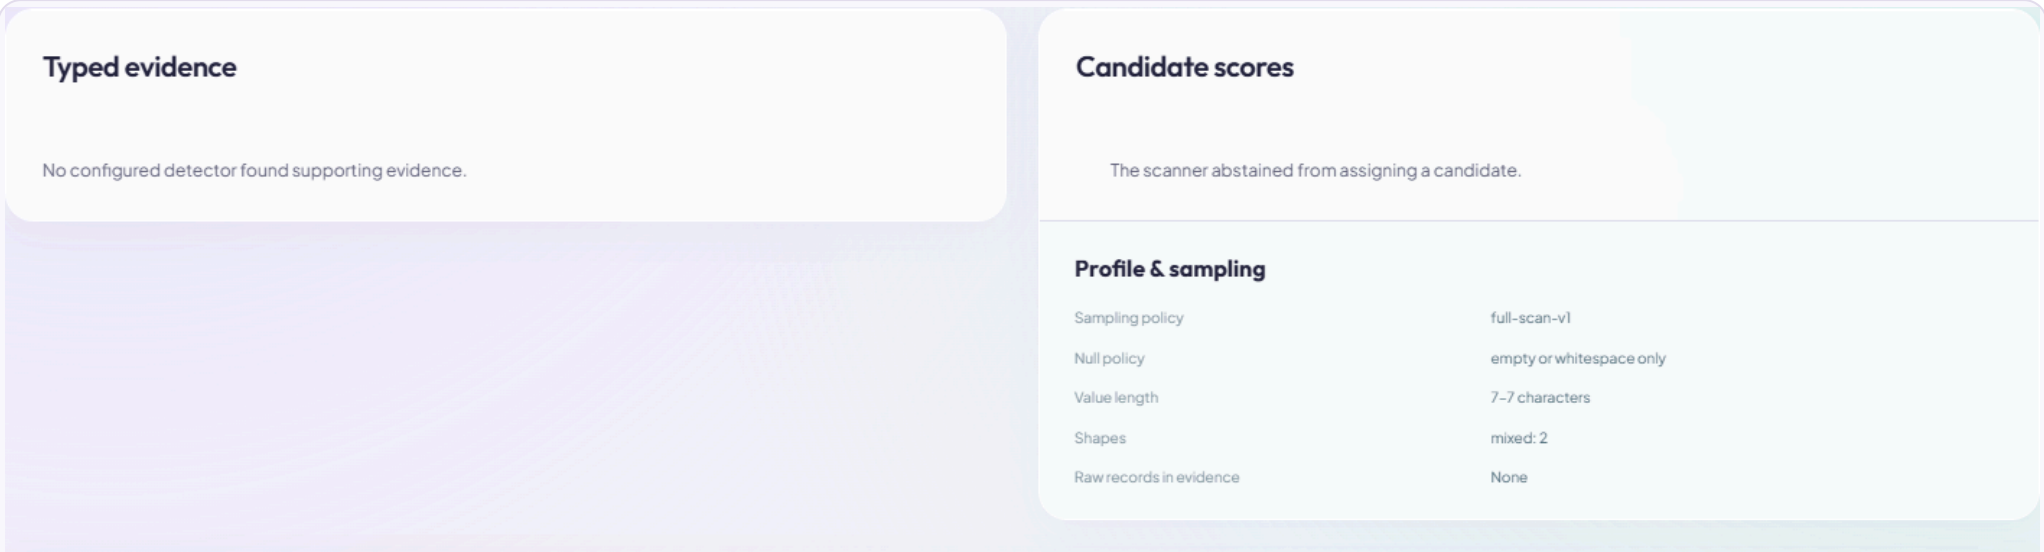

Screenshot 40 · Click the image to enlarge it in the HTML guide.


What happened: Before adding a rule: no supported candidate.

C · EVALUATION, EXPORTS AND EXTRA CASES

41 Add a domain-specific rule

What to click: Configuration → Add rule → set Identity, pattern ZX:[0-9]{4}, header code.

Rules describe the organisation's declared conventions. Full-value matching prevents a substring from accidentally matching. Saving a rule versions the policy; existing sources must be rescanned before new findings can be reviewed under it.

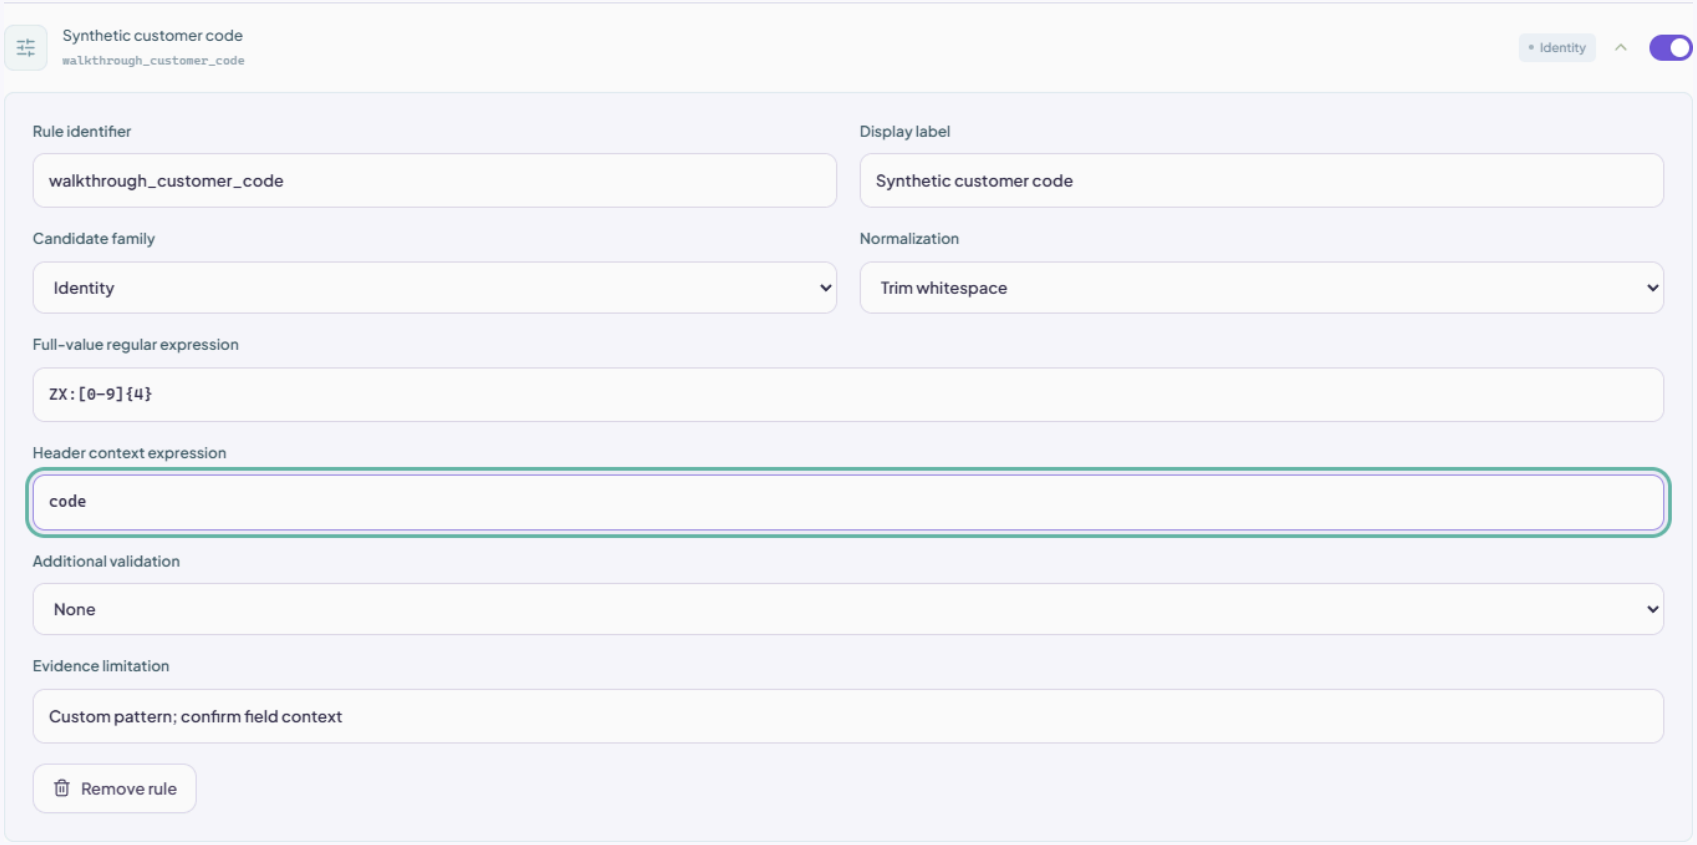


Screenshot 41 · Click the image to enlarge it in the HTML guide.

What happened: The synthetic custom rule is prepared in the editor; it has not yet changed scan results.

42 A rescan applies the saved rule

What to click: Save configuration → Sources → Custom codes / Scan → Inventory → code.

The rescan now observes two value matches and the supporting header. The field becomes an Identity candidate under the explicit synthetic rule. It still needs a human review and declared purpose/retention; a detector match is not an approval.

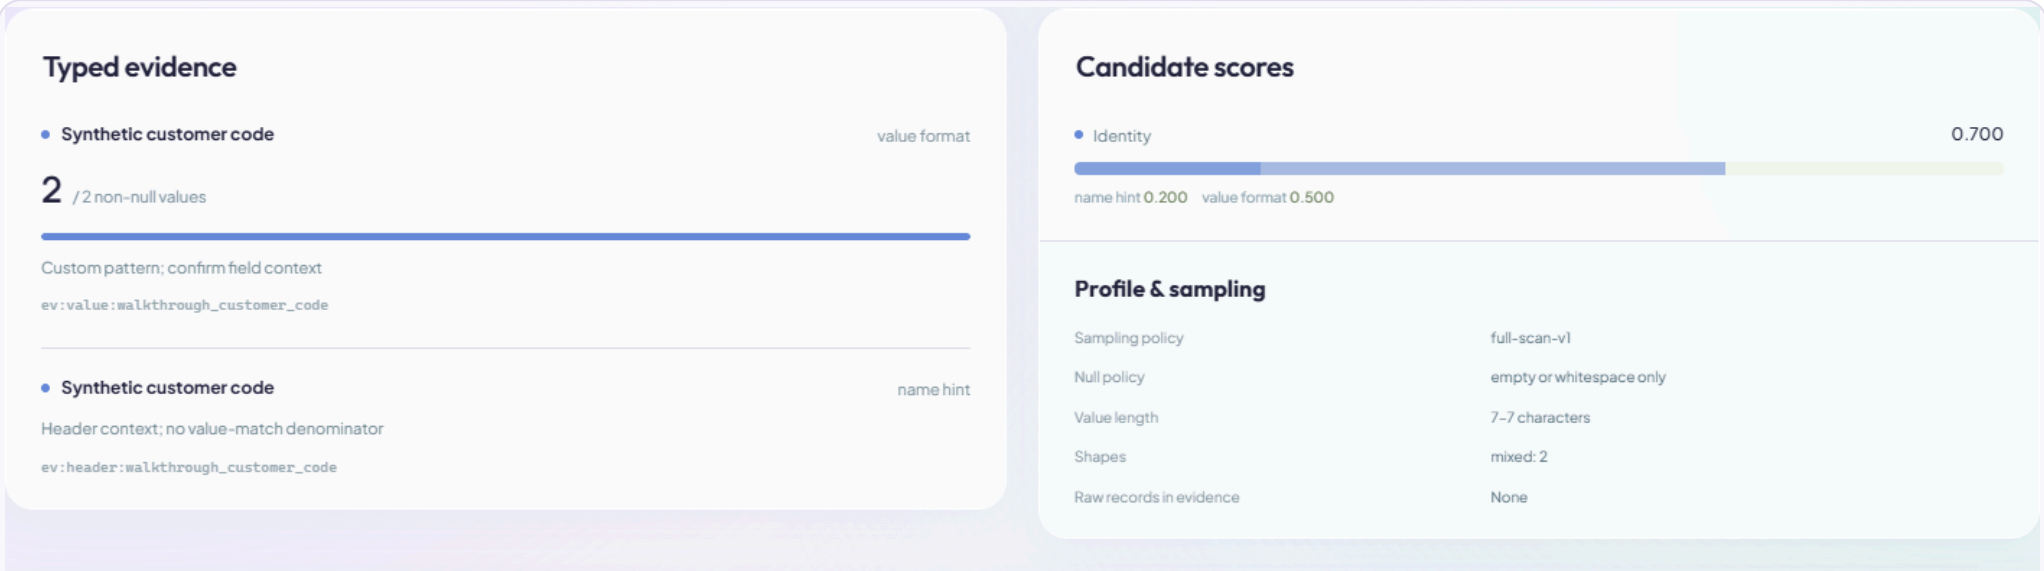

Screenshot 42 · Click the image to enlarge it in the HTML guide.

What happened: After the saved rule and rescan: Identity candidate, 2/2 matches, score 0.700.

How to explain it in one minute

“First we upload a file or database. PrivacyTwin inspects each field and shows evidence for candidate classes. A human reviews the classification and the owner's declared metadata separately. We preview missing documentation before saving. When the data or rules change, ReviewGuard compares the new dependencies with the original decision. It reopens affected reviews, gives a reason and preserves unrelated decisions. We export the inventory, gaps and original evidence so the result can be inspected later.”

> For submission, independently human-labelled evaluation and the organizer's report/repository requirements still matter. Perfect scores on the small bundled synthetic set do not establish general accuracy. Complete metadata is technical documentation, not a legal determination.