

A Distributed System Case Study: Apache Kafka

High throughput messaging for diverse consumers

Why Look at Kafka?

- You can use Kafka to build sophisticated, log-centric distributed systems
 - LinkedIn does this at a huge scale
- You can examine how Kafka works to understand how to build distributed systems generally
 - Choices, tradeoffs, strategies, design patterns

Log-Centric Architecture

“The Log: What every software engineer should know about real-time data's unifying abstraction”, Jay Kreps,
<https://engineering.linkedin.com/distributed-systems/log-what-every-software-engineer-should-know-about-real-time-datas-unifying>

Logs and State Machines: Example 1



- Think about how you do database backup and restore
 - Every time you do a Create, Update, or Delete, you change the DB state
 - You need to store both the data and all the operations that got you to the current state.
 - You can use this information to completely replicate the state of the DB on another server if you have a crash

Logs and State Machines: Example 2

- Think about Git
 - Git stores all the commits as diffs from the previous commit.
 - You can restore any previous state of the code base
- These are examples of Event Sourcing
 - <https://martinfowler.com/eaaDev/EventSourcing.html>

We'll apply these concepts to distributed systems

Three
microservices,
replicated

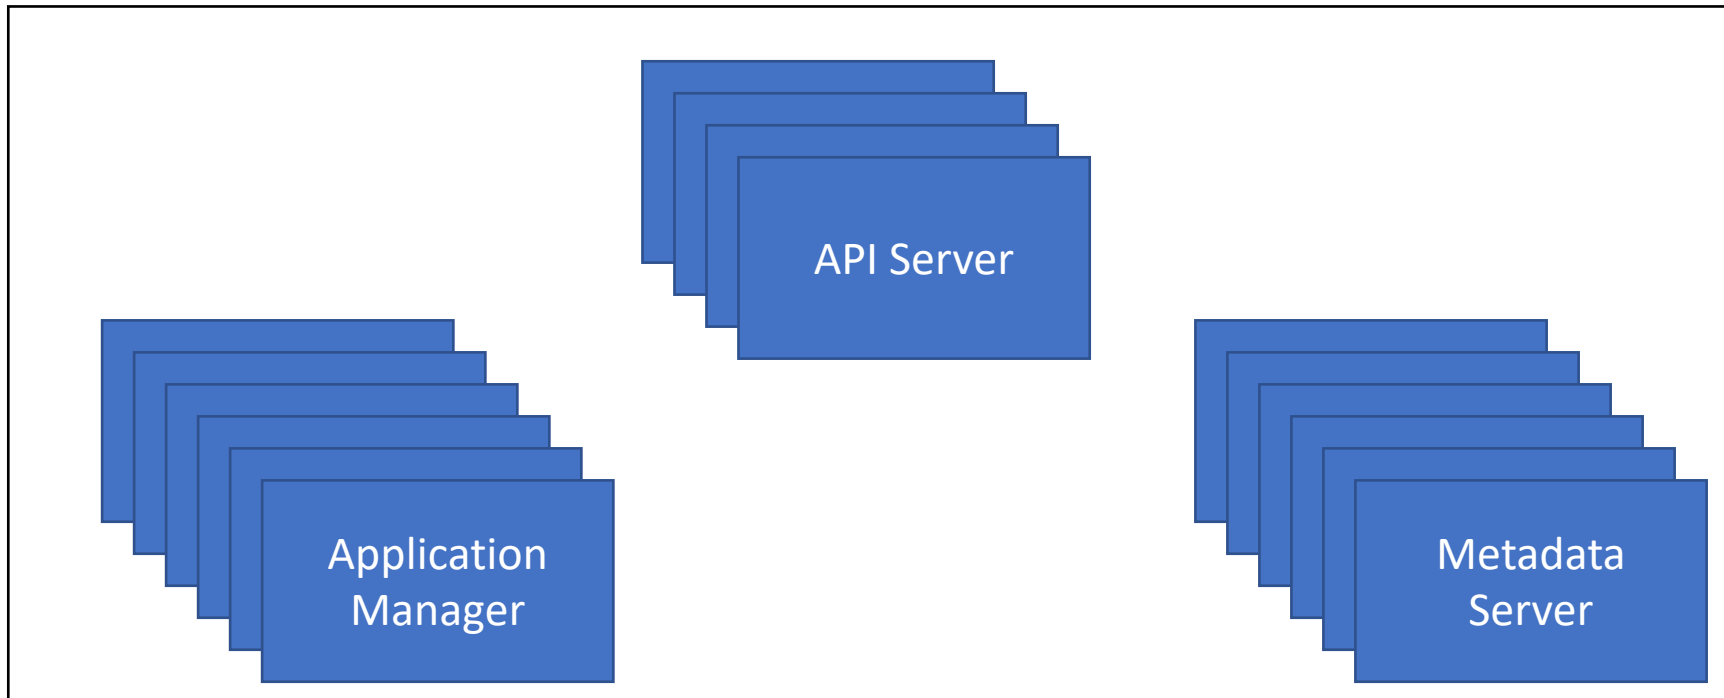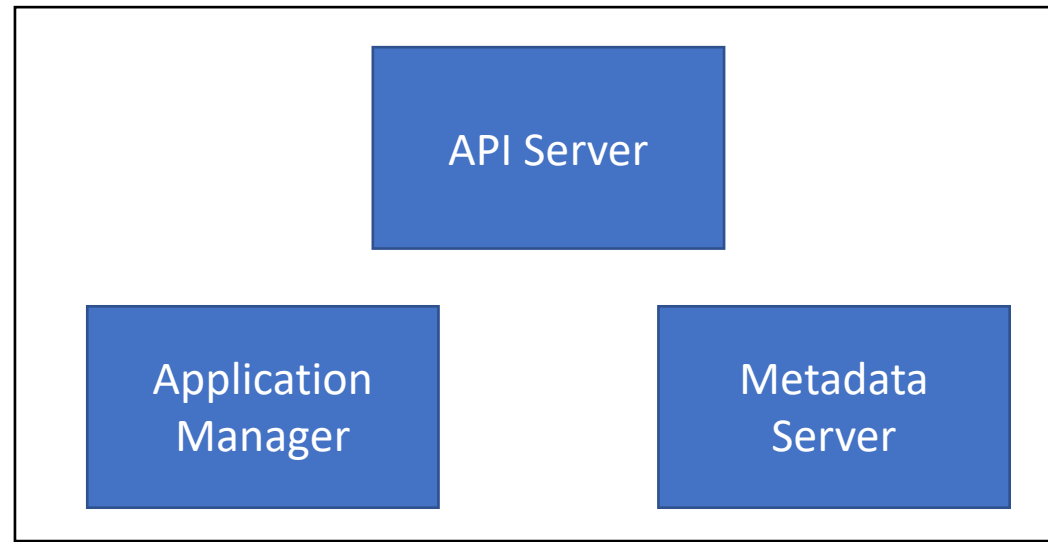

Messaging and Microservices

- Messaging systems are a good way to deliver messages to service replicas.
 - Each replica of a service gets a message
- Topics are a good way to associate message types with different service groupings.
 - Application manager and metadata manager
- If you aren't already using a messaging approach, you'll have to invent one to manage message distributions to your replicas.
 - **Don't invent when you can use someone else's solution**
 - Especially if that solution is used to run multi-billion dollar companies.
 - We've covered how to do this with RabbitMQ
 - In this lecture, we'll look at an alternative approach with Apache Kafka.


Lecture Sources

- Kreps, J., Narkhede, N. and Rao, J., 2011, June. Kafka: A distributed messaging system for log processing. In *Proceedings of the NetDB* (pp. 1-7).
- Wang, G., Koshy, J., Subramanian, S., Paramasivam, K., Zadeh, M., Narkhede, N., Rao, J., Kreps, J. and Stein, J., 2015. Building a replicated logging system with Apache Kafka. *Proceedings of the VLDB Endowment*, 8(12), pp.1654-1655.
- <https://kafka.apache.org/documentation/>
- <https://sookocheff.com/post/kafka/kafka-in-a-nutshell/>

RabbitMQ versus Apache Kafka



OR

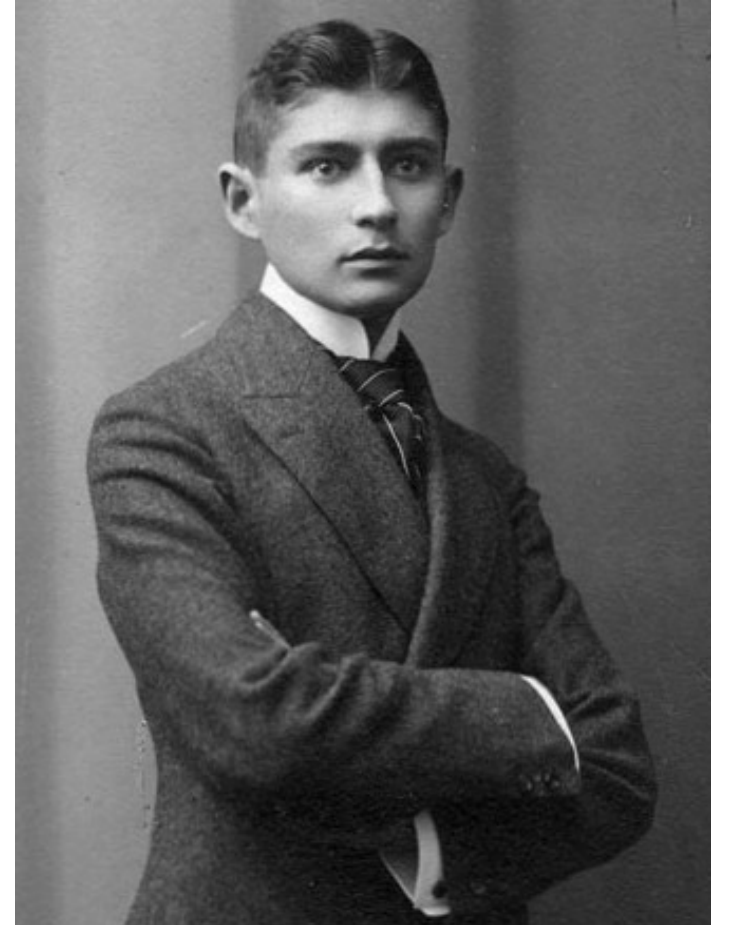


Push



VS

Pull



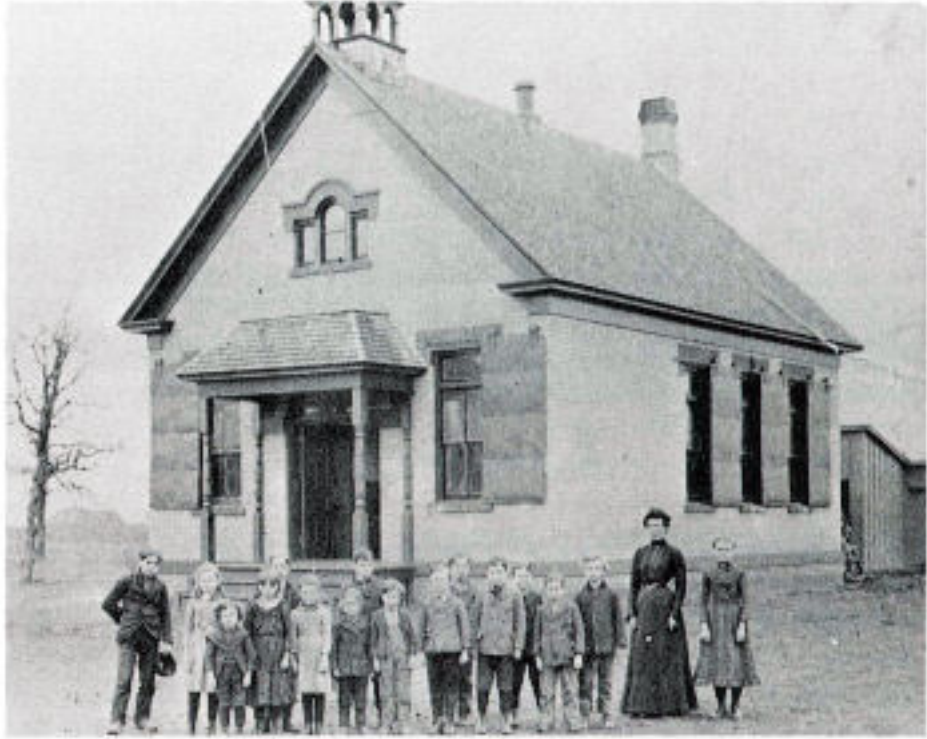

VS



Traditional
Enterprise
Systems

Data-
Centric
Businesses




LinkedIn's Requirements

- LinkedIn needs to push billions of messages per day to a wide variety of consumers
- Real-time processing applied to activity streams
 - Keep people engaged with the site through social network-supplied content.
- Asynchronous processing
 - Find people I may want to connect to
 - Find topics that may be interesting to me
 - Identify advertisements that I may be interested in
- System logs: Identify problems with operations
- And they needed a way to recover a large-scale infrastructure in case of catastrophic failures.

Consequences of Use Case Requirements

- Consumers must decide when to pull the data
 - Fast or slow, small or large
- This means that the messaging system needs to store a lot of data (TBs)
 - This is not what traditional message systems are designed to do.
 - Kafka will need an efficient way to find the requested message
- Virtue from Necessity: support message rewind and replay
 - This is not a normal operation for a queue, which removes messages after they are delivered.
 - **Treat the accumulated, ordered messages as input for a state machine**

Kafka decouples data-pipelines

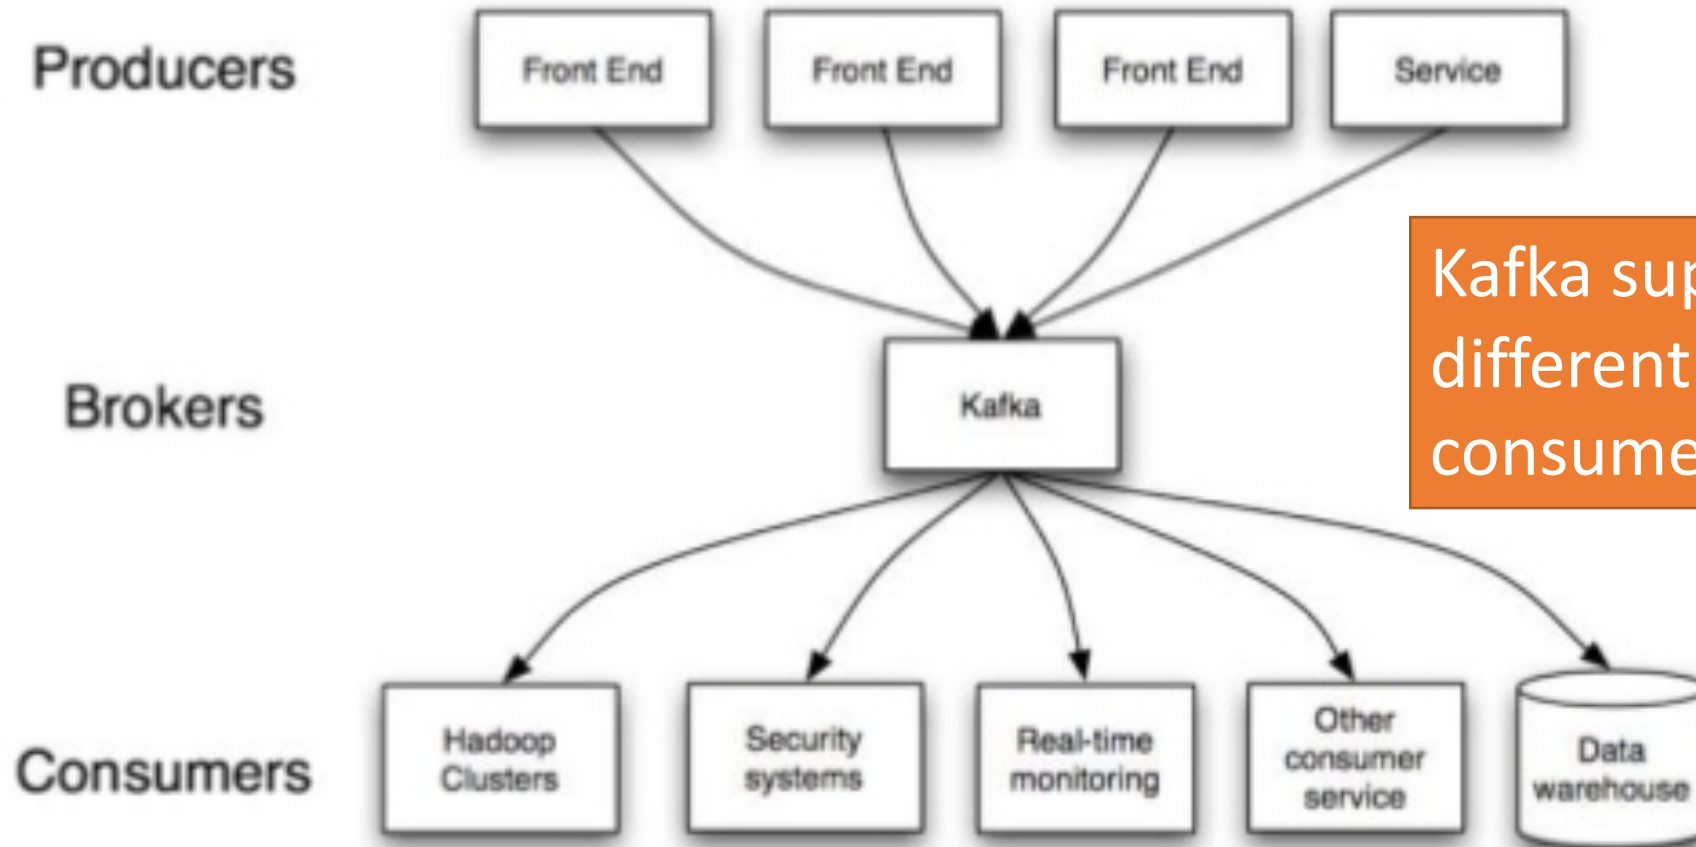

Kafka	Traditional Messaging: AMQP
Brokers are stateless. This makes broker distribution simpler. State management is done by producers and consumers.	Brokers are state-full. This makes broker distribution more difficult since load balancing and fault recovery are harder.
Messages can be delivered in batches	Messages are individually delivered
"At least once" delivery	"Exactly once" delivery
Eventual consistency model for messages partitioned across one broker	Strong consistency between brokers in a distributed system
Optimized for highly variable latency, large message throughput: streaming data, logs to late night batch pulls	Optimized for low latency delivery of smaller messages
Assumes replay of messages	Replay is an add-on

Apache Kafka resembles in some ways the REST architecture (idempotency)

Apache Kafka and Related Work

- Apache Kafka is a hybrid of a log aggregator and a messaging system
- Messaging systems
 - Usually assume low latency of delivery. Messages are delivered quickly
 - This doesn't work for batch systems
 - Have complicated delivery guarantees that aren't needed for real-time data
 - Are not designed for high throughput techniques such as message batching
 - Weakly designed as distributed systems: consistency rather than availability (CAP)
- Distributed Log Aggregators (Scribe, Flume, Hedwig)
 - Are only for server logs
 - Only support push model: producer sets the rate
 - Kafka use case: pull model lets consumers set the rate, support rewind

Apache Kafka Terminology: Topic-Based Publish-Subscribe



Component	Description
Topic	The label for a stream of messages of a particular type. Kafka further divides topics into partitions.
Producer	An entity that publishes to a topic by sending messages to a broker
Broker	An entity on a network that receives, stores, and routes messages.
Consumer	An entity that subscribes to one or more topics. Kafka generalizes this to Consumer Groups

Kafka Brokers

Connecting message producers to consumers

Kafka Uses Clusters of Brokers


- Kafka is run as a cluster of brokers on one or more servers.

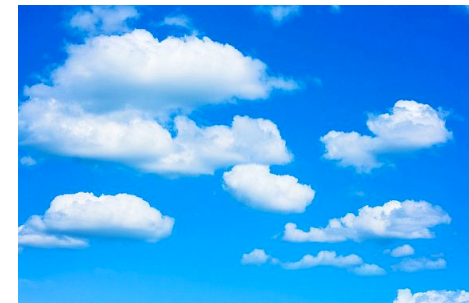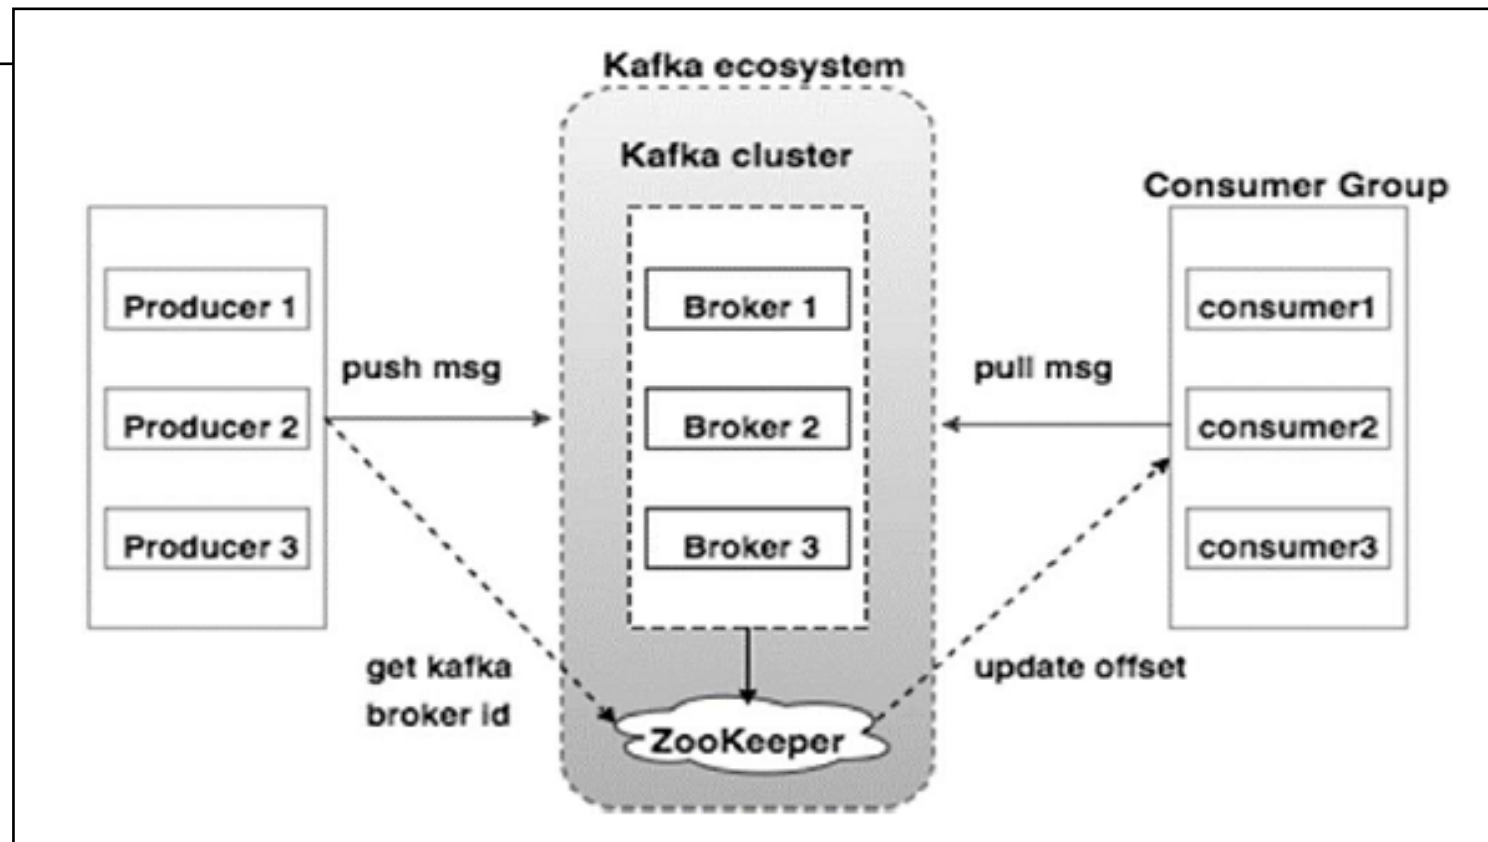

Kafka uses Zookeeper to manage state of clients and leadership of brokers.

Distributed Brokers

- Kafka brokers are designed to be distributed
 - Multiple brokers
 - Messages to each topic are stored in partitions
 - Partitions are allocated across brokers
- Partitions are stored as multiple segment files on a specific broker.

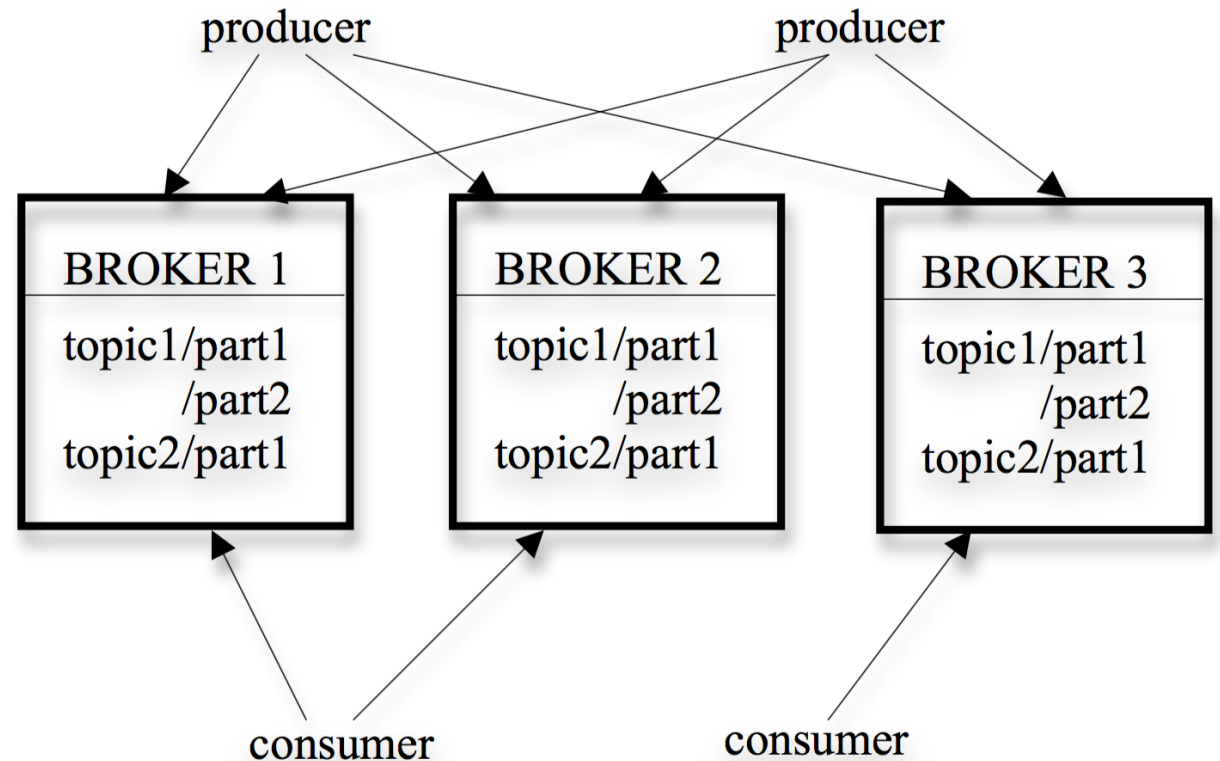


Topics and Partitions

Topics are broken up into **partitions** that span multiple brokers

Kafka Partitions

- Kafka topics are divided into *partitions*.
- Partitions parallelize topics by splitting the data across multiple brokers
- Each partition can be placed on a separate machine
 - Allows multiple consumers to read from a topic in parallel.
 - Topic content size can be larger than physical storage on any one broker
- Consumers can also be parallelized to read from multiple partitions using consumer groups

Anatomy of a Topic

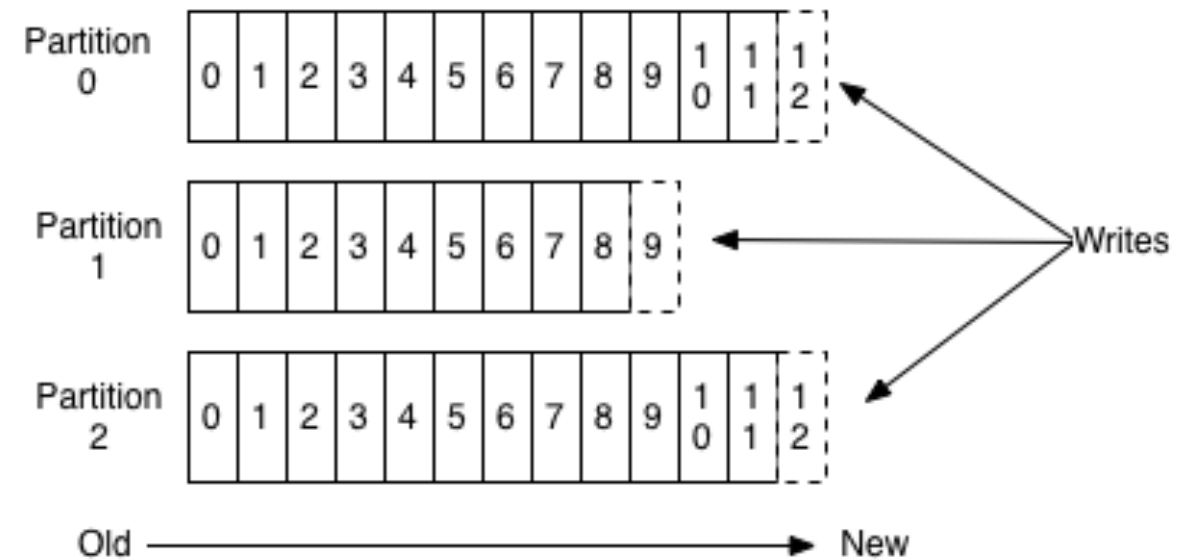


Kafka guarantees all messages in a partition are time-ordered, but it does not guarantee order across partitions. Choose partitioning strategies accordingly.

Aside: Write-Ahead Logging

- “Kafka acts as a kind of write-ahead log that records messages to a persistent store and allows subscribers to read and apply these changes to their own stores in a system appropriate time-frame.”
 - Goodhope et al
- Write-Ahead Logging: this is a technique of writing your file first and then having your broker read the file.
 - This is the reverse of the way logging normally works
 - Why? If the broker needs to be restarted, it reads its log to recover its state.
 - The way a broker works in recovery mode is the same as the way it works ordinarily.
- Kafka uses the file system
 - Linux file systems already have many sophisticated features for balancing in-memory versus on-disk files

Kafka Partitions Are Replicated

Leader (red) and replicas (blue)

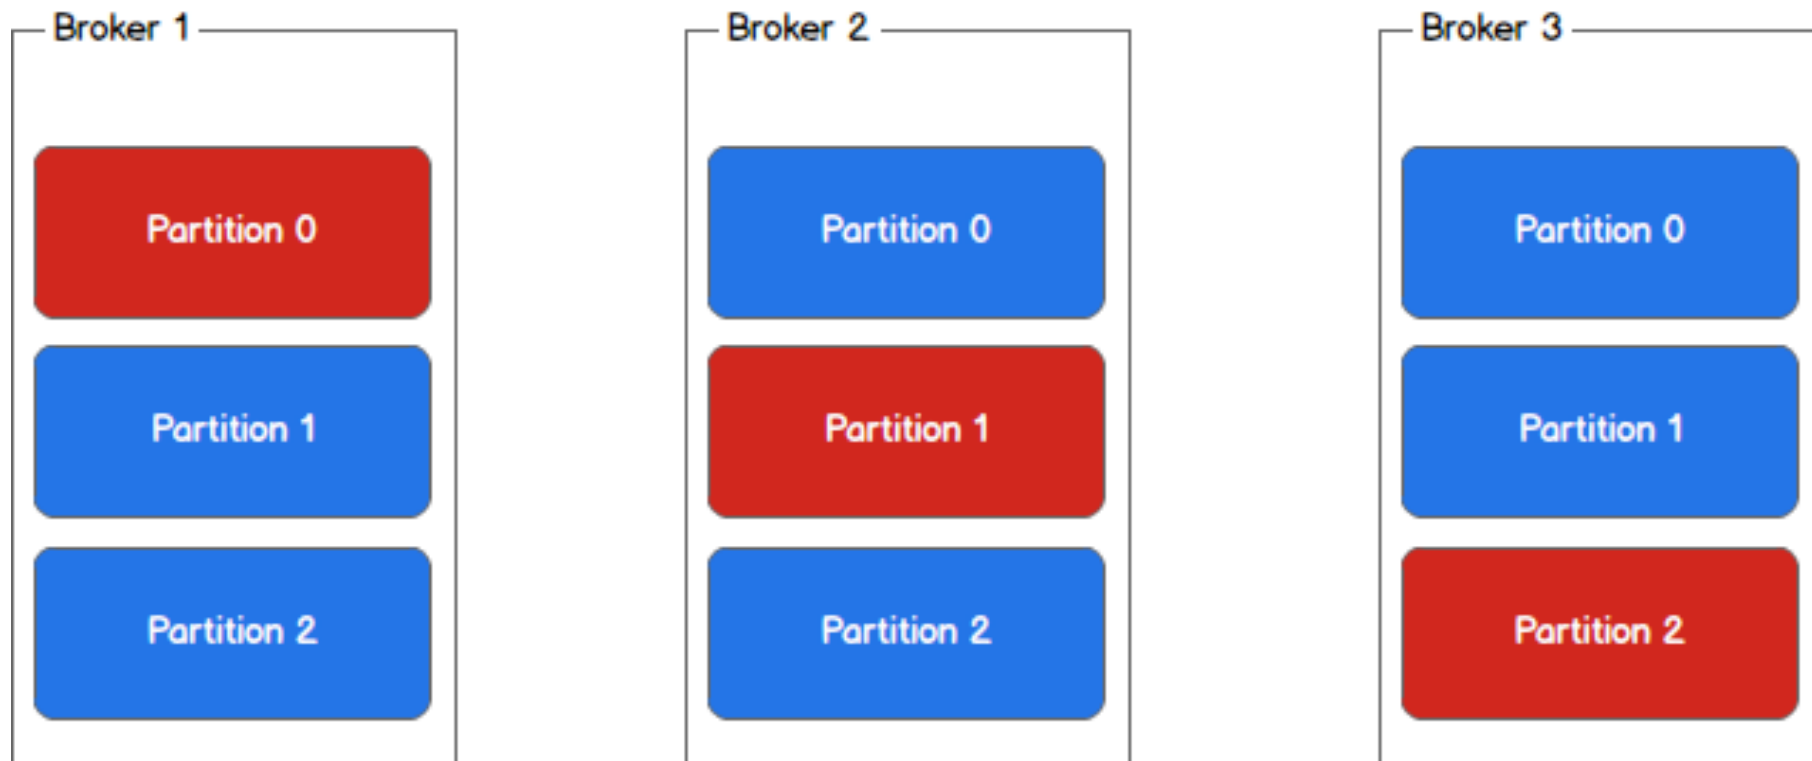


If a leader for a partition replica fails, a follower becomes the new leader

Producers

Kafka Producers

- Producers publish data to the topics of their choice.
- The producer is responsible for choosing which record to assign to which partition within the topic.
- This can be done in a round-robin fashion simply to balance load
 - Other distribution strategies can be used.
- Producers write to the partition's leader.
 - The broker acting as lead for that partition replicates it to other brokers

Leader (red) and replicas (blue)

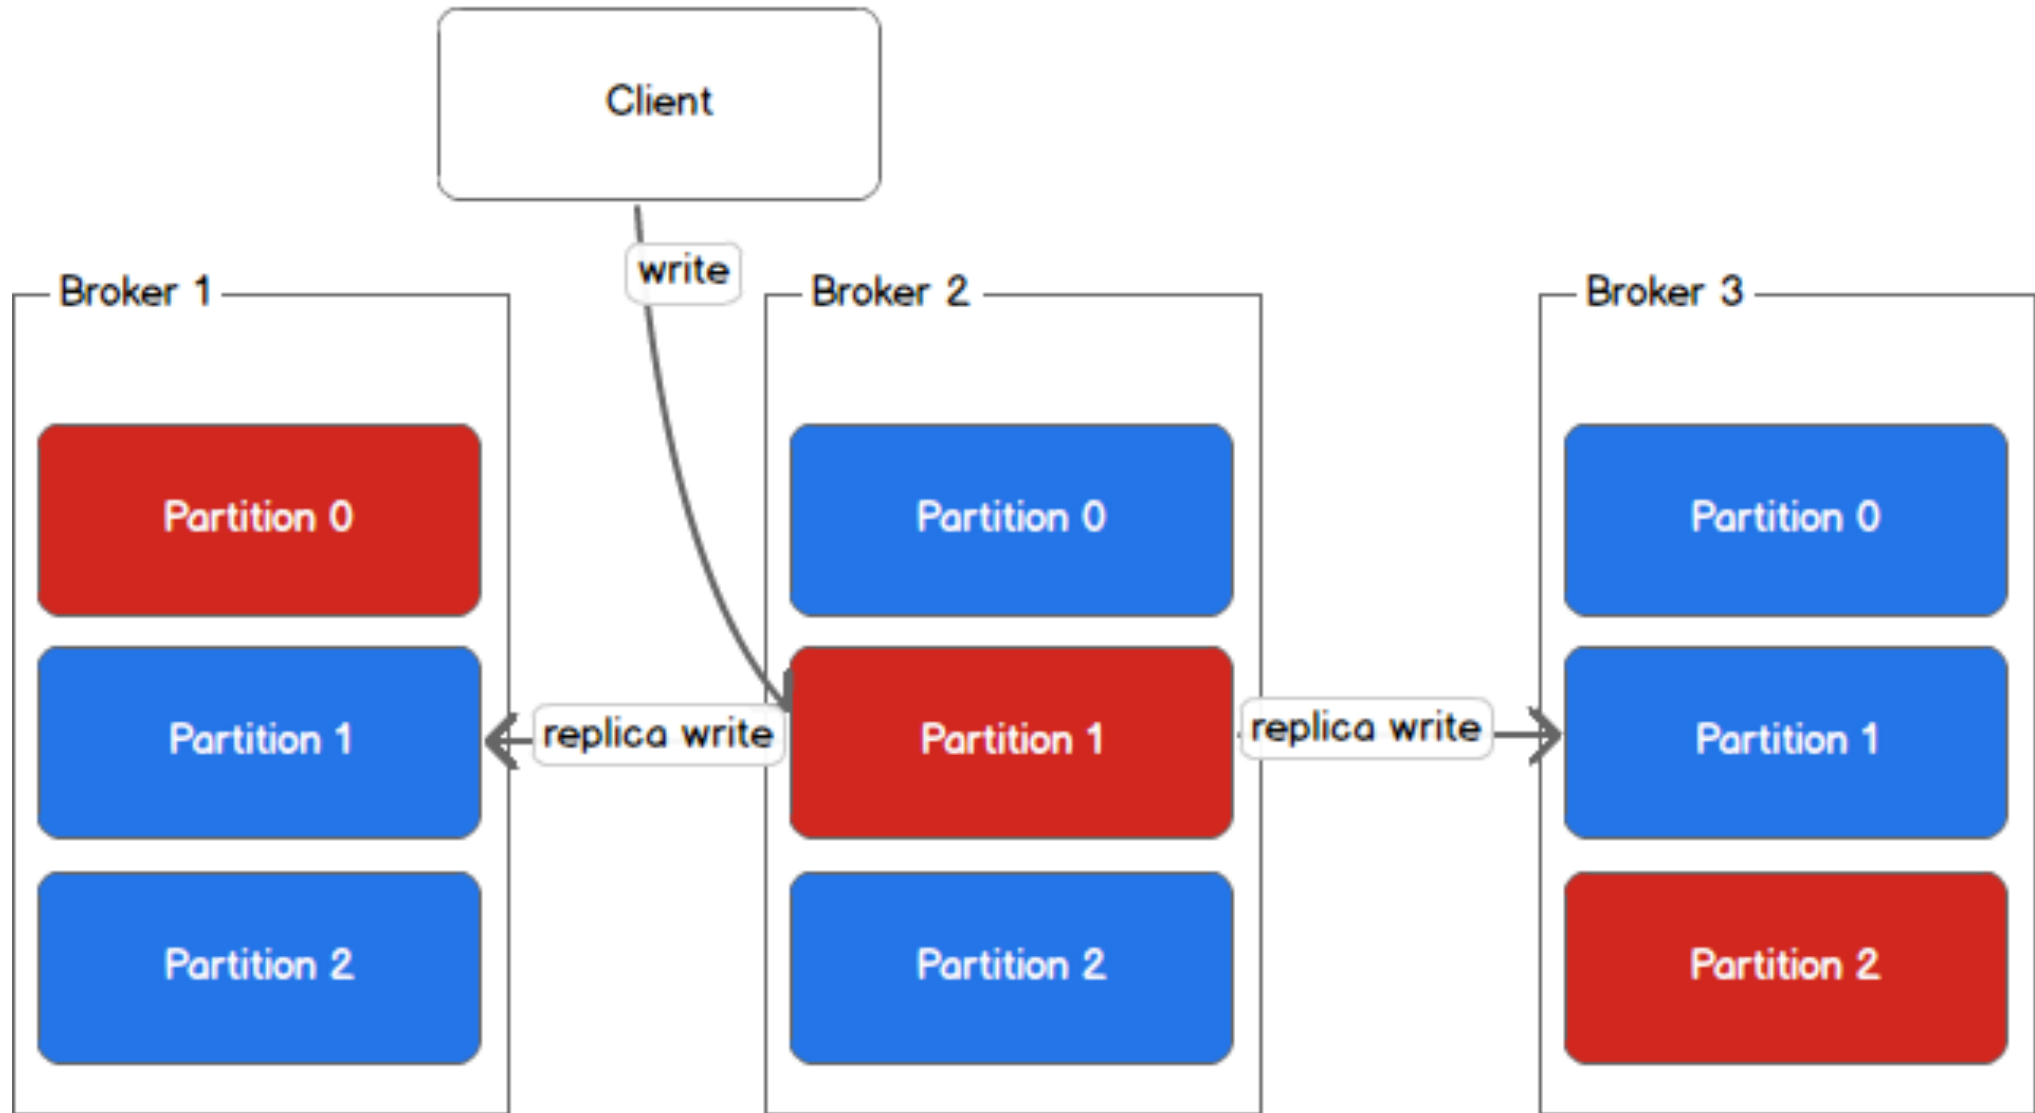

A producer writes to Partition 1 of a topic. Broker 2 is the leader. It writes replicas to Brokers 1 and 3


Consumer Groups

Kafka Consumer Groups

- Consumer groups contain one or more consumers of a given topic.
 - Many consumer groups can subscribe to the same topic.
 - A consumer group is whatever is useful for a given consuming application
- Only one member of a consumer group consumes the messages in a partition
 - Avoid locking and other state management issues
 - You can make a work queue with a consumer group
- Kafka wants to divide messages stored on brokers evenly among consumers for load balancing
 - But keep it simple, avoid complicated coordination.

Consumers and Consumer Groups

- Kafka lets you collect consumers into consumer groups
- In a group, each consumer instance is associated with a specific partition.
- Collectively, a group receives all messages on a topic.
- If the group expands or contracts, Kafka will rebalance.

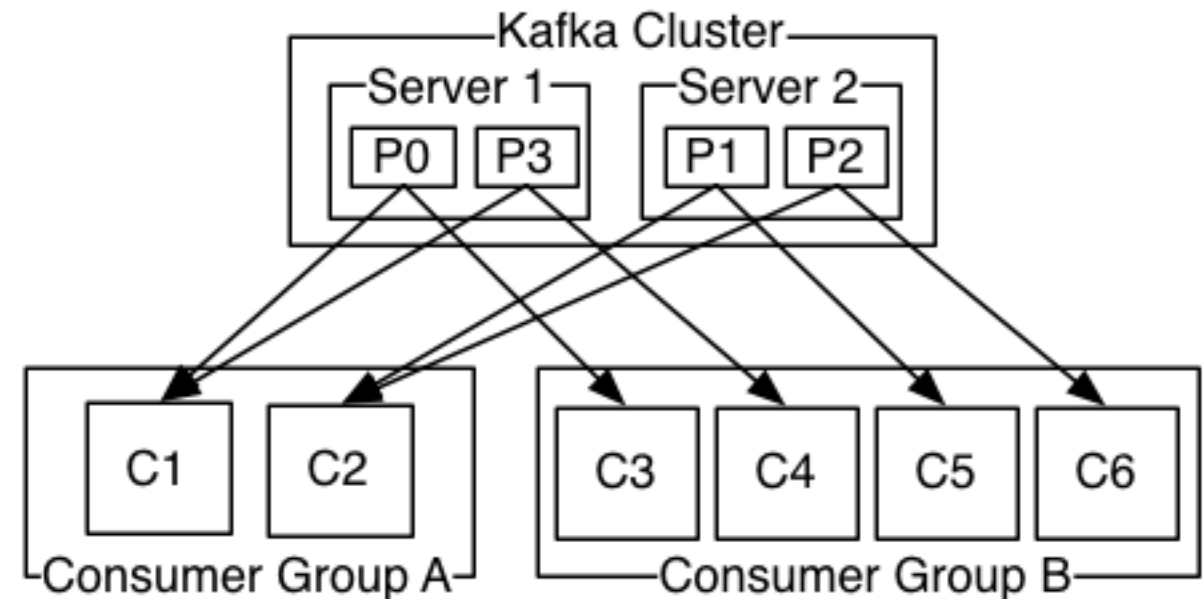

Consumer groups resemble queues

Consumer Group Scenarios

- Consumer Load Balancing: All consumers are in one group
 - Consumer Group B, previous slide
- Broadcast: each consumer is its own group
 - Each consumer receives messages from all partitions
- Partition Load Balancing: $N(\text{Partitions}) > N(\text{Consumers in Group})$
 - Consumer Group A, previous slide
 - But messages between partitions may not be ordered
- Consumer ordering: $N(\text{Partitions}) == N(\text{Consumers in a Group})$
 - Each member gets messages from only one partition

We assume round-robin message distribution to partitions. Note message order is preserved only within a partition

Rewinding and Replaying Messages


- Kafka persistently stores messages much longer than conventional messaging systems
 - Doesn't assume low-latency delivery.
- The state of a topic is the message order, stored in partition files.
- A consumer can request the same messages many times if it needs to.
 - Why? Rollback. A consumer may have had a bug, so fix the bug and consume the message again with the corrected code.
 - Recall Blue-Green deployments
 - Or the consumer may have crashed before processing the message
 - This is NOT a typical queue pattern.
- Rewinding is much more straightforward in a pull-based architecture.

Is Kafka a Good Choice for You?

Think about your requirements for routing messages to replicated services. Can you map these to publishers, topics, partitions and consumer groups?

Kafka and Zookeeper

Managing brokers, consumers, and producers

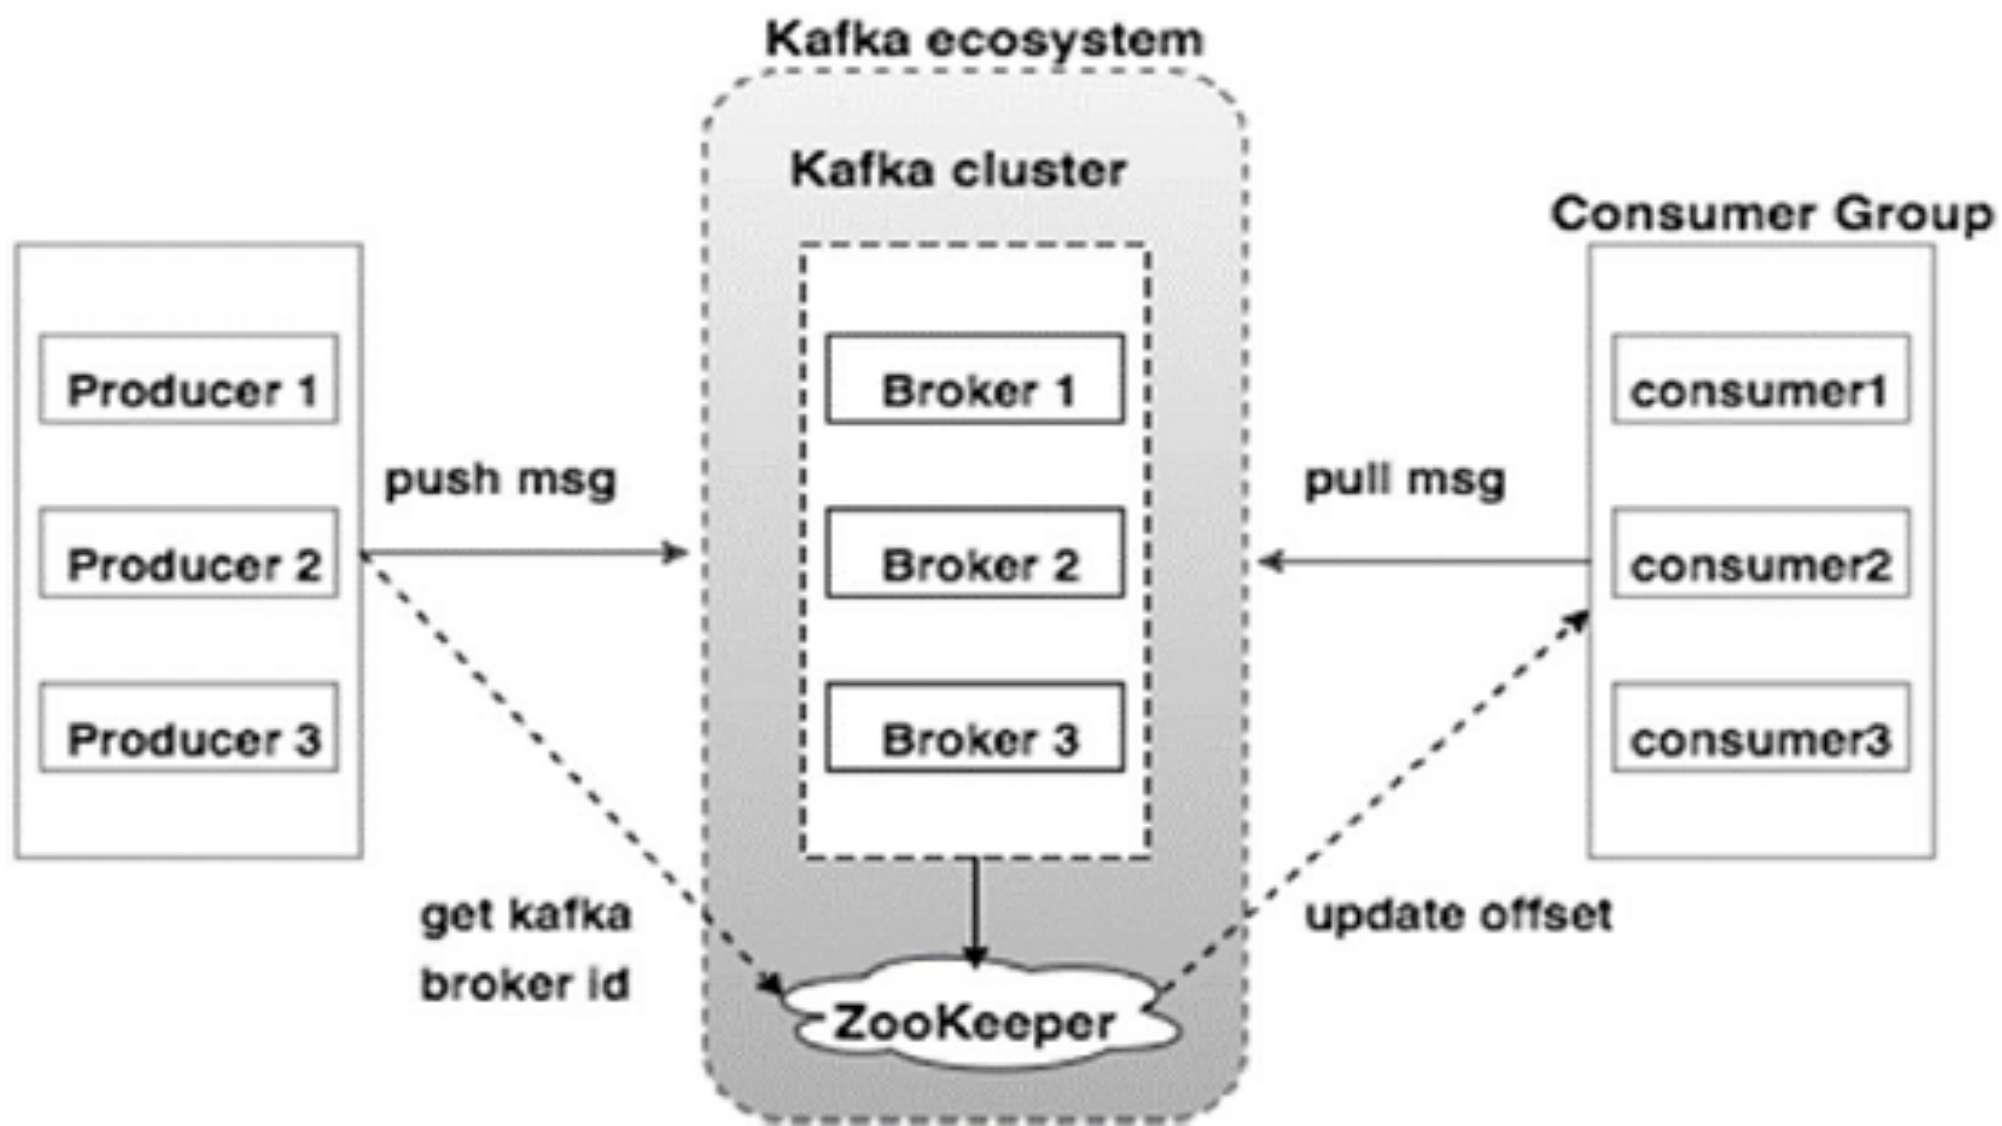

Zookeeper Registry	Description	Node Type
Broker Registry	Contains brokers' host names, ports, topics, and partitions. Used by the brokers to coordinate themselves. Ex: deal with a broker failure.	EPHEMERAL
Consumer Registry	Contains the consumer groups and their constituent consumers.	EPHEMERAL
Ownership Registry	Contains the ID of the consumer of a particular consumer group that is reading all the messages. This is the "owner".	EPHEMERAL
Offset Registry	Stores the last consumed message in a partition for a particular consumer group.	PERSISTENT

Each consumer places a watch on the broker registry and the consumer registry and will be notified if anything changes.

Delivery Guarantees

- Kafka chooses “at least once” delivery.
 - It is up to the consuming application to know what to do with duplicates
 - Duplicates are rare, occur when an “owning” consumer crashes and is replaced
 - **Two-phase commits** are the classic way to ensure “exactly once” delivery.
- Messages from a specific partition are guaranteed to come in order.
- Kafka stores a **CRC** (a hash) for each message in the log to check for I/O errors




What About the Message Payload?

- Apache Kafka supports clients in multiple programming languages.
- This means that the message must be serialized in a programming language-neutral format.
- You can make your own with JSON or XML
- Kafka also supports Apache Avro, which is a schema-based binary serialization format.
 - Compare Avro with Apache Thrift and Protobuf
- Efficient message formats are essential for high throughput systems

Kafka, Airavata, and Microservices

Some thought exercises

Three
microservices,
replicated

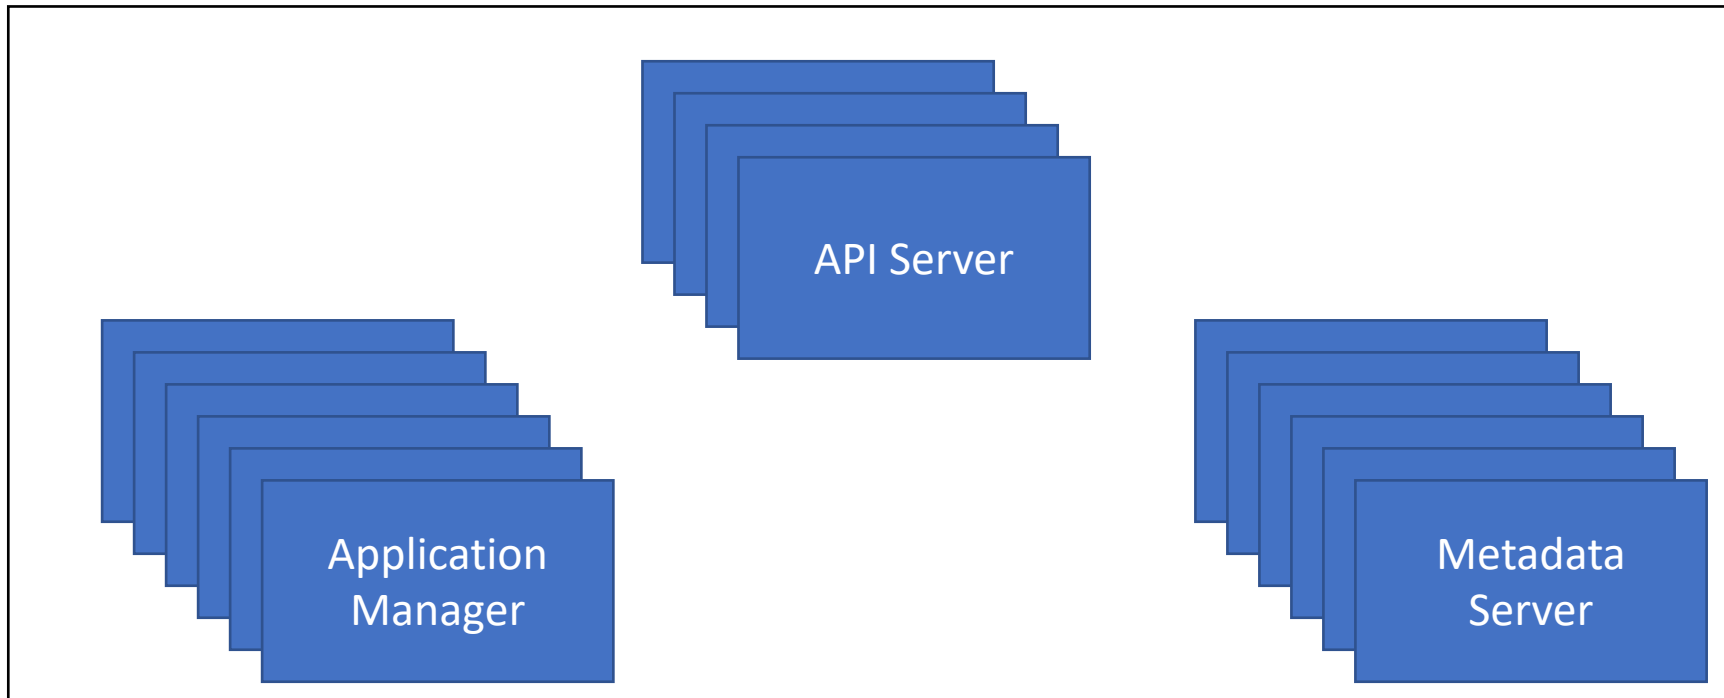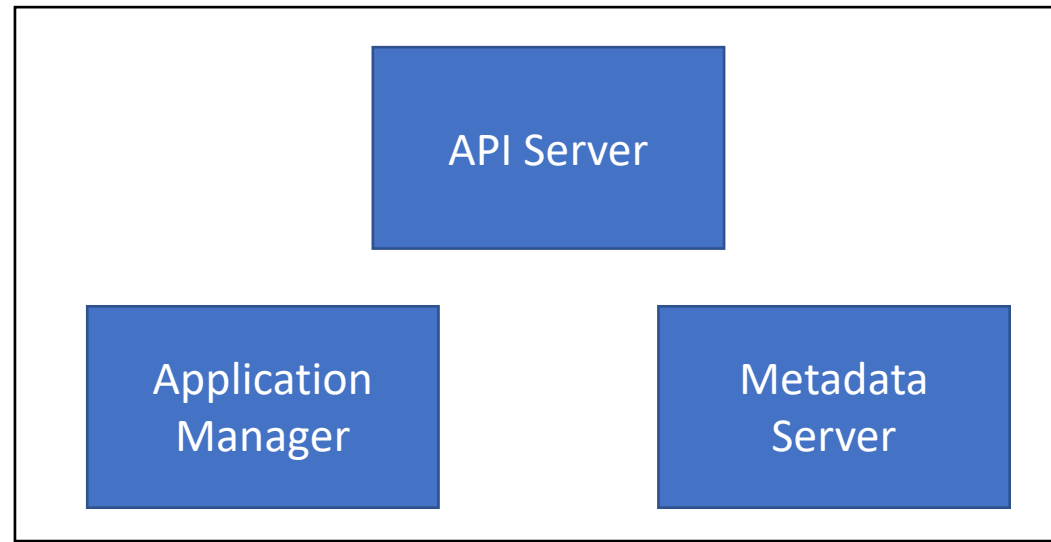

Some General Distributed Systems Principals

Kafka, logs, and REST

Log-Centric Architecture

- Distributed servers use a replicated log to maintain a consistent state
- The log records system states as sequential messages.
- New servers can be added to expand the system or replace malfunctioning servers by reading the log
 - No in-memory state needs to be preserved
- The server just needs to know that it has an uncorrupted (not necessarily latest) version of the log.
- You can use this approach for both highly consistent and highly available systems (CAP)

Kafka is a log-oriented system that can be used to build other log-oriented systems

This just leaves one little problem...

How do you keep the log replicas up to date?

Primary-Backup Replication	Quorum-Based Replication
1 leader has the master copy and followers have backups	1 leader has the master copy and followers have backups
On WRITE, the master awaits the appending to all backup for acknowledging the client	On WRITE, the master waits on only a majority of the followers to confirm backups before it returns
Supports strong consistency for distributed READS, but doesn't scale easily and has lower throughput	Supports eventual consistency and higher throughput; doesn't require good networking between leader and followers
If the master is lost, restore from a backup	If a master is lost, elect a new leader from the replicas that have the latest data
$F+1$ replicas can tolerate F failures	$2F+1$ replicas can tolerate F failures

Kafka State Management

- Kafka brokers are stateless
 - They don't track which messages a client has consumed or not.
 - This is the client's job
 - Brokers simply send whatever the client requests
 - Compare to REST
- Brokers eventually must delete data
 - How does a broker know if all consumers have retrieved data?
 - It doesn't. Kafka has a Service Level Agreement:
 - "Delete all data older than N days" for example

