ASSIGNMENT 8

Basic Queries and Aggregate Functions

Event Ticketing and Venue Seating System

Name	Aishani Dutta
Registration Number	2511021240020
Course / Section	BCA SEM 3 2025
Date	23 October 2026

The queries below use the sample data in EventTicketingDB. Amounts are in Indian rupees. Each output was obtained by running the query in MySQL 8.0.46.

```
USE EventTicketingDB;
```

Show confirmed bookings

```
SELECT booking_id, user_id, total_amount
FROM Bookings
WHERE booking_status = 'Confirmed'
ORDER BY booking_id;
```

Output

booking_id	user_id	total_amount
201	1	1000.00
202	2	300.00
203	3	800.00
205	1	600.00
206	5	1200.00
208	2	200.00
210	4	300.00

Seven bookings are confirmed. Pending and cancelled bookings are excluded.

List the next events

```
SELECT event_id, title, event_date
FROM Events
WHERE event_date >= '2026-11-01'
ORDER BY event_date, start_time, event_id;
```

Output

event_id	title	event_date
101	Acoustic Evening	2026-11-05
102	The Last Letter	2026-11-07
103	Design Meetup	2026-11-08
104	Jazz Night	2026-11-12
105	Comedy Hour	2026-11-14

The events are listed in date order, starting with Acoustic Evening.

Count bookings by status

```
SELECT booking_status, COUNT(*) AS booking_count
FROM Bookings
GROUP BY booking_status
ORDER BY booking_status;
```

Output

booking_status	booking_count
Cancelled	1
Confirmed	7
Pending	2

There are seven confirmed bookings, two pending bookings and one cancelled booking.

Find events with at least three bookings

```
SELECT event_id, COUNT(*) AS booking_count
FROM Bookings
GROUP BY event_id
HAVING COUNT(*) >= 3
ORDER BY event_id;
```

Output

event_id	booking_count
101	3
104	3

Events 101 and 104 each have three booking records. This count includes all statuses. HAVING checks the group count after GROUP BY.

Calculate successful payment totals

```
SELECT COUNT(*) AS payments,
       SUM(amount) AS total_received,
       ROUND(AVG(amount), 2) AS average_amount,
       MIN(amount) AS smallest,
       MAX(amount) AS largest
FROM Payments
WHERE payment_status = 'Successful';
```

Output

payments	total_received	average_amount	smallest	largest
7	4400.00	628.57	200.00	1200.00

Only successful payments are included. A failed payment attempt is not money received. All amounts are in Indian rupees.

Change an event start time


```
START TRANSACTION;
UPDATE Events SET start_time = '19:30:00'
WHERE event_id = 105;
SELECT event_id, title, start_time
FROM Events WHERE event_id = 105;
ROLLBACK;
```

Output

event_id	title	start_time
105	Comedy Hour	19:30:00

The start time changes to 19:30. ROLLBACK restores the original time after the example.

Query result screenshot

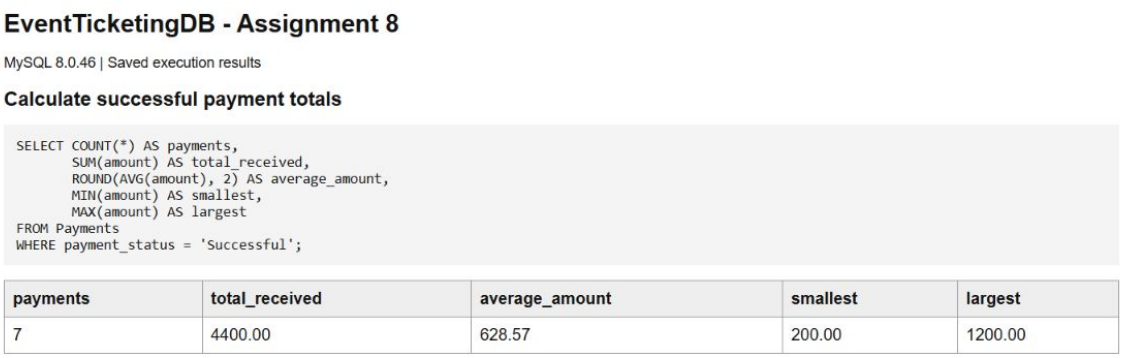

EventTicketingDB - Assignment 8

MySQL 8.0.46 | Saved execution results

Calculate successful payment totals

```
SELECT COUNT(*) AS payments,
       SUM(amount) AS total_received,
       ROUND(AVG(amount), 2) AS average_amount,
       MIN(amount) AS smallest,
       MAX(amount) AS largest
FROM Payments
WHERE payment_status = 'Successful';
```

payments	total_received	average_amount	smallest	largest
7	4400.00	628.57	200.00	1200.00

Saved MySQL results displayed in the browser.