CARELON GLOBAL SOLUTIONS · BITS

RTM Console
Backend Implementation Guide

The changes we will make to give the console a database: PostgreSQL on AWS, migrations with Kysely run by a single **db:migrate** command, a validated configuration, and how the rules engine saves and recovers its work.

Real-Time Monitoring & Escalation

FOR	COVERS	BUILDS ON	EDITION
Backend engineers · BITS	Database, migrations, configuration, deployment	PostgreSQL Schema (12 Oct), PR #40 review	4 November 2026

PREPARED BY

Arielle Jimera

UI/UX Designer / Developer · BITS Automation Team

Contents

1	Progress and known gaps	2
2	What changes, at a glance	10
3	What gets saved, and when	12
4	Hosting on AWS	16
5	Configuration: one validated environment	22
6	Connecting to PostgreSQL	23
7	Migrations with Kysely	25
8	Running db:migrate before a deployment	28
9	Changes to the proposed schema	31
10	How the engine saves and recovers	33
11	Local development and tests	35
12	Delivery plan and acceptance checks	36
13	Frequently asked questions	38
14	Quick reference card	39

1 Progress and known gaps

Where the work stands on 9 November 2026, the known gaps in what is built and what closes each one, and the questions already answered. The rest of the guide describes the design; this section says how much of it is built.

Current progress

Piece	Status	Notes
Phase 0 foundation: settings check, database URL, Kysely and `db:migrate`, local PostgreSQL, rules that survive a restart	Done	Merged in PR #39.
Database and logins on `van-reservation-prod`	Done	Created on 3 November 2026 (PostgreSQL 17.7), and the `rtm_app` login was tested (Section 4). All 7 migrations, and so all 24 tables, ran on it on 9 November 2026; `npm run db:status` on the server shows which migrations have run.
Rule levels: Tower, Sub-Tower and LOB, over the rule's default	Done	Merged in PR #50. Built as `rule_override`, as PR #44 proposes, pointing at the `tower`, `sub_tower` and `lob` rows by ID (Section 9). Edited in the Rules tab under each rule. The Phase 0 rule tables stay as merged in PR #39. Two known gaps (below): Managers are not yet limited to their own Towers, and who made a change is not saved yet.
A separate login for `db:migrate`	Done	Merged in PR #45. `DB_MIGRATE_USER` and `DB_MIGRATE_PASSWORD` sit in the same `.env.local` as the app's login, and only the `db:*` commands use them (Sections 5 and 8).
Local PostgreSQL 17.7 and the corrected pgAdmin steps	Done	Merged in PR #45. The local image now matches production. Section 4 has the steps as they worked, with `npm run db:role-passwords`.
Deployment on CGSPH	Settled	As Van Reservation: in the app's folder, `git pull`, `npm ci`, `npm run build`, `npm run db:migrate`, then restart the app (Section 8). The server was last deployed on 8 November 2026, at PR #48. From there, one deployment is planned once the Phase 1, 2 and 3 tables are all built, so their migrations run together, in order.
Critical route (question 6)	Done	Merged in PR #45. A migration, `critical_route`, adds the route and its 3 steps; the engine and the Rules page know it. "LOB Manager" is the agent's Manager: their Team Lead's supervisor, from Genesys or the CGS directory.

Piece	Status	Notes
Phase 1 · People, queues and groupings	Done	Delivered in four PRs: (1) agents keyed by Genesys user ID instead of name, merged (#46); (2) people and supervisors from Genesys, with the CGS directory filling gaps, merged (#48); (3) the Phase 1 tables: the queue map, people, queues, membership, desktop-alert subscriptions and the org on screen are saved in the database instead of `.rtm/`, merged (#49); (4) rule overrides and the LOB drill-down, merged (#50): each agent is placed in the LOB with most of their queues and gets that LOB's settings, queue rules are also checked for each Tower, Sub-Tower or LOB with an override, the agent grid reads each group's numbers against its own thresholds, and admins get a CSV of agents whose queues are in several LOBs.
Phase 2 · Shift records	Done	Merged in PR #51. One migration, `shift_records`, with six tables (Section 9). Each Genesys floor saves every call-out, acknowledgement, reason and incident move, with its shift, strikes, the incident counter and the desktop alerts sent. After a restart the floor carries on: today's call-outs and every open one, incidents not closed, today's strikes and the queue rules already in breach come back, and call-out and incident numbers carry on from the database. CSV replays and the simulator are not saved.
Phase 3 · Raw events	Done	One migration, `source_events`, with `source_event_stream` (Section 9). Each Genesys floor keeps every agent update and call end, and its queue numbers and AHT when they change. After a restart each agent's calls, transfers, short calls and a starting AHT for the day come back. At midnight Eastern, and at start-up for anything left from an earlier day, the table is emptied for every org. That completes the 24 tables.
Deployment of Phases 1 to 3	Done	Deployed to CGSPH on 9 November 2026 in one go, with the incident owner and notes (PR #53): 5 new migrations and the `notification_log` partitions for the next 12 months. Checked in pgAdmin the same day: the live Genesys floor fills `person`, `queue`, `queue_member`, `shift`, `monitoring_instance` and `source_event_stream`. Not yet seen on production: an incident's owner and notes, which need a third strike first.

"Ready for review" means built and tested on a developer's PC, not yet merged. Production gets the tables on the first deployment after the merge, when `db:migrate` runs there.

Known gaps

Built, but not yet the way the design says. Each is safe to deploy as it is. Every design question is answered; the one thing still needed from others is which Towers, Sub-Towers and LOBs each Manager oversees, and it closes the first two gaps.

Gap	What happens today	What closes it
Managers can change any Tower's rules **Question 7**	A Manager may change rules only for the Towers, Sub-Towers and LOBs they oversee. Nothing links a Manager to a Tower yet, so any Manager can add, change or remove any override. Admins are as designed: any level.	A list from WFM and the BITS RTM Dev Team of the Towers, Sub-Towers and LOBs each Manager oversees, then a check in `PATCH /api/rules`. Needed before Managers edit overrides in production.

Gap	What happens today	What closes it
Every leader sees a group's queue call-outs **Question 4**	When a queue rule fires for one Tower, Sub-Tower or LOB with an override, the call-out is a floor call-out, so every leader role sees it, not only that group's leaders.	The same list as the gap above: then such a call-out reaches only the leaders of that group.
No sign-in: the role is picked in the header **Questions 9 and D**	Anyone can choose any role with "View as"; `readSession()` in `lib/server/session.ts` reads only that choice. CGSAuth, the CGS sign-in, confirms who someone is (Domain ID, name, manager's Domain ID) but carries no roles, so the console has to work the role out itself.	Sign in with CGSAuth, match the Domain ID to `person.domain_id` to find the Genesys user, then take the role from the reporting lines with the same rules "View as" uses today: direct reports on the floor make a Team Lead, being above a Team Lead makes a Manager, anyone else is an agent. Admins and Senior Leaders come from a list the console keeps. Each role keeps the screens it sees today, and "View as" stays for admins and developers only. To handle: about 35% of agents have no supervisor in Genesys; the chain above a Team Lead reaches directors; one Domain ID can be in more than one org; a role saved at sign-in lags the data until the next sign-in. This also names each Admin and Senior Leader in the audit (the row below).
Admins and Senior Leaders are audited by role only	Every audited change keeps who made it (`actor_id` , the person) and as what role (`actor_role`). A Team Lead, Manager or agent is named; an Admin or Senior Leader has no person in the console's view, so their entries say only "admin" or "senior". `rule_version.changed_by` and `rule_override.changed_by` are filled only for someone with a `person` row, so a save never fails for want of one.	Sign-in that tells the app who each Admin is (CGSAuth), then their Domain ID as `actor_id` .
Rule overrides not tried in a browser	The Rules tab's override rows, the place picker and the "Several LOBs" CSV are covered by tests but were never clicked through: the local database has no queue map yet.	Upload the mapping workbook on the Console, then add, change and remove an override on the Rules tab, before the deployment.

Gap	What happens today	What closes it
Shift records and raw events not tried on a live floor	Saving and the carry-on after a restart are covered by tests against PostgreSQL, but no Genesys floor has run with them: the developer's PC has no live feed, and the simulator is not saved.	After the deployment, restart the app mid-day: the ledger, open incidents, strike counts and each agent's calls should come back, and the next call-out number should follow the last one. Check that `source_event_stream` is empty of the day before after midnight Eastern.
Alert routes and the state mapping are not read	`notification_route_step` holds each route's rungs (who strike 1, 2 and 3 reach) and `status_mapping` the Genesys-status-to-console-state rules PR #44 planned, but the app uses its own copy in the code (`stageFor()` in `lib/engine/escalation.ts` , `lib/feed/gencloud/state.ts`). Editing the tables changes nothing. A test fails if the tables and the code ever disagree. `notification_route` is used: a rule can only name a route it lists. `genesys_region` is likewise a copy of each org's address in `lib/orgs.ts` .	An admin screen to edit the routes and the state mapping, with the engine and the feed loading them from the tables at start-up. Until there is a screen, reading the tables gains nothing.
An incident's owner cannot be reassigned Question 5	Deployed 9 November 2026: whoever starts an investigation is its owner (`owner_id` , and `owner_role` from the `incident_owner` migration, so an Admin, who has no person, is kept by role). Notes can be kept while it is investigated (`comments`) and a closing note added when it closes (`resolution`), each saved with an audit entry (`incident.note` for notes). Reopening clears the owner; the next to start owns it. What is still missing: handing an investigation to someone else. `priority` and `root_cause` stay empty by design: priority comes from the rule's severity, and the dispositions cover root cause.	An "Assign to" choice on the incident screen (part of the incident-report form, item 7), saved with an audit entry.
Raw events are the feed's output	`source_event_stream` keeps each update as the Genesys feed delivered it to the engine (a console state, a call end, queue numbers), not Genesys's original messages. `monitoring_instance.source_event_id` is not filled: most call-outs fire from the clock, not from one event.	Nothing for the KPIs. Keeping the original messages too, if a raw archive is ever needed.
Screens show today and what is open	The console reads the engine's memory, which after a restart holds today's call-outs and every open one. Older closed call-outs and incidents are saved but no screen shows them.	A history or reporting screen that reads `monitoring_instance` and `incident_log` . The same goes for `audit_event` and `notification_log` : written, kept, and shown nowhere yet.

Gap	What happens today	What closes it
Only calls are rebuilt from the raw events	Queue numbers and each agent's AHT are kept in `source_event_stream` but not read back: after a restart they come from Genesys's own totals since midnight, within a minute. The events give calls, transfers and a starting AHT; short calls come from the day's short-call call-outs.	Nothing, unless a KPI is added that Genesys cannot give again.
Alert partitions are topped up only on a deployment	`npm run db:migrate` now ends by making any missing `notification_log` partition for this month and the next 12. Nothing runs it on a schedule: if a year passes with no deployment, rows go to the default partition. Nothing fails, and the next run moves them into their month's partition.	Nothing, while the app deploys at least once a year; otherwise run `npm run db:partitions` on the server.
Only desktop alerts are logged	`notification_log` gets one row per desktop alert per browser, with whether the push service took it. In-console toasts and pop-ups, and their buttons (Got it, Send reason), are not logged; the call-out row still keeps the acknowledgement and the reason.	The browser reporting what it showed and what was clicked.
No adherence on live **Backlog item 9**	Genesys does not supply adherence; it comes from NICE IEX, which is not connected. Live adherence shows N/A on agent cards, My View and the Adherence tile, and the Adherence breach rule cannot fire. AHT also shows N/A until Genesys sends a figure or the agent's first call ends, and an Offline agent with no calls today shows N/A for every number.	A NICE IEX feed passing each agent's adherence.
Exports ignore the on-screen filters **Backlog item 30**	The Instance Ledger and the investigation register can be searched by agent name or ID and filtered by queue, but Export CSV and Export incidents CSV still download every row.	Passing the search and queue picks to the export routes.
Updates are missed while the app restarts **Backlog item 29**	A redeploy stops the app for about 10 seconds, and Genesys does not resend what it sent meanwhile. Calls that end in the gap are not counted (Calls, Xfr, Short) and are not in `source_event_stream` ; AHT is unaffected. A breach already under way at reconnect gets no call-out for that occurrence. A call in progress at the restart is counted only if the app sees an update before its hang-up, and an agent still in ACW for a call that ended in the gap shows On Call until wrap-up ends. The write queue is in memory and is not saved on stop, so up to about a second of records can be lost.	Save the write queue on SIGTERM; at start-up, read the active conversations on the watched queues so calls in progress and ACW are tracked from the start; optionally back-fill the gap from Genesys conversation details. Until then, deploy outside floor hours.

Already answered

Question	Answer	From
How does a deployment restart RTM Console? **N**	It already runs on CGSPH under pm2, with its settings in `.env.local` in the app's folder, and the developer can restart it. The folder, the app's name and the restart commands are in the private deployment note (kept outside this public repository). The server was last deployed on 8 November, at PR #48.	Arielle, 6 Nov
6. Should there be a "critical route"?	Yes, and it is built. A fifth route, `critical`: strike 1 goes to the agent and their LOB Manager for immediate review; strike 2 to the agent, the Team Lead and the LOB Manager; strike 3 and later go to Ops and open an incident, as on every full route. A floor call-out (no agent) goes to the LOB Manager. No rule uses it until an admin picks it on the Rules page.	
What is a shift, and when do strikes start again at zero? **Decision 7**	One day on US Eastern time, midnight to midnight. Strikes start again at zero at Eastern midnight.	Floor lead
When is an incident opened?	On every strike from 3 on, each with its own incident; strike 5 on one rule means 3 incidents. Incidents never merge, and only strikes open them.	Floor lead
How long are raw Genesys events kept? **Decisions 8 and 9**	One day, so the day's KPIs survive a restart. Emptied at midnight Eastern; call-outs and incidents are kept.	Team lead
How is the business grouped?	Tower → Sub-Tower → LOB → queues, as in the WFM mapping file, and some towers have several LOBs. For example, Towers: Member Services, Provider and Related Services. Sub-Towers: CSBD - Provider, GB AFC. LOBs: P2P Host, ROM West, PSS - Process Support Specialist, Horizon Member, Legacy Provider.	BITS RTM Dev Team, 3 Nov; Arielle, 6 Nov
Can rules differ by group?	Yes: a rule's default can be changed for a Tower, Sub-Tower or LOB, in `rule_override` (PR #44). There is no agent or queue level.	Arielle, BITS RTM Dev Team, 6 Nov
How far do the floor numbers drill down? **Decision 6**	Whole floor, then Tower, Sub-Tower and LOB. They are worked out per queue and added up; they are not shown per queue.	Arielle, 4 Nov
Where do the database logins live on the server?	Both in the app's `.env.local`: `rtm_app` for the app and `rtm_migrator` for `db:migrate` (Section 8).	Arielle, 3 Nov
Where does each agent's LOB come from? **Questions 1 and L**	From the WFM mapping file, through the agent's queues. Genesys user records have no LOB field: `department`, `division` and `groups` were checked and none is the LOB.	Arielle, 6 Nov
Who gets the strike 2 alert? **Question 2**	The agent and the agent's immediate supervisor. Genesys holds the link, and supervisors are Genesys users too, so each `person` row points at its supervisor's row. When the supervisor signs in, their Domain ID finds their row and, through it, their agents.	Arielle, 6 Nov

Question	Answer	From
Is a `team` table needed? Question 2	No. A team is a queue, and an agent can be on several queues, so `queue` and `queue_member` cover teams.	Arielle, 6 Nov
When settings at several levels apply, which one counts? Question 3	The most specific one, field by field: LOB, then Sub-Tower, then Tower, then the rule's default. A level can change only the threshold and take the rest from the level above.	Arielle, 6 Nov
How is a signed-in person matched to an agent? Question 9	Genesys already stores each agent's Domain ID, so the Domain ID from CGS sign-in is matched to the Genesys user. Leader roles (Team Lead, LOB Manager and so on) come from the Genesys feed and the CGS sign-in, not from a list kept by hand.	Arielle, 6 Nov
PR #40 and PR #44	The phased design stays. From PR #44 come `rule_override` and `queue_lob_map`; the decisions above are kept where the two differ (Section 9).	Arielle, 6 Nov
Rule overrides A, B, C	Stored in `rule_override`, pointing at `tower`, `sub_tower` and `lob` rows by ID, so a rename does not detach them. Those tables are filled from the WFM mapping upload. One Tower setting applies in every Genesys org.	Arielle, 6 Nov
What is a floor rule set for a LOB checked against? Question 4	That LOB's own numbers. The whole floor is still checked against the default.	Arielle, 6 Nov
Who may change a rule at each level? Question 7	Admins: any level. Managers: only the Towers, Sub-Towers and LOBs they oversee. Not enforced yet (Known gaps).	Arielle, 6 Nov
Where do leader roles come from? D	From the Genesys supervisor link: anyone with direct reports is a Team Lead, and their supervisor is the Manager. Admins come from a CGS sign-in group or a short list in `.env.local`.	Arielle, 6 Nov
Which Genesys fields hold the supervisor and the Domain ID? D	The supervisor is the user's `manager`, a Genesys user ID (on 64% of 1,000 active Commercial users checked; Genesys also lists a manager's direct reports). There is no Domain ID field: it is whatever follows the last " - " in the user's name, in capitals ("Last, First - AB12345"). That gives a 7-character ID for 997 of the 1,000.	Checked in Genesys, Arielle, 6 Nov
What happens when Genesys has no supervisor for someone? Phase 1 step 2	About a third of active Genesys users have none set. Genesys comes first; where it has none, for an agent or their Team Lead, the CGS associate directory's manager is used, matched to a Genesys user by Domain ID (`CGS_AUTH_API_KEY`). In a sample of 50 agents this took the share with both a Team Lead and a Manager from 10 to 41. Agents still without one are flagged: their call-outs reach admins only, and admins can download the list from Dashboards.	Arielle, 7 Nov
What does the Dashboards breakdown table group by? Phase 1 step 2	By Team Lead: one row per Team Lead with their Manager, headcount, call-outs by stage, open incidents and top cause. A queue holds agents of several Team Leads, so a row per queue no longer has one Team Lead.	Arielle, 8 Nov

Question	Answer	From
Where do a queue's and an agent's LOB come from? E	Both from the WFM mapping upload: a queue's directly, an agent's through their queues. An agent whose queues are all unmapped gets the defaults.	Arielle, 6 Nov
Which LOB counts for an agent whose queues sit in several LOBs? Question M	Rare, according to BITS RTM Dev Team. The LOB with most of the agent's queues; on a tie, the LOB that comes first alphabetically. Admins can download the list of these agents from Dashboards ("Several LOBs" CSV), with the LOB their rules follow and the others, to check the mapping. Their rule settings and call-outs use that one LOB.	Arielle, BITS RTM Dev Team, 6 Nov
Can a person be in more than one Genesys org? F	Assumed not: one org per person, revisited if someone turns up in two.	Arielle, 6 Nov
Which group does a call-out or incident record? G	The agent's Tower, Sub-Tower and LOB at the moment it fired.	Arielle, 6 Nov
Which fields does an incident need? Question 5	Status, disposition and comments as today, plus Owner (who is investigating) and Resolution (a closing note). Priority comes from the rule's severity, and the 12 dispositions cover Root Cause.	Arielle, 6 Nov
Do the `.rtm/` files move into the database? Question 8	The queue map moves to `queue_lob_map`; the last roster is replaced by `person` and `queue_member`; the watched org becomes a flag on `genesys_org`. The Genesys tokens stay in a file on the server, since saving them would need encryption first.	Arielle, 6 Nov
How is the app hosted? H	Like Van Reservation, in the same teamcgs.io AWS account: the app on the CGSPH instance at rtm-console.teamcgs.io, the database on Van Reservation's RDS instance. Van Reservation runs under pm2 behind nginx, and has no CI/CD: a release is `git pull`, install, build, `db:migrate` and a restart, run by hand on the server. RTM Console does the same. The server-specific details are in the private deployment note (kept outside this public repository).	Arielle, 6 Nov
Where does the RDS certificate file live? Question 10	On CGSPH, in the file Van Reservation already uses: it holds Amazon's public RDS root certificates and the app can read it. RTM Console sets `DB_CA_CERT` to the same path (in the private deployment note (kept outside this public repository)), so nothing is added to the repository.	Arielle, 6 Nov

DONE: IDS INSTEAD OF NAMES

Agents are keyed by their Genesys user ID, which never changes, so two people with the same name, or a renamed team, no longer mix up their records (PR #46, backlog item 4).

Setup checklist

- [ ] **Confirm the app's server.** DONE The CGSPH EC2 instance that hosts the .teamcgs.io sites (Section 4).
- [ ] **Create the database and its two logins** on `van-reservation-prod`, once, in pgAdmin (Section 4). DONE 3 November 2026, including the test login as `rtm_app`.

- [ ] **Note the PostgreSQL version** (step 1 of the pgAdmin steps), so local development uses the same one (Section 11). DONE PostgreSQL 17.7; the local Docker image is `postgres:17.7-alpine`.
- [ ] **Add to the `.env.local` on CGSPH** both logins and the other settings (Sections 5 and 8).
- [ ] **Deploy as Van Reservation does:** `git pull`, build, `db:migrate`, then restart the app (Section 8).

2 What changes, at a glance

Every change in this guide, in one table. New pieces are marked NEW, changes to existing code CHANGE, corrections to the proposed schema FIX, and pieces that wait on a decision WAITS.

Change	What it means
Typed environment NEW	One module, `lib/env.ts`, validates every setting with Zod and is the only place that reads `process.env`. A missing or invalid setting stops the server at start-up with one message listing every problem (Section 5).
Validation at boot NEW	`instrumentation.ts` parses the environment in its `register()` hook, which Next.js runs once before the server accepts requests. The Node-only part is in `instrumentation-node.ts`, so the edge build never sees it.
Database URL module NEW	`lib/db/url.ts` builds the connection string: an explicit `DATABASE_URL` wins, otherwise it is composed from `DB_HOST`, `DB_PORT`, `DB_NAME`, `DB_USER` and `DB_PASSWORD` (Section 6).
Kysely and `db:migrate` NEW	Kysely is the type-safe query builder; `kysely-ctl` runs the migrations. `npm run db:migrate` brings any database up to date (Sections 7 and 8).
Rule levels NEW	A rule's settings can differ for a Tower, Sub-Tower or LOB, with the rule's default as the fallback, and a level can change only some of them. Stored in `rule_override` from Phase 1 (Section 9).
A login for migrations NEW	`DB_MIGRATE_USER` and `DB_MIGRATE_PASSWORD`: the `db:*` commands log in as `rtm_migrator` while the app runs as `rtm_app`, from the same `.env.local` (Section 8).
Reference data in migrations NEW	The 5 routes, the 14 default rules, the status mapping and the Genesys regions are written by migrations, so a freshly migrated database is ready to use with no separate seed step.
Storage layer NEW	A `Store` interface with two implementations: in memory (development, tests, replays) and PostgreSQL. `PERSISTENCE_MODE` picks one; memory is refused outside development and test (Section 10).
Rules survive a restart CHANGE	`registry.rules` in `lib/server/runtime.ts` is loaded from the database instead of `defaultRules()`, and every rule edit writes a new `rule_version`.
Write-behind queue CHANGE	The engine stays in charge, in memory. What it records is queued and written to PostgreSQL in batches, so the one-second tick never waits on the database (Section 10).
Shared RDS instance NEW	A new database, `rtm_console`, on the existing `van-reservation-prod` instance: no added cost, with its own roles and capped connections so it cannot touch or slow down Van Reservation (Section 4).

Change	What it means
Local PostgreSQL NEW	`docker-compose.yml` runs a pinned PostgreSQL on port 5435, with the same names as `.env.example` (Section 11).
Partitions never missing FIX	`notification_log`, partitioned by month, gets a default partition and the next 12 months, so an insert can never fail for want of a partition (Section 9).
Fewer writes for strike state FIX	`agent_rule_state` stores strikes only, not the `fired` flag that flips at every status change (Section 9).
Live floor only FIX	Only the Gencloud floor is saved. CSV replays stay in memory, and the simulator is saved only when asked for, so simulated call-outs never mix with real ones in reports (Section 9).
Call-outs, incidents, strikes NEW	Phase 2: each call-out, strike and incident is saved against the agent's Genesys user ID, and today's floor carries on after a restart (Section 9). Live since 9 November 2026.
Raw event log NEW	Phase 3: holds today's Genesys events only, so each agent's calls for the day survive a restart. Emptied at midnight Eastern (Section 9).

3 What gets saved, and when

The console keeps working the way it does today: it checks the floor every second and updates the screen straight away. The database is its record and its memory across restarts. Every time something happens on the floor or someone acts in the console, a record is also saved.

How a record is saved

1. **The console acts first.** The call-out, acknowledgement or rule change shows on screen at once, as today.
2. **A record joins a queue.** Records wait in the order they happened.
3. **About once a second, the queue is written in one go.** Either the whole batch is saved or none of it is; a failed write is tried again with the same records in the same order. If the database is down, the floor keeps running and records wait in the queue (Section 10).

Most events **add a new row** (a call-out, a rule version, an audit entry). Actions on something that already exists, such as acknowledging a call-out or closing an incident, **update its row**, so it always shows its latest state. Nothing is deleted.

Scenarios

When	What is saved	Table	From
The database is first set up (`db:migrate`)	New rows: the 14 default rules, the 5 alert routes and their steps, the Genesys status names and regions. Once, so a new database is ready to use.	`rules_master`, `rule_version`, `notification_route`, `notification_route_step`, `status_mapping`, `genesys_region`	Phase 0
An admin changes a rule: threshold, severity, route, or on/off	A new version of the rule, with who changed it and when, and an audit entry with the settings before and after, who and in what role. The rule then points at that version. Older versions are kept, so every call-out shows the rule as it was when it fired. Quick edits in a row become one version. From Phase 1, a change for one Tower, Sub-Tower or LOB is a new `rule_override` version instead, with its own audit entry.	`rule_version`, `rules_master`, `audit_event`	Phase 0
The app starts	Nothing is written. It reads the rules and, from Phase 2, today's shift, strike counts, open call-outs and open incidents, so it carries on where it stopped.	(reads only)	Phase 0
Agents and queues come in from Genesys	New rows for new people and queues; updated rows when a name, supervisor or queue membership changes.	`person`, `queue`, `queue_member`	Phase 1

When	What is saved	Table	From
Someone turns on desktop alerts	A new row for that browser, removed from use when they turn alerts off.	`push_subscription`	Phase 1
A new day starts (midnight, US Eastern)	A new shift row for that Eastern date. Every call-out and incident that day links to it, and strike counts start again at zero. The raw events table is emptied, and the day's calls start again at zero. That is the only data removed: open call-outs and incidents carry over and stay on screen until someone acknowledges or closes them.	`shift`	Phase 2
An agent breaks a rule (strikes 1 and 2)	A new call-out row: agent, rule and its version, the value that broke it, the strike number and who it went to (team lead, then lead). The agent's strike count for that rule is updated.	`monitoring_instance`, `agent_rule_state`	Phase 2
Third strike	As above, plus a new incident with the next incident number (for example INC-2026-0042), saved together with the call-out so neither exists without the other.	+ `incident_log`, `incident_counter`	Phase 2
Fourth strike and later	The same as the third strike: a new call-out row and a **new** incident with the next number, saved together. Strike 5 means 3 incidents. Earlier incidents are not changed.	`monitoring_instance`, `incident_log`, `incident_counter`	Phase 2
A floor-wide call-out (queue numbers, no single agent)	A new call-out row with no agent and no strike.	`monitoring_instance`	Phase 2
An alert is sent (desktop or in the console)	A new row: who it went to, when, and whether it was delivered.	`notification_log`	Phase 2
A team lead acknowledges a call-out	The call-out row is updated: acknowledged, and when.	`monitoring_instance`	Phase 2
Someone switches the floor: to another org, or to and from the simulator	An audit entry: what the floor showed before and after, who and in what role.	`audit_event`	Phase 3
Acknowledge all	Each open call-out in view is updated as above, plus one audit entry for the bulk action.	`monitoring_instance`, `audit_event`	Phase 2

When	What is saved	Table	From
A reason is added to a call-out	The call-out row is updated with the reason (and acknowledged, if sent from the nudge).	`monitoring_instance`	Phase 2
An incident moves: Open, Investigating, Closed	The incident row is updated with its status, outcome and closing time, plus an audit entry for each move. Starting it makes that person its owner; notes during the investigation and the closing note are saved on the same row.	`incident_log` , `audit_event`	Phase 2
Every raw Genesys update	New rows, many per write, about once a second; queue numbers and AHT only when they change. The table only ever holds the current Eastern day; on start-up the console rebuilds each agent's calls for the day from it.	`source_event_stream`	Phase 3

NOT SAVED

CSV replays and simulator runs stay in memory, so practice data never mixes with real call-outs. Live timers (time in state, hold time) are not saved either: Genesys sends them again when the console reconnects. The Genesys token is a secret and never goes in a table.


Example: one agent's afternoon

An agent goes over the hold-time limit several times. This is what the database holds after each step.

Time	What happens	What is saved
14:05	Over the limit: strike 1, call-out to the team lead.	Call-out #1 added (strike 1, to team lead, open). Strike count set to 1.
14:07	The team lead acknowledges and adds a reason.	Call-out #1 updated: acknowledged at 14:07, with the reason.
15:20	Over the limit again: strike 2, to the lead.	Call-out #2 added (strike 2, to lead). Strike count set to 2.
16:10	Strike 3: an incident is opened and the manager is notified.	Call-out #3 added, strike count set to 3, incident INC-2026-0042 added (Open), all in one write. Alert to the manager logged.
16:30	Operations starts investigating.	INC-2026-0042 updated to Investigating; audit entry added.
17:00	Operations closes it as coached.	INC-2026-0042 updated to Closed, outcome "Coached", closed at 17:00; audit entry added.

Time	What happens	What is saved
17:05	The console restarts for an update.	Nothing lost. On start it reads strike count 3 and the closed incident, and carries on.

How it fits together

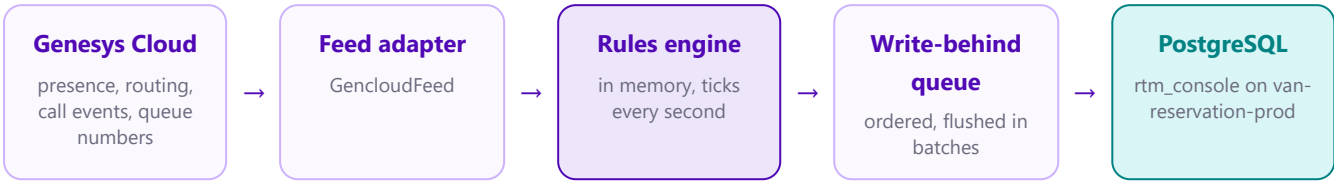

While running, the engine writes forward. At start-up the arrow reverses: the engine loads rules, strikes, open call-outs and incidents from PostgreSQL.

Three rules for the design

Rule	Why
The engine never waits on the database	A slow query or a failover would freeze every timer on the floor. Writes go into a queue and are flushed together, about once a second.
One engine process	The engine's state is in memory, so two copies behind a load balancer would disagree. The console runs as **one** long-lived task. With one writer, two strikes can never be numbered at the same time; a unique key on the incident's call-out stays as a safety net.
The database enforces the business rules	One incident per strike from 3 on, call-outs pointing at real rules and people, and the version of a rule that fired, are all checked by keys and indexes, not by our code.

For developers: where the engine writes today

These are the functions behind the scenarios above. Each one will hand a record to the store as well as changing memory.

Code	Becomes
`fire()`, `lib/engine/escalation.ts`	A `monitoring_instance` row and a strike in `agent_rule_state`
`openIncident()`, same file	An `incident_log` row numbered from `incident_counter`, in the same transaction as the call-out
`ack`, `ackAll`, `comment`, `lib/engine/engine.ts`	Updates to `monitoring_instance`; `ackAll` also writes an `audit_event`
`invAction`	An `incident_log` update and an `audit_event`
`setThr`, `setSev`, `setRoute`, `setOn`	A new `rule_version`, `rules_master.current_version` moved to it, and an `audit_event`
`setFloorSource()`, `lib/server/runtime.ts`	An `audit_event` (`feed.switch`)
`pushBatch()`, saving a subscription, `lib/server/push.ts`	`notification_log` and `push_subscription` rows

Code	Becomes
`engine.reset()` in `createGencloud()`	Opening or resuming the active `shift`

4 Hosting on AWS

For now the console reuses what is already running: the app on an EC2 instance, and its data in a **new database on the existing RDS instance** `van-reservation-prod`. Same instance, so no added cost. The console can move to an instance of its own later by changing one connection string.

Piece	Choice	Notes
App	The CGSPH EC2 instance, **one Node process**	The instance that hosts the .teamcgs.io sites, as Van Reservation does. Runs `next start` under pm2, as Van Reservation does, which restarts it if it stops. Not Lambda or Amplify server rendering: they stop the process between requests.
Database	A new database, `rtm_console`, on the RDS instance `van-reservation-prod`	Its own database, not a schema inside the Van Reservation one, with its own roles (Section 6). Backups, maintenance window and PostgreSQL version are the instance's.
Secrets	The `.env.local` file in the app's folder	Readable only by the user the app runs as, and never committed. It holds both database logins, the Genesys and VAPID settings and the admin secret (Section 8). The passwords are also kept in a password manager.
Network	Security groups	The RDS security group already admits the Van Reservation app. Add the RTM EC2 instance's security group on port 5432, and nothing else.
Logs	The process manager, or CloudWatch Logs	A failed start-up check (Section 5) appears as one readable message.

⚠ SHARING A PRODUCTION INSTANCE: GROUND RULES

Van Reservation is live on this instance. The console must never be able to read its data or slow it down.

- **Separate database, separate roles.** `rtm_migrator` and `rtm_app` can connect to `rtm_console` only; `CONNECT` on it is revoked from `PUBLIC`, and the RTM roles are granted nothing on the Van Reservation database (see the note after the setup steps below).
- **Capped connections.** Each RTM role gets a `CONNECTION LIMIT` (for example 15 for the app, 3 for the migrator), so the console can never use up the instance's connection slots.
- **No instance-wide changes.** No parameter-group edits, no extensions that need `shared_preload_libraries`, no reboots for RTM's sake. Anything like that waits for a dedicated instance.
- **Only deployed environments connect.** Developers work against the local Docker database (Section 11), never against this instance.
- **Batched writes.** The write-behind queue (Section 10) keeps the console's load to one small transaction about once a second.

Creating the database and roles in pgAdmin (once)

This is done once, by someone with the master login for `van-reservation-prod`, in pgAdmin. It creates only RTM objects: two roles, one database and its grants. Nothing on the Van Reservation database changes. From then on, `db:migrate` creates and changes the tables.

Object	Type	Settings
`rtm_migrator`	Login role	Connection limit 3. Owns `rtm_console`. Used only by `db:migrate`.
`rtm_app`	Login role	Connection limit 15. Reads and writes rows; cannot create or change tables.
`rtm_console`	Database	Owner `rtm_migrator`. `CONNECT` for the two RTM roles only.

STATUS: DONE ON 2026-11-03

The setup below was run on `van-reservation-prod` (PostgreSQL 17.7) as its master login, `vanadmin`, through pgAdmin. The steps are written as they worked there, and the test login as `rtm_app` (step 8) passed. Keep them for a rebuild or a move to another instance.

BEFORE YOU START IN PGADMIN

- **Run one step at a time.** In the Query Tool, highlight the statements for a step and press **F5**: pgAdmin then runs only the highlighted text. Step 4 (`CREATE DATABASE`) must run on its own; PostgreSQL refuses it when it is sent together with other statements.
- **pgAdmin shows only the last result.** When several statements run together, *Data Output* shows the last one's rows and *Messages* the last one's message. Run a check query on its own to see its result.
- **The master login is not the owner.** On RDS the master login is not a superuser, and since PostgreSQL 16 it does not take on the rights of a role it created. A `GRANT` or `REVOKE` it runs on `rtm_console` is skipped with only a warning, not an error. So steps 5 and 6 first switch to the owner with `SET ROLE rtm_migrator` , and end with `RESET ROLE` .
- **Passwords never go in the Query Tool as plain text.** The role dialog's password field is locked for the RDS master login, so step 3 sets each password from a hash made on your own PC. Neither pgAdmin's history nor the server's logs ever hold the password itself.
- **Check the server name** in the Query Tool's title bar before each step: it must be `van-reservation-prod` , and the database must be the one the step names. If pgAdmin reaches the instance through a tunnel, the address shows as `127.0.0.1` with a local port; that is expected.

1. **Open a Query Tool on the `postgres` database.** In the Object Explorer, expand the `van-reservation-prod` server, then *Databases*, right-click `postgres` and choose *Query Tool*. Roles belong to the whole instance, so this database is the right place for steps 1 to 5, and it keeps you out of the Van Reservation database. First, record what the instance is running:

```
SELECT version();          -- the PostgreSQL version: the local Docker image must match it (Section 11)
SELECT current_user;       -- the master login (vanadmin); see the check below
SELECT datname FROM pg_database WHERE NOT datistemplate;   -- existing databases; rtm_console must not
be listed yet
```

   Run each line on its own to see its result. To confirm the login is the instance's master login, all three columns must be *true*:

```
SELECT pg_has_role(current_user, 'rds_superuser', 'MEMBER') AS is_rds_master,
       rolcreaterole AS can_create_roles, rolcreatedb AS can_create_databases
FROM pg_roles WHERE rolname = current_user;
```

2. **Create the two roles.** They are created without passwords, so nobody can log in as them until step 3. The `GRANT` lets the master login create a database owned by `rtm_migrator` (step 4) and switch to it with `SET ROLE` (steps 5 and 6).

```
CREATE ROLE rtm_migrator LOGIN CONNECTION LIMIT 3;
CREATE ROLE rtm_app      LOGIN CONNECTION LIMIT 15;
GRANT rtm_migrator TO CURRENT_USER;
```

3. **Set the passwords from a hash.** On your own PC, in a terminal of your own (PowerShell or the VS Code terminal; **not** through an AI assistant or anything else that records the output), in the repository:

```
npm run db:role-passwords
```

It prints a new random 40-character password for each role, once, and an `ALTER ROLE ... PASSWORD 'SCRAM-SHA-256$...'` line for each. Save both passwords in a password manager straight away; they go only there and in the `.env.local` on the server (Section 8), never in a chat or ticket. Paste only the two `ALTER ROLE` lines into the Query Tool on `postgres` and run them; then close the terminal. If a password is ever seen by anyone else, run the command again and apply the new lines: the old password stops working.

4. **Create the database**, highlighting this statement on its own:

```
CREATE DATABASE rtm_console OWNER rtm_migrator;
```

5. **Close the database to everyone else.** By default every role may connect to a new database; this limits `rtm_console` to its owner, `rtm_app` and the master login. The grants run as the owner (see *Before you start*).

```
SET ROLE rtm_migrator;
REVOKE CONNECT, TEMPORARY ON DATABASE rtm_console FROM PUBLIC;
GRANT CONNECT ON DATABASE rtm_console TO rtm_app;
GRANT CONNECT ON DATABASE rtm_console TO vanadmin;    -- the master login from step 1
RESET ROLE;
```

Then check, on its own:

```
SELECT current_user AS back_to,                                          -- vanadmin
       has_database_privilege('vanadmin', 'rtm_console', 'CONNECT') AS master_can_connect,   -- true
       has_database_privilege('rtm_app',  'rtm_console', 'CONNECT') AS app_can_connect,      -- true
       has_database_privilege('public',   'rtm_console', 'CONNECT') AS everyone_can_connect; -- false
```

If pgAdmin then says *permission denied for database "rtm_console"* when you open it, it is reusing an attempt made before the grants: close any tab on `rtm_console`, then *Disconnect Server* and *Connect Server*.

6. **Set the grants inside `rtm_console`.** Right-click *Databases*, *Refresh*, then right-click `rtm_console` and open a **new** Query Tool on it: these grants apply only to the database the Query Tool is connected to. The default privileges give `rtm_app` read and write access to every table and sequence that `rtm_migrator` creates later, so no migration has to grant them one by one. They are set while acting as `rtm_migrator`, so they apply to the objects it creates.

```
SET ROLE rtm_migrator;
REVOKE CREATE ON SCHEMA public FROM PUBLIC;    -- already the default on PostgreSQL 15 and later
GRANT USAGE, CREATE ON SCHEMA public TO rtm_migrator;
GRANT USAGE ON SCHEMA public TO rtm_app;
ALTER DEFAULT PRIVILEGES IN SCHEMA public
  GRANT SELECT, INSERT, UPDATE, DELETE ON TABLES TO rtm_app;
ALTER DEFAULT PRIVILEGES IN SCHEMA public
  GRANT USAGE, SELECT ON SEQUENCES TO rtm_app;
RESET ROLE;
```

Then check, on its own, in the same Query Tool:

```
SELECT current_user AS me,                                                    -- vanadmin
       has_schema_privilege('rtm_migrator', 'public', 'CREATE') AS migrator_can_create, -- true
       has_schema_privilege('rtm_app', 'public', 'USAGE')        AS app_can_use,        -- true
       has_schema_privilege('rtm_app', 'public', 'CREATE')       AS app_can_create,     -- false
       has_schema_privilege('public',  'public', 'CREATE')       AS everyone_can_create, -- false
       (SELECT string_agg(defaclobjtype::text || ': ' || defaclacl::text, '  ')
          FROM pg_default_acl WHERE defaclrole = 'rtm_migrator'::regrole) AS future_grants;
```

`future_grants` must read `r: {rtm_app=arwd/rtm_migrator} S: {rtm_app=rU/rtm_migrator}`: tables readable and writable by `rtm_app`, sequences usable by it. If a statement fails partway, close the tab without saving, so the session does not stay switched to `rtm_migrator`.

7. **Check the roles.** In the Query Tool on `postgres`:

```
SELECT rolname, rolcanlogin, rolconnlimit
FROM pg_roles WHERE rolname LIKE 'rtm\_%' ORDER BY rolname;  -- rtm_app 15, rtm_migrator 3
```

The owner and who may connect were checked in step 5.

8. **Test the app login.** This is the only step that proves the `rtm_app` password works. In pgAdmin, *Object → Register → Server*: a name such as *rtm-test (delete me)*; on *Connection*, the same host and port as `van-reservation-prod` (and the same *SSH Tunnel* settings, if it uses one); maintenance database `rtm_console`, user `rtm_app`, and **Save password** left off; SSL mode *require* unless the tunnel already protects the link. Paste the password when asked. In a Query Tool on that connection, one line at a time:

```
SELECT current_user, current_database();    -- rtm_app, rtm_console
CREATE TABLE should_fail (x int);           -- must fail: permission denied for schema public
```

Then remove the test server registration. A login from your PC only works through the tunnel or if the RDS security group admits your address; the deployed app connects from the EC2 instance.

THE VAN RESERVATION DATABASE

PostgreSQL lets every role connect to an existing database unless `CONNECT` was revoked from `PUBLIC` there, so `rtm_app` may be able to open the Van Reservation database. It still cannot read any of its tables unless they were granted to `PUBLIC`. To confirm, open a Query Tool on the Van Reservation database and run:

```
SELECT table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee = 'PUBLIC'
  AND table_schema NOT IN ('pg_catalog', 'information_schema');   -- expect no rows
```

Revoking `CONNECT` from `PUBLIC` on the Van Reservation database would close this fully, but it is a change to Van Reservation: do it only with its owner's agreement, after checking which roles its app uses.

UNDOING IT

Until the console has stored real data, the whole setup can be removed without touching anything else. Close every tab and connection on `rtm_console` first. Then, in the Query Tool on `postgres`, run each line on its own, in this order (only the owner may drop the database, and `DROP DATABASE` refuses to run together with other statements):

```
SET ROLE rtm_migrator;
DROP DATABASE rtm_console;
RESET ROLE;
DROP ROLE rtm_app;
DROP ROLE rtm_migrator;
```

Moving out later

When the console needs its own instance (more load, its own maintenance window, an extension that needs a parameter change), dump `rtm_console` with `pg_dump`, restore it on the new instance, and change `DATABASE_URL`. Nothing in the code depends on sharing.

AWS CREDENTIALS IN THE APP

On EC2 the app uses the **instance profile** through the AWS SDK's default credential chain: no access keys in the environment. Explicit keys are accepted only for local work, and the environment check refuses half a set: a key without its secret, or a temporary `ASIA…` key without its session token.

5 Configuration: one validated environment

Today eight files read `process.env` directly, and a missing value shows up only when a feature first needs it. After this change the application reads one parsed, typed object, and a broken deployment fails at start-up with a message that names every problem.

How it works

1. `lib/env.ts` exports `parseEnv(raw)`, a pure function that checks a set of variables against a Zod schema and returns a typed object. It is what the tests call.
2. The same file exports `env()`, which parses `process.env` once and caches the result. Everything else in the app imports `env()`; nothing else reads `process.env`.
3. `instrumentation.ts` calls `env()` in `register()`, on the Node.js runtime. If anything is wrong the server stops before it accepts a request, and the log lists **every** failing variable with its reason, not just the first.

The rules every variable follows

Rule	In practice
No silent default for a secret	Passwords, tokens and keys are required where they are needed and never filled in for you.
Empty is not missing	`KEY=` sets an empty string, which fails validation. A commented-out `# KEY=` means the variable is absent, which is allowed for optional settings.
Safe values may default	For example `DB_PORT` (5432), `DB_POOL_MAX` (10), `RTM_TIME_ZONE` (America/New_York).
Pairs are checked together	Both Genesys OAuth values or neither; all three VAPID values or none; `PERSISTENCE_MODE=postgres` requires database settings. These checks live in the schema, not in the code that uses them.
Stubs only where safe	`PERSISTENCE_MODE=memory` is accepted only when `APP_ENV` is `development` or `test`. It is an allowlist, so a new environment name is refused by default.

WHY APP_ENV AND NOT NODE_ENV

Every `next build` runs with `NODE_ENV=production`, including staging and a developer's production build. `APP_ENV` says which environment the server is really in.

New and existing variables

Variable	Required	What it does
`APP_ENV` NEW	Yes	`development`, `test`, `staging` or `production`.
`PERSISTENCE_MODE` NEW	Yes	`postgres` or `memory` (development and test only).
`DATABASE_URL` NEW	Either this…	Full connection string. Always wins over the `DB_*` values.


Variable	Required	What it does
`DB_HOST`, `DB_PORT`, `DB_NAME`, `DB_USER`, `DB_PASSWORD` NEW	…or these	Composed into a URL when `DATABASE_URL` is not set. The password is URL-encoded for you.
`DB_MIGRATE_USER`, `DB_MIGRATE_PASSWORD` NEW	In deployed environments	The login the `db:*` commands use instead of `DB_USER`: `rtm_migrator`, while `DB_USER` is `rtm_app`. Both or neither, and only with the `DB_*` settings. The app never uses it. Left out on a developer's PC.
`DB_SCHEMA` NEW	No	A PostgreSQL schema to work in, set through `search_path`. Lets several developers share one database.
`DB_SSLMODE` NEW	No	`verify-full` by default. `disable` for the local container; `no-verify` refused outside development.
`DB_CA_CERT` NEW	No	Path to an extra certificate authority: on CGSPH the RDS bundle Van Reservation already uses; on a PC behind corporate TLS inspection, the company's certificate. Added to the trusted list, never a replacement for it.
`DB_POOL_MAX` NEW	No	Connections in the pool; default 10.
`TEST_DATABASE_URL` NEW	No	Database for integration tests (Section 11).
`NEXT_PUBLIC_FEED`, `NEXT_PUBLIC_VIEW_AS`, `NEXT_PUBLIC_DEV_TOOLS`	As today	Read at build time and inlined into the browser bundle, so they are checked at build as well.
`RTM_SITE_PASSWORD`, `RTM_ADMIN_SECRET` CHANGE	As today	Now also given a minimum length, and known placeholder values are refused. Unset still means "page locked"; set but wrong still means "unauthorized".
`GENESYS_TOKEN`, `GENCLOUD_API_BASE`, `RTM_VIEW_CONFIG_ID`, `GENCLOUD_CLIENT_ID`, `GENCLOUD_CLIENT_SECRET`	For the live feed	Unchanged in meaning; read through `env()`.
`VAPID_PUBLIC_KEY`, `VAPID_PRIVATE_KEY`, `VAPID_SUBJECT`	All or none	Desktop alerts, as today.

`.env.example` is the contract: every variable carries a comment saying what it does, whether it is required, what breaks if it is wrong and how to keep it safe. Copied as it is, it must fail the start-up check rather than run with an unsafe value.

6 Connecting to PostgreSQL

One connection pool per process, created only when the first query needs it. The URL logic is a small pure module with its own tests, kept apart from Next.js.

How the URL is chosen

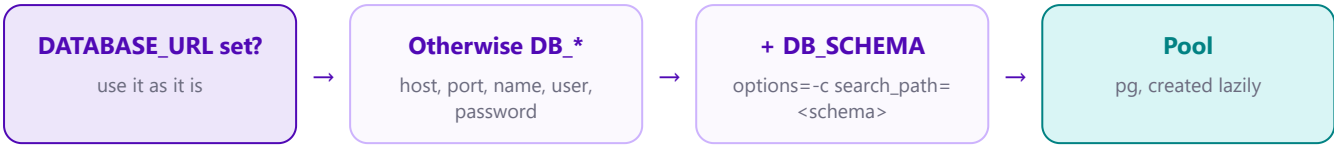

A `DATABASE_URL` exported in the shell beats the one in `.env.local`: the loader never overwrites a variable that is already set.

`schemaFromUrl(url)` reads the schema a URL points at from its `search_path` option. The tests use it to make sure they never run against the main schema.

Two roles, least privilege

Role	Can	Used by
`rtm_migrator`	Owns the schema: create, alter and drop tables, indexes and partitions.	`db:migrate` and the other `db:*` commands, through `DB_MIGRATE_USER`.
`rtm_app`	Select, insert, update and delete rows. Cannot change the schema. Granted through default privileges, so new tables are covered automatically.	The running console.

If the app is ever compromised it cannot drop a table, and a typo in app code cannot alter the schema.

Encryption in transit

- Whether the instance insists on TLS is set in its parameter group, which belongs to Van Reservation. The console uses TLS either way.
- The app verifies the server against the **RDS certificate bundle** (`DB_SSLMODE=verify-full` and `DB_CA_CERT`). On CGSPH the bundle is the file Van Reservation already uses (Section 1, question 10).
- On a PC behind corporate TLS inspection, `DB_CA_CERT` adds the company's certificate to the trusted list. Turning verification off is never the fix.

> **WHY PG IS KEPT OUT OF THE BUNDLE**
>
> `pg` is added to `serverExternalPackages` in `next.config.ts`, next to `exceljs` and `web-push`, so Next.js loads it from `node_modules` at run time instead of bundling it.

7 Migrations with Kysely

Kysely is a type-safe SQL query builder, not an ORM: queries read like SQL and are checked by TypeScript. Its migrator applies numbered TypeScript files in order and records each one in the database. `kysely-ctl` is its command-line tool.

The commands

Command	Does	Needs the database
`npm run db:migrate`	Applies every migration not yet applied, oldest first, then runs `db:partitions`. Does nothing when up to date.	Yes, as `rtm_migrator`
`npm run db:partitions`	Makes any missing `notification_log` partition for this month and the next 12, moving rows out of the default partition first. Safe to repeat.	Yes, as `rtm_migrator`
`npm run db:make -- <name>`	Creates an empty, timestamped migration file to fill in.	No
`npm run db:status`	Lists the migrations and which are applied.	Yes
`npm run db:rollback`	Undoes the last migration. **Local only**: refused when `APP_ENV` is staging or production.	Yes
`npm run db:types`	Regenerates `lib/db/schema.ts`, the TypeScript description of every table, from a migrated database (`kysely-codegen`).	Yes, local
`npm run db:role-passwords`	Prints a new random password for each RTM database role, once, and the `ALTER ROLE` line that sets it from a SCRAM hash, so the password itself never reaches pgAdmin (Section 4, step 3). Run it in a terminal of your own.	No
`npm run db:up`	Starts the local PostgreSQL container.	No

Files

```
# configuration, read by kysely-ctl; uses lib/env.ts for the connection
kysely.config.ts
# one file per change, applied in name order
lib/db/migrations/
  <timestamp>_reference.ts            # Phase 0: regions, orgs, routes, rules, status mapping, audit
  <timestamp>_critical_route.ts       # the fifth route (question 6)
  <timestamp>_people.ts               # Phase 1: groupings, queue map, people, queues, subscriptions
  <timestamp>_rule_overrides.ts       # Phase 1: rule_override
  <timestamp>_shift_records.ts        # Phase 2
lib/db/schema.ts                      # generated by db:types, committed
lib/db/client.ts                      # the lazily created Kysely instance
lib/db/url.ts                         # DATABASE_URL composition, schemaFromUrl()
lib/store/                            # the Store interface, memory and PostgreSQL
tools/db/                             # db:types, the rollback guard, the test-database init script, role
passwords
```

The TypeScript scripts in `tools/db/` run with `tsx`, a dev dependency; `role-passwords.mjs` runs with plain Node.

A migration, in outline

```
import { type Kysely, sql } from "kysely";

export async function up(db: Kysely<unknown>): Promise<void> {
  await db.schema.createTable("notification_route")
    .addColumn("route_id", "text", c => c.primaryKey())
    .addColumn("route_name", "text", c => c.notNull())
    .addColumn("enabled", "boolean", c => c.notNull().defaultTo(true))
    .execute();
  // ...then insert the four routes
}

export async function down(db: Kysely<unknown>): Promise<void> {
  await db.schema.dropTable("notification_route").execute();
}
```

The schema builder covers almost all of the design: identity columns, generated columns, check constraints, partial indexes and deferrable foreign keys. The rest, such as `PARTITION BY RANGE`, is written with Kysely's `sql` template inside the same migration.

The migrations, by phase

What each migration creates, with the decisions in Section 1 built in. `db:make` adds a timestamp to each file name, so they always run in this order.

Migration	Creates	Built in from the decisions
`reference` **Phase 0**	`genesys_region`, `genesys_org`, `notification_route`, `notification_route_step`, `rules_master`, `rule_version`, `status_mapping`, `audit_event`, with their rows	The three Genesys orgs the console watches and their regions; the 14 default rules, each at version 1; the 4 routes. `changed_by` and `updated_by` have no foreign key yet.
`critical_route` **Phase 0**	No tables: 1 row in `notification_route` and 3 in `notification_route_step`	The `critical` route: strike 1 to the agent and LOB Manager, strike 2 adds the Team Lead, strike 3 and later to Ops with an incident. Added as its own migration because `reference` is already merged and must not change.

Migration	Creates	Built in from the decisions
`people` **Phase 1**	`tower`, `sub_tower`, `lob`, `person`, `queue`, `push_subscription`, `queue_member`, `queue_lob_map`; `genesys_org.on_screen`	Tower → Sub-Tower → LOB → queues, each with one parent, filled from the WFM mapping upload, which is kept in `queue_lob_map` in upload order. Hierarchy rows are never deleted, so an override keeps its target. A team is a queue, and `queue_member` lists each agent's queues, their home queue first. People keyed by Genesys user ID, each with their org, Domain ID, supervisor (a deferred foreign key to `person`) and LOB (the one with most of their queues, ties by name). People and queues that leave the roster are kept, marked as off it. Queues keep their Genesys division and people their last Genesys login. Subscriptions are keyed by a hash of the endpoint, with the browser and the last time an alert reached it. Adds the `person` foreign keys on `rule_version.changed_by` and `status_mapping.updated_by`; `audit_event.actor_id` keeps none, since admins are not always Genesys users. On its first start the app copies `.rtm/queue-map.json` and `.rtm/genesys-org` in, once.
`rule_overrides` **Phase 1**	`rule_override`	Versioned settings per Tower, Sub-Tower or LOB, pointing at exactly one `tower`, `sub_tower` or `lob` row by ID, with `scope_level` worked out from which one is set (Section 9). Threshold, severity, route and on/off are each null to take the value from the level above; a version with all four null removes the override, and the highest version per rule and place is current. Each change also writes an `audit_event`. The unit stays the rule's, and system rules take no override (the app refuses one).
`shift_records` **Phase 2**	`shift`, `agent_rule_state`, `monitoring_instance`, `incident_counter`, `incident_log`, `notification_log`	A shift is **one US Eastern day per org**: `org_id` and `shift_date`, unique together, with `starts_at` and `ends_at` at Eastern midnight (23 or 25 hours on a daylight-saving day). One active shift per org; `floor_fired` lists the queue and system rules in breach, so a restart does not raise them again. Strike rows are per shift, so strikes start at zero each day with nothing deleted; `agent_rule_state` keeps `strikes` only, not `fired`. A call-out's `instance_id` is the number the console shows, handed out by the app from one counter for every org; it points at the exact `rule_version` and, when one applied, the most specific `rule_override`. A floor call-out has no person and strike 0 (a check holds this). **One incident per strike** from 3 on: `incident_log` has `instance_id`, the call-out that opened it, unique, and `strike` (3 or more), written in the same transaction as the call-out and `incident_counter`. A check refuses a closed incident without a final disposition. **One incident counter for every org**, one row per year, so numbers start again at 0001 each January. Call-outs and incidents carry over midnight. `source` does not allow `csv`: replays are never saved. `notification_log` is split by month, with a default partition and the next 12 months. Acknowledge all and each incident move write an `audit_event`.

Migration	Creates	Built in from the decisions
`source_events` Phase 3	`source_event_stream`	**Holds the current Eastern day only**, for each agent's calls after a restart. Not partitioned; emptied with `TRUNCATE` at midnight Eastern, for every org at once. When another org's floor has already written the new day's events, only the older rows are deleted instead, so none is lost. Each event carries its `org_id`, `entity_type` and `entity_id` (the agent's uid, the queue's name, or `floor`), `metric_name` (`state`, `call.end`, `aht`, `counts`, `queue`), `metric_value` and the update as `event_payload` (JSONB). `processed_flag` from the schema draft is left out: nothing reads events to process them. Grants `TRUNCATE` on this table to `rtm_app`, where that login exists. Also adds `audit_event.actor_role`: the role each audited change was made in, next to `actor_id`.
`incident_owner` Incidents	`incident_log`	Adds `owner_role` next to `owner_id`: the role of whoever started the investigation. `owner_id` is null for an Admin, who has no person, so the role keeps who owns it, as `audit_event.actor_role` does.

Rules for writing migrations


Rule	Why
Never edit a migration that has run outside your machine	It will not run again anywhere it already ran. Write a new one.
Production goes forward only	`down()` is for local work. A bad change in production is fixed by a new migration.
Reference data belongs in migrations	Routes, default rules, status mapping and regions are written once, by the migration that creates their table. A later rule edit by an Admin is never overwritten.
One concern per file	A failed migration is rolled back as a whole and is easy to read in review.
Regenerate types and commit them	After a new migration, run `db:types` and commit `lib/db/schema.ts` with it, so queries are checked against the real columns.

SAFE TO RUN TWICE, SAFE TO RUN TOGETHER

Kysely records applied migrations in `kysely_migration` and holds a lock in `kysely_migration_lock` while it works. Running `db:migrate` again does nothing, and two runs at once wait for each other. It also refuses to apply an older file after a newer one has run, which catches a branch merged out of order.

8 Running db:migrate before a deployment

The RDS instance has no public address, so `db:migrate` has to run from inside the VPC: from a laptop it cannot connect. The EC2 instance that runs the console is inside the VPC, so the deployment runs it there, after the new code is built and before the app is restarted.

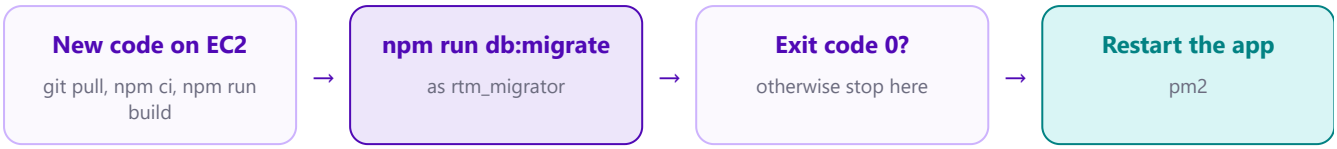

The new code starts only after the database has been migrated for it.

Step by step

1. Connect to CGSPH. Pull and build **in the app's own folder**, as Van Reservation does:

   ```
   cd <the app's folder>
   git pull
   npm ci
   npm run build
   ```

   If the build fails, stop: the database is untouched. The build replaces the `.next` folder the running app uses, so go straight on to the next steps and restart soon after.

2. Run `npm run db:migrate`. It reads the same `.env.local` as the app and logs in as `rtm_migrator` through `DB_MIGRATE_USER` and `DB_MIGRATE_PASSWORD`; the app itself logs in as `rtm_app` through `DB_USER`.

   ```
   # .env.local on CGSPH, added to what is there (values from the password manager; never committed)
   APP_ENV=production
   PERSISTENCE_MODE=postgres
   DB_HOST=<the RDS endpoint>
   DB_NAME=rtm_console
   DB_USER=rtm_app
   DB_PASSWORD=...
   DB_MIGRATE_USER=rtm_migrator
   DB_MIGRATE_PASSWORD=...
   DB_SSLMODE=verify-full
   DB_CA_CERT=<path to the RDS bundle>
   ```

   Before the first deployment, `npm run db:status` checks the settings and the connection without changing anything: it lists the migrations not yet run.

3. **Exit code 0:** restart the console onto the new build:

   ```
   <stop the app>
   <start the app>
   <check it is online>
   ```

   The exact commands are in the private deployment note (kept outside this public repository). On start-up it validates its settings and loads its rules from the new schema. To roll the code back, check out the previous commit or tag, then `npm ci`, `npm run build` and restart; migrations are not undone by this. Before the next deployment, `git checkout main` so `git pull` works again.

4. **Anything else:** stop. The database is untouched, because a failed migration is rolled back inside its transaction. Read the error, fix it with a new commit, and deploy again.

There is no CI/CD: merging to `main` deploys nothing. A release goes live only when someone runs these steps on CGSPH, the same way Van Reservation is deployed.

THE MIGRATOR TOUCHES ONLY RTM_CONSOLE

`rtm_migrator` owns `rtm_console` and has no rights on the Van Reservation database, so a migration cannot change anything but the console's own tables, however it is written.

WRITE MIGRATIONS THE OLD CODE CAN LIVE WITH

For a short time the old app runs against the new schema. Add columns and tables freely. To rename or remove one, use two releases: first stop using it, then drop it.

Running it by hand

Migrations normally run only on the server, as a step of the deployment. In an emergency they can be run from a laptop through an SSM port-forwarding session to the database, but the certificate is then issued to the RDS name rather than the forwarded local address, so this needs care; ask before doing it.

9 Changes to the proposed schema

The 20 tables in the PostgreSQL Schema doc are kept. These are the corrections found in review, each to match how the engine actually runs. Each one is made in the first migration of its table.

Area	In the schema doc	Change
Strike 3 and later FIX	The incident number is taken from `incident_counter` inside the transaction; a race is retried.	The engine numbers incidents in memory, from one counter shared by every org (`registry.incidentSeq`), and cannot wait mid-tick. At start-up the counter continues from `incident_counter` ; the flush writes the counter, incident and call-out in one transaction. With one engine process there is no race.
Data sources FIX	`shift.source` allows gencloud and sim; `monitoring_instance.source` also allows csv. Sim agents have no Genesys ID or org.	Only the Gencloud floor is saved. CSV replays are private to a session and stay in memory. The simulator is saved only behind a setting, under its own org and people.
Partitions FIX	`notification_log` and `source_event_stream` are partitioned by month.	`notification_log` stays monthly, with a `DEFAULT` partition and the next 12 months at creation. `npm run db:migrate` then keeps 12 months ahead, as `rtm_migrator` , moving any rows that reached the default partition into their month (Section 8). The app's login cannot create tables, so it cannot add them itself. Not `pg_partman` for now: it would mean changing the shared instance's parameter group.
Raw events FIX	`source_event_stream` is kept by month.	It holds **one day**. It is not partitioned: at midnight Eastern it is emptied with `TRUNCATE` , which is instant and gives the space back at once, unlike deleting rows. The emptying goes through the same ordered write queue as the events, so an event from 23:59:59 can never land after it. The migration grants `TRUNCATE` on this one table to `rtm_app` .
Orgs FIX	`shift` has no org; `shift_id` is a name such as `'2026-10-07-day'` , with one active shift per source.	The console runs one floor per Genesys org. `shift` gets `org_id` and `shift_date` (the Eastern date), unique together, and one active shift **per org**. Call-outs, incidents and strikes reach their org through the shift; raw events carry `org_id` themselves.
Incident numbers FIX	`incident_counter` has one row per year.	Kept, and **shared by every org**, so numbers never repeat across orgs. Numbering starts again at `0001` each January (on the Eastern date): `INC-2027-0001` follows `INC-2026-…` . The engine already does this (#37): one shared counter that keeps its year and last number (`{ year, n }`), the same pair this table stores. At start-up it continues from this table.

Area	In the schema doc	Change
Strike state FIX	`agent_rule_state` stores `strikes` and `fired`.	Store `strikes` only. `fired` flips at every status change for about 1,600 agents. After a restart the engine already marks rules an agent is past as fired, without a call-out.
Event volume FIX	Tens of thousands of raw events per shift.	Plan for hundreds of thousands in a day. Events are buffered and inserted many rows per statement, once a second. The table never holds more than one day.
Times FIX	`timestamptz` everywhere.	Kept. Every record is stamped with the real date and time at the moment it happens. The engine's seconds since midnight only drive the screen and are not stored.
Incidents FIX	One open incident per agent per rule (`one_open_incident`); later strikes raise its count.	**One incident per strike** from strike 3 on. The `one_open_incident` index is dropped; instead each incident points at the call-out that opened it, and that link is unique, so one strike can never open two incidents. Each incident stores its strike number. The engine's `openIncident()` changes to match: today it reuses an open incident; it will always open a new one.
Rule levels NEW	One threshold, severity and route per rule, the same everywhere.	Settings can differ for a Tower, Sub-Tower or LOB, as PR #40 and PR #44 propose. `rule_override` holds one rule's settings for one place, versioned, and points at its `tower` , `sub_tower` or `lob` row. A field left empty takes the value from the level above, so the most specific setting wins field by field, with `rule_version` as the default. Built in Phase 1.
Rule edits	Every edit is a new `rule_version` .	Kept. Edits to the same rule by the same person within a few seconds are folded into one version, so typing a threshold does not leave a version per keystroke.

Tables by phase

Phase	Tables	Status
0 · Reference	`genesys_region` , `genesys_org` , `notification_route` , `notification_route_step` , `rules_master` , `rule_version` , `status_mapping` , `audit_event` (8)	Built
1 · People and groupings	`tower` , `sub_tower` , `lob` , `person` , `queue` , `push_subscription` , `queue_member` , `queue_lob_map` , `rule_override` (9)	Done
2 · Shift records	`shift` , `agent_rule_state` , `monitoring_instance` , `incident_log` , `incident_counter` , `notification_log`	Done
3 · Raw events	`source_event_stream`	Done

24 tables in all. `rule_version.changed_by` and `status_mapping.updated_by` point at `person`. In Phase 0 they are created without that foreign key, which Phase 1 adds once `person` exists.

Compared with the 12-table proposal (PR #40)

PR #40 proposed 12 tables built at once, and PR #44 revised it to 22. Their rule levels, `rule_override` and `queue_lob_map` were adopted (above). Where it conflicts with decisions already made and built, those decisions are kept.

Topic	PR #40	This design
Incidents per agent	One open incident per agent per call-out, enforced by an index.	Every strike from the third on opens its own incident, and incidents never merge. The screens and the engine already work this way.
What opens an incident	Strike 3, or any critical rule straight away.	Strike 3 and later only. Floor rules have no agent to investigate, so they never open one.
Raw Genesys events	Every event kept, split by month.	The current Eastern day only, emptied at midnight (decisions 8 and 9). Keeping everything would be by far the largest storage cost.
Call-out to event link	Each call-out points at the event that triggered it.	No link, because the events are emptied every night. The call-out stores the value that broke the rule instead.
Incident numbers	One counter from 1001 that never resets.	INC-YYYY-NNNN, starting again each January and shared by every org (#37).
Genesys orgs	Not covered.	Three orgs in two regions (#35). Without them the US West orgs cannot be watched.
Shifts and strikes	Not covered; strikes are a count on the call-out.	Strikes per shift, reset at Eastern midnight (decision 7, #36). A restart then picks up mid-day.
Route steps, push subscriptions	JSON inside the route and the person.	Rows of their own, so the database checks each step and old browsers can be removed one by one.
Query builder	Drizzle or Kysely.	Kysely (decision 1).

10 How the engine saves and recovers

The engine keeps working exactly as it does today. What changes is that every record it makes is also handed to a store, and that on start-up it begins from what the store remembers instead of from nothing.

The store

MEMORY STORE

Keeps nothing beyond the process. Used in development without a database, in unit tests, and always for CSV replays. Refused in staging and production.

POSTGRESQL STORE

Queues each record in order and flushes the queue in one transaction about once a second. A failed flush is retried with the same records in the same order; the console raises a notice if the queue keeps growing.

On start-up

1. Validate the environment (Section 5). Stop if anything is wrong.
2. Load the rules at their current version. In Phase 0 this is the only step.
3. From Phase 2: find or open the shift for today's Eastern date, then load today's strike counts, every open call-out and incident from any day, and the incident counter.
4. From Phase 3: empty any events left from an earlier day, then rebuild each agent's calls, transfers, short calls and a starting AHT for today from `source_event_stream`.
5. Connect the feed. Genesys gives each agent's time already in state; rules an agent is past are marked fired without a call-out, as today.

What is never stored

Data	Why not
Live timers (time in state, hold time)	Taken again from Genesys at connect.
The `fired` flag per rule episode	Rebuilt at connect (Section 9).
CSV replays	Private to the session that started them.
The Genesys token	A secret: it stays in the environment or the server's `.rtm/` folder, never in a table.

IF THE DATABASE IS DOWN

The floor keeps running: timers, call-outs and alerts carry on from memory, and records wait in the queue. A start-up with the database unreachable fails, because the engine cannot know the current rules or strikes.

11 Local development and tests

A developer can work with no database at all, as today, or against a local PostgreSQL in Docker that behaves like RDS. Developers never connect to `van-reservation-prod`.

First run with a local database

1. Copy `.env.example` to `.env.local` and set `APP_ENV=development`, `PERSISTENCE_MODE=postgres` and the `DB_*` values given for the container.
2. `npm run db:up` starts PostgreSQL in Docker on **port 5435**, so it never clashes with a PostgreSQL already installed on 5432 or with other local containers on 5433 and 5434.
3. `npm run db:migrate` creates every table and the reference data.
4. `npm run dev` as usual. Rule edits now survive a restart.

To work without a database, set `PERSISTENCE_MODE=memory`. Nothing else changes.

The container

Setting	Value
Image	A pinned `postgres` release with the same major version as `van-reservation-prod`
Container name	`rtm-console-db`
Host port	5435
Data	A named volume, `rtm-console-pgdata`, kept between restarts
Health check	`pg_isready`, so scripts can wait for it
Credentials	The same local-only values as `.env.example`

Tests

Kind	How
Unit (most)	As today, with Vitest and the memory store. No database needed.
Environment	`parseEnv()` with crafted inputs: missing, empty, commented out, half pairs, stubs outside the allowlist, partial AWS keys, a temporary key without its session token.
Database URL	`DATABASE_URL` precedence, composition from `DB_*`, special characters in passwords, `schemaFromUrl()`.
Integration	Migrations and the PostgreSQL store against a real database. Skipped when no test database is configured.

The test database is chosen in this order: `TEST_DATABASE_URL` if set; otherwise the main URL with the schema `<schema>_test` if a schema is in use; otherwise the database `<database>_test`. Integration tests refuse to run against anything that is not a test database.

12 Delivery plan and acceptance checks

Four phases, ordered by what each is waiting for. Each phase is its own pull request, and its migration is final once merged.

Phase 0 · Foundation Built

Typed environment and boot check, database URL module, Kysely and `db:migrate`, local PostgreSQL, reference-data migration, the store, and **rules that survive a restart**. Merged in #39; the migration login and the critical route in #45.

Phase 1 · People and groupings Built

The engine carries Genesys user IDs (#46). Supervisors come from Genesys, with the CGS directory filling gaps (#48). Towers, Sub-Towers, LOBs, queues, people, the WFM mapping and push subscriptions are saved in the database (#49). Rule overrides and the LOB drill-down apply (#50).

Phase 2 · Shift records Built

Shifts, call-outs, incidents, strikes and desktop-alert deliveries, through the write-behind queue, and recovery after a restart.

Phase 3 · Raw events Built

Today's Genesys events with batched inserts, emptied at midnight Eastern. Each agent's calls for the day survive a restart.

Phase 0 is done when

All of these pass on a developer's PC, against PostgreSQL 17.7 in Docker (4 November 2026).

- [ ] `.env.example` copied as it is fails the start-up check, safely and readably.
- [ ] One run of the check reports every failing variable, not only the first.
- [ ] Commented-out optional variables work; empty strings are refused; the pair rules are tested.
- [ ] `DATABASE_URL` precedence, `DB_*` composition and `schemaFromUrl()` are tested.
- [ ] The memory store is refused outside development and test; partial or temporary AWS keys without a session token are refused.
- [ ] The Docker database matches `.env.example`, and `db:make` works with no database settings.
- [ ] `db:migrate` on an empty database creates the Phase 0 tables and reference data; a second run does nothing.
- [ ] `db:migrate` logs in as `DB_MIGRATE_USER` when it is set, and the app never does.
- [ ] An edited threshold is still there after a restart, with its old value kept as an earlier version.
- [ ] `npm run typecheck`, `npm run lint` and `npm test` pass.

Phase 1 is done when

Checked on a developer's PC against PostgreSQL 17.7 in Docker (9 November 2026), except where marked.

- [ ] Agents, call-outs and incidents are keyed by Genesys user ID; two agents with the same name stay apart.
- [ ] Each agent's Team Lead and Manager come from Genesys, with the CGS directory filling gaps; agents with neither are listed for admins.
- [ ] The queue map, people, queues, membership, desktop-alert subscriptions and the org on screen survive a restart, from the database instead of `.rtm/`; the old files are copied in once.

- [ ] A rule override for a Tower, Sub-Tower or LOB applies to that group's agents, field by field, with the rest from the level above; it is kept as a version and survives a restart.
- [ ] A queue rule with an override is checked against that group's own numbers, and the agent grid colours each group by its own thresholds.
- [ ] An override for a system rule is refused, and so is a place that is not in the queue mapping.
- [ ] Admins can download the agents whose queues are in several LOBs.
- [ ] `npm run typecheck`, `npm run lint` and `npm test` pass, including the database tests.
- [ ] Still to check: the Rules tab's overrides clicked through in a browser with a mapping loaded; `db:migrate` on the server, on the planned deployment. The other known gaps are in Section 1.

Phase 2 is done when

Checked on a developer's PC against PostgreSQL 17.7 in Docker (9 November 2026), except where marked.

- [ ] Each call-out on a Genesys floor is saved with its shift, the rule version and override that applied, and the strike it counted; strike 3 and later save the incident and the incident counter in the same transaction.
- [ ] Acknowledging (one, from a desktop alert, or all), an agent's reason and each investigation move are saved; Acknowledge all and incident moves leave an audit entry.
- [ ] After a restart, today's call-outs and every open one, incidents not closed, today's strikes and the queue rules in breach come back; numbers carry on from the last saved.
- [ ] A new Eastern day opens a new shift and closes the one before; strikes start again at zero.
- [ ] Each desktop alert is logged per browser, without failing for a person or browser the database does not know.
- [ ] CSV replays and the simulator save nothing.
- [ ] `npm run typecheck`, `npm run lint`, `npm test` (with the database tests) and `next build` pass.
- [ ] Still to check: a restart mid-day on the live floor, after the deployment (Section 1, Known gaps).

Phase 3 is done when

Checked on a developer's PC against PostgreSQL 17.7 in Docker (9 November 2026), except where marked.

- [ ] Each agent update and call end from a Genesys floor is kept in `source_event_stream`, gathered into one insert about once a second; queue numbers and AHT only when they change.
- [ ] After a restart, each agent's calls, transfers, short calls and a starting AHT for today come back.
- [ ] At midnight Eastern the table is emptied with `TRUNCATE`, through the same ordered queue as the events; a floor that rolls over after another org's has written the new day deletes only the older rows.
- [ ] At start-up, events left from an earlier day are emptied first.
- [ ] The audit log covers every change PR #44 lists that the app makes: rule and override edits, queue map uploads, Acknowledge all, incident moves and floor switches, each with who (`actor_id`) and in what role (`actor_role`), and the values before and after.
- [ ] CSV replays and the simulator keep no events.
- [ ] `npm run typecheck`, `npm run lint`, `npm test` (with the database tests) and `next build` pass.
- [ ] Still to check: on the server, after the deployment, that `rtm_app` can empty the table at midnight (Section 1, Known gaps).

13 Frequently asked questions

Why Kysely and not an ORM such as Prisma?

The schema leans on PostgreSQL features (partial unique indexes, partitions, deferrable keys, generated columns) that ORMs hide or do not support. Kysely writes plain SQL with TypeScript checking, and its migrations are ordinary TypeScript files in the repository.

Do I need a database to work on the console?

No. `PERSISTENCE_MODE=memory` runs it exactly as it runs today.

Can I run db:migrate from my laptop against AWS?

Not directly: the database has no public address. Run it on CGSPH as part of the deployment, or in an emergency an SSM port-forward (Section 8).

What happens if a migration fails halfway?

It runs in a transaction, so PostgreSQL rolls it back and the database is as it was. Do not restart the app: it keeps running the code it had.

Can sharing van-reservation-prod affect Van Reservation?

Only through load, and that is capped: connection limits on the RTM roles, batched writes, and no changes to the instance itself. The RTM roles cannot read or change Van Reservation's data. If the console's load ever matters, it moves to its own instance (Section 4).

Should developers point at the shared instance?

No. It is a production instance. Develop against the local Docker database; only the deployed console connects to `rtm_console`.

Can we run two copies of the console for resilience?

Not yet. Two engines would disagree. A second web tier needs the engine to publish each tick through a broker such as Redis (data architecture document, Section 9).

Will an Admin's rule edits be overwritten by a later migration?

No. Default rules are inserted once, by the migration that creates the table. Changing a default for new installs means a new migration that touches only rules nobody has edited.

Where do the real passwords go?

In a password manager, and in the `.env.local` on the server, readable only by the app's user. On a developer's PC, its own `.env.local` holds only the local Docker values. None of these is ever committed: the repository is public.

14 Quick reference card

FIRST LOCAL RUN

Copy `.env.example` → `.env.local` → `npm run db:up` → `npm run db:migrate` → `npm run dev`.

NEW MIGRATION

`npm run db:make -- add_x` → write `up` and `down` → `db:migrate` → `db:types` → commit both.

DEPLOY (EC2)

`npm ci` → `npm run build` → `npm run db:migrate` (logs in as `DB_MIGRATE_USER`) → exit 0 → restart the app.

WHICH URL WINS

`DATABASE_URL` → else `DB_*`. A shell export beats `.env.local`. `DB_SCHEMA` sets `search_path`.

NO DATABASE

`PERSISTENCE_MODE=memory`, development and test only.

NEVER

Edit an applied migration · roll back in production · change the shared instance's settings · turn off TLS verification · commit a secret.

Packages added

Package	Purpose
`kysely`, `pg`	Query builder and PostgreSQL driver (dependencies)
`zod`	Environment validation (dependency)
`kysely-ctl`, `kysely-codegen`, `@types/pg`	Migration commands and type generation (development only)

SETTLED FOR PHASE 2

A shift is one US Eastern day, midnight to midnight, and strikes start again at zero at Eastern midnight. Every strike from 3 on opens its own incident, so strike 5 on the same rule means 3 incidents to investigate. These answers go into the first Phase 2 migration, which cannot be edited once it has run.