



Hidden-Deep-Into-My-Heart

Hidden Deep Into My Heart

TryHackMe Write-up

Web - Easy - 100 points

<https://tryhackme.com/room/lafb2026e9>

The Task

This room gives you a small website called "Love Letters Anonymous" - a cute valentine message board. Somewhere inside it, Cupid left a vault with a secret hidden in it. The job is just to find what's hidden and grab the flag.

POINTS

100

CATEGORY

Web

DIFFICULTY

Easy

From
TryHackMe
To
You

My Dearest Hacker,


Cupid's Vault was designed to protect secrets meant to stay hidden forever. Unfortunately, Cupid underestimated how determined attackers can be.

Intelligence indicates that Cupid may have unintentionally left vulnerabilities in the system. With the holiday deadline approaching, you've been tasked with uncovering what's hidden inside the vault before it's too late.

You can find the web application here: `http://10.48.183.106:5000`

Web

With love,
Chief Inspector Valentine ❤️

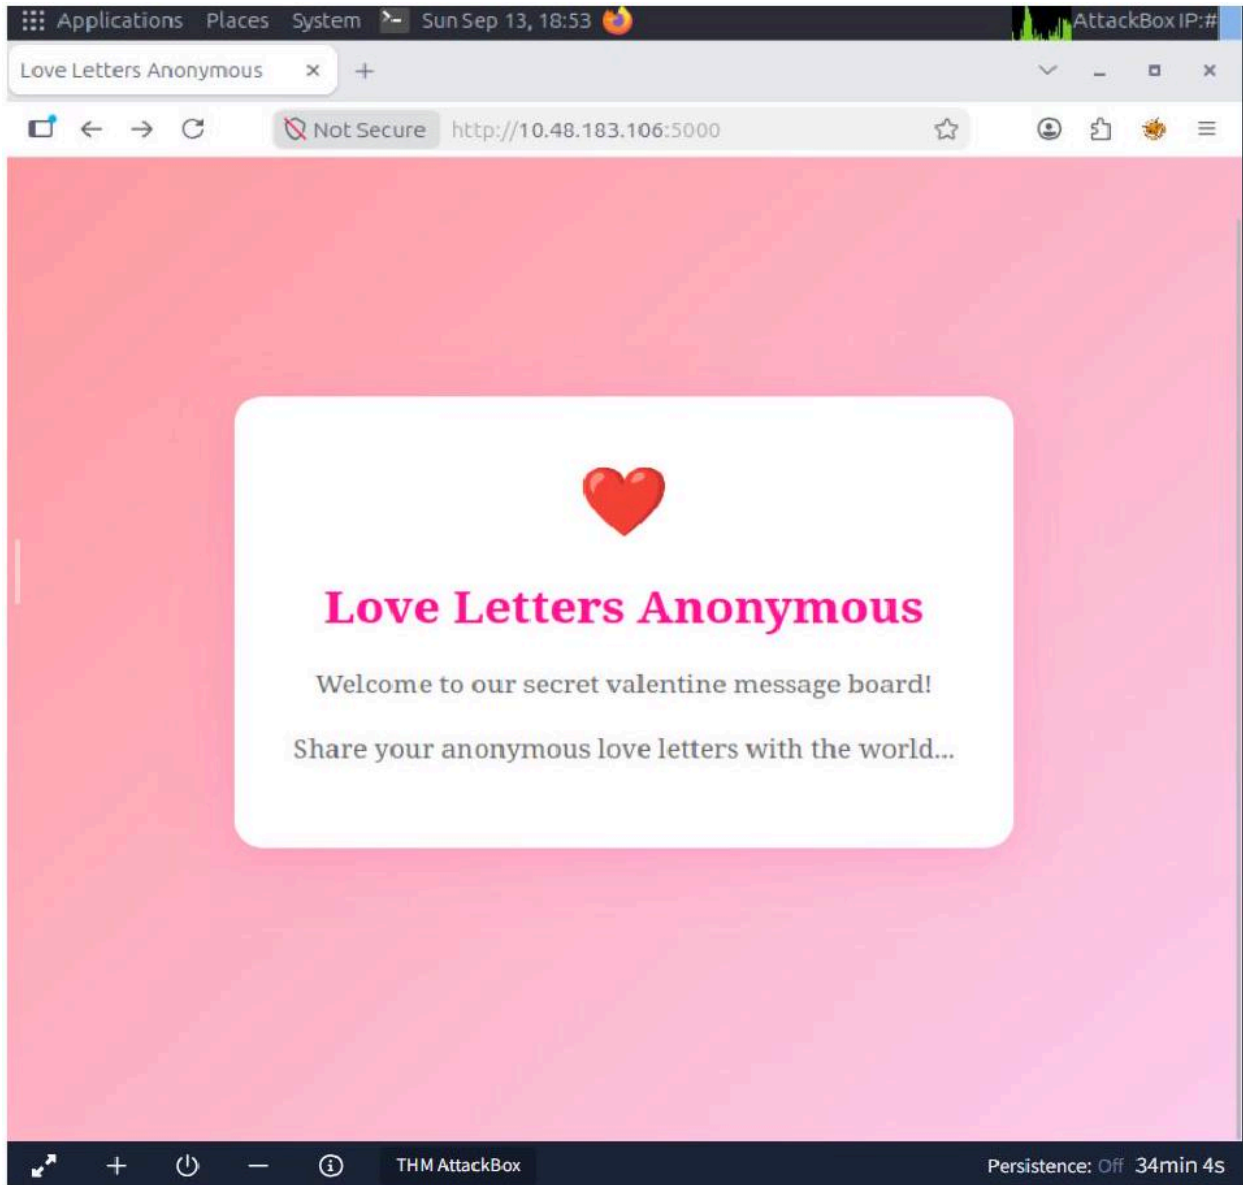

The website we're given - just a plain landing page

My Approach

A plain landing page like this never shows everything. So the first move is always to check the quiet, boring stuff a normal visitor never looks at - starting with robots.txt.

Step 1 - Check robots.txt

robots.txt is a file websites use to tell search engines which pages to skip. But it's also a great hint list for us, because it literally names the folders the owner didn't want found.

```
$ curl http://10.48.183.106:5000/robots.txt
User-agent: *
Disallow: /cupids_secret_vault/*
# cupid_arrow_2026!!!
```

Two things jumped out: a hidden folder called cupids_secret_vault, and a comment left right below it that looks exactly like a password - cupid_arrow_2026!!!


Step 2 - Scan that hidden folder

Just knowing the folder name isn't enough - there could be more pages inside it we can't see. So I ran dirsearch, a tool that quickly checks a big list of common page names against a folder to see which ones actually exist.

```
$ dirsearch -u
http://10.48.183.106:5000/cupids_secret_vault/
```

```
[18:43:56] Starting: cupids_secret_vault/
[18:44:27] 200 - 2KB - /cupids_secret_vault/administrator
Task Completed
```


That turned up a page called administrator sitting inside the hidden folder.

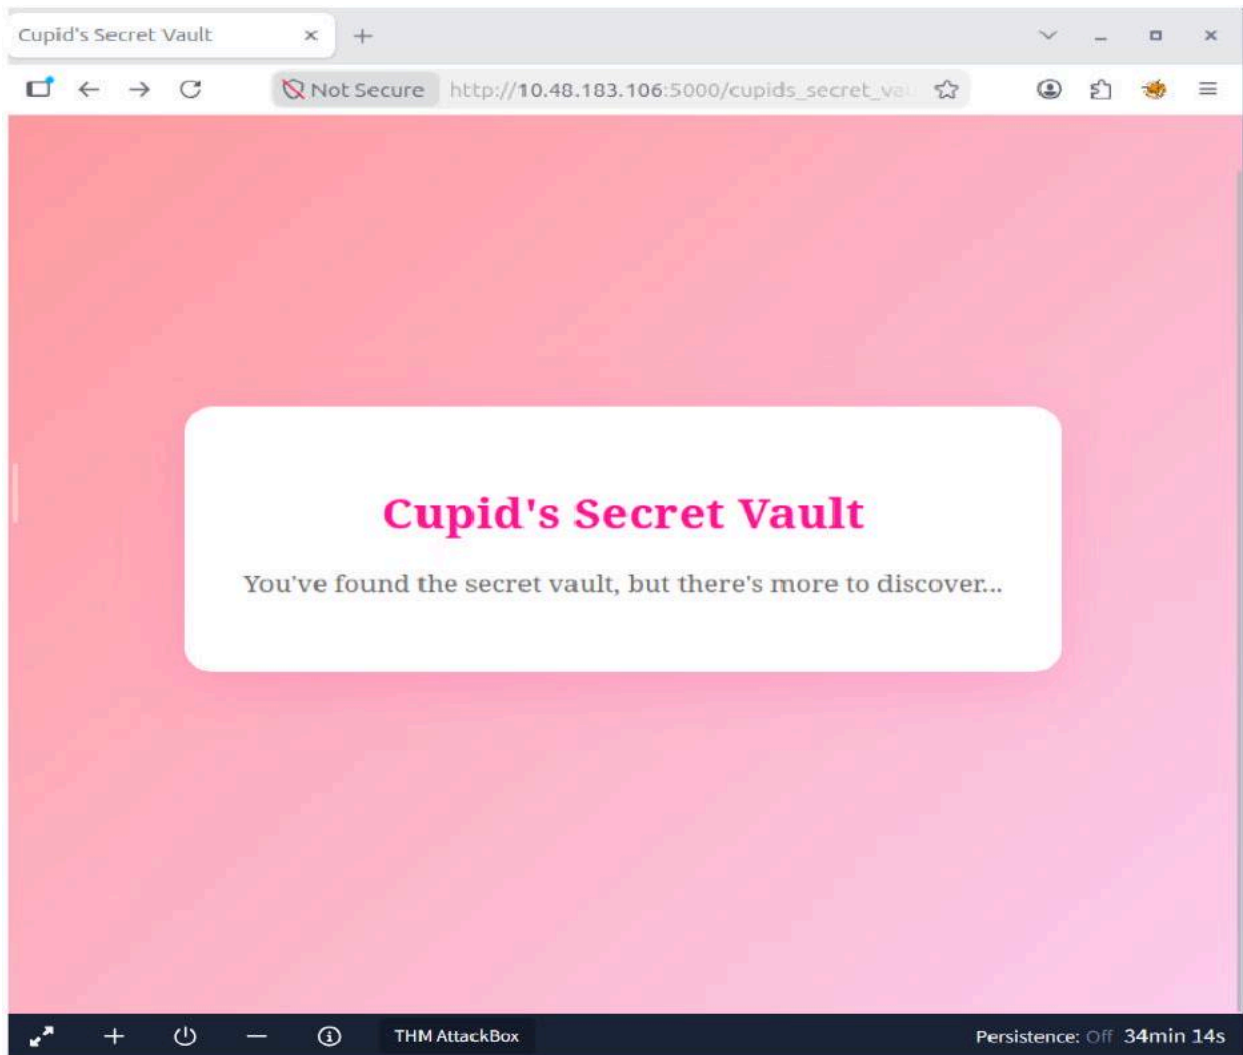

Visiting the hidden folder on its own - a teaser, not the real page yet

Step 3 - Log in


Opening the administrator page showed a login form. I tried the obvious username, admin, and used the password we found sitting in the robots.txt comment.

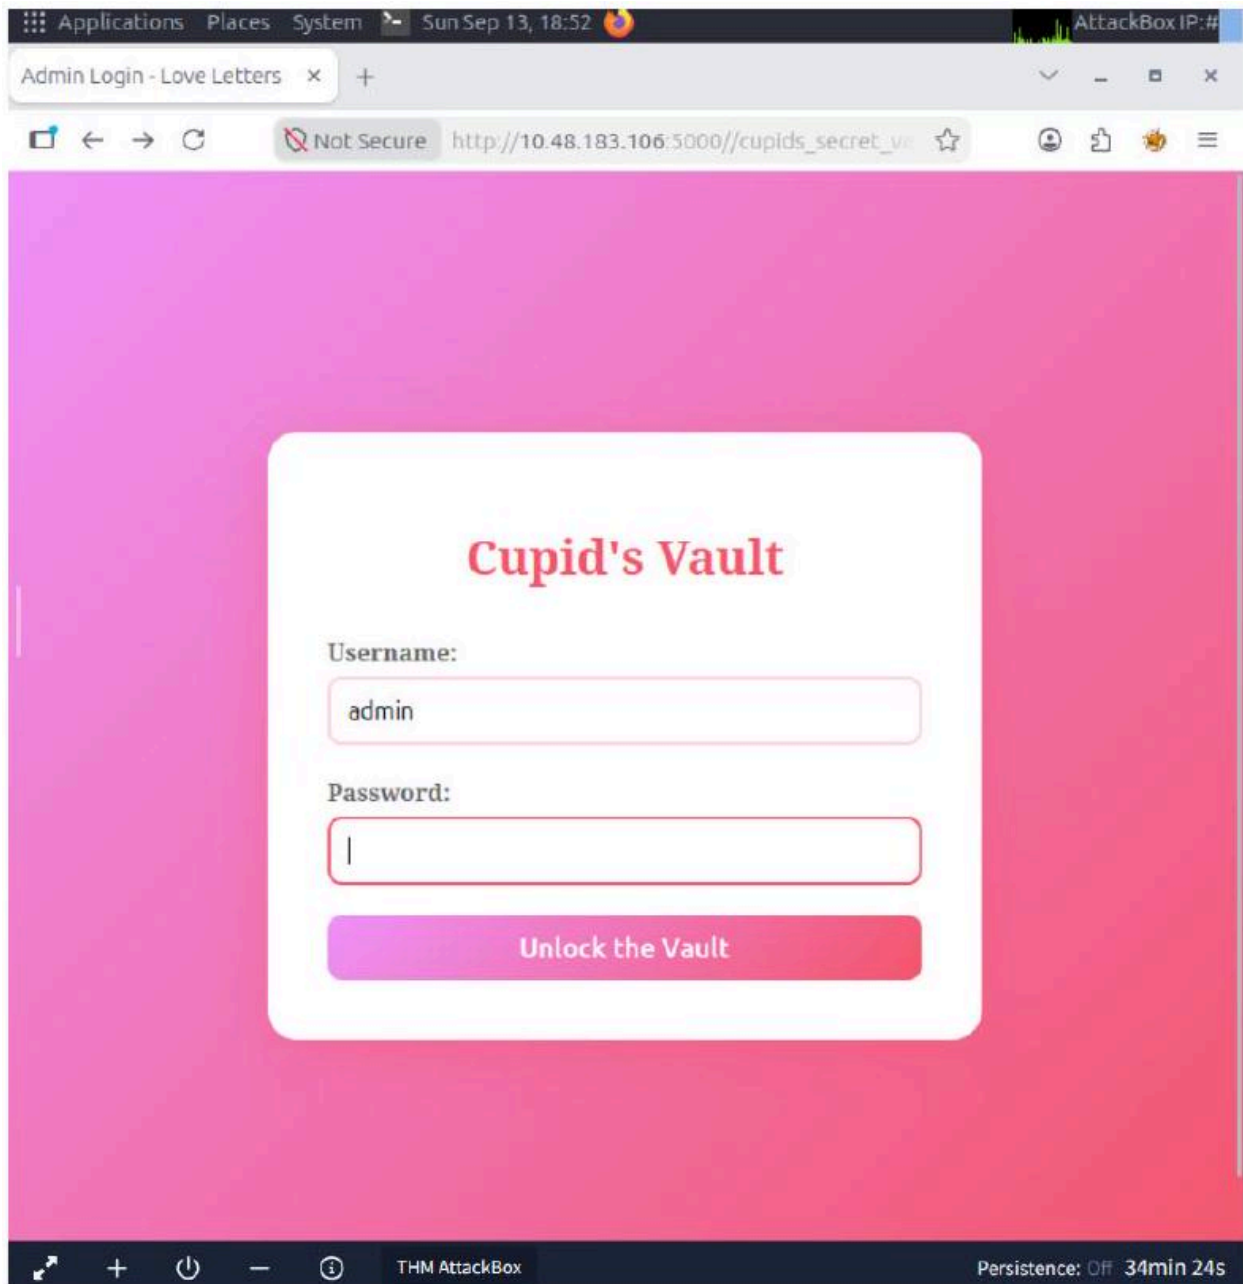

Cupid's Vault login - admin + the password from robots.txt

Step 4 - Grab the flag

That combination worked, and it dropped straight into an admin dashboard with the flag sitting right there.

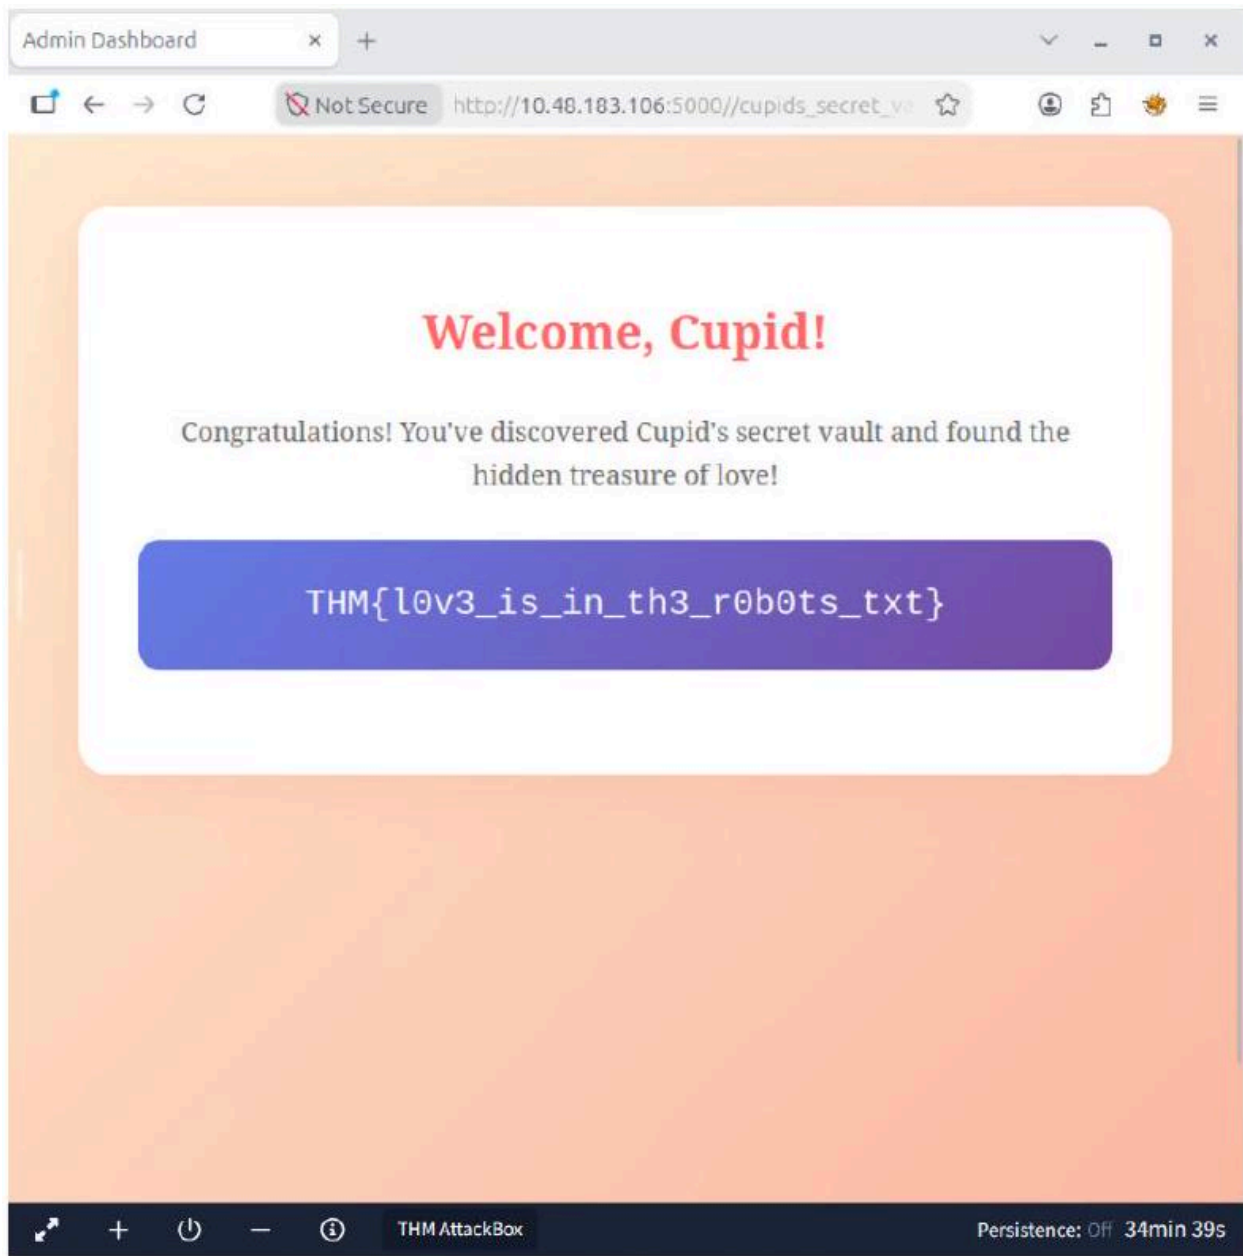

Logged in - flag: THM{l0v3_is_in_th3_r0b0ts_txt}

The Flag

```
THM{l0v3_is_in_th3_r0b0ts_txt}
```

Quick Notes

What robots.txt is for

It tells search-engine crawlers which parts of a website they should or shouldn't crawl. It's not a lock - it's just a polite request to well-behaved bots. Anyone can still open the file and read it, which is exactly why it's one of the first things to check.

Why and when to use dirsearch

Use it when you already found one hidden folder or page, and want to know what else is sitting inside it that isn't linked anywhere on the actual site. It works by trying a huge list of common file and folder names against the target and keeping whatever gets a real response, instead of you guessing names one by one.

- Use it right after something like robots.txt points you at a folder
- Use it when a site feels like it's hiding more pages than it shows
- Skip it if you already know exactly which page you need - it's for discovery, not for known targets