
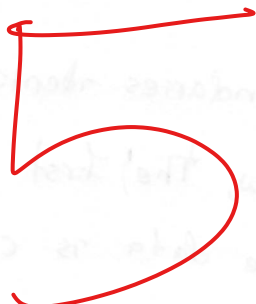


1. ~~D~~
2. ~~A~~
3. ~~D~~
4. ~~D~~
5. ~~D~~
6. ~~C~~
7. ~~B~~
8. ~~C~~
9. ~~D~~
10. ~~B~~
11. ~~A~~
12. ~~B~~
13. ~~C~~
14. ~~C~~
15. ~~A~~
16. ~~B~~
17. ~~A~~
18. ~~D~~
19. ~~A~~
20. ~~C~~

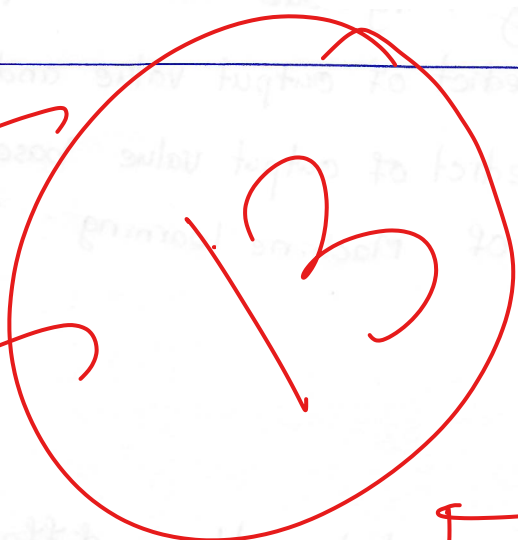

Answer

(2)

21. Supervised learning : try ^{to} model relationship and dependencies between the target predict of output value and the feature input new data such the predict of output value base on the relationship

24. The two challenges of Machine learning :

- supervised
- unsupervised

34. For linear boundaries identified by three different SVM classifiers

as shown below, The first picture is good ~~change~~ way because ^{correct} it's device the data is clear and line is set data by group.

23. Regression analysis is the assumptions of multivariate normality and make it process with simple regression, multiple regression, and polynomial regression.

22. A model M_1 gives 99% of accuracy for training dataset and it gives 30% of accuracy for testing dataset. For the model

M_1 mean we need to training machine first before testing it.

Example : we have one Robot and want it to detect the color and the color that we have are three such as red, yellow, blue

So ~~first~~ we need to train the robot of model M_1 and make it know ^{really} all color and then take it to test to know if it can know all the color

or not. we do like ^{this} to make it ~~not~~ must easy and make them to

check any mistake.

25. The two major applications of data science

- Quantitative data : it have two types discrete and Continuous
- Qualitative data : it have two types Nominal and ordinal

26. - Structured data and semi-structured data

- structured data :

- semi-structured data : the combination between supervise and unsupervise. it's work with small amount of supervise value and large amount of unsupervise value.

27. To find out an outlier in the data is we need to get the point that near the outlier point and combine it again and again until can't find the point of ~~out of data~~ that not in the group.

28. Data pre-processing is the data that can make data look clean.

30. Continuous attributes are discretized the variable of the output and input value.

29. data normalization is required in k-NN because it use to find categorical variables value.

31. K in k-means algorithm is used to calculate the value of ϵ .

32. The name few hyperparameters of machine learning algorithm is Support Vector Machine (SVM).

33. Gradient descent is the algorithm that we used to find output of regression.

35. A Radial basis function kernel work in SVM

