

PART No.
TGM-31-627A-xx

9 REV.


$\sqrt{Rt=6}$ ($\nabla = \sqrt{Rt=0.8}$)

Formula:
D = OD. Shaft Part Maximum
d = OD. Small Part Maximum + 0.1
A = OD. Flank Part Maximum + 0.07
T = Lg. OD. Flank Part Maximum + 0.01
L = Lg. Under Flank Part Maximum + 0.01
B = Lg. Under Cut Part T/N. Min
C = OD. Under Cut Part T/N. Maximum + 0.01
E = OD. Under Cut R/L Part Maximum + 0.01
F = Under Cut R/L Part Min -0.05

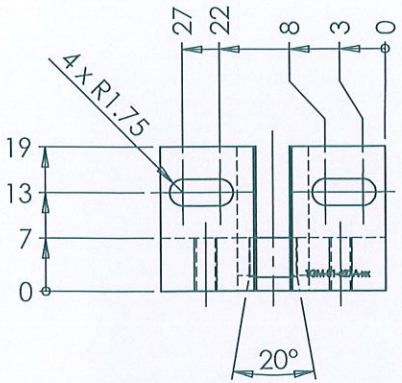

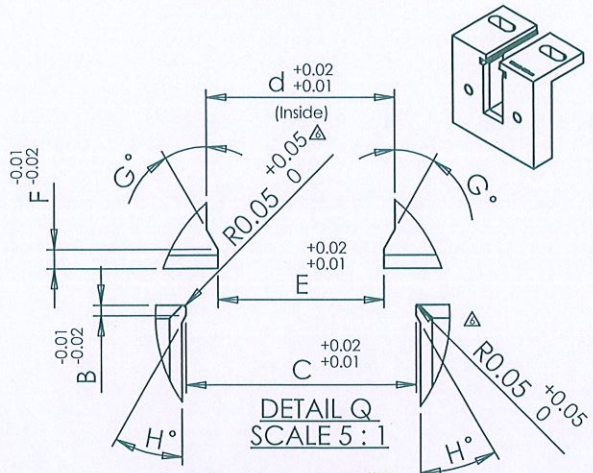


DETAIL Q
SCALE 5 : 1

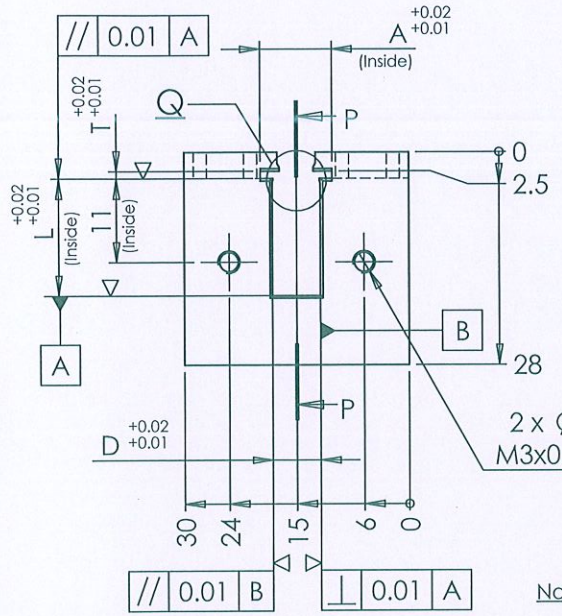

2 x Ø 2.5 THRU
M3x0.5 - 6H THRU

Marking Dwg. No. #9
For P/No.

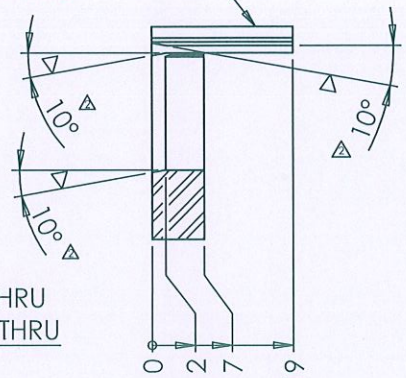

SECTION P-P
SCALE 1 : 1

Note: 1. Break all Corner approx by C0.2
2. General Tolerance ±0.1

Item	D	d	A	T	L	B	C	E	F	G°	H°	For P/No.	Check
-106	4.052	4	5.37	0.976	21.6	0.35	3.64	-	-	-	30°	A5D46-2-G1B Rev.B RQ : 363/25	Preecha
-107	6.4	5	9.54	1.377	20.14	1.4	6.17	-	-	-	30°	FF3035-2-63-NB	Preecha RQ.41/26

REV.	ECN No.	DATE	NAME	DESCRIPTION
8	-----	2 Jul'18	Preecha	Up Date Dwg. Rq : 355/18
9	-----	8 NOV'21	Preecha	CH : Spec Item -95 9.321 => 9.337 Rq:493/21
3	-----	16 Jul'13	Preecha	Change: Spec Item -02, -18 Rq. 3048
4	-----	13 Sep'13	Preecha	Change: Spec Item -10 Rq. 3205
5	-----	14 Jan'14	Preecha	Change: Spec Item -28 Rq. 11/15
6	-----	22 Jan'15	Preecha	Add: R0.05 +0.05 0 Rq. 33/15
7	-----	17 Apr'17	Preecha	Add: F20142CAAP1S1 Item 47 etc;. Rq. 191/17

MinebeaMitsumi Inc.
Copy issued Uncontrolled
4/2/2569
Engineering Design center
G/M.1 & M/A. Div.

M/C. KCL-50 | Q'ty 1
MATERIAL SKD-11
FINISH Buff All Area
HEAT TREATMENT HRC 50 to 60

List Request No. 2792
3 RD ANGLE
SCALE : | SHEET 6/6 | UNIT (mm.)

DETAILED	DESIGNED	CHECKED	APPROVED
Phalachai	Aphisek	Preecha	Preecha

DATE 1 Feb' 13

NMB MinebeaMitsumi Inc.
General Machining Parts Div. 1

TITLE: Jig Protect Chip (A)

PART No. TGM-31-627A-xx

9 REV.