
Micron Caliper S_Cal EVO

DESCRIPTION SMART MICRON

- High-quality ergonomic caliper with micron display and integrated Bluetooth® system
- Hardened and finely ground stainless steel frame, thickness 3.5 mm
- New extra-large display unit, resolution 0.001 mm, digits height 11.5 mm
- Preset function to measure by comparison
- Convenient push button for sending data that can also be programmed with another function
- Memorising the home position even when the instrument is switched off
- Available in the following executions :
  - Measuring range 150 mm with rectangular depth rod
  - Measuring range 150 mm with cylindrical depth rod
- Protection class IP67
- Delivered with calibration certificate
- Wheel available as an option

Built-in Bluetooth®

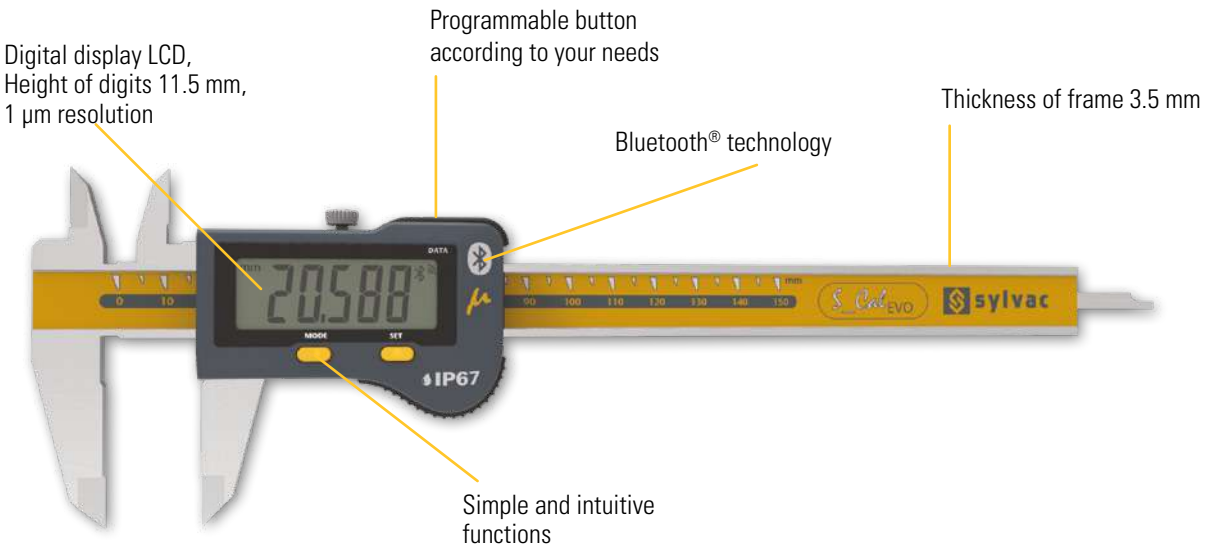

ISO 13385-1

Built-in Bluetooth®

SIS Smart Inductive System

WATER RESISTANT

IP67




* SIS description on page 5

Micron Caliper

S_Cal EVO

DIMENSIONAL DRAWING

SMART MICRON

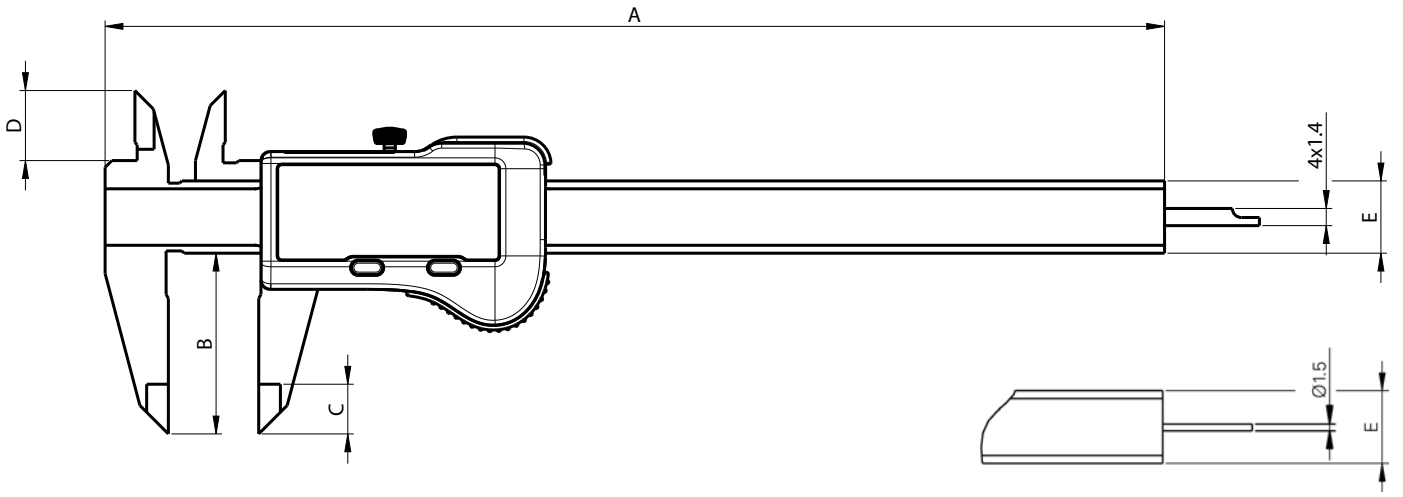

TECHNICAL SPECIFICATIONS

		810-9506	810-9516	810-9526
Measuring range	mm	150	150	200
Max. Error - external measurements E_{MPE}	µm	15[1)]	15[1)]	25[1)]
Max. Error - internal measurements S_{MPE}	µm	20-30[2)]	20-30[2)]	30[2)]
Resolution	mm	0.001		
A	mm	234.5	234.5	290.5
B	mm	40	40	50
C	mm	11	11	14
D	mm	16	16	19
E	mm	16 x 3.5	16 x 3.5	16 x 3.5
Depth rod	mm	▬ 4 x 1.4	Ø 1.5	▬ 4 x 1.4
Protection rating according to IEC 60529		IP67		
Output data		Bluetooth® wireless technology		
Functions		Zero setting, Preset (max 999.99), mm/inch, Hold, Data		
Smart Inductive Sensor		●		

[1)] Versions 150mm : 0-150 mm : 15 µm / ISO13385-1
Versions 200mm : 0-100 mm : 15 µm / ISO13385-1,
100-200 mm : 25 µm / ISO13385-1

[2)] Ø4-25 : 20 µm / ISO13385-1
Ø26-150 : 30 µm / ISO13385-1

S_Cal / S_Depth


STANDARD DELIVERY

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate (S_Cal EVO µm)

APPLICATIONS



Depth measurement with S_Cal EVO and base 910-2205.

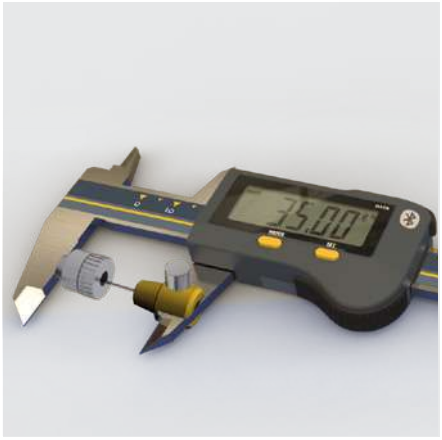

S_Cal EVO Smart with kit 910-2207
Depth measurement of small internal Ø



S_Cal EVO Standard measurement



Part measurement with S_Cal µm



Part measurement with sending data



Depth measurement with S_Cal EVO