
PART No.
TGM-12-295A-01

3 REV.

Rt=6 (Rt=0.8)

MinebeaMitsumi Inc.
Copy issued Uncontrolled
8/4/2568
Engineering Design center
G/M.1 & M/A. Div.

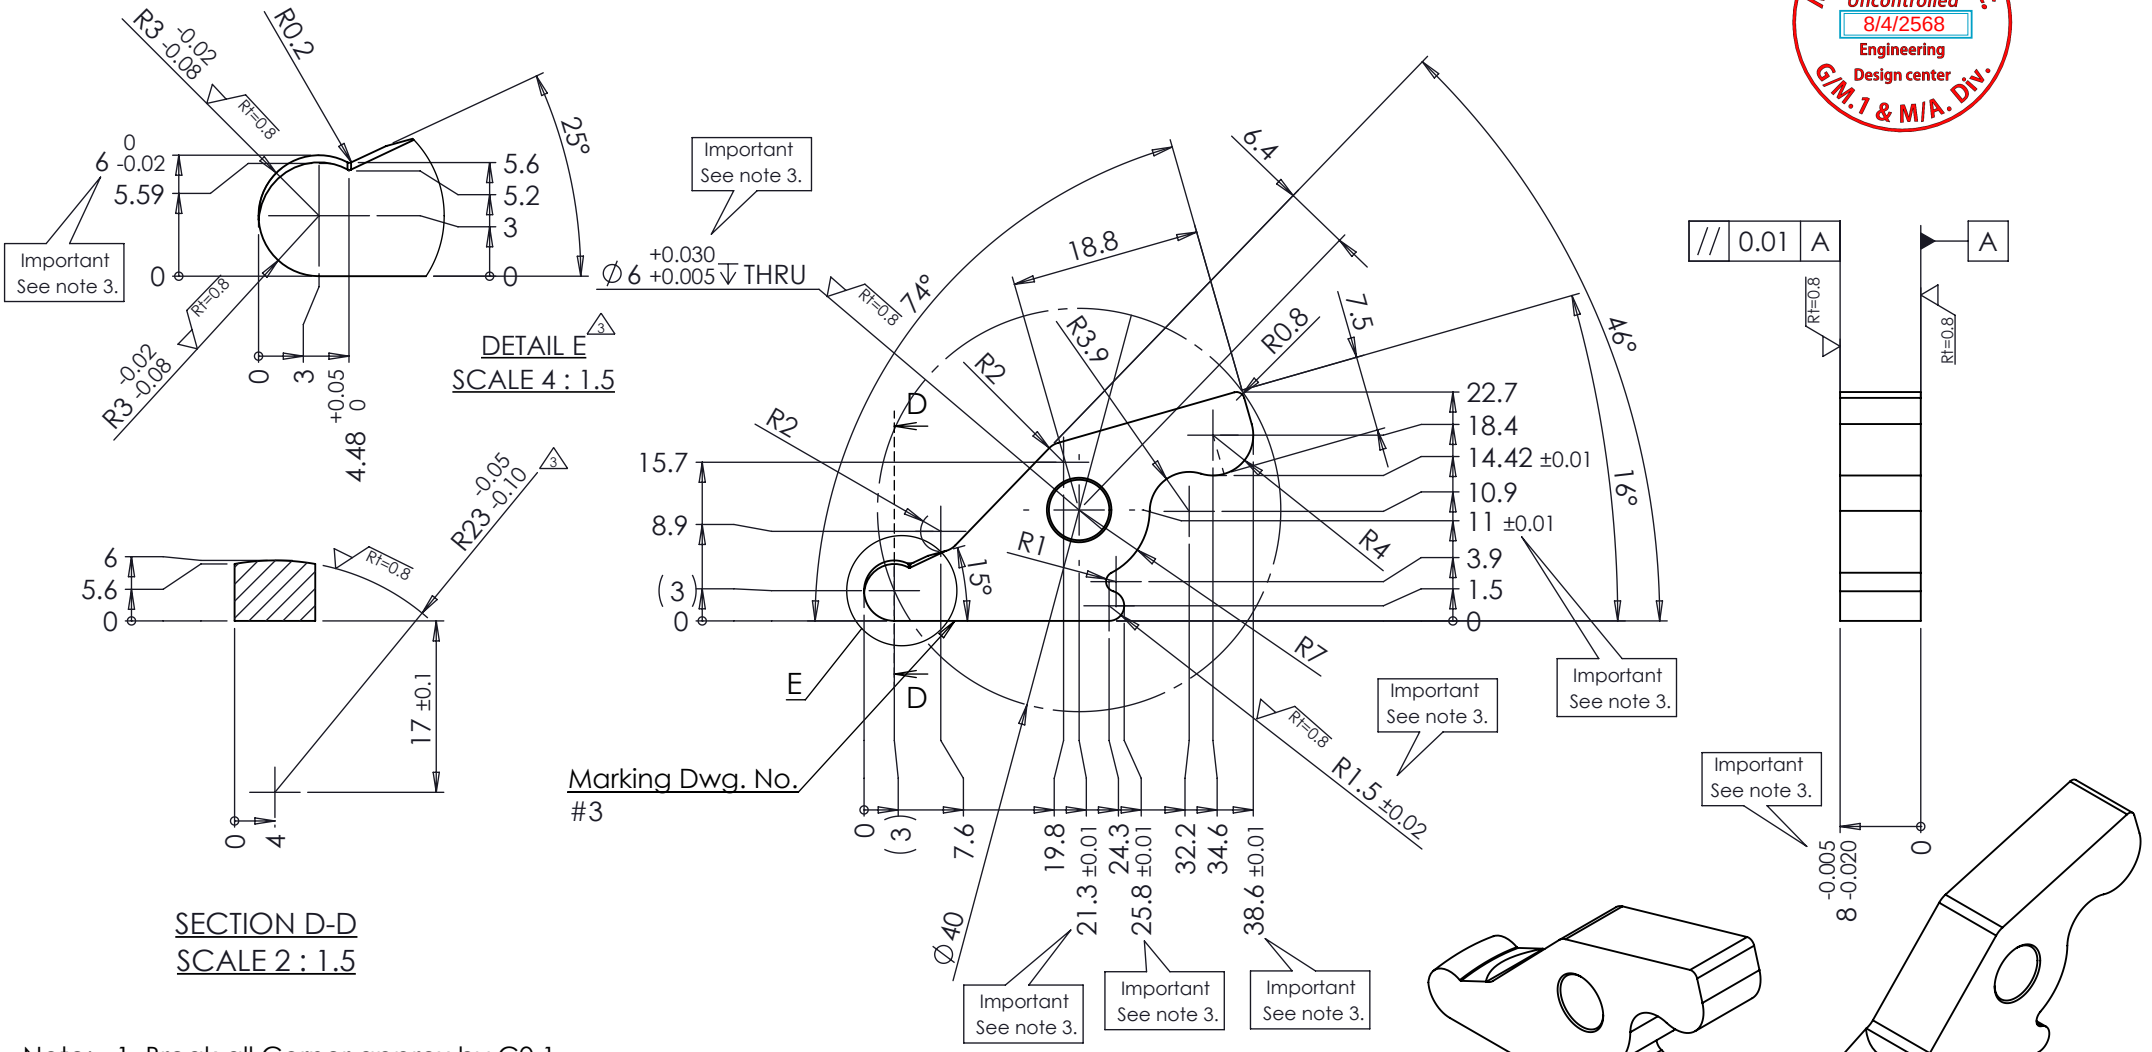

Note: 1. Break all Corner approx by C0.1
2. General Tolerance ±0.05
3. For vendor above these spec. request attach data all parts

REV.	ECN No.	DATE	NAME	DESCRIPTION
1	----	----	---	ENGINEERING RELEASE
2	----	28 May'09	Preecha	Change: HRC 55 to 60 ==> 50 to 55
3	----	8 Apr' 25	Preecha	Add: Detail E

UNLESS SPECIFIED C0.1 OR R0.1	
GENERAL TOLERANCE	
JISB0405 MACHING WORKING	
LESS THAN 0.5	±0.05
0.5 ~ 6	±0.1
6 ~ 30	±0.2
30 ~ 120	±0.3
120 ~ 400	±0.4
400 ~ 1000	±0.8
ANGLE	±1°

0.8S 6.3S 25S 100S ~ UNCUT

M/C.	Q'ty
B-12	2

MATERIAL: SCM 440
FINISH: -
HEAT TREATMENT: HRC 50 to 55

List Request No.: -

3 RD ANGLE

SCALE : | SHEET / | UNIT (mm.)

DETAILED	DESIGNED	CHECKED	APPROVED
Phalachai	Aphisek	Preecha	Preecha

DATE 23 Feb' 09

NMB MinebeaMitsumi Inc.
General Machining Parts Div. 1

TITLE: Toggle (B-12)
None guide bush

PART No. TGM-12-295A-01

3 REV.