ASSIGNMENT 10 – FRAPPE INSTALLATION & WORKSPACE EXPLORATION

Name: Radhika Rawol
Assignment: 10
Technology: Frappe Framework

Assignment 10.1 – Frappe Installation & Setup

1. Objective

The objective of this assignment is to install and configure the Frappe development environment, create a development site, understand the Bench directory structure, and verify that the Frappe application is running successfully.

2. Software and Technologies Used

The following software and technologies were used:

- Ubuntu
- Python 3
- Git
- MariaDB
- Redis
- Node.js
- npm
- Yarn
- Frappe Bench
- Frappe Framework
- Google Chrome
- Microsoft Word
- Windows Snipping Tool

3. Installation Steps

Step 1 – Open Ubuntu

All Frappe installation commands were executed in the **Ubuntu terminal**.

The Ubuntu version was checked using:

lsb_release -a

Python was checked using:

python3 --version

Step 2 – Update Ubuntu

sudo apt update

sudo apt upgrade -y

Step 3 – Install Basic Dependencies

sudo apt install -y git curl wget build-essential python3-dev python3-setuptools python3-pip python3-venv software-properties-common

Step 4 – Install MariaDB

sudo apt install -y mariadb-server mariadb-client

MariaDB was started using:

sudo systemctl start mariadb

Its status was verified using:

sudo systemctl status mariadb

Step 5 – Install Redis

sudo apt install -y redis-server

Redis was started using:

sudo systemctl start redis-server

Step 6 – Install Node.js

Node.js was installed using NVM.

curl -o- https://raw.githubusercontent.com/nvm-sh/nvm/v0.40.3/install.sh | bash

After reopening Ubuntu, Node.js was installed and checked.

nvm install 18

nvm use 18

node --version

npm --version

Step 7 – Install Yarn

npm install -g yarn

Version was checked using:

yarn --version

Step 8 – Install Frappe Bench

python3 -m pip install --upgrade pip

pip3 install frappe-bench

Bench installation was verified using:

bench --version

4. Create Frappe Bench

The home directory was opened:

cd ~

A new Frappe Bench was created:

bench init frappe-bench

Then:

cd ~/frappe-bench

The directory structure was checked using:

ls

5. Development Site Creation

Inside the Frappe Bench directory, the development site was created using:

bench new-site development.localhost

The required database and Administrator passwords were entered during the setup.

Note: Passwords are not included in this documentation for security reasons.

The installed applications were checked using:

bench --site development.localhost list-apps

6. Start Frappe Development Server

The Frappe development server was started using:

bench start

The server displayed processes such as web, socketio, scheduler, worker and watcher.

The Frappe site was then opened in Google Chrome:

http://development.localhost:8000

The Frappe login page was displayed successfully.

---

7. Bench Directory Structure

The main Frappe Bench directory contains important folders and files.

Folder/File	Description
apps	Contains installed Frappe applications

config	Contains configuration files
env	Contains Python virtual environment
logs	Contains application logs
sites	Contains Frappe sites and site-specific configuration
Procfile	Defines processes used by Bench
patches.txt	Contains patch information
currentsite.txt	Stores the current site information

The Bench directory was explored using:

cd ~/frappe-bench

ls


Screenshot: Insert screenshot of the Bench directory here.

Screenshots – Assignment 10.1

Screenshot 1 – Ubuntu Version

Insert screenshot here


Caption: Ubuntu terminal showing the system information.

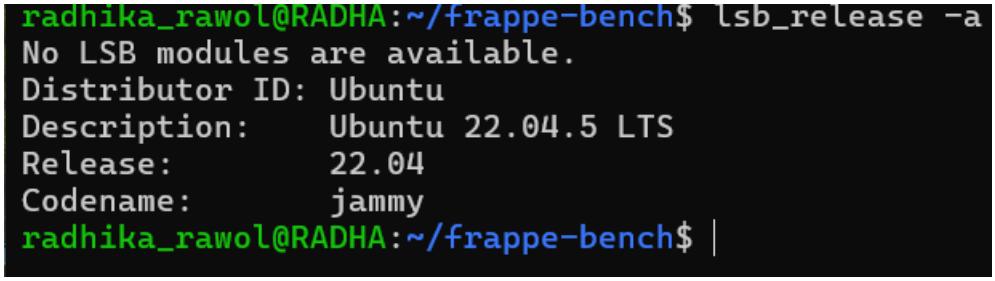

Screenshot 2 – Python Version

Insert screenshot here

Caption: Python version installed in Ubuntu.

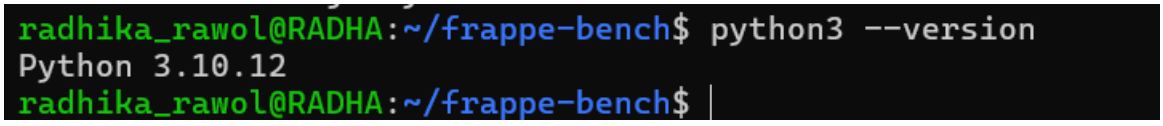

Screenshot 3 – Bench Version

Insert screenshot here

Caption: Frappe Bench version successfully installed.

```
radhika_rawol@RADHA:~/frappe-bench$ bench --version
5.31.0
radhika_rawol@RADHA:~/frappe-bench$
```

Screenshot 4 – Bench Directory

Insert screenshot here

Caption: Frappe Bench directory structure.


```
radhika_rawol@RADHA:~/frappe-bench$ cd ~/frappe-bench
ls
Procfile  apps  config  env  logs  patches.txt  sites
radhika_rawol@RADHA:~/frappe-bench$
```

Screenshot 5 – Frappe Development Server

Insert screenshot here

Caption: bench start showing Frappe development services.

```
radhika_rawol@RADHA: ~/fra
radhika_rawol@RADHA:~/frappe-bench$ cd ~/frappe-bench
bench start
12:54:21 system         | socketio.1 started (pid=2584)
12:54:21 system         | redis_cache.1 started (pid=2581)
12:54:21 system         | redis_queue.1 started (pid=2582)
12:54:21 system         | watch.1 started (pid=2593)
12:54:21 system         | web.1 started (pid=2597)
12:54:21 system         | schedule.1 started (pid=2598)
12:54:21 system         | worker.1 started (pid=2603)
12:54:21 redis_queue.1  | 2585:C 28 Sep 2026 12:54:21.337 # oO0OoO0OoO0Oo Redis is starting oO0OoO
0OoO0Oo
12:54:21 redis_queue.1  | 2585:C 28 Sep 2026 12:54:21.337 # Redis version=6.0.16, bits=64, commit=
00000000, modified=0, pid=2585, just started
12:54:21 redis_queue.1  | 2585:C 28 Sep 2026 12:54:21.337 # Configuration loaded
12:54:21 redis_cache.1  | 2588:C 28 Sep 2026 12:54:21.337 # oO0OoO0OoO0Oo Redis is starting oO0OoO
0OoO0Oo
12:54:21 redis_cache.1  | 2588:C 28 Sep 2026 12:54:21.337 # Redis version=6.0.16, bits=64, commit=
00000000, modified=0, pid=2588, just started
12:54:21 redis_cache.1  | 2588:C 28 Sep 2026 12:54:21.337 # Configuration loaded
12:54:21 redis_cache.1  | 2588:M 28 Sep 2026 12:54:21.351 * Running mode=standalone, port=13001.
12:54:21 redis_queue.1  | 2585:M 28 Sep 2026 12:54:21.352 * Running mode=standalone, port=11001.
12:54:21 redis_queue.1  | 2585:M 28 Sep 2026 12:54:21.352 # Server initialized
12:54:21 redis_queue.1  | 2585:M 28 Sep 2026 12:54:21.352 # WARNING overcommit_memory is set to 0!
 Background save may fail under low memory condition. To fix this issue add 'vm.overcommit_memory
 = 1' to /etc/sysctl.conf and then reboot or run the command 'sysctl vm.overcommit_memory=1' for
this to take effect.
12:54:21 redis_cache.1  | 2588:M 28 Sep 2026 12:54:21.353 # Server initialized
12:54:21 redis_cache.1  | 2588:M 28 Sep 2026 12:54:21.353 # WARNING overcommit_memory is set to 0!
 Background save may fail under low memory condition. To fix this issue add 'vm.overcommit_memory
 = 1' to /etc/sysctl.conf and then reboot or run the command 'sysctl vm.overcommit_memory=1' for
this to take effect.
12:54:21 redis_queue.1  | 2585:M 28 Sep 2026 12:54:21.355 * Ready to accept connections
12:54:21 redis_cache.1  | 2588:M 28 Sep 2026 12:54:21.355 * Ready to accept connections
12:54:22 watch.1        |
12:54:22 watch.1        | yarn run v1.22.22
12:54:22 watch.1        | $ node esbuild --watch --live-reload
12:54:22 socketio.1     | Realtime service listening on: ws://0.0.0.0:9001
12:54:24 web.1          | /home/radhika_rawol/frappe-bench/env/lib/python3.10/site-packages/whoosh
/analysis/filters.py:50: DeprecationWarning: invalid escape sequence '\w'
12:54:24 web.1          |   url_pattern = rcompile("""
```

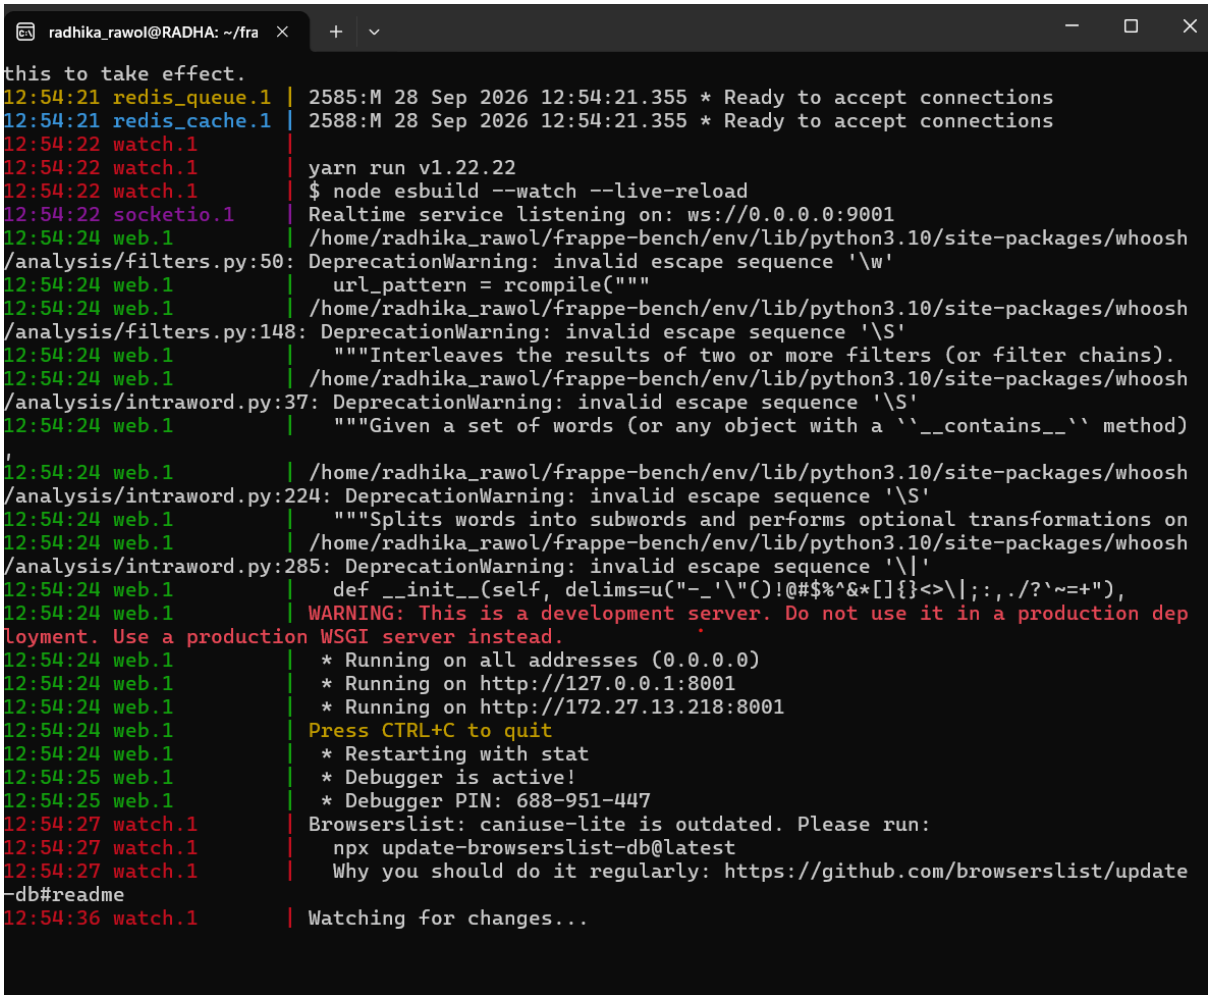

Screenshot 6 – Frappe Login Page

Insert screenshot here

Caption: Frappe development site opened in Google Chrome.

