

Functional Interface

Interface having just one abstract method
(default methods may be as many as needed)

Annotation `@FunctionalInterface` checks
requirements of a functional interface

Functional Interface is intended for possible
usage of the Lambda expressions and Method
References

Lambda Expressions

Instead of a regular class

Instead of an anonymous class

Only inline syntax :

```
([name,...])->expression|statement|  
                                     {statement;...}
```

```
list.sort((x,y)->Integer.compare(y,x));
```

Method Reference

Instead of lambda expression that calls one method with the same parameters order

Static method: `<Class name>::<method name>`

Non Static method:

`<Object reference>::<method name>`

Constructor: `<Class name>::new`

Method Reference Examples

list.sort((x,y)->Integer.compare(x,y)) -
lambda

list.sort(Integer::compare) - method
reference

list.forEach(x->System.out.println(x)) -
lambda

list.forEach(System.out::println) - method
reference

Functional Streams

Java 8 Stream isn't related to Input/Output


Functional pipeline opening a chain of actions with each object (Monad)

Filter is widespread method name for extracting from collection the objects matching a predicate

Java collection doesn't have the filter method but Stream does.

Parallel streams - parallel performing of a chain actions

Stream Pipeline

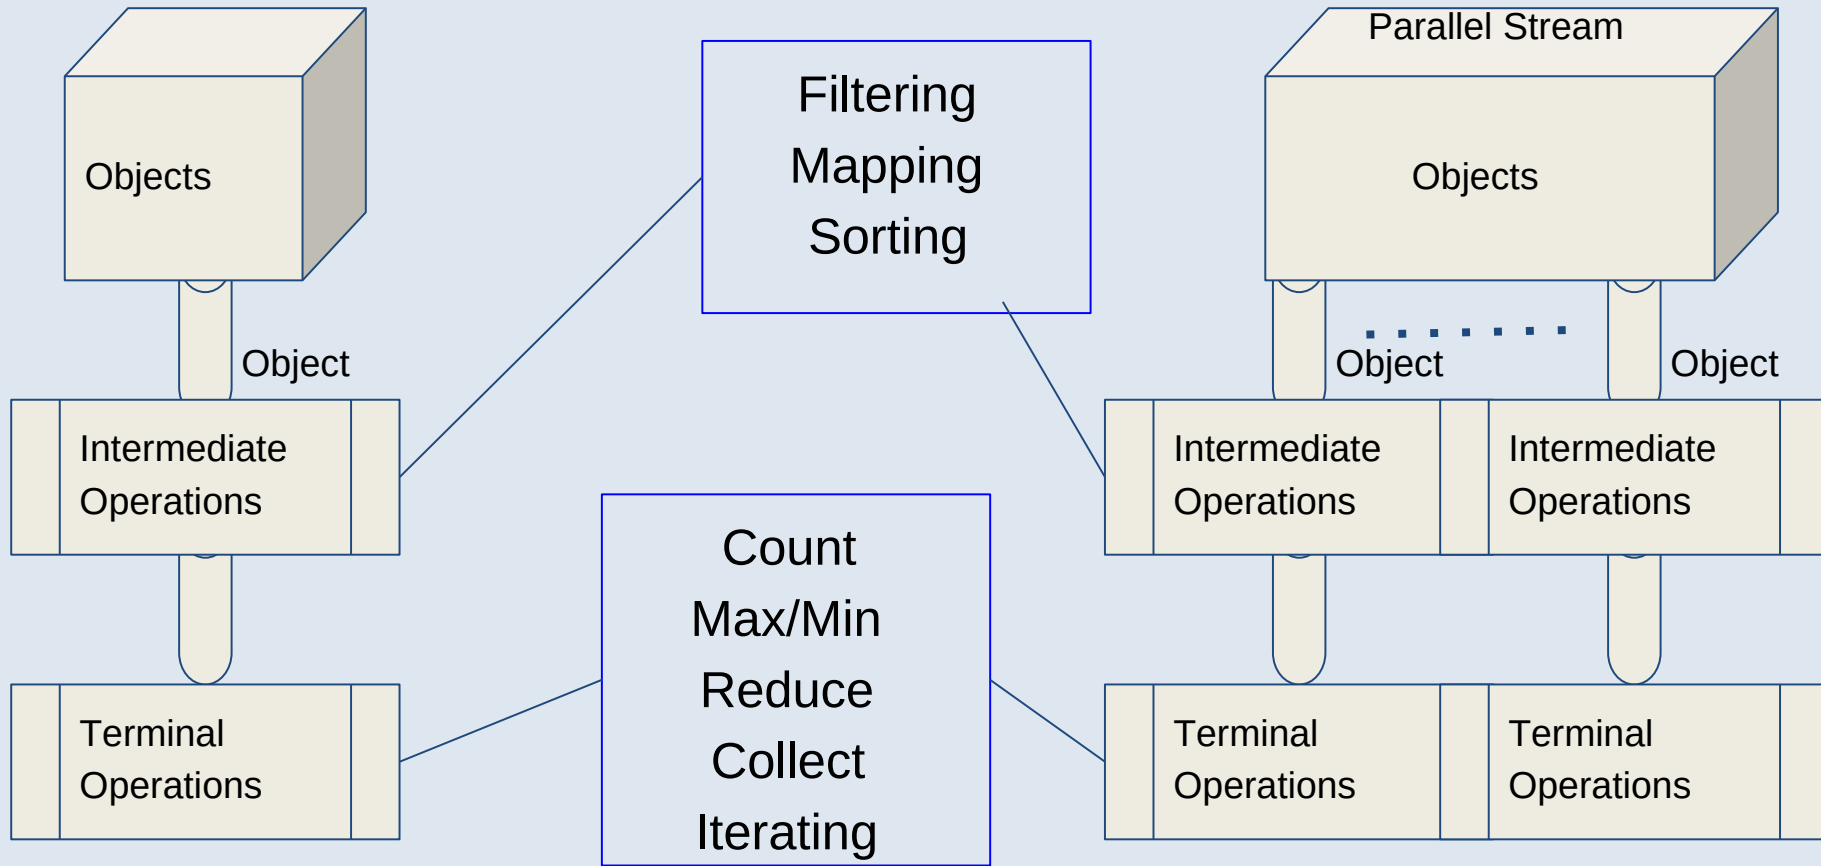

How to get Stream Java Core

From collection:

collection.stream()/collection.parallelStream()

From array: *Arrays.stream(array)/Arrays.stream(array).parallel()*

From iterable:

StreamSupport.stream(numbers.splititerator(), false) - regular

StreamSupport.stream(numbers.splititerator(), true) - parallel

From Random Generator:


generator.ints()/generator.longs() (with several options in the method parameters)

From BufferedReader:

reader.lines()


Intermediate Operations

- Lazy - running only after terminal operation
- Return Stream
- **Filtering**
 - `filter(Predicate<T>)`
- **Sorting**
 - `sorted()/sorted(Comparator)`
- **Mapping**
 - Gets a reference to the Function interface
 - `map` - mapping one to one
 - `mapToObj` - mapping one primitive (int,long,double) to an object
 - `mapToInt/Long/Double` - mapping one object to a primitive
 - `flatMap/flatMapToObj/Int/Long/Double` - mapping one to many

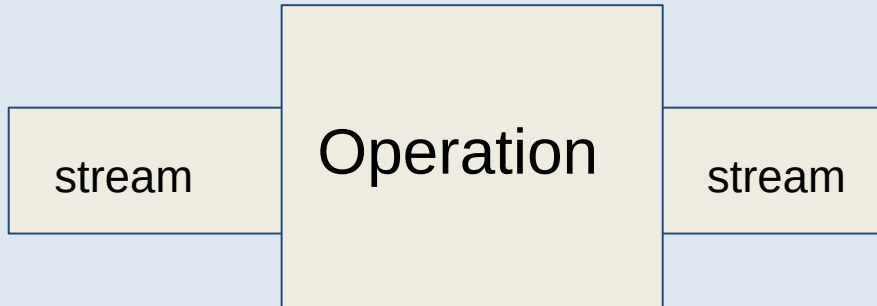

Terminal Operations

- Starts running whole pipeline from a getting stream
- Aggregated statistics
- Iterating - `forEach`
- Reducing
- Collecting

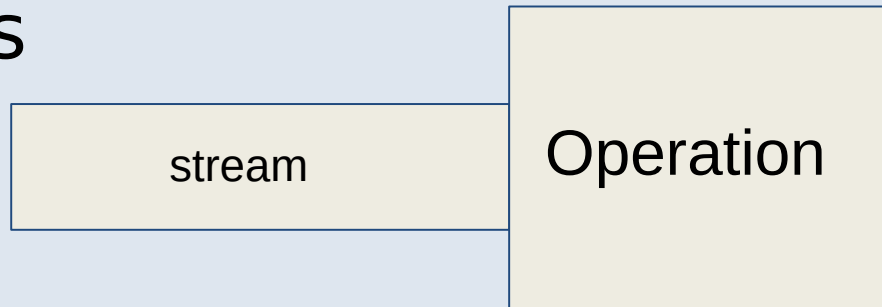

Aggregated Statistics

- For all streams:
 - count/min/max
- For the primitive's streams (IntStream, LongStream, DoubleStream):
 - summaryStatistics() getting reference to Int/Long/DoubleSummaryStatistics class with methods:
 - getMin, getMax, getSum and getAverage

Reducing

- Combines all elements of a stream into a single result
 - For `Stream<T>` :
 - `T reduce (T initial, BiFunction<T,T> accumulator)`
 - `R reduce(R initial, BiFunction<R,T> accumulator, BiFunction<R,R>combiner)`

numbers.stream().reduce(1,(x,y)->x+y)

***persons.stream().reduce(0,(sum,p2)->sum+
p2.getAge(),(sum1,sum2)->sum1+sum2)***

Collecting

- Method ***collect()*** transforms the elements of the stream into a different kind of result, e.g. a List, Set or Map
- Accepts Collector objects
- Pretty complicated but there are the standard collectors for most applied operations:
 - `Collectors.toList`
 - `Collectors.toSet`
 - `Collectors.groupingBy`

GroupingBy

- One of the Collectors (***Collectors.groupingBy()***)
- Groups according to the method ***apply*** of the ***interface Function<T,R>***
- Mostly two kinds:
 - `groupingBy(Function<T,R>)` returns `Map<R,List<T>>` - example: lists of the persons (`List<T>` - `List<Person>`) having the specific age (`R`- Integer)
 - `groupingBy(Function<T,R>,Collectors.counting())` returns `Map<R,Integer>` example: how many persons (Integer) have the specific age (`R`-Integer)