
The five-model data map

ObjectId references + embedded data · cardinalities describe the source model

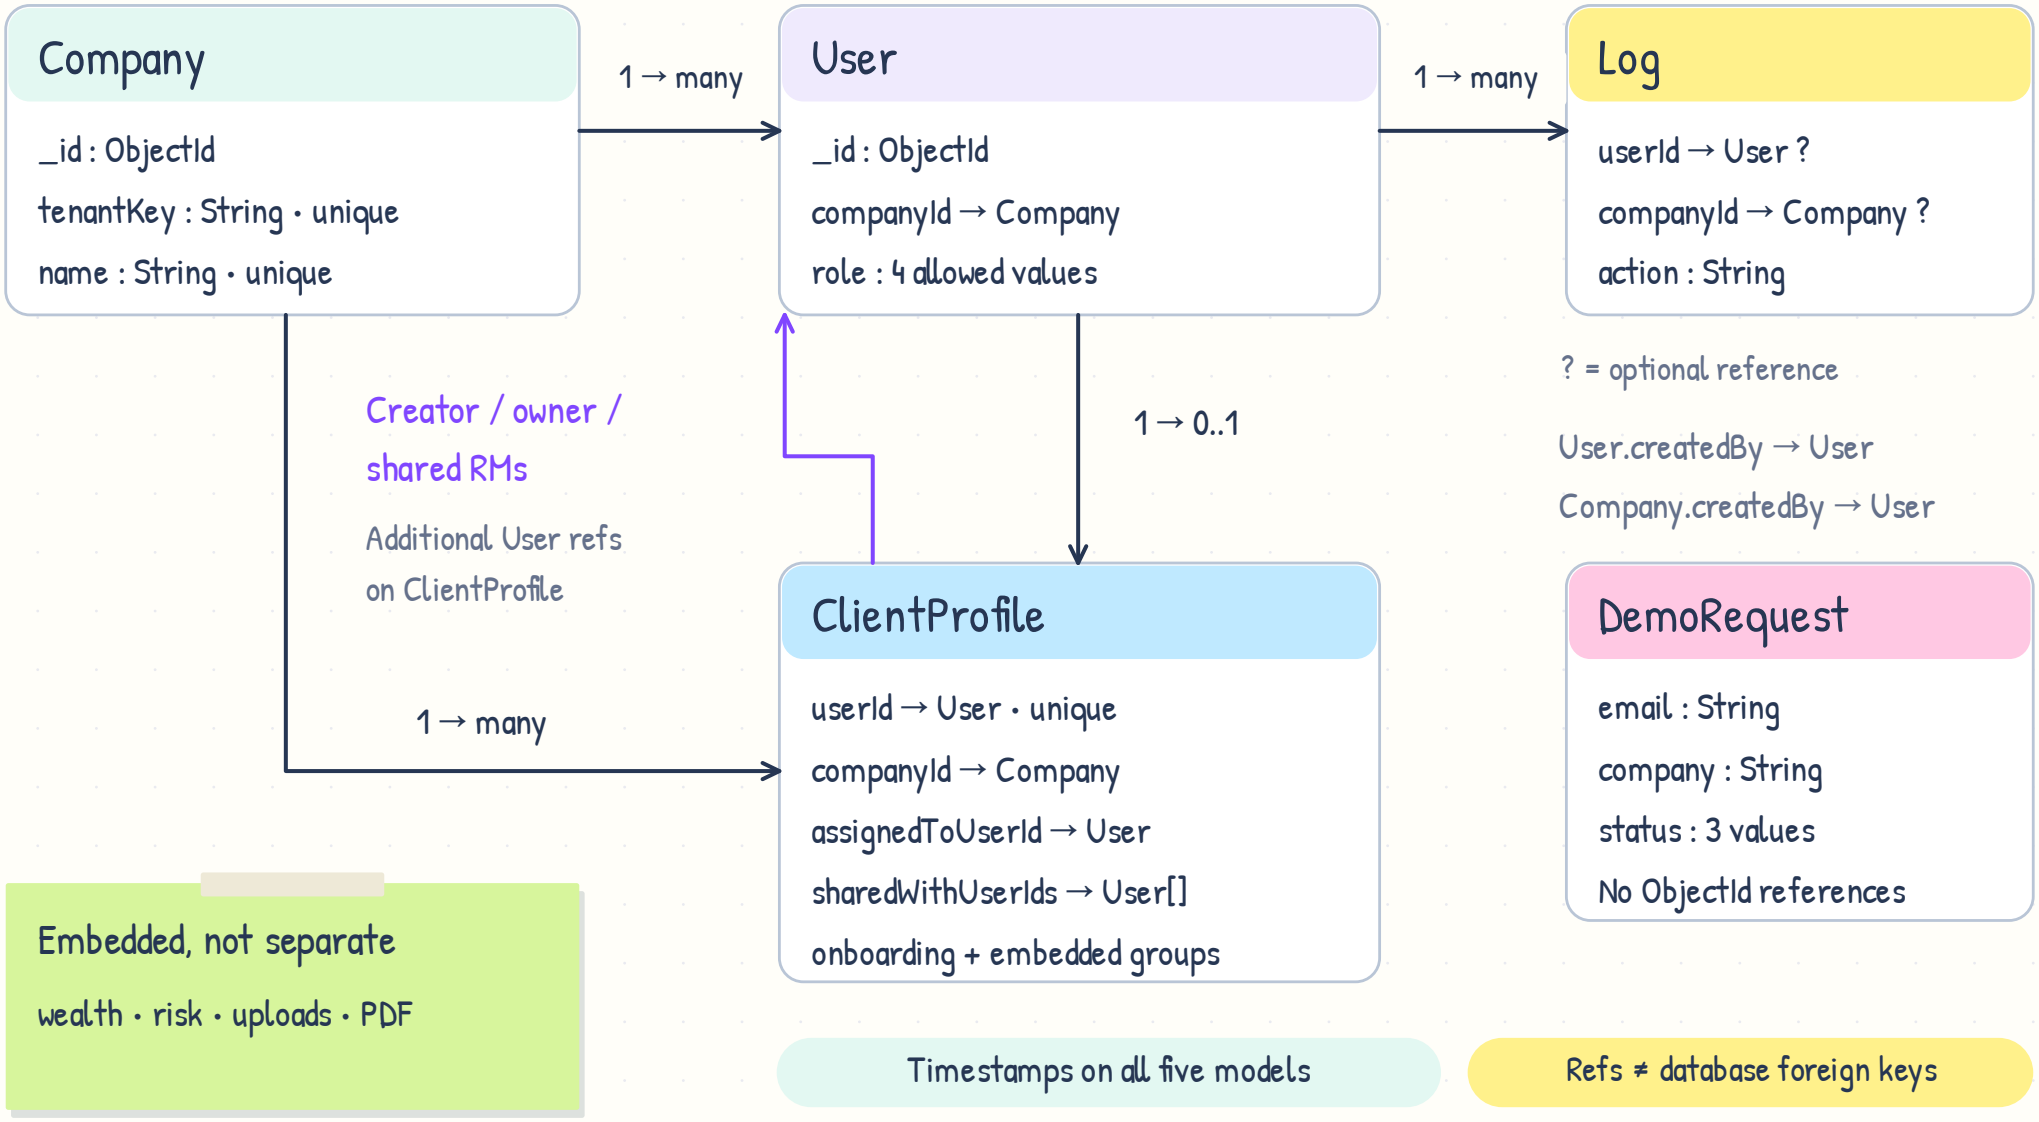

Identity belongs to a tenant

One shared MongoDB connection · companyId scopes tenant data in application routes

User : identity + access

username : String · required · unique
passwordHash : String · required
role : superadmin | supervisor | rm | client
companyId : ObjectId → Company
companyName : String ? · snapshot
fullName / email / phone : String ?
isActive : Boolean = true
createdBy : ObjectId → User ?
createdAt / updatedAt : Date

Company : tenant + organization

name : String · required · unique
tenantKey : String · required · unique
status : active | suspended = active
primaryContact : { fullName, email, phone }
address : { line1, line2, city, country, ... }
legalName / registrationNumber / taxId : String ?
website / logoUrl / notes : String ?
createdBy : ObjectId → User · required
createdAt / updatedAt : Date

Tenant rule

Non-superadmin → companyId required
Superadmin → companyId = null

JWT companyId — tenant context → **Route query** — companyId filter → **Tenant records** — User / ClientProfile

RM scope adds: assignedToUserId OR sharedWithUserIds

ClientProfile is an embedded aggregate

One profile per client user · nested objects carry the account-opening data

ClientProfile

Ownership + workflow

userId · companyId · assignedToUserId

status · onboardingType · onboarding

accountHolders

isJoint : Boolean

holder1 / holder2 : Person

sourceOfWealth

5 categories × holder1 / holder2 / joint

Each value : Money

financialProfile

netWorth : Money · employmentStatus

proposedInvestment · restrictions

riskProfile

questionnaire : 6 answers

calculatedScore / calculatedProfile

documents + pdf

uploads : Upload[] · upload flags

pdfUrl : String · lastGeneratedAt : Date

Also embedded: investmentServices · externalAdvisers

Person

name / contact : String

dateOfBirth : Date ?

address + declarations

Money

amount : Number = 0

currency : String = GBP

Upload

label : String

url : String

uploadedAt : Date

Embedded schemas use _id: false


Upload stores a URL, not a file blob

Schema capacity → phase forms still need a save API

Two status machines, different meanings

Record activation is implemented · form submission states are schema capacity

ClientProfile.status · operational lifecycle

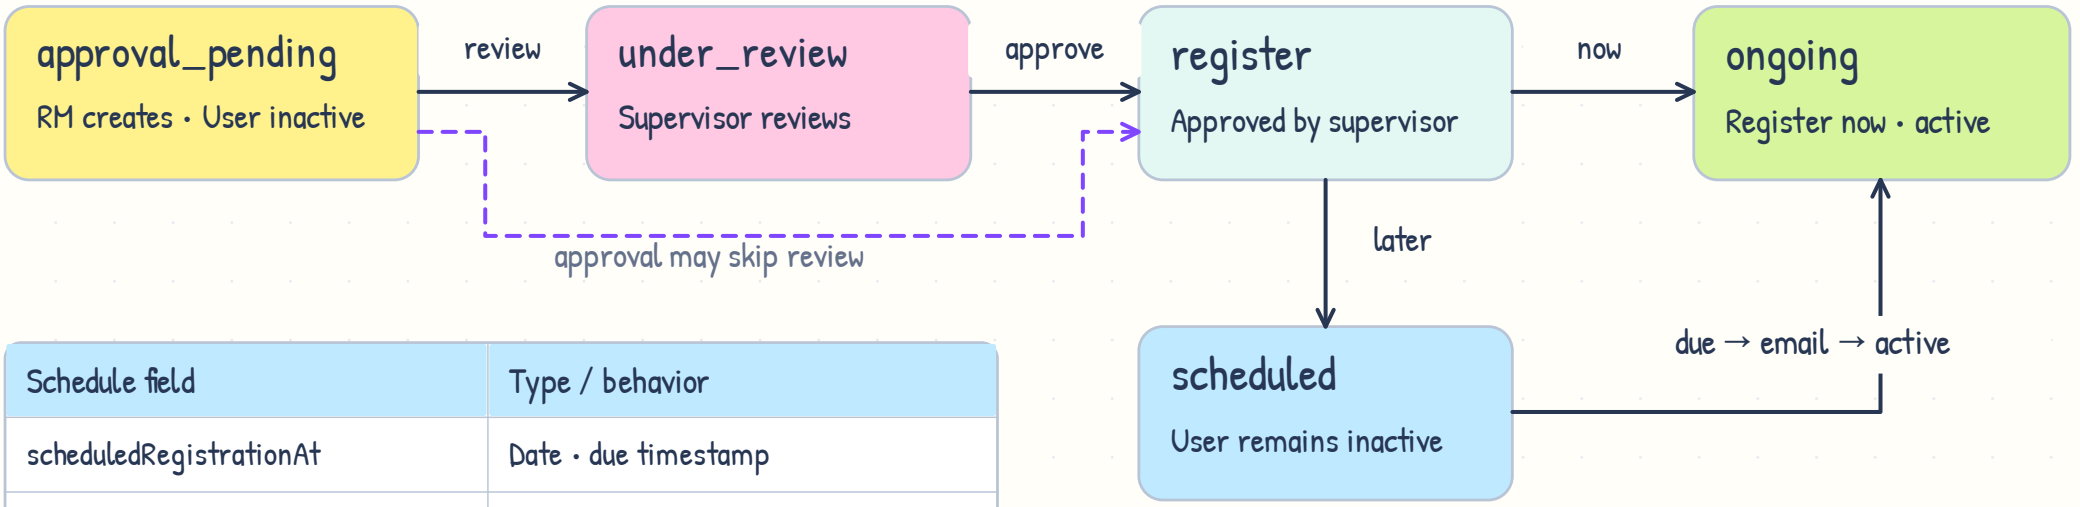

Schedule field	Type / behavior
scheduledRegistrationAt	Date · due timestamp
scheduledTimeZone	String · IANA zone
scheduledCredentialsEnc	String · AES-GCM

Success clears secret; failure returns to scheduled

Enum values only · phase forms currently have no persistence endpoint

onboarding.status · separate form lifecycle

not_started | in_progress | submitted | approved | rejected + reason

Events, leads & the query index map

Declared schema indexes · live database indexes and retention were not inspected

Log : activity event

action : String · required

userId → User ? · role = guest

companyId → Company ?

name / username : String ?

companyName : String ?

actionTitle : String ?

metadata : Object = {}

ip / userAgent : String ?

POST /api/log + /batch

Identity enriched on write

Only superadmin reads logs

DemoRequest : lead

firstname / lastname : String

email / phone : String

message : String

company : String ?

role : supervisor | rm | client | other

status : pending / approved / rejected

subscriptionStatus : 4 values

No User / Company reference

POST /api/requestdemo

Public intake → pending lead

No custom lead index declared

Indexes → access patterns

User

username UNIQUE

companyId + role + companyName

Company

name UNIQUE · tenantKey UNIQUE

ClientProfile

userId UNIQUE

companyId + assignedToUserId

companyId + onboarding.status

companyId + createdByUserId

Log

createdAt ↓

companyName + createdAt ↓

username + createdAt ↓

Integrity lives in routes

Tenant + RM checks · no FK cascade

User + profile writes are separate

Every model: _id + createdAt + updatedAt