
The whole Cosmosis system


Four roles · one web application · one tenant-aware MongoDB data model

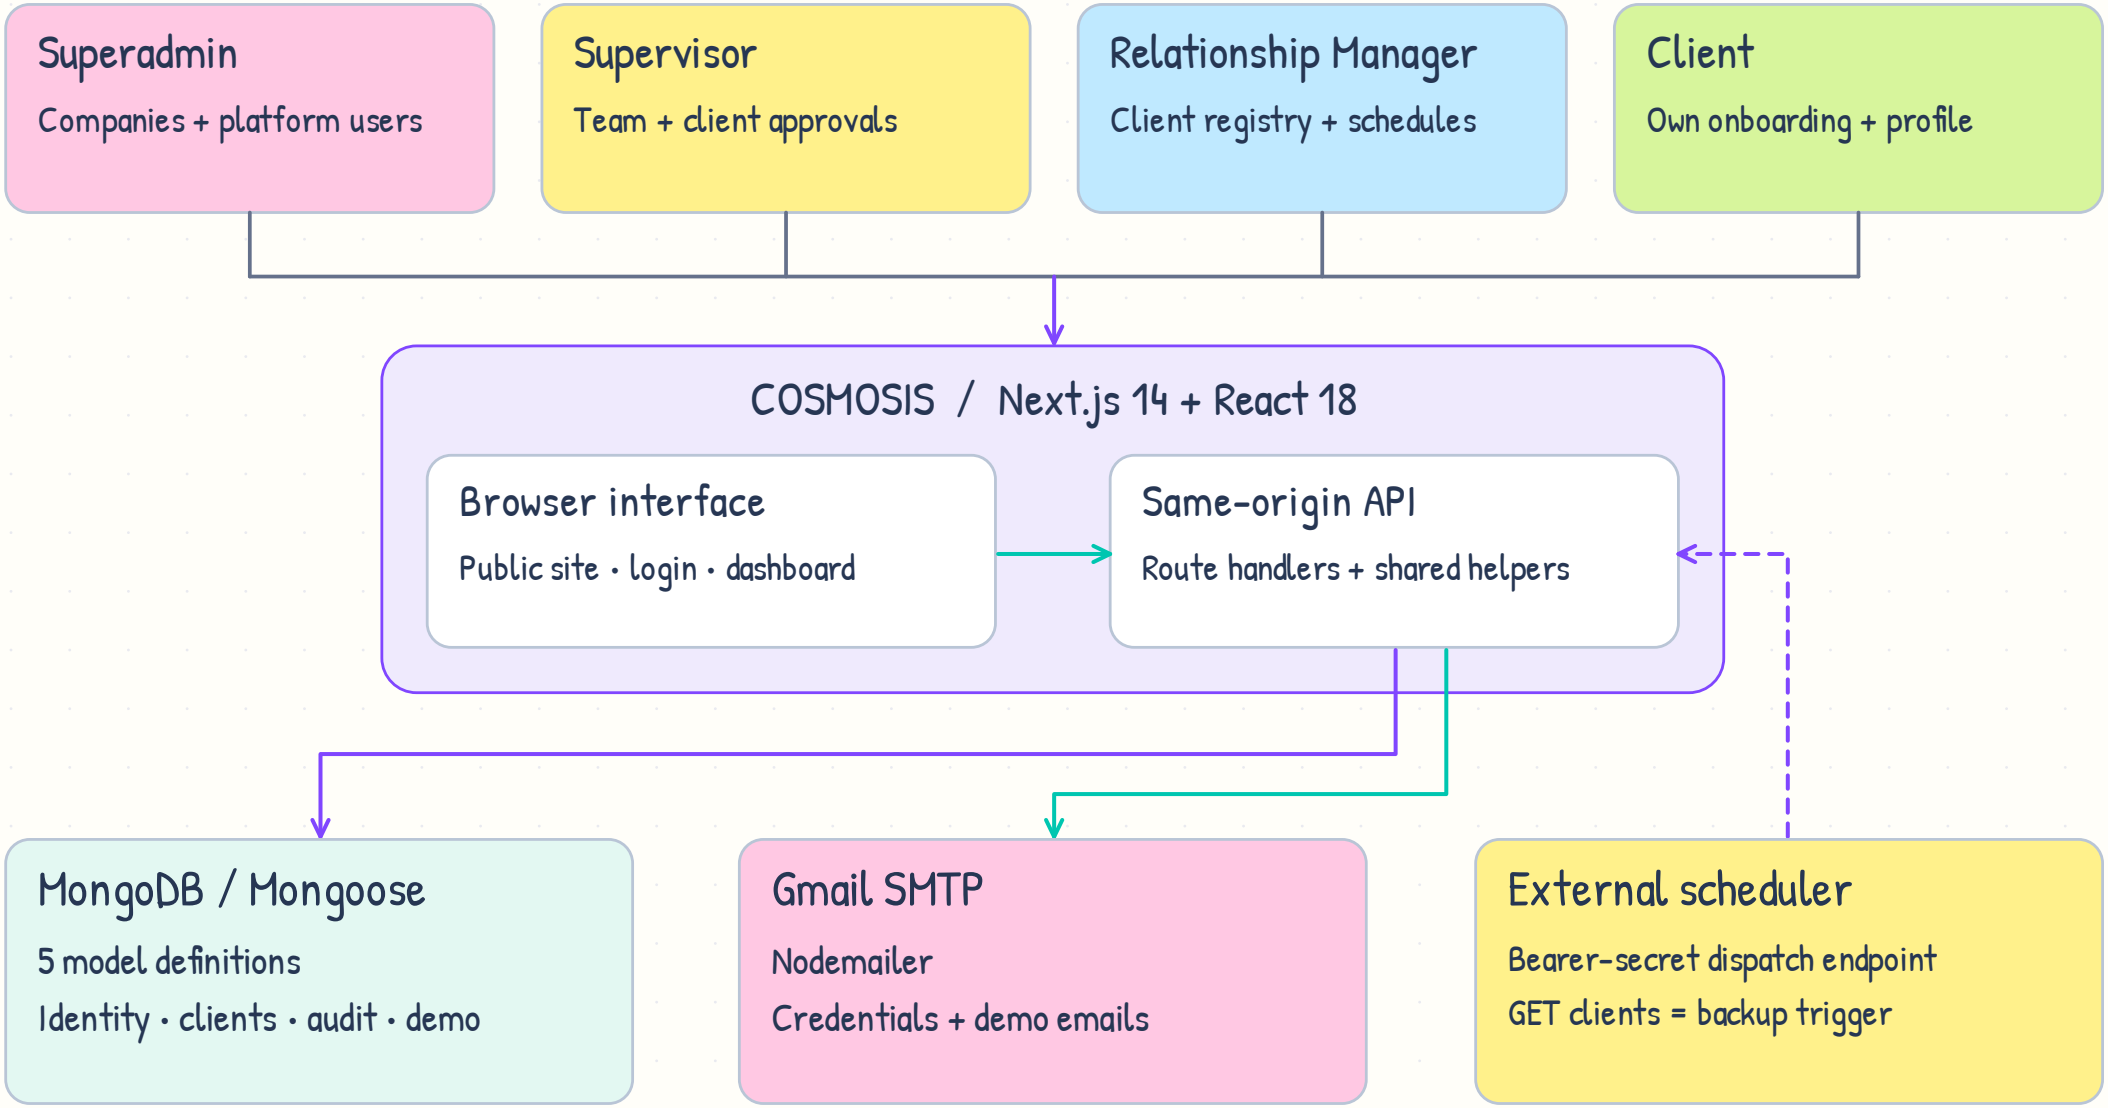

One codebase; deployment infrastructure and external scheduler configuration are outside this source model.


How the application is assembled

Layered runtime view · feature pages own their fetches · shared UI keeps the dashboard consistent

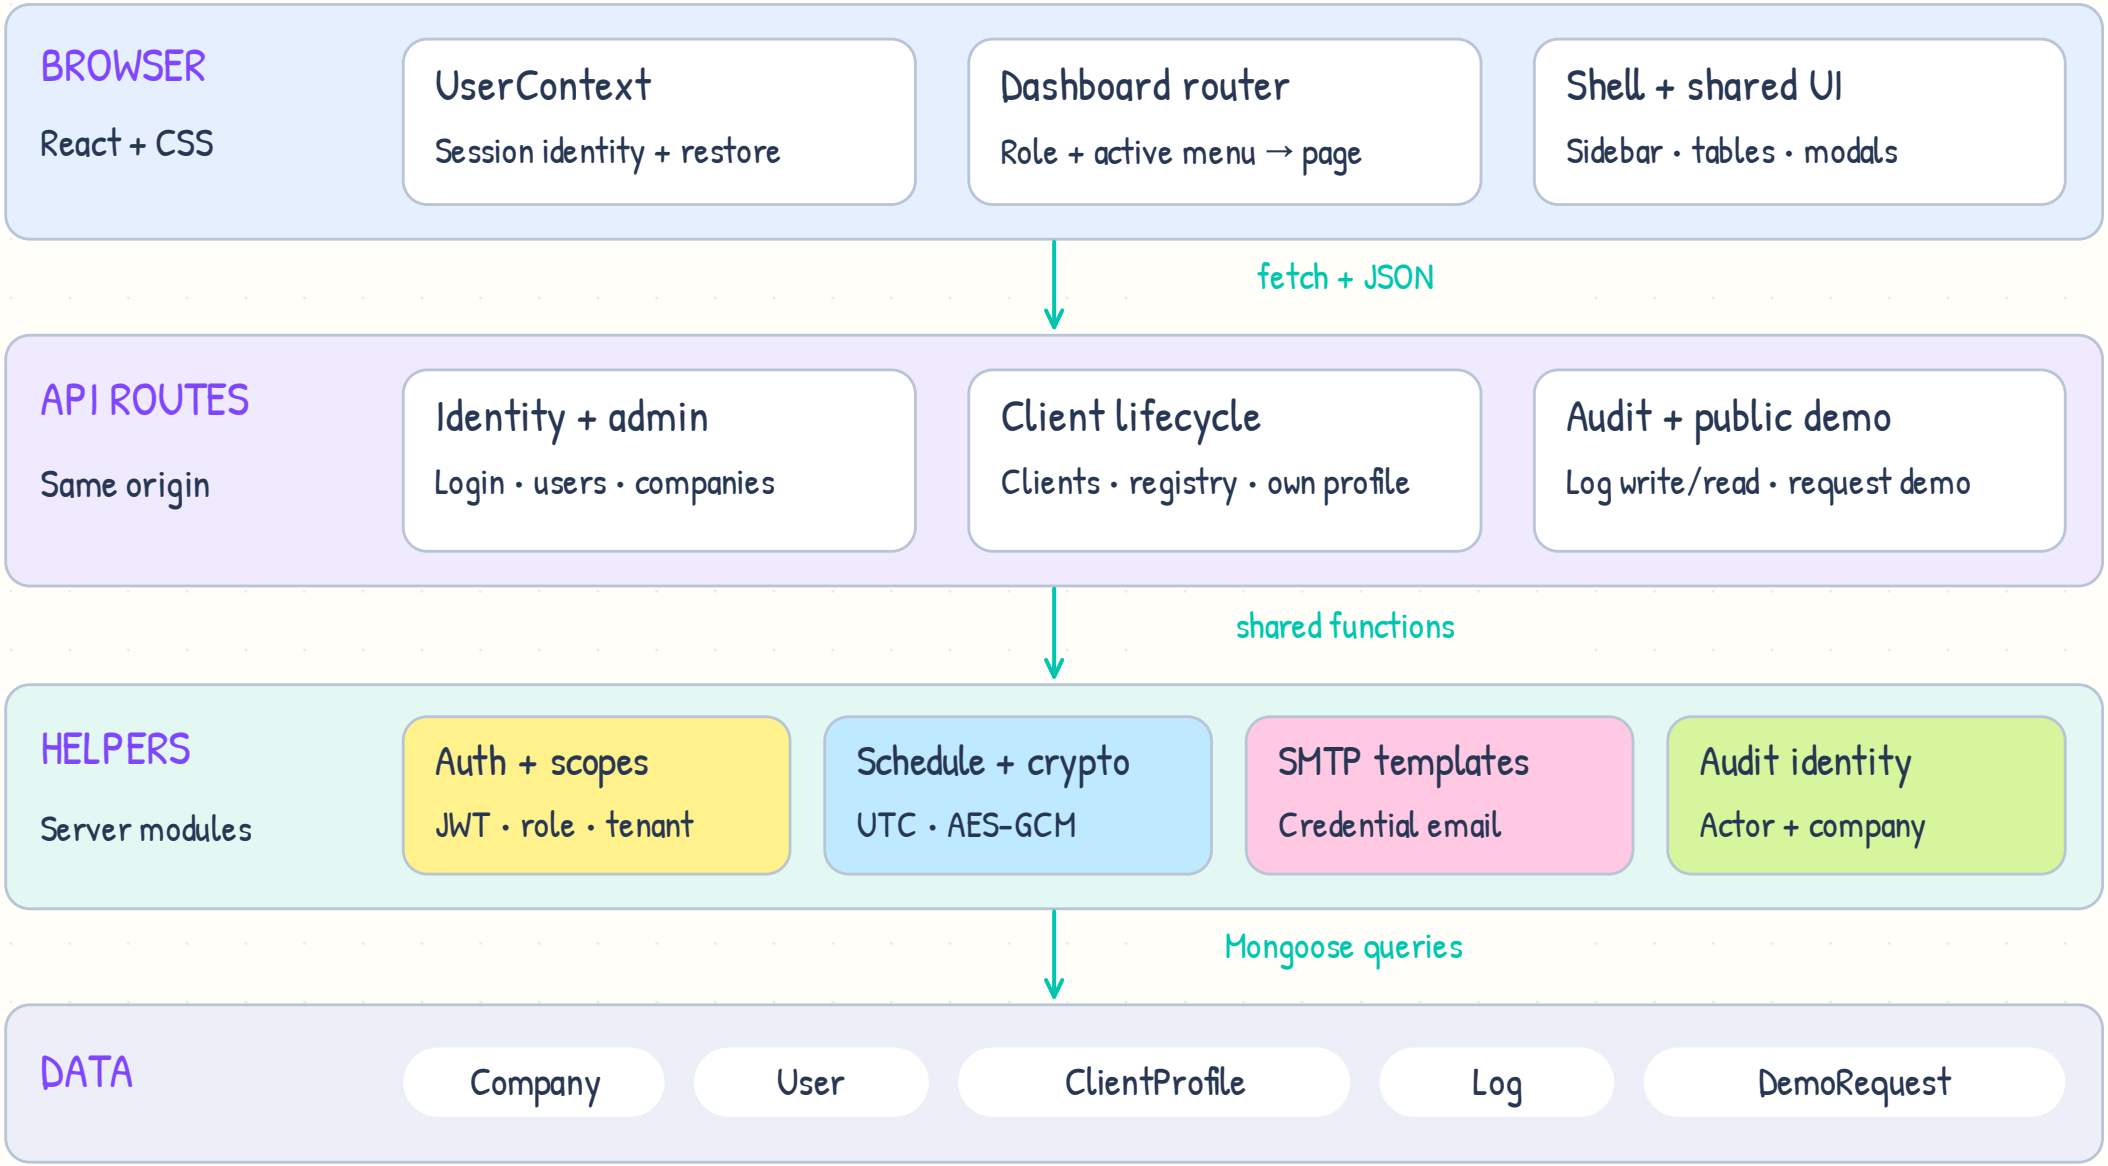


A session from login to protected data

JWT cookie flow · bcrypt password comparison · middleware and handler checks

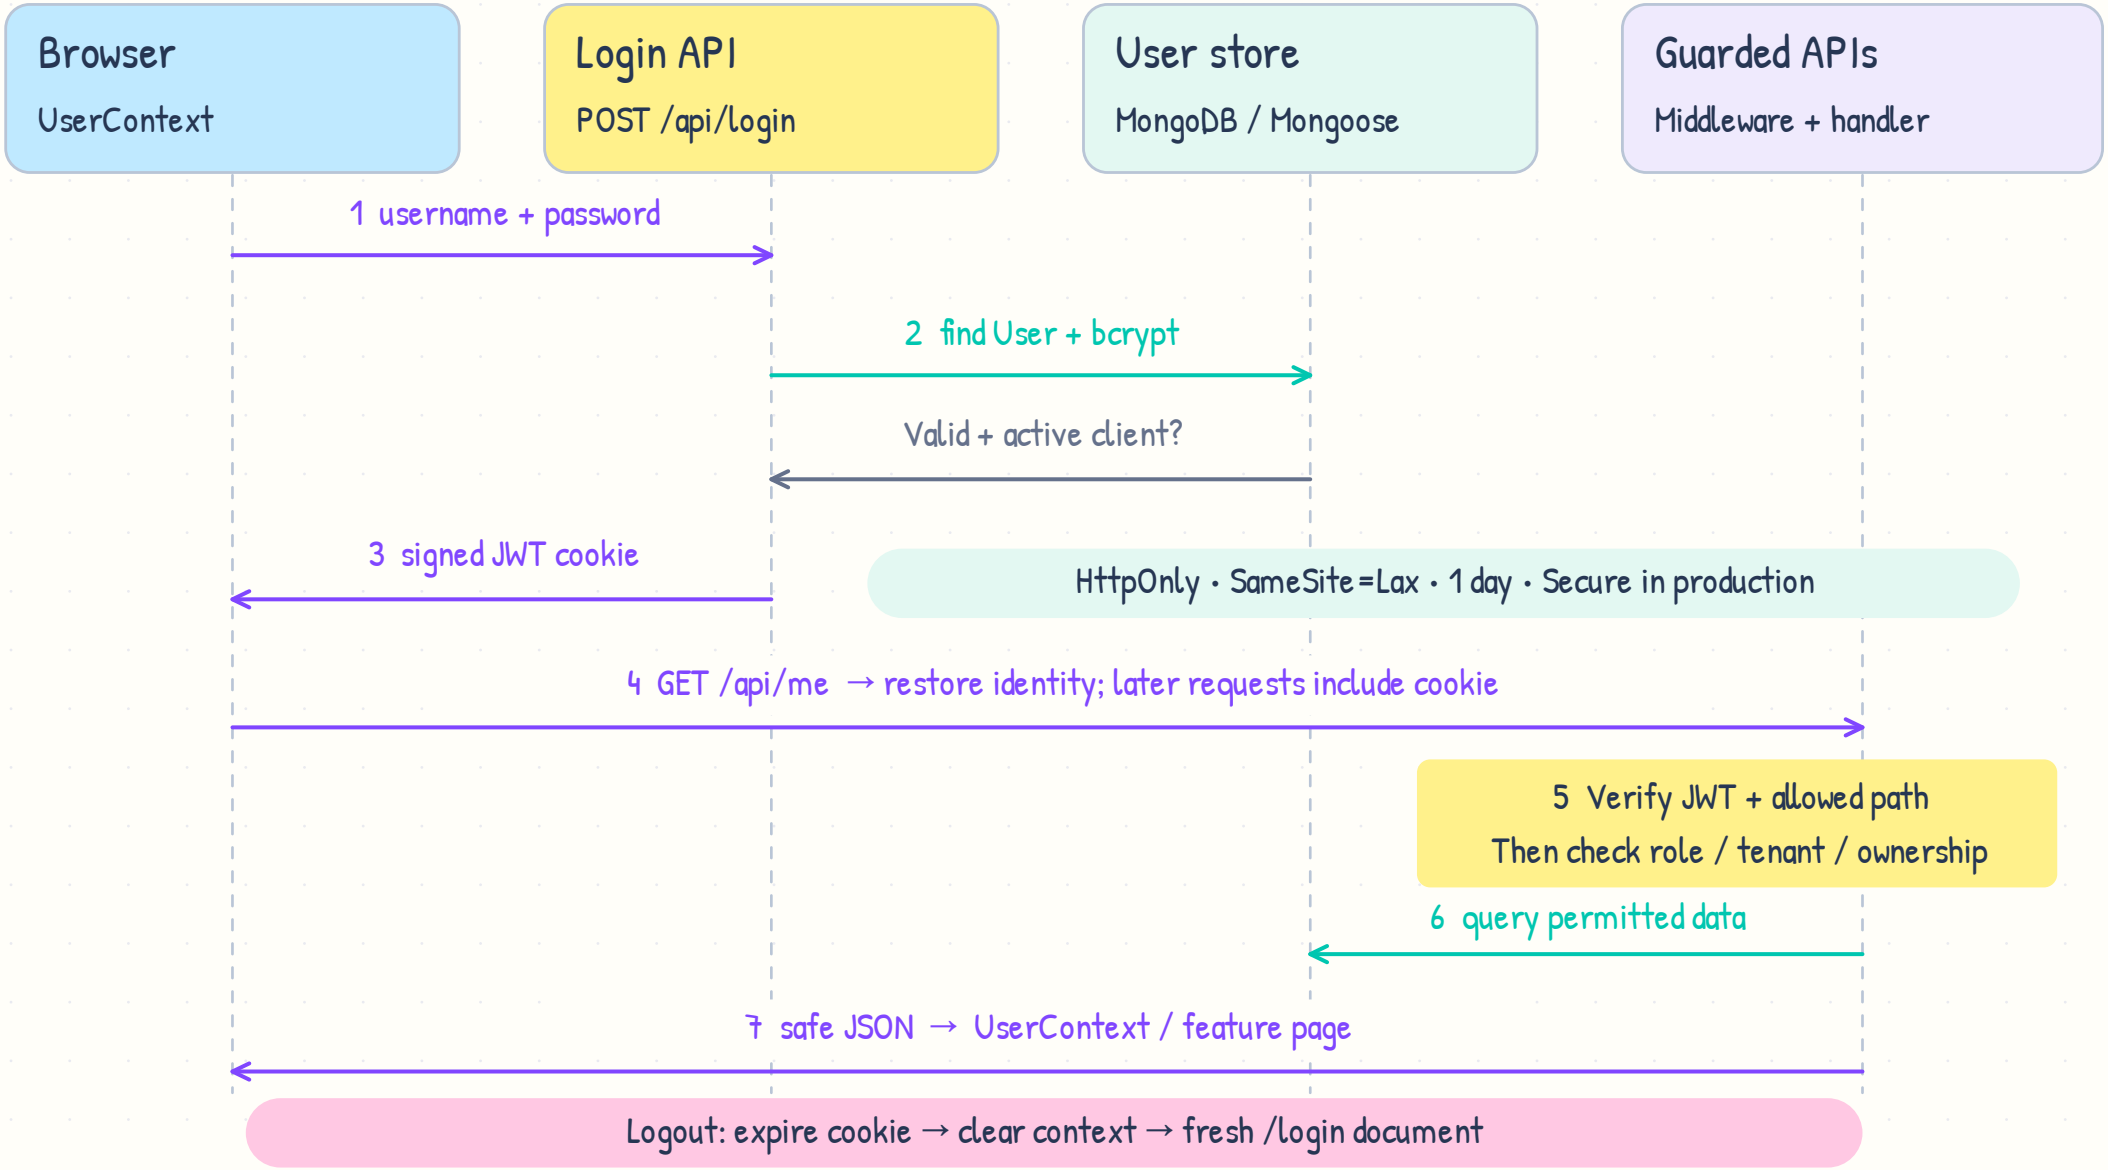

Who can act, and inside which boundary?

Core workflow access model · shared database · companyId and actor relationships define scope

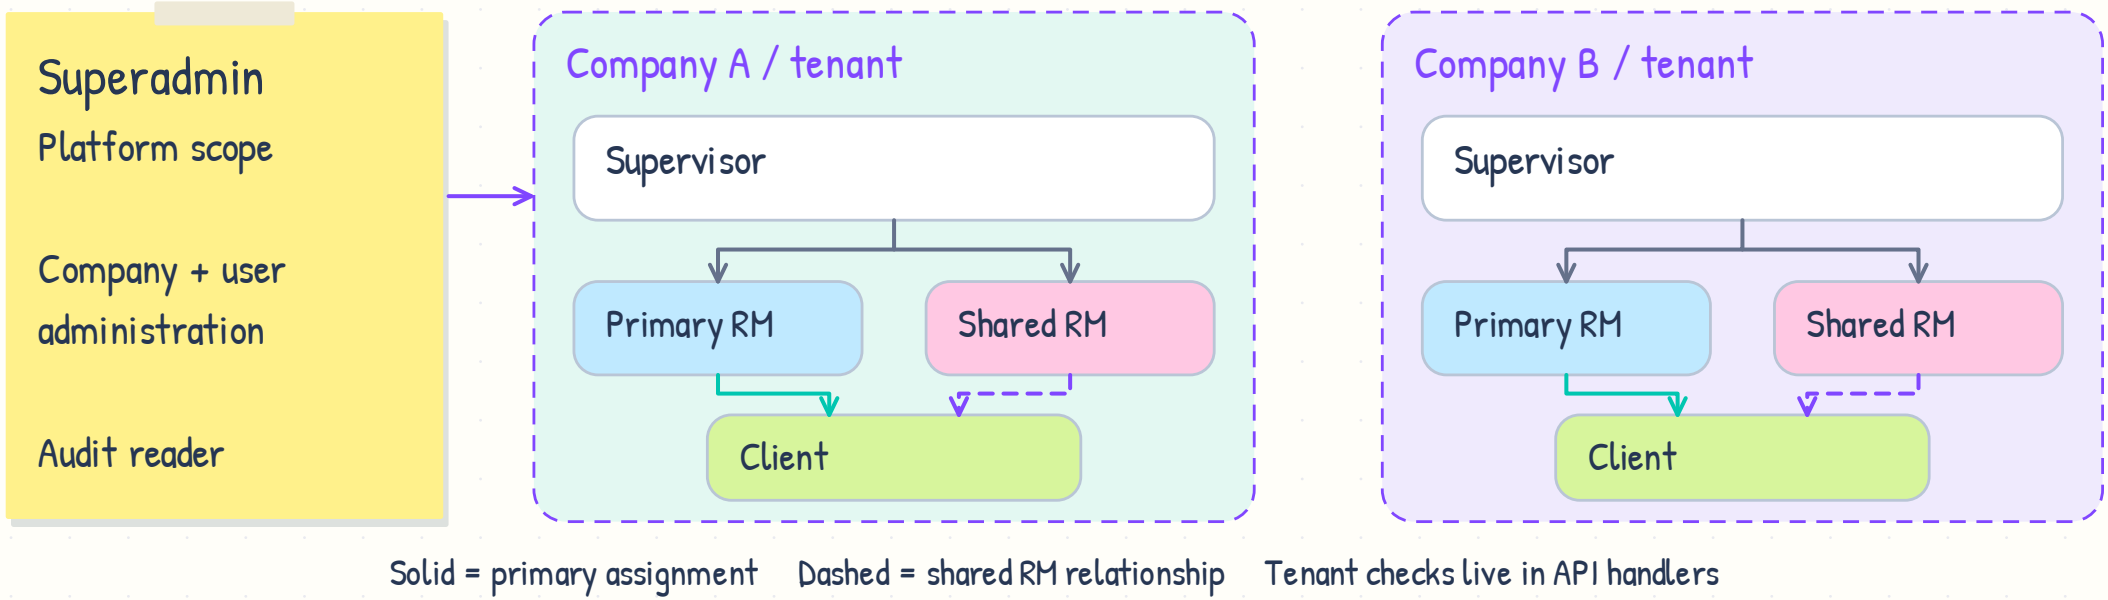


Solid = primary assignment Dashed = shared RM relationship Tenant checks live in API handlers

Actor	Data scope	Core actions / surfaces
Superadmin	Platform / all companies	Companies · supervisors · users · audit logs
Supervisor	Own company	RMs · clients · approve / review · assign / share
RM	Assigned + shared clients	Register · schedule · status; delete primary only
Client	Own profile	Read onboarding · profile; form save is pending


From routes to helpers to documents

Dependency map · each route combines its guards, business helpers and Mongoose models

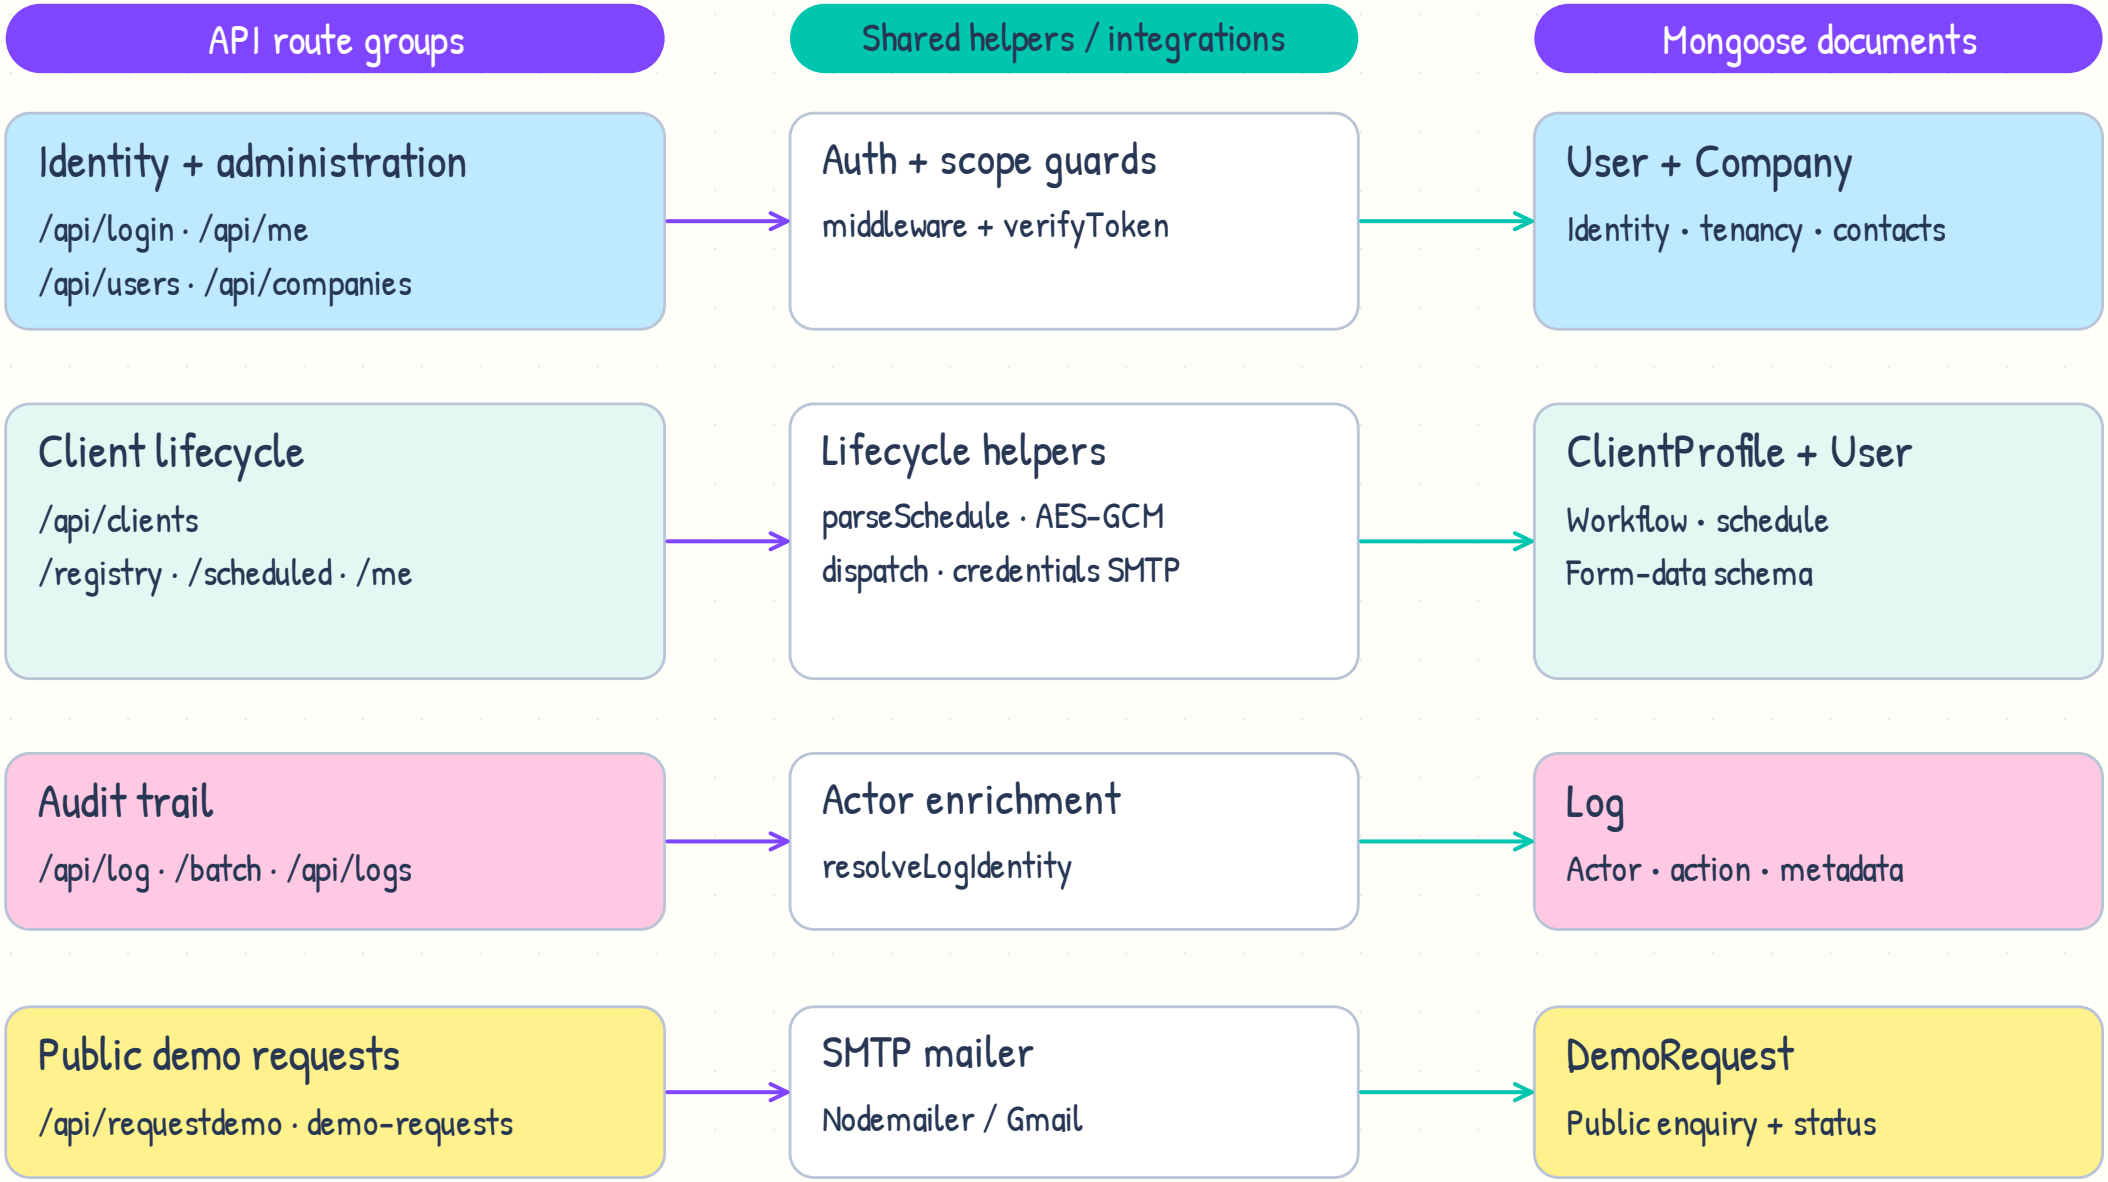

The five-model data map

ObjectId references + embedded data · cardinalities describe the source model

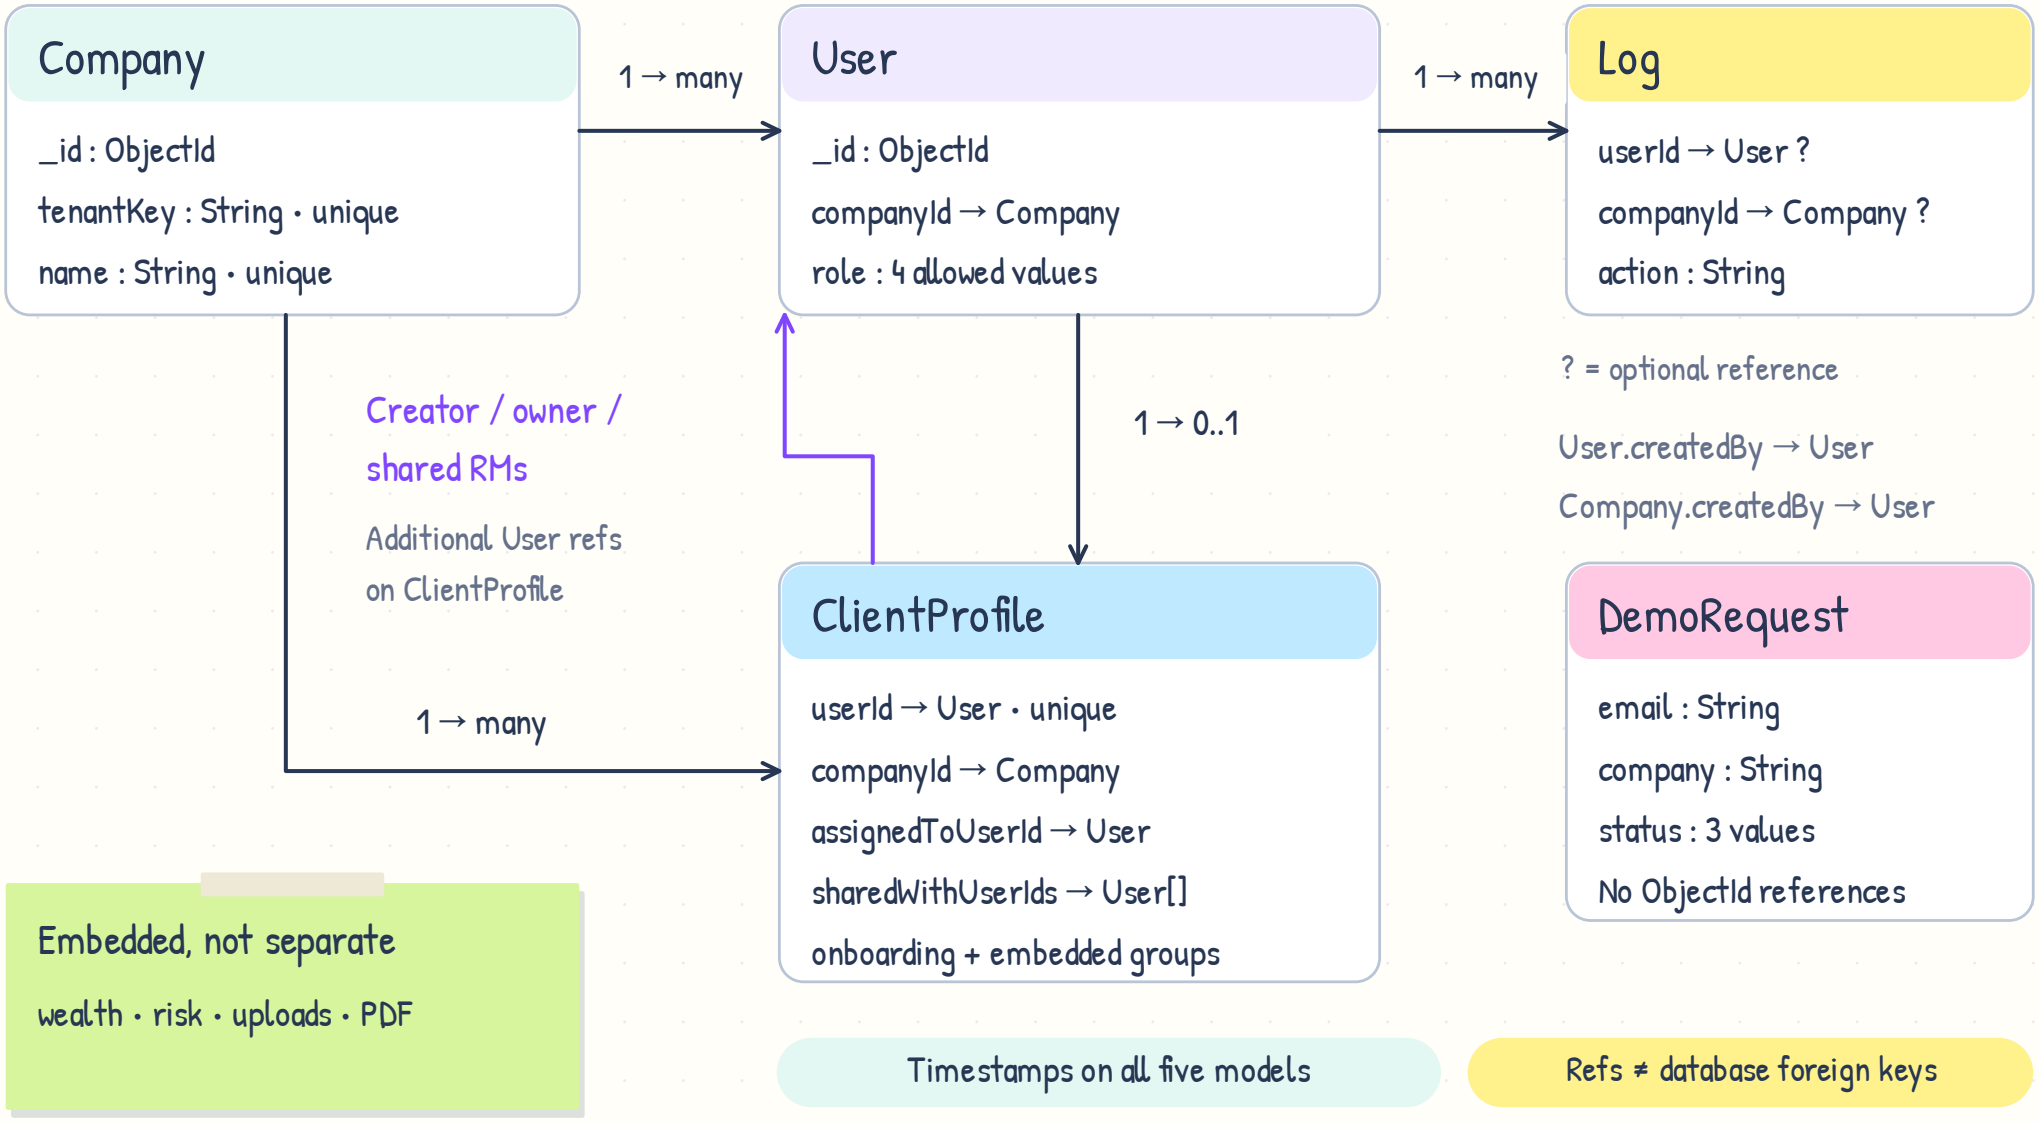

Identity belongs to a tenant

One shared MongoDB connection · companyId scopes tenant data in application routes

User : identity + access

username : String · required · unique
passwordHash : String · required
role : superadmin | supervisor | rm | client
companyId : ObjectId → Company
companyName : String ? · snapshot
fullName / email / phone : String ?
isActive : Boolean = true
createdBy : ObjectId → User ?
createdAt / updatedAt : Date

Company : tenant + organization

name : String · required · unique
tenantKey : String · required · unique
status : active | suspended = active
primaryContact : { fullName, email, phone }
address : { line1, line2, city, country, ... }
legalName / registrationNumber / taxId : String ?
website / logoUrl / notes : String ?
createdBy : ObjectId → User · required
createdAt / updatedAt : Date

Tenant rule

Non-superadmin → companyId required
Superadmin → companyId = null

JWT companyId — tenant context → **Route query** — companyId filter → **Tenant records** — User / ClientProfile

RM scope adds: assignedToUserId OR sharedWithUserIds

ClientProfile is an embedded aggregate

One profile per client user · nested objects carry the account-opening data

ClientProfile

Ownership + workflow

userId · companyId · assignedToUserId

status · onboardingType · onboarding

accountHolders

isJoint : Boolean

holder1 / holder2 : Person

sourceOfWealth

5 categories × holder1 / holder2 / joint

Each value : Money

financialProfile

netWorth : Money · employmentStatus

proposedInvestment · restrictions

riskProfile

questionnaire : 6 answers

calculatedScore / calculatedProfile

documents + pdf

uploads : Upload[] · upload flags

pdfUrl : String · lastGeneratedAt : Date

Also embedded: investmentServices · externalAdvisers

Person

name / contact : String

dateOfBirth : Date ?

address + declarations

Money

amount : Number = 0

currency : String = GBP

Upload

label : String

url : String

uploadedAt : Date

Embedded schemas use _id: false


Upload stores a URL, not a file blob

Schema capacity → phase forms still need a save API

Two status machines, different meanings

Record activation is implemented · form submission states are schema capacity

ClientProfile.status · operational lifecycle

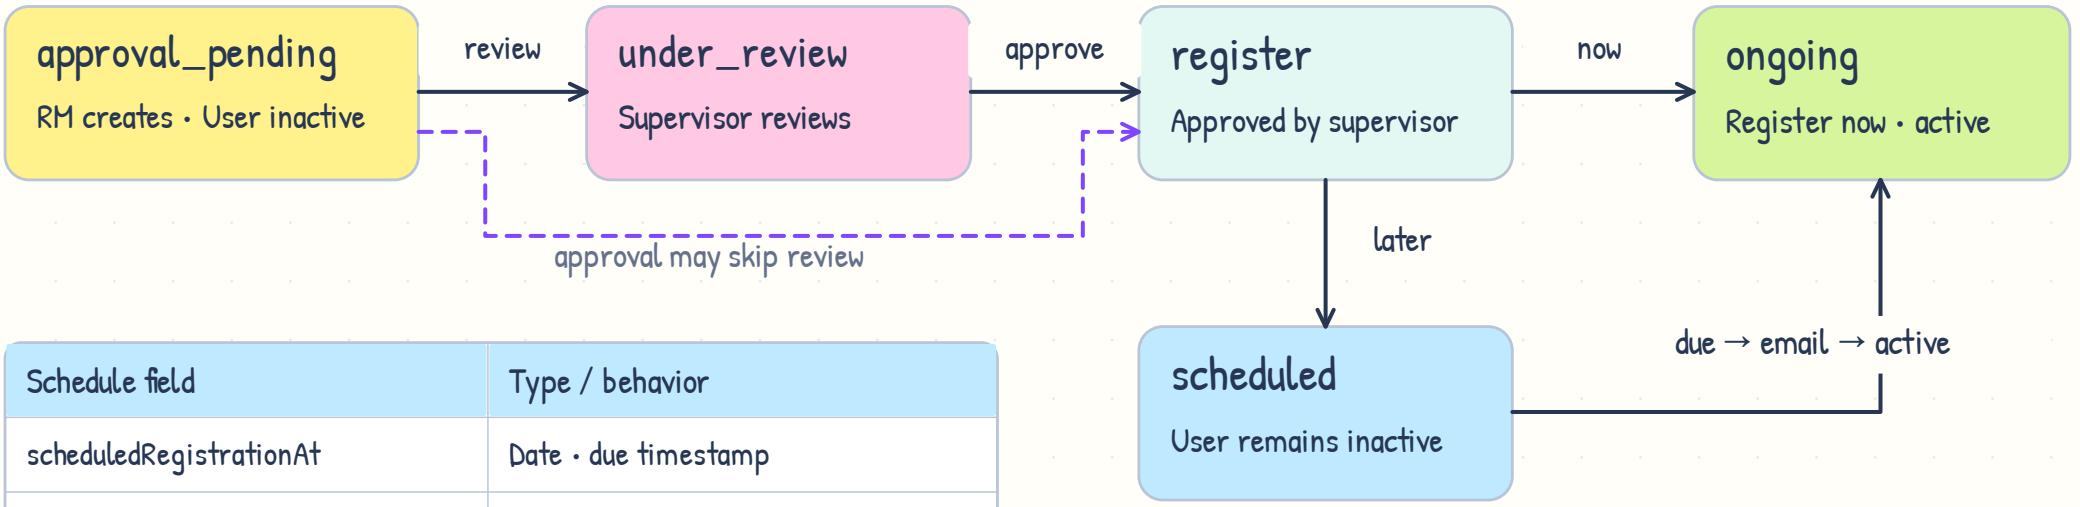

Schedule field	Type / behavior
scheduledRegistrationAt	Date · due timestamp
scheduledTimeZone	String · IANA zone
scheduledCredentialsEnc	String · AES-GCM

Success clears secret; failure returns to scheduled

Enum values only · phase forms currently have no persistence endpoint

onboarding.status · separate form lifecycle

not_started | in_progress | submitted | approved | rejected + reason

Events, leads & the query index map

Declared schema indexes · live database indexes and retention were not inspected

Log : activity event

action : String · required

userId → User ? · role = guest

companyId → Company ?

name / username : String ?

companyName : String ?

actionTitle : String ?

metadata : Object = {}

ip / userAgent : String ?

POST /api/log + /batch

Identity enriched on write

Only superadmin reads logs

DemoRequest : lead

firstname / lastname : String

email / phone : String

message : String

company : String ?

role : supervisor | rm | client | other

status : pending / approved / rejected

subscriptionStatus : 4 values

No User / Company reference

POST /api/requestdemo

Public intake → pending lead

No custom lead index declared

Indexes → access patterns

User

username UNIQUE

companyId + role + companyName

Company

name UNIQUE · tenantKey UNIQUE

ClientProfile

userId UNIQUE

companyId + assignedToUserId

companyId + onboarding.status

companyId + createdByUserId

Log

createdAt ↓

companyName + createdAt ↓

username + createdAt ↓


Integrity lives in routes

Tenant + RM checks · no FK cascade

User + profile writes are separate


Every model: _id + createdAt + updatedAt

The client record lifecycle

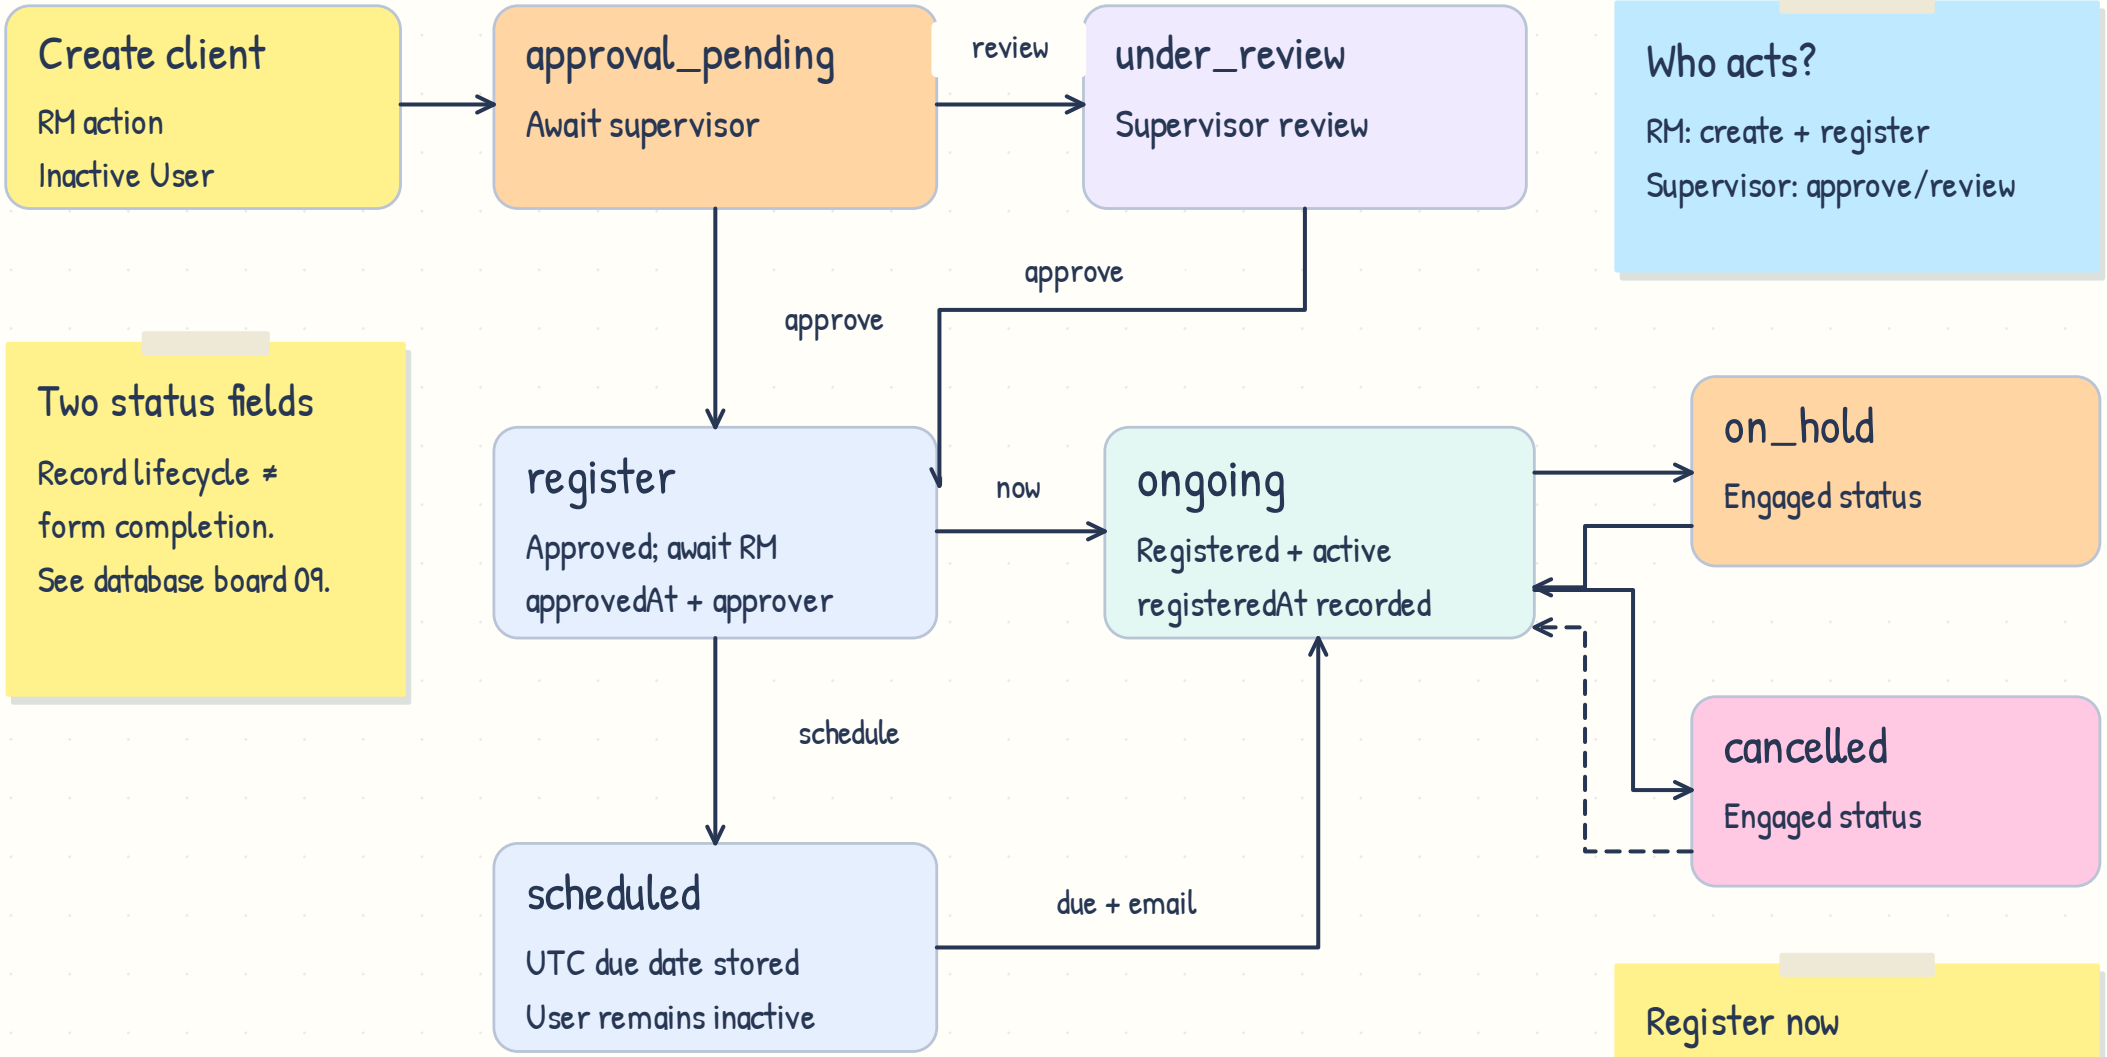

Shown: RM-created path. Supervisor direct creation can start in an engaged state.

Schedule → dispatch → activate

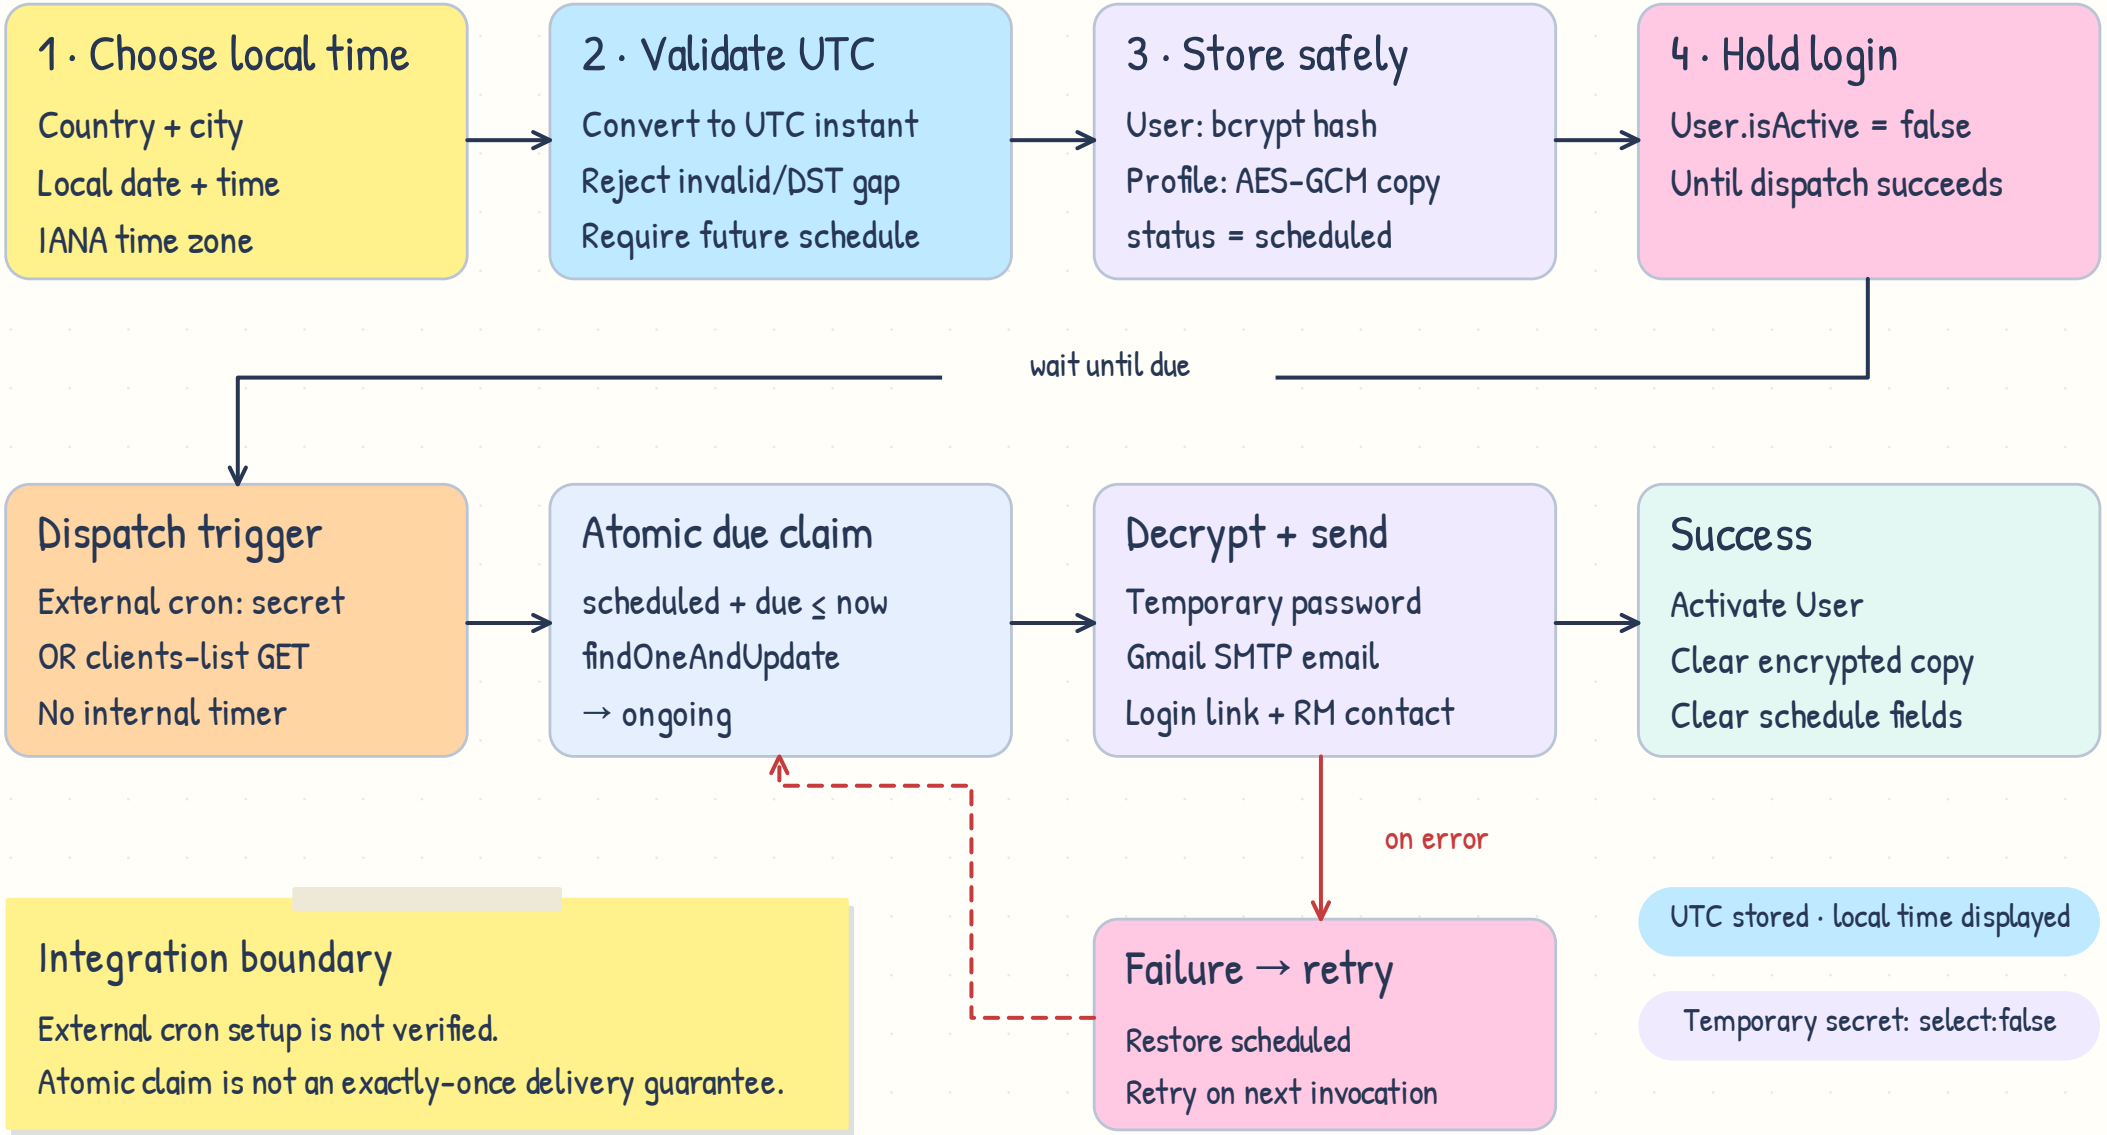

The individual onboarding journey

0 · Prerequisites

Charges & Regulatory Information + Terms & Conditions → scroll-gated reader; no stored read flag

1 · Personal details

1

Account holders · NCI

Non-US declaration

Services · advisers · news

2 · Source of wealth

2

Employment · inheritance/gift

Business/property sale

Other wealth

3 · Financial profile

3

Portfolio · employment

Assets · liabilities · net worth

Income · spend · dependents

Knowledge & experience

4 · Risk profile

4

Risk questionnaire

Investment strategy

Non-standard investments

5 · Signature

5

Signature form UI

No dedicated signature field

in the current schema

6 · Documentation

6

Documentation checklist

Upload URL metadata exists

Upload pipeline pending

Current UI: open → fill → Next / Close

Form saving + submitting still pending

Individual only

Other types: coming soon

Audit clicks and client activity

A · Persisted UI interaction log

Meaningful click
ActionLogger
Readable action title
Path + UI context

→

Browser buffer
Flush at 10 events
OR 5 seconds
Unload beacon

→

Server enrichment
/api/log/batch
Actor + tenant from User
/api/log: single event

→

Log model
Stored audit entry
Superadmin reader
/api/logs filters

Explicit UI actions can also go directly to /api/log.

UI audit ≠ complete backend transaction audit

B · Derived activity feed

Scoped /api/clients
createdAt
onboarding.submittedAt
onboarding.approvedAt

→

Build dated activities
Creation / submission / approval
Sort from record timestamps
No event collection

→

RM notifications + dashboard
Dated activity cards
Derived again from client records
No persisted unread counter

Separate paths: interaction logs describe clicks; activity cards describe client-record milestones.

Where each screen gets its evidence

Screen / feature	Input	Visual result	Current state
RM / Supervisor	/api/clients + /api/users	Counts · pipeline · team	Connected
Superadmin	Companies · users · clients · logs	Totals · companies · audit	Connected
Client dashboard	GET /api/clients/me	Own saved state + uploads	Connected
RM notifications	Client milestone timestamps	Dated activity cards	Derived
Profile completion	Ten personal fields counted	Estimated percentage	Derived
Submissions	buildDummySubmissions()	Sample phase fields + dates	Sample UI
Phase forms	Form inputs in the browser	Next / Close navigation	Save pending
Reports / health	No reporting / monitoring API	Empty rows / unavailable	Placeholder

Stored record → derived view

Charts summarize existing API records.

Future write path


Form fields exist; saving is not wired.

Current-state source snapshot

Deployment and live data not inspected.

The dashboard, taken apart

A shared shell surrounds every role-specific workspace · source-based UI schematic

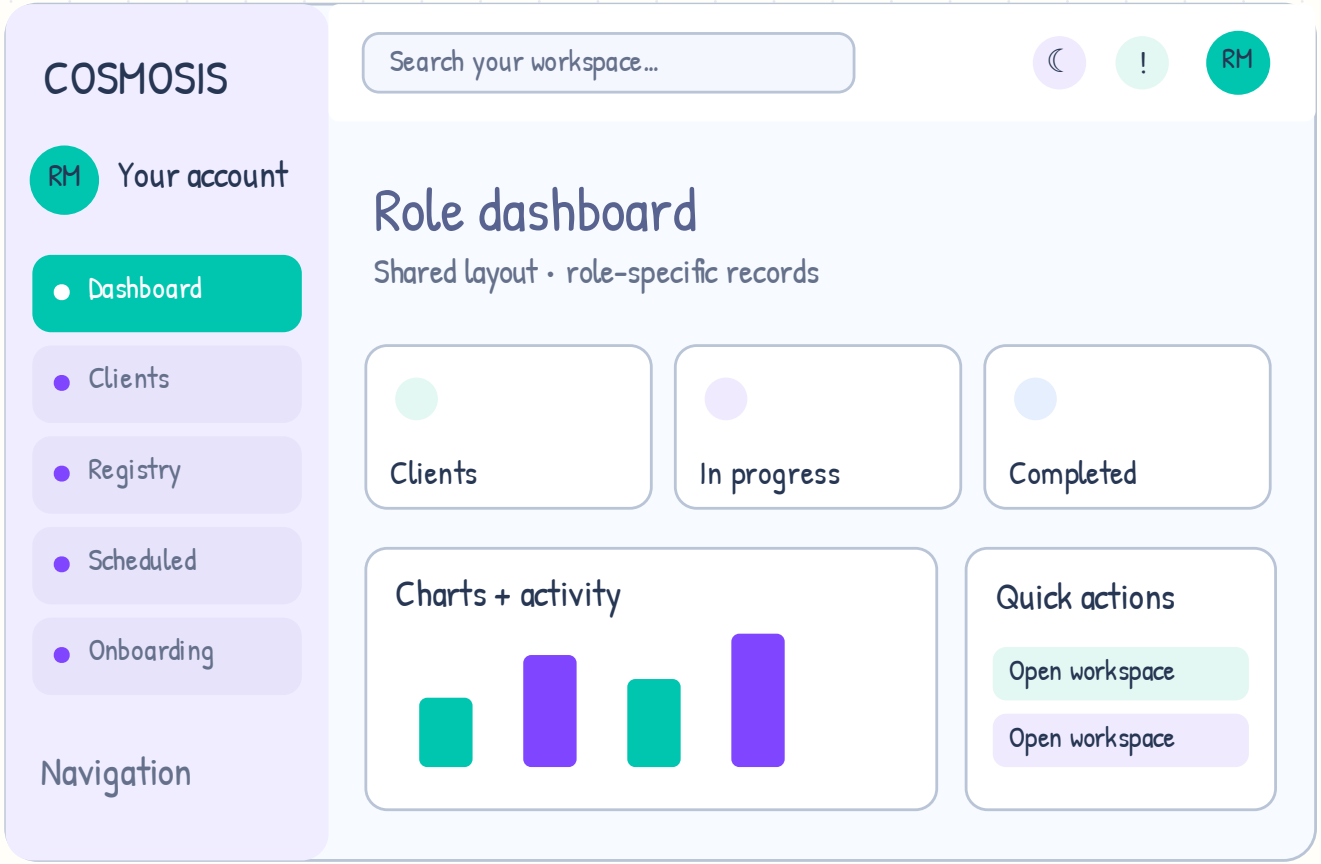

262 px sidebar

60 px header

Scrollable stage

DashboardPage
user + activeMenu + role config

DashboardShell
sidebar + header + content

DashboardMenuSection
background + page boundary

DashboardPageLoading
readiness + inert content

Role-specific page
dashboard / table / onboarding

One layout, four workspaces

API routes enforce permissions

The Cosmosis color & component recipe

Exact app swatches + bright presentation notes · handwriting is used for these printed boards

Brand mint	Dashboard teal	Dashboard purple	Heading slate	Main ink	Muted slate	Page mist	Sidebar lilac
#21CFB2	#00C6B0	#8046FF	#59638F	#090943	#737FAE	#F7FAFF	#EFEDFF

Status color carries meaning

Approval pending	Under review	Awaiting registry	In progress	Cancelled
#FEF0DC / #C26A0A	#EFEAFD / #6D4FD8	#E6EFFD / #3A6FD8	#E3F8F2 / #17B89B	#FDE8E8 / #C63B3B

Shape tokens

Button

Dialog card

Buttons / inputs: 10 px radius

Modal card: 18 px radius

Font roles

App: Poppins

Headings: 32 px

Print boards: Patrick Hand

Dark theme accents

Teal

Purple

Surface #0C1B29

Text #EEF3FF

Reusable pieces: tables & dialogs

Exploded component models · data and columns are supplied by each management page

Management table

TablePageLayout

ManagementTableToolbar

Field | Search / filter | + Add

GenericTableThead + Tbody

Name	Status	Actions
Client	In progress	Info / Edit

ManagementTablePagination

TanStack row model · 8 rows / page

action →

ModalKit

ModalShell header

i

icon + title + badges + Close

Scrollable body

ModalSection → DetailRow

ModalField → input / select

Cancel | Primary


Backdrop: dim + blur 6 px

Record source → data + columns

View = read · form = edit

Onboarding: interaction & focus model

How a client enters, explores and leaves a form · individual account UI

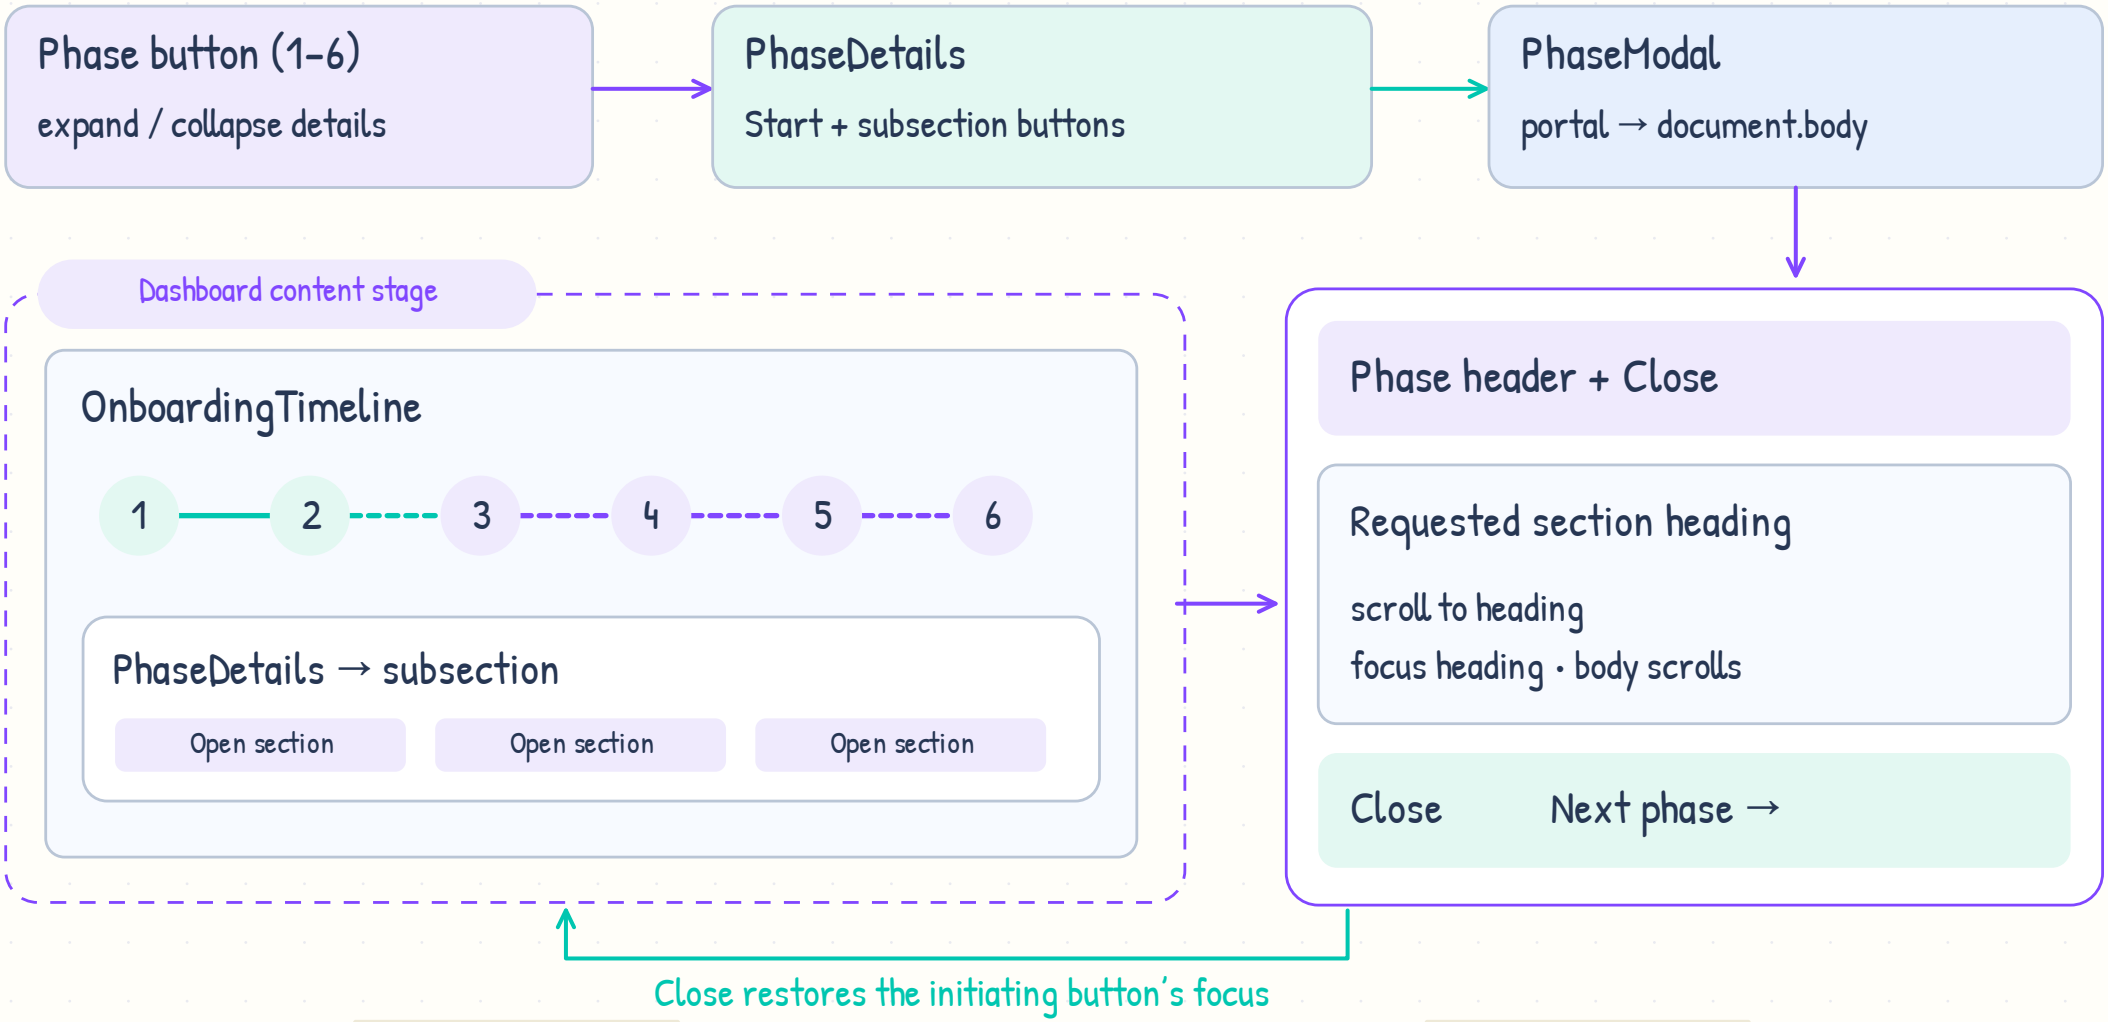


Subsection action → heading focus


Next changes the open phase

One interface, many viewing conditions

Theme changes colors · responsive rules reflow space · source-based miniature wireframes

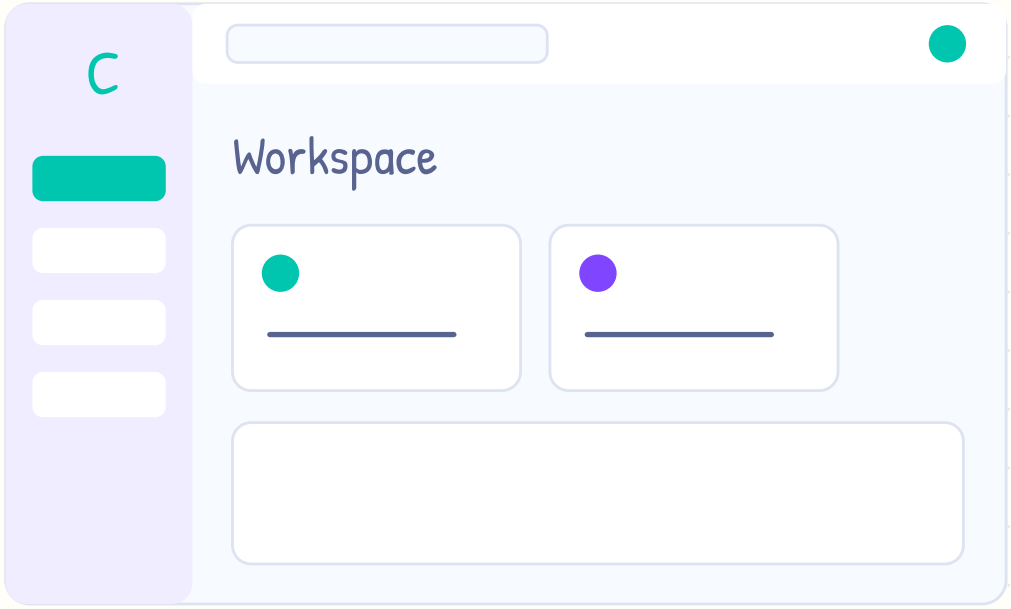

Light: default

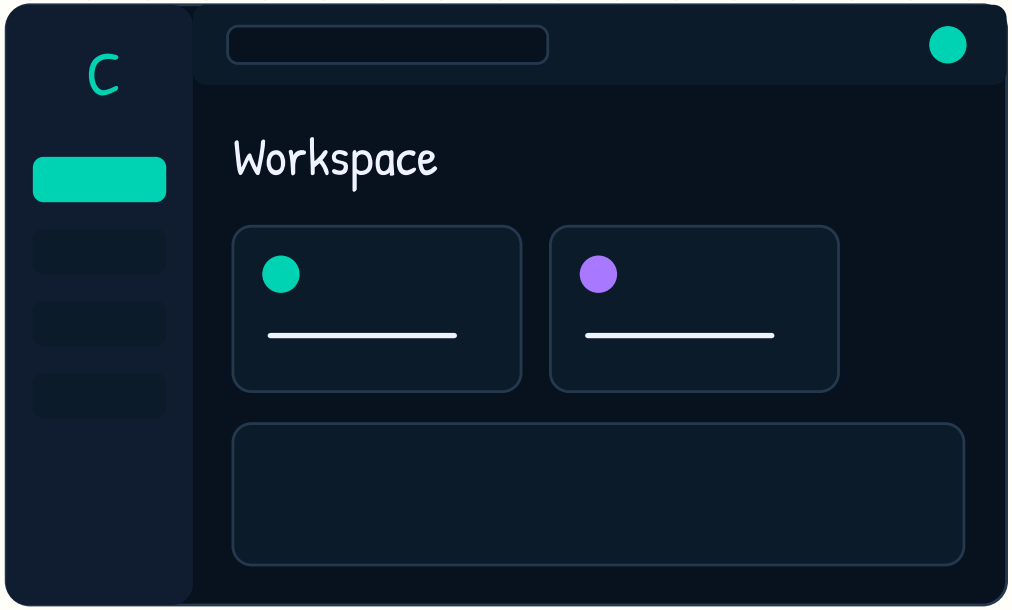

Dark: remembered

Theme button
toggle light / dark

→

useDashboardTheme
state + storage event

→

localStorage
save + restore choice

HTML attribute
data-dashboard-theme

Responsive rules

262 px → 80 px
sidebar collapse

≤760 px
slide-out navigation

≤1100 px
labelled table records