myAssistente

Personal Desktop Assistant – Toolkit Documentation

Release 4.X · English Manual

Content: Title Installation Screenshots Default commands Username and assistant name Documentation

---

User Manual

Updated for release 4.X

Startup guide

- **Purpose:** This manual guides you through the first installation and configuration of your myAssistente.
- **Prerequisites:** The myAssistente executable for your operating system, or the Python source file with Python installed on your machine (multiplatform).
- **Sections:** Installation, First program startup, Enjoy

> **Download** all necessary files from the Assistant GitLab project repository. English and Italian languages are included. If you need additional languages (15 languages ready to use), download the corresponding `lang_XX.json` file from the localization-file folder of the same GitLab repository.

Installation

The Assistant application is portable and can be launched from any location, including the desktop or a USB drive.

Windows

Download and unzip `myAssistente_[last release]windows.zip`
Run `myAssistente.exe`

Linux

Download and unzip `myAssistente_[last release]linux.zip`
Run `myAssistente`

Python

Download `myAssistente_[last release].py`
Download the complete `_dati/` folder
Ensure your Python installation includes all required dependencies (see README)
Place `myAssistente_[last release].py` and the `_dati/` folder in the same directory
Run `myAssistente_[last release].py`

All Operating Systems

Optional: add any additional `lang_XX.json` language files inside the `_dati` folder (the same location where `lang_it.json` and `lang_en.json` are stored).

For customization of the default language and other parameters, please refer to the [myAssistente JSON Configuration Manual](#).

Screenshots

Welcome screen

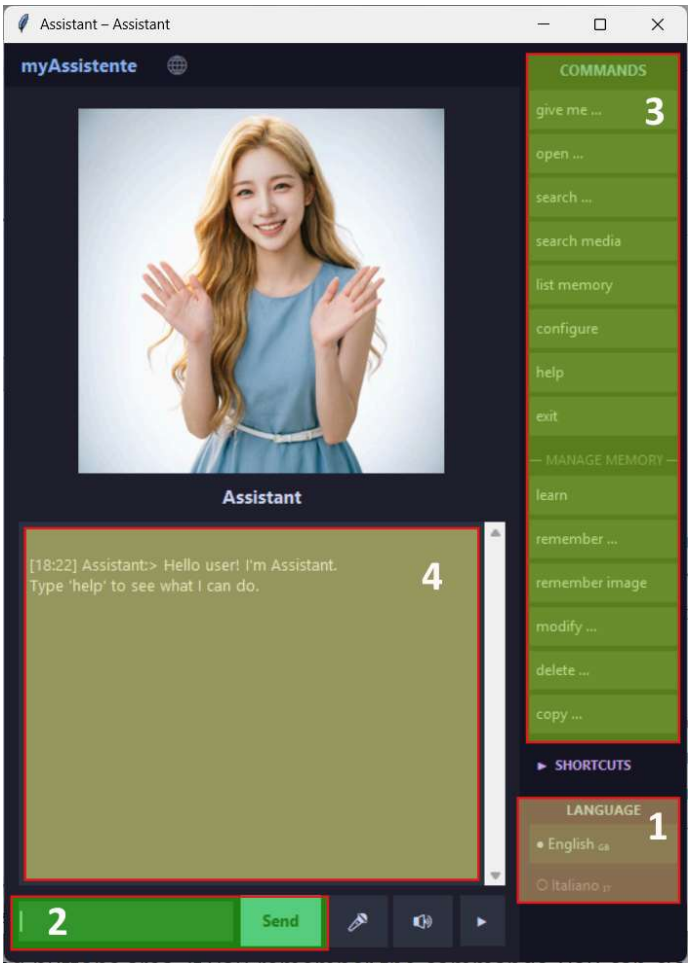

1) Area to **change language**.
If the language is not correct at startup, change it using the bottom-right buttons.
NOTE: languages placed inside `_dati` are automatically detected by the application. The program starts with the last selected language.

2) Area to **enter commands**. By pressing the microphone you can use voice commands.
Note: STT (Speech to Text) uses the **Google API**, and your audio will be sent to Google. For 100% privacy, do not press the microphone—use text commands only.

3) **Command buttons** area. If you already know the commands, you can close this sidebar using the arrow at the bottom right, next to the speaker, or use the buttons instead of typing/speaking commands.

4) **Assistant answer area**. The answer will appear here and will be spoken if the speaker is enabled. To stop the reading of the answer, enter the command `ok` or press the "Quiet please" shortcut button.

Shortcut

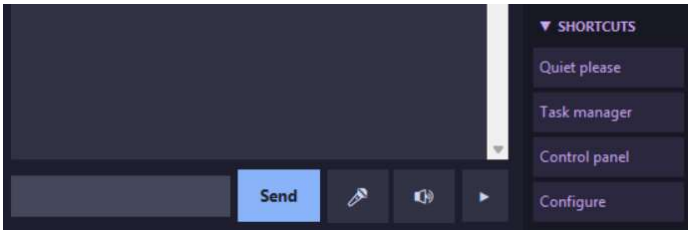

By clicking the arrow on the right of SHORTCUT, you can open/close your personalized shortcut commands.
All buttons in this area are customizable (for details, refer to the [Assistant JSON Configuration Manual]).

Default Commands

Command	Description (lang_en.json)
`give me <name>`	Retrieves data
`open <name>`	Opens a file, link, or program
`search <query>`	Searches memory
`search media <query>`	Searches pictures, music, and videos stored inside the `_dati/asset` folder
`list memory`	Shows all entries
`configure`	Configures the config.json file
`help`	Shows available commands

Command	Description (lang_en.json)
`exit`	Closes the assistant
`--- MANAGE MEMORY ---`	
`learn`	Guided input
`remember <name> <data>`	Saves information
`remember image <name> <data>`	Saves images
`modify <name>`	Modifies an entry
`delete <name>`	Deletes an entry
`copy <name>`	Copies to clipboard
`SHORTCUT`	
List of your personalized shortcuts	
`LANGUAGE`	
`language <code>`	Changes language

> **Note** All command names are customizable in the `lang_XX.json` file. For each command you can define multiple words: the first one will appear in the command panel, while the others can be used as alternatives (e.g., for the same command you may set: search / find / look for — “search” will appear in the panel).

Username and assistant name

Type or press the microphone and say:

```
[23:09] user:> configure short
[23:09] Assistant:> Assistant name setup: nome_avatar current value
Enter new name or leave empty to cancel
[23:09] user:> Alice
[23:09] Alice:> Parameter 'nome_avatar' updated to 'Alice'
[23:09] Alice:> User name setup: nome_utente current value = 'user'
Enter new name or leave empty to cancel
[23:09] user:> Emanuele
[23:09] Alice:> Parameter 'nome_utente' updated to 'Emanuele'
[23:09] Alice:> Configuration completed.
```

> **Note** You can perform the same configuration by editing the `_dati/config.json` file (using any simple text editor such as Notepad).
>
> ```
> {
>  "nome_avatar": "Assistant",   <- assistant's name
>  "nome_utente": "user",        <- username
>  "avatar_iniziale": "benvenuto",
>  "avatar_random": ["sorridente","coniglio","soddisfatto"],
> ```

Documentation

Advanced documentation is **IN PROGRESS** for release 4.x.
The documents will be available in the /DOCS folder of the repository. For now, please refer to the documentation of previous releases.

- **config.json file** — configure assistant name, username, startup language (managed automatically by the program), STT/TTS parameters, and

optional AI provider API keys.

- **memory.json file** — where the assistant stores (learn/remember commands) and retrieves (open/search/list commands) information.
- **lang_XX.json file** — customize all language settings.
- **aiml_XX.json file** — advanced external AIML engine for conversational phrases.

---

myAssistente – Personal Desktop Assistant Toolkit

Author's website · © 2026 Emanuele Cassani