


OpenUSD composition tree — pin_insertion (task_activated mode)



payload arc: loadable / unloadable per work zone

sibling zone payloads are composed only by building_root_all_loaded.usda;
building_root.usda (task_activated) composes the active zone alone

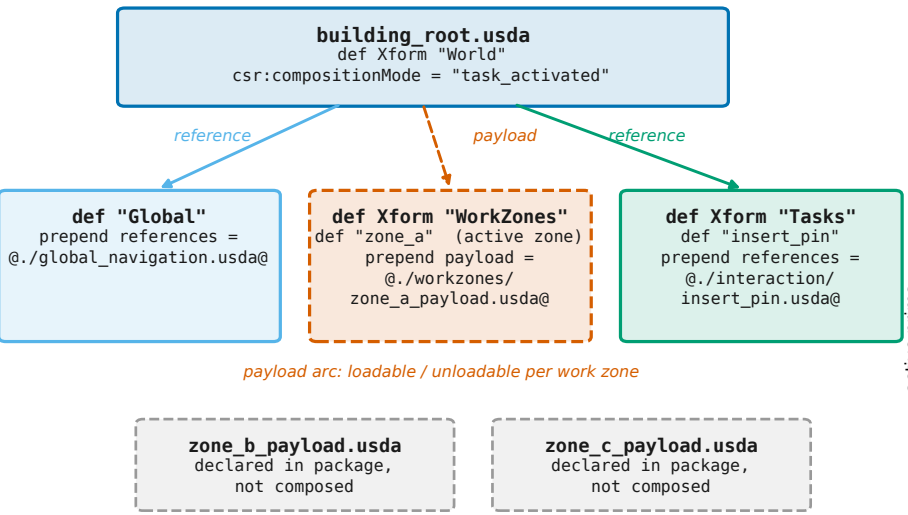