


FINOVA architecture

Based on the current frontend source. Solid arrows show implemented dependencies or request paths. Dashed arrows show inferred backend responsibilities; backend internals and storage technologies are not available in this repository.

System architecture

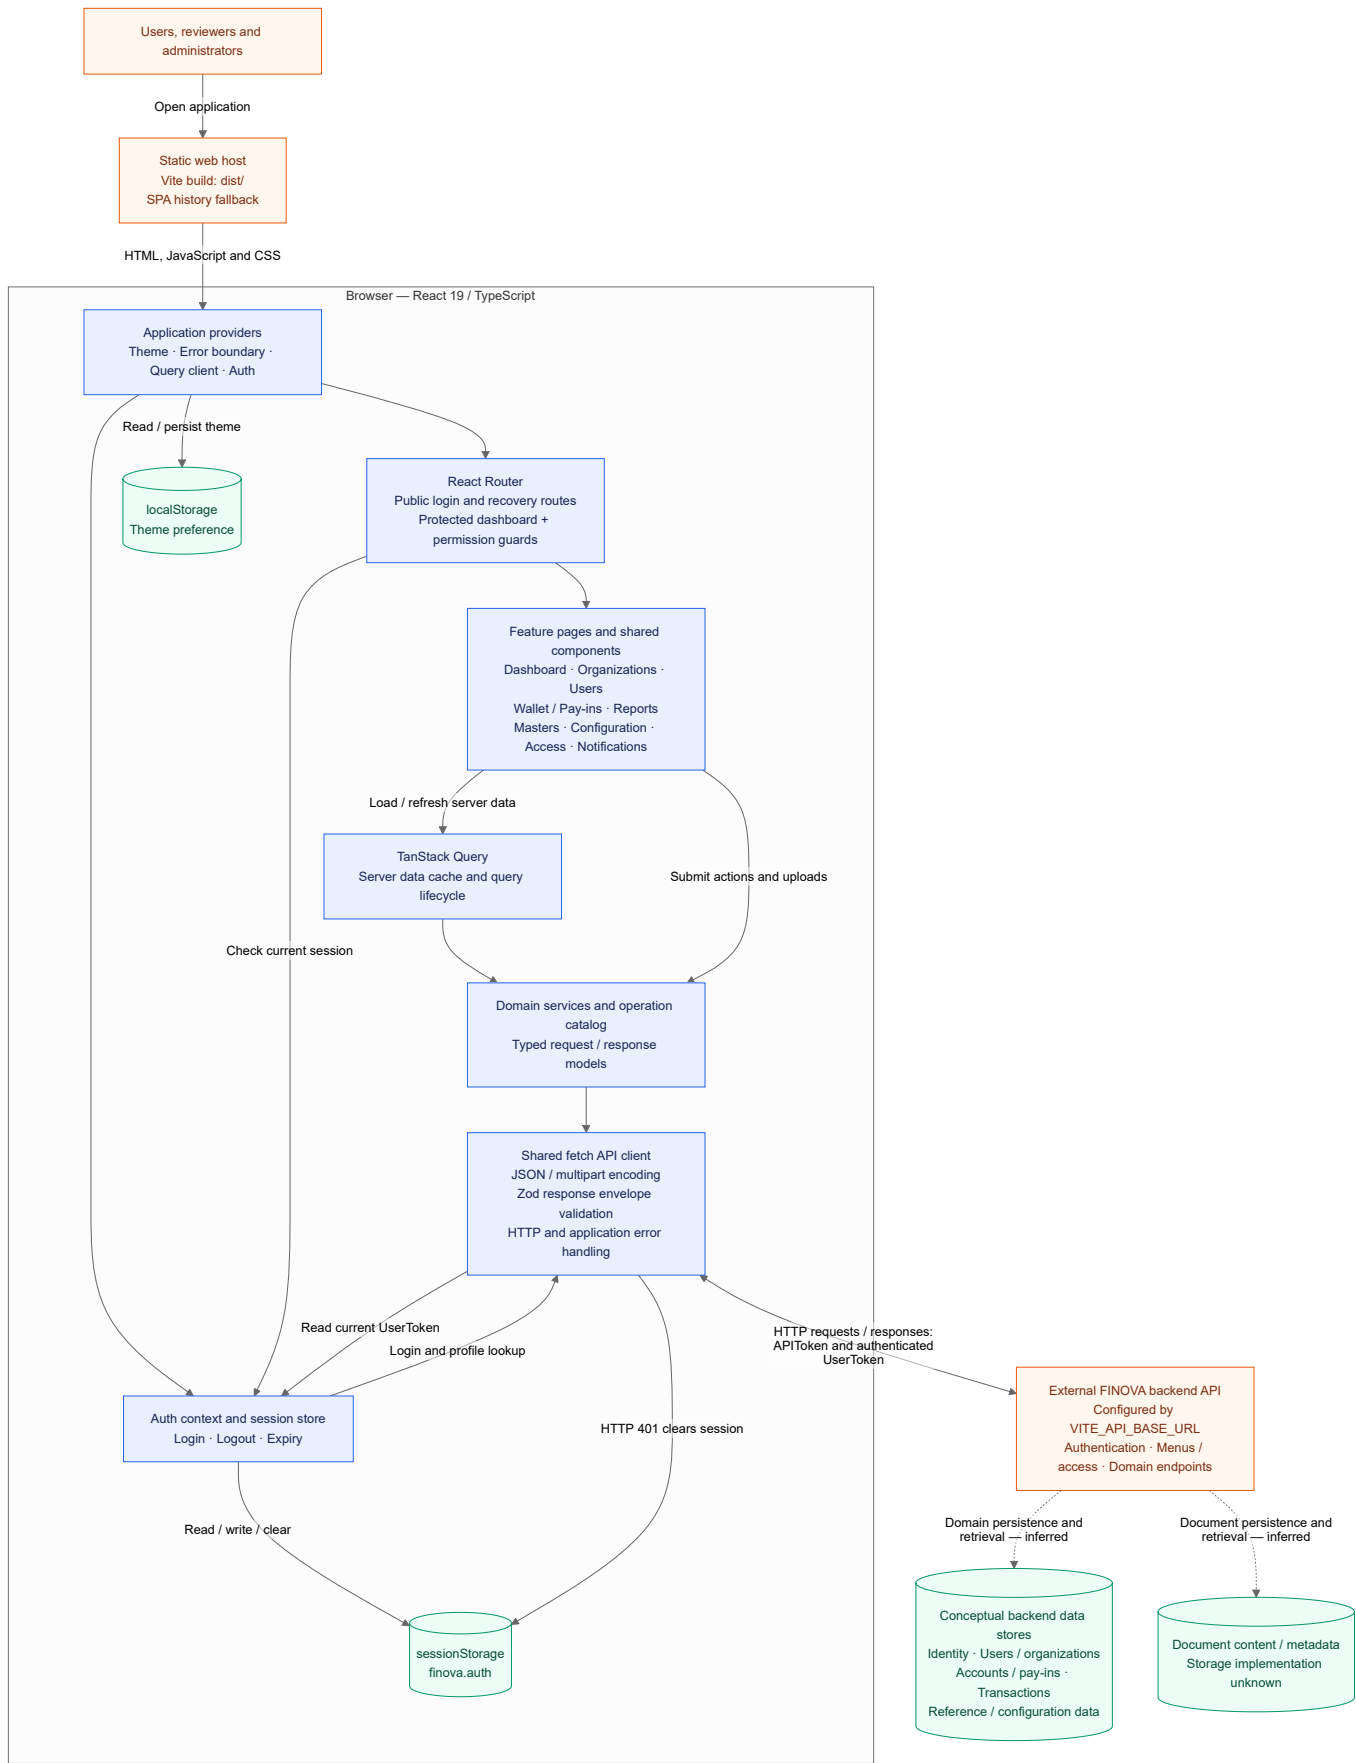


Frontend module map

Layer	Source	Responsibility
Bootstrap	src/main.tsx	Mount React and initialize application providers
Routing and shell	src/app/	Lazy route modules, dashboard layout, session and menu permission guards
Feature UI	src/pages/	Domain workflows and page-specific validation
Shared UI	src/components/	Forms, tables, result views, file viewers and status handling
Core	src/core/	API transport, authentication, sessions, navigation and permissions
Services	src/services/	Domain API wrappers and schema-driven operation catalog
Contracts	src/models/	Request and response types
Appearance	src/theme/	MUI theme, CSS tokens and persisted theme selection

The diagram groups request and response paths for readability. TanStack Query manages server data; form and component state also live in React and React Hook Form. Menu-based frontend guards control navigation, while authorization must be enforced by the backend. Logout, session expiry and authenticated HTTP 401 clear the local session; the auth provider clears the query cache when the session is absent. There is no implemented refresh-token flow.

src/services/device.ts additionally defines a direct browser adapter for a local Morpho RD service at https://localhost:11100. This is separate from the FINOVA API client; the adapter's presence does not establish an active page integration or verified hardware workflow. SMS/email delivery, payment-provider processing, ledger posting and backend deployment topology are not established by this frontend.

Build and deployment

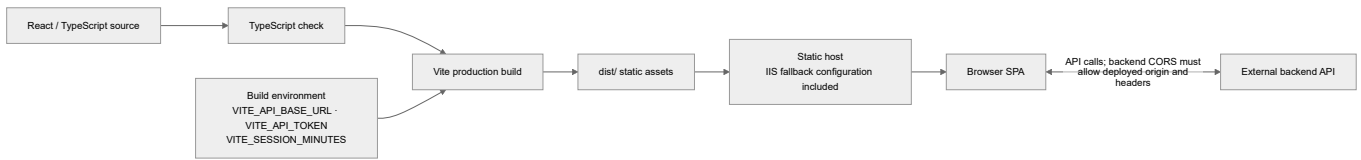

Build environment values are bundled into the browser application. The deployment host and backend infrastructure are not specified by this repository.

Sources: [bootstrap](#), [routing](#), [shell](#), [API client](#), [authentication](#), [session store](#), [theme persistence](#), [build configuration](#), and [IIS configuration](#).

Related diagrams: [Data flow](#) and [Application process flow](#).