

RUN A CICD PIPELINE FOR TERRAFORM TO INIT,FORMAT,VALIDATE,PLAN AND APPLY.

1.JENKINS INSTALLATION

First install Jenkins in a server

Create a ec2 instance and connect to that instance then switch to root user by using

(`sudo su -`) command.

install Jenkins using this commands

```
sudo wget -O /usr/share/keyrings/jenkins-keyring.asc \
```

```
https://pkg.jenkins.io/debian/jenkins.io-2023.key
```

```
echo "deb [signed-by=/usr/share/keyrings/jenkins-keyring.asc]" \
```

```
https://pkg.jenkins.io/debian binary/ | sudo tee \
```

```
/etc/apt/sources.list.d/jenkins.list > /dev/null
```

```
sudo apt-get update
```

```
sudo apt-get install Jenkins
```

```
ubuntu@ip-10-0-1-201:~$ sudo su -
root@ip-10-0-1-201:~# sudo wget -O /usr/share/keyrings/jenkins-keyring.asc \
h ps://pkg.jenkins.io/debian/jenkins.io-2023.key
echo "deb [signed-by=/usr/share/keyrings/jenkins-keyring.asc]" \
h ps://pkg.jenkins.io/debian binary/ | sudo tee \
/etc/apt/sources.list.d/jenkins.list > /dev/null
sudo apt-get update
sudo apt-get install Jenkins
```

Jenkins requires java to run

2.INSTALL JAVA

`apt install openjdk-17-jdk -y` : This command used to install java


`java -version` : To check the java version

```
root@ip-10-0-1-201:~# java -version
openjdk version "17.0.11" 2024-04-16
OpenJDK Runtime Environment (build 17.0.11+9-Ubuntu-1)
OpenJDK 64-Bit Server VM (build 17.0.11+9-Ubuntu-1, mixed mode, sharing)
root@ip-10-0-1-201:~#
```

after installing Jenkins and java in the server we need to restart the Jenkins server

`systemctl restart Jenkins` : to restart the Jenkins

systemctl status Jenkins : to check the Jenkins status , whether its running or not

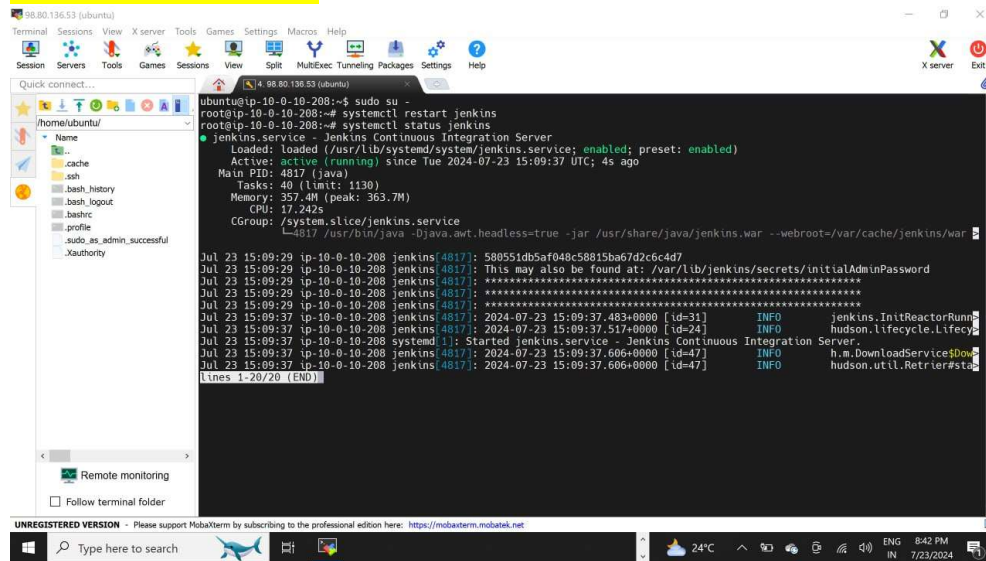


```
ubuntu@ip-10-0-10-208:~$ sudo su -
root@ip-10-0-10-208:~# systemctl restart jenkins
root@ip-10-0-10-208:~# systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
   Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: enabled)
   Active: active (running) since Tue 2024-07-23 15:09:37 UTC; 4s ago
     Main PID: 4817 (java)
       Tasks: 40 (limit: 1130)
      Memory: 357.4M (peak: 363.7M)
         CPU: 17.242s
        CGroup: /system.slice/jenkins.service
                └─4817 /usr/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war


Jul 23 15:09:29 ip-10-0-10-208 jenkins[4817]: 58851db5af048c58815ba67d2c6c4d7
Jul 23 15:09:29 ip-10-0-10-208 jenkins[4817]: This may also be found at: /var/lib/jenkins/secrets/initialAdminPassword
Jul 23 15:09:29 ip-10-0-10-208 jenkins[4817]: *****
Jul 23 15:09:29 ip-10-0-10-208 jenkins[4817]: *****
Jul 23 15:09:37 ip-10-0-10-208 jenkins[4817]: 2024-07-23 15:09:37.483+0000 [id=31] INFO jenkins.IntReactorRunn
Jul 23 15:09:37 ip-10-0-10-208 jenkins[4817]: 2024-07-23 15:09:37.517+0000 [id=24] INFO hudson.lifecycle.Lifecyc
Jul 23 15:09:37 ip-10-0-10-208 jenkins[4817]: 2024-07-23 15:09:37.606+0000 [id=47] INFO h.m.DownloadService$Down
Jul 23 15:09:37 ip-10-0-10-208 jenkins[4817]: 2024-07-23 15:09:37.606+0000 [id=47] INFO hudson.util.Retrier#sta
Jul 23 15:09:37 ip-10-0-10-208 jenkins[4817]: 2024-07-23 15:09:37.606+0000 [id=47] INFO hudson.util.Retrier#sta
[Lines 1-20/20 (END)]
```


3. LOGIN INTO JENKINS DASHBOARD

To access Jenkins. We need to allow inbound traffic on PORT 8080 in the AWS security group.

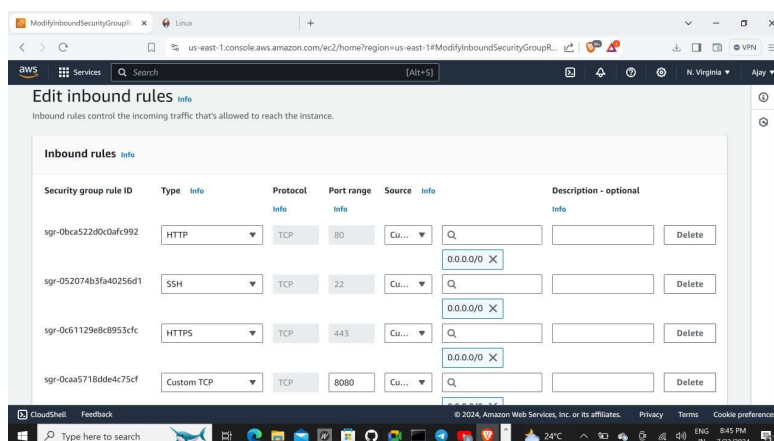

Copy the public ip of the server and paste in the browser with port number 8080{Example : 54.89.243.242:8080}

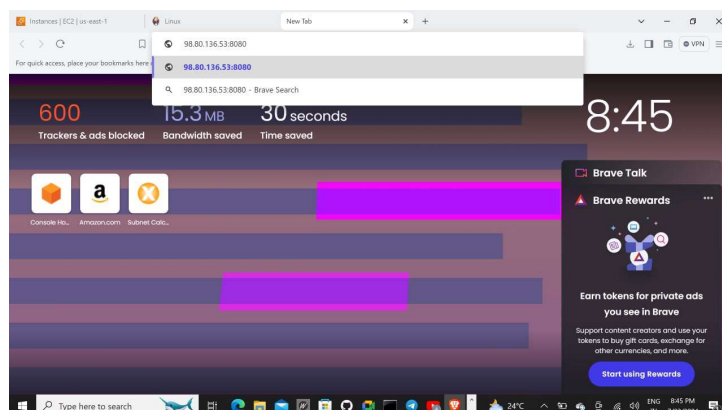


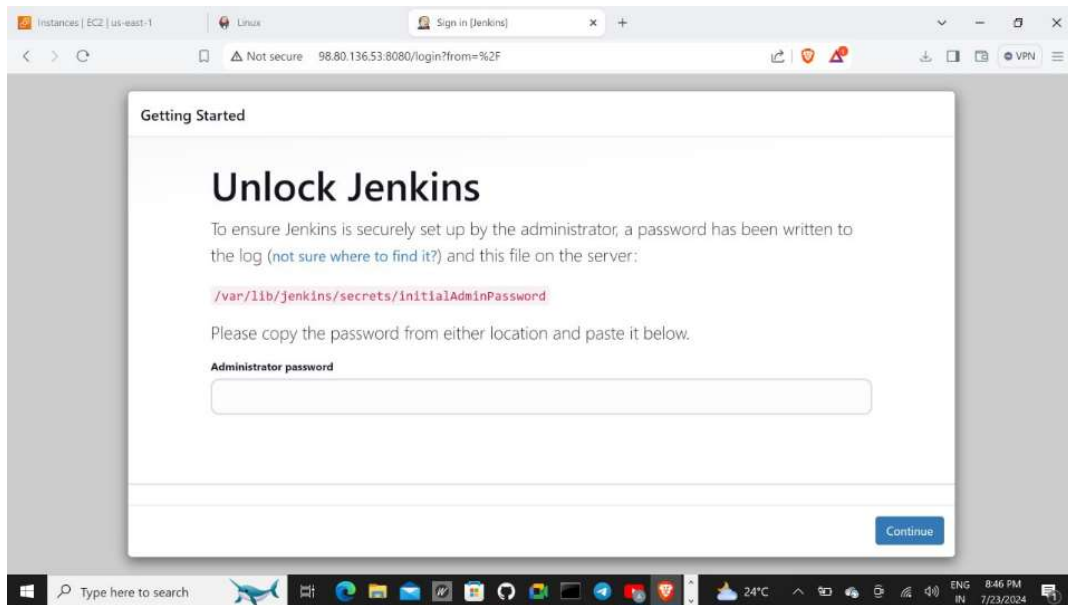


To unlock Jenkins we need administrator password

Go to your terminal and paste the command below to get the password to unlock Jenkins


Cat /var/lib/jenkins/secrets/initialAdminPassword

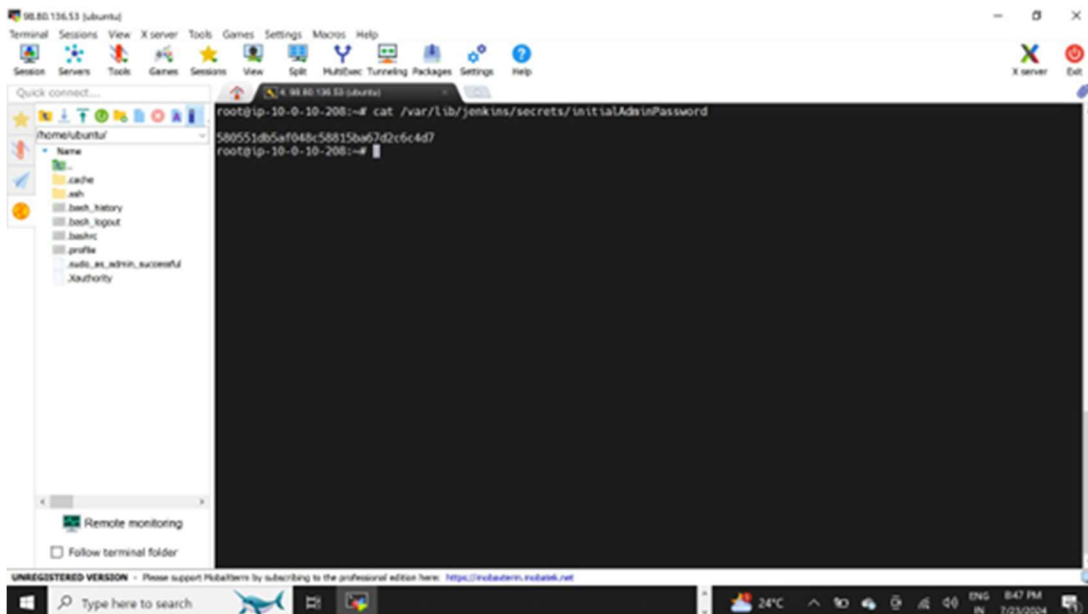

Select install suggested plugins

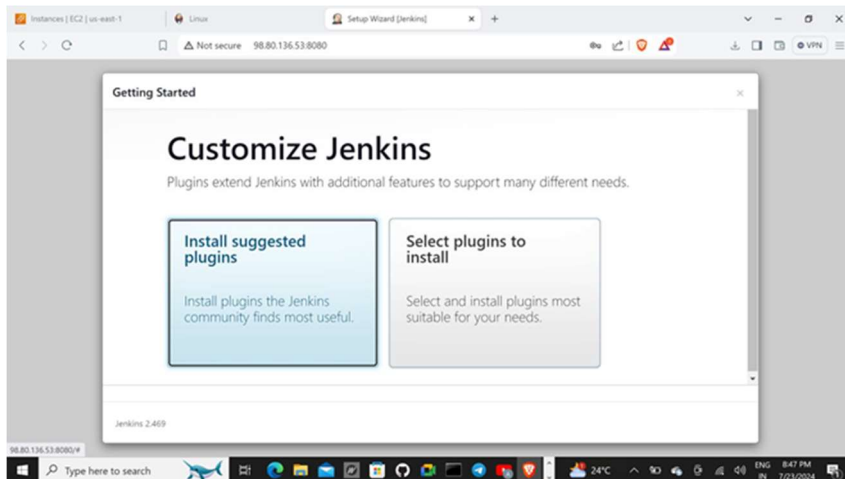


Create an admin user by filling in the required information

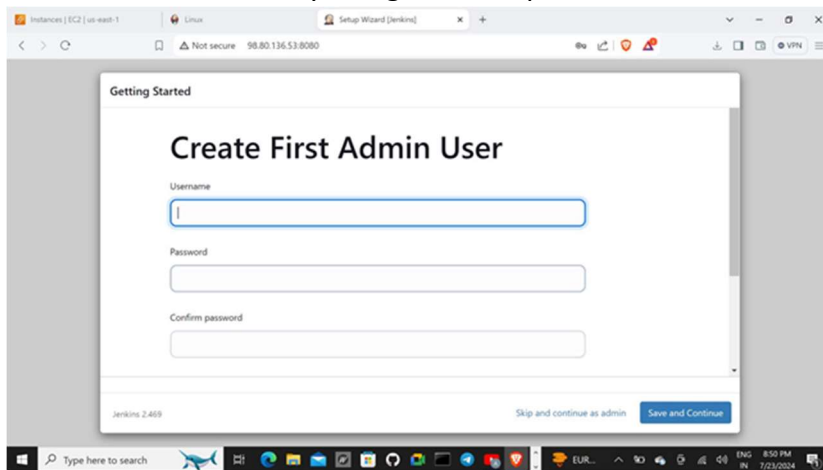

Click save and finish.

Now Jenkins setup has been completed.

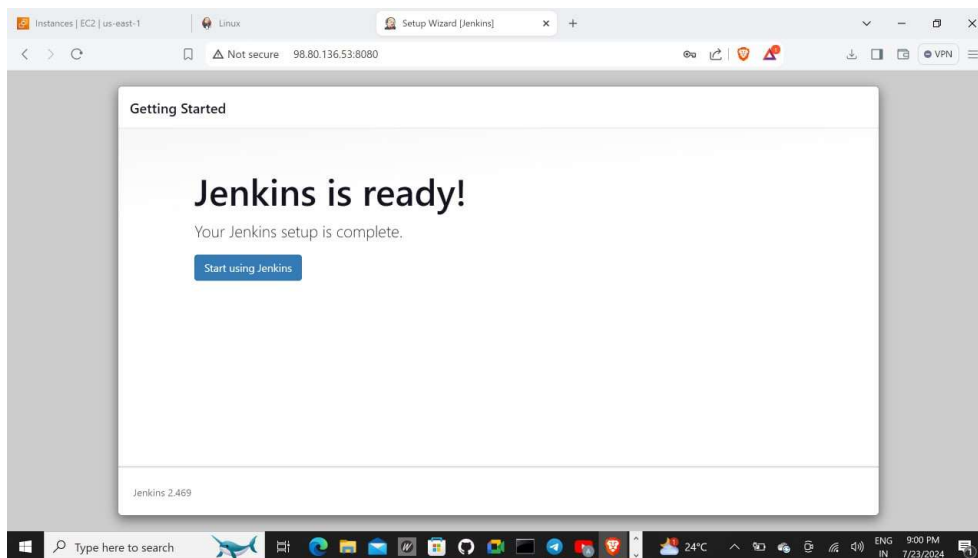

in Jenkins dashboard select manage Jenkins and click on plugins and install terraform plugins.

Now, again select manage Jenkins and click on tools and install terraform and save.

Select credentials and add aws credentials and git credentials.

Create a vpc ,public and private subnet , internet gateway ,rout table and create a ec2 instance in public subnet by using terraform.

➤ In main.tf

```
provider "aws" {
  region = "us-east-1"
}
//create a vpc
resource "aws_vpc" "myvpc"{
  cidr_block = "10.0.0.0/16"

  tags = {
    Name = "MyVPC"
  }
}
//Create a public subnet

resource "aws_subnet" "PublicSubnet"{
  vpc_id = aws_vpc.myvpc.id
  availability_zone = "us-east-1a"
  cidr_block = "10.0.1.0/24"
  tags = {
    Name = "terra_sub-pub"
  }
}

//create a private subnet

resource "aws_subnet" "PrivSubnet"{
  vpc_id = aws_vpc.myvpc.id
  cidr_block = "10.0.2.0/24"
  map_public_ip_on_launch = true

  tags = {
    Name = "terra_sub-pvt"
  }
}

//create IGW
```

```

resource "aws_internet_gateway" "myIgw"{
  vpc_id = aws_vpc.myvpc.id

  tags = {
    Name = "terra_igw"
  }
}

//route Tables for public subnet

resource "aws_route_table" "PublicRT"{
  vpc_id = aws_vpc.myvpc.id
  tags = {
    Name = "terra_RT"
  }
  route {
    cidr_block = "0.0.0.0/0"
    gateway_id = aws_internet_gateway.myIgw.id
  }
}

//route table association public subnet

resource "aws_route_table_association" "PublicRTAssociation"{
  subnet_id = aws_subnet.PublicSubnet.id
  route_table_id = aws_route_table.PublicRT.id
}

//ec2 instance

resource "aws_instance" "ec2" {
  ami          = "ami-04a81a99f5ec58529"
  instance_type = "t2.micro"
  subnet_id    = aws_subnet.PublicSubnet.id
  associate_public_ip_address = true

  tags = {
    Name = "terra_ec2"
  }
}

```

➤ In variable.tf

```

variable "ami_id" {
  description = "The AMI ID for the EC2 instance"
}

```

```

    type      = string
    default = "ami-04a81a99f5ec58529"
}

variable "instance_type" {
    description = "The instance type"
    type      = string
    default = "t2.micro"
}

variable "public_subnet_id" {
    default = aws_subnet.PublicSubnet.id
}

```

➤ In output.tf

```

output "vpc_id" {
    value = aws_vpc.myvpc.id
}

output "public_subnet_id" {
    value = aws_subnet.PublicSubnet.id
}

output "private_subnet_id" {
    value = aws_subnet.PrivSubnet.id
}

output "route_table_id" {
    value = aws_route_table.PublicRT.id
}

```

Create a backend.tf file to store state file in s3 bucket

```

terraform {
    backend "s3" {
        bucket = "terraform-bucket12"
        key    = "state"
        region = "us-east-1"
    }
}

```

Create a Jenkins script for terraform to run a pipeline

```
pipeline{
  agent any
  stages{
    stage('Git checkout'){
      steps{
        "your's git repo URL"
      }
    }
    stage('Terraform init'){
      steps{
        sh 'terraform init'
      }
    }

    stage('Terraform Format') {
      steps {
        sh 'terraform fmt -check'
      }
    }

    stage('Terraform Validate') {
      steps {
        sh 'terraform validate'
      }
    }
    stage('Terraform plan'){
      steps{
        sh 'terraform plan'
      }
    }
    stage('Terraform apply'){
      steps{
        sh 'terraform apply --auto-approve'
      }
    }
  }
}
```

Explanation

pipeline: Defines a Jenkins pipeline.

agent any: Runs the pipeline on any available agent.

stage('Checkout'): Checks out the Terraform code from the specified Git repository.

stage('Terraform Init'): Initializes the Terraform configuration.

stage('Terraform Format'): Checks if the Terraform files are formatted correctly using `terraform fmt -check`.

stage('Terraform Validate'): Validates the Terraform configuration using `terraform validate`.

stage('Terraform Plan'): Creates an execution plan using `terraform plan` and saves it to a file named `tfplan`.

stage('Terraform Apply'): Applies the changes required to reach the desired state of the configuration using the previously created plan (`tfplan`).

After creating all files push them into git repository.

```
git init
```

```
git remote add origin https://github.com/username/repository.git
```

```
git add . # Add all files
```

```
git commit -m "Commit message"
```

```
git push -u origin master
```

use these commands to add your local files into git repository

open the Jenkins dashboard and select the new item.

Enter an item name: `terraform_cicd`

Select an item type: pipeline

After selecting pipeline click on ok .It opens Configuration in that select pipeline

Select pipeline script from SCM in the definition

SCM: Git

Repository URL: https://github.com/ajayguvva/terraform_cicd.git


Credentials : give your Credential

Branch Specifier: `main` (branch name where the files are stored)

Script Path: `jenkinsfile` (path name where the script is written)

After filling all this then click on apply and save it.

Now select build now and it will run cicd pipeline.

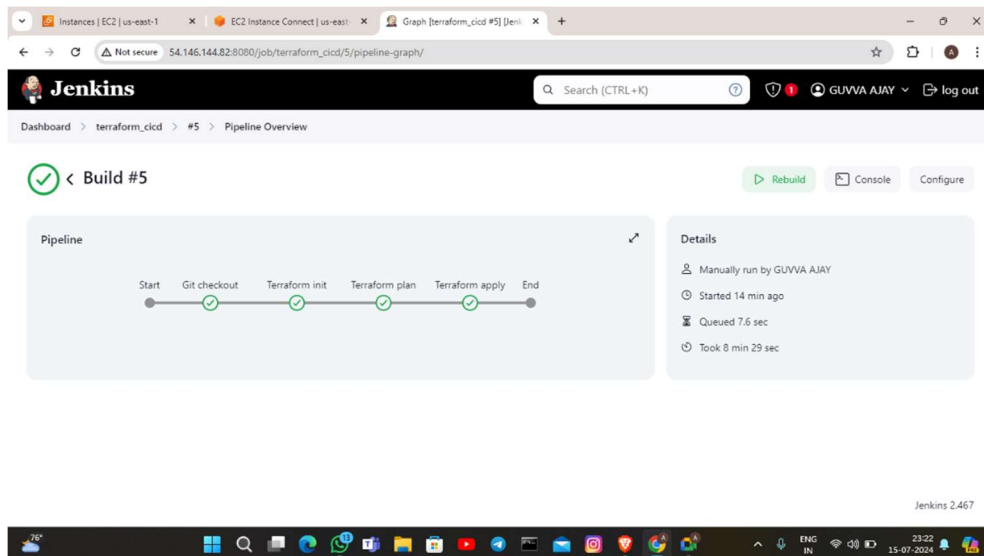

This setup will provision a VPC with public and private subnets, an internet gateway, route tables, and an EC2 instance in the public subnet using Terraform. The Jenkins pipeline will automate the Terraform workflow from initialization to applying changes.