

TM Forum Specification

Resource Inventory Management API User Guide

TMF639

Team Approved Date: 28-May-2020

Release Status: Production	Approval Status: TM Forum Approved
Version 4.0.1	IPR Mode: RAND

NOTICE

Copyright © TM Forum 2020. All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to TM FORUM, except as needed for the purpose of developing any document or deliverable produced by a TM FORUM Collaboration Project Team (in which case the rules applicable to copyrights, as set forth in the [TM FORUM IPR Policy](#), must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by TM FORUM or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and TM FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

TM FORUM invites any TM FORUM Member or any other party that believes it has patent claims that would necessarily be infringed by implementations of this TM Forum Standards Final Deliverable, to notify the TM FORUM Team Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the TM FORUM Collaboration Project Team that produced this deliverable.

The TM FORUM invites any party to contact the TM FORUM Team Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this TM FORUM Standards Final Deliverable by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the TM FORUM Collaboration Project Team that produced this TM FORUM Standards Final Deliverable. TM FORUM may include such claims on its website but disclaims any obligation to do so.

TM FORUM takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this TM FORUM Standards Final Deliverable or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on TM FORUM's procedures with respect to rights in any document or deliverable produced by a TM FORUM Collaboration Project Team can be found on the TM FORUM website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this TM FORUM Standards Final Deliverable, can be obtained from the TM FORUM Team Administrator. TM FORUM makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.

Direct inquiries to the TM Forum office:

4 Century Drive, Suite 100

Parsippany, NJ 07054, USA

Tel No. +1 973 944 5100

Fax No. +1 973 998 7196

TM Forum Web Page: www.tmforum.org

Table of Contents

NOTICE	2
Table of Contents	4
List of Tables	5
Introduction	6
SAMPLE USE CASES.....	7
Support of polymorphism and extension patterns	8
RESOURCE MODEL.....	9
Managed Entity and Task Resource Models	9
Resource resource	9
Notification Resource Models	17
Resource Create Event	18
Resource Attribute Value Change Event	19
Resource State Change Event.....	19
Resource Delete Event	19
API OPERATIONS.....	21
Operations on Resource	21
List resources.....	21
Retrieve resource	22
Create resource	25
Patch resource.....	27
Delete resource	30
API NOTIFICATIONS.....	31
Register listener	31
Unregister listener	32
Publish Event to listener	32
Acknowledgements	34
Release History	34
Contributors to Document.....	34

List of Tables

N/A

Introduction

The following document is intended to provide details of the REST API interface for the Resource Inventory. The intent of this API is to provide a consistent/standardized mechanism to query and manipulate the resources of the inventory.

It includes the model definition as well as all available operations.

SAMPLE USE CASES

Resource inventory query for a party (Use Case 1)

The Resource Inventory API can be used to query the resource instances for a party playing the role of customer via Self Service Portal or the Call Centre operator can query the resource instances on behalf of the customer while a customer may have a complaint or a query.

Resource inventory create/update as part of resource provisioning (Use Case 2)

The Resource Inventory API can be called by the Resource Order Management to create a new resource instance/ update an existing resource instance in the Resource Inventory.

Support of polymorphism and extension patterns

Support of polymorphic collections and types and schema based extension is provided by means of a list of generic meta-attributes that we describe below. Polymorphism in collections occurs when entities inherit from base entities, for instance a LogicalResource and PhysicalResource inheriting properties from the abstract Resource entity.

Generic support of polymorphism and pattern extensions is described in the TMF API Guidelines v3.0 Part 2 document.

The @type attribute provides a way to represent the actual class type of an entity. For example, within a list of Resource instances some may be instances of LogicalResource where other could be instances of PhysicalResource. The @type gives this information. All resources and sub-resources of this API have a @type attributes that can be provided when this is useful.

The @referredType can be used within reference entities (like for instance a ResourceRef object) to explicitly denote the actual entity type of the referred class. Notice that in reference entities the @type, when used, denotes the class type of the reference itself, such as LogicalResourceRef or PhysicalResourceRef, and not the class type of the referred object. However, since reference classes are rarely sub-classed, @type is generally not useful in reference objects.

The @schemaLocation property can be used in resources to allow specifying user-defined properties of an Entity or to specify the expected *characteristics* of an entity.

The @baseType attribute gives a way to provide explicitly the base of class of a given resource that has been extended.


RESOURCE MODEL

Managed Entity and Task Resource Models

Resource resource

Resource is an abstract entity that describes the common set of attributes shared by all concrete resources (e.g. TPE, EQUIPMENT) in the inventory.

Resource model

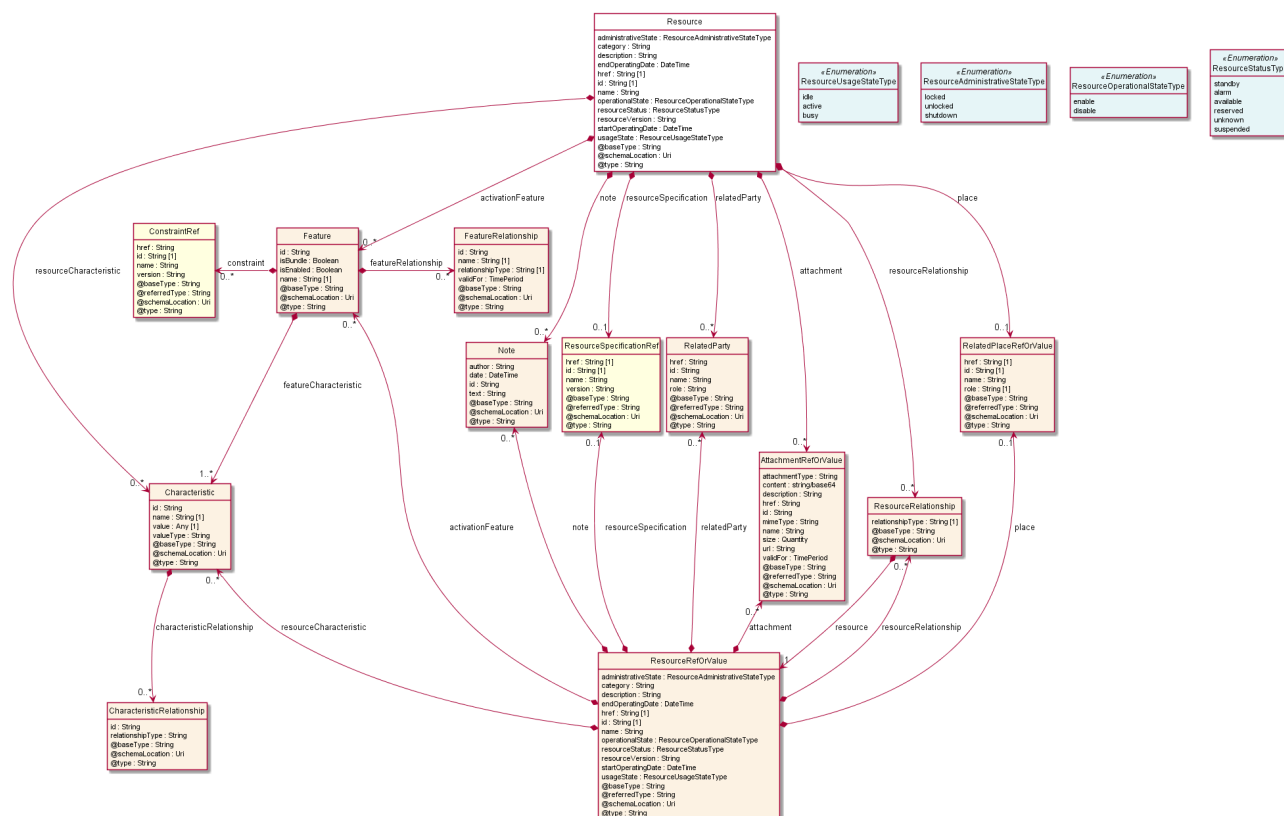

Field descriptions

Resource fields

- activationFeature** A list of features (Feature [*]). Applicable configuration features of a resource for activation.
- administrativeState** A resource administrative state type (ResourceAdministrativeStateType). Tracks the administrative state of the resource, such as locked, unlocked, shutdown and so on.
- attachment** A list of attachment ref or values (AttachmentRefOrValue [*]). the attribute type,schemaLocation and referredType are related to the contained entity and not to AttchmentRefOrValue itself.

category	A string. Category of the concrete resource. e.g Gold, Silver for MSISDN concrete resource.
description	A string. free-text description of the resource.
endOperatingDate	A date time (DateTime). A date time(DateTime). The date till the resource is operating.
href	A string. The URI for the object itself.
id	A string. Identifier of an instance of the resource. Required to be unique within the resource type. Used in URIs as the identifier for specific instances of a type.
name	A string. A string used to give a name to the resource.
note	A list of notes (Note [*]). Extra information about a given entity.
operationalState	A resource operational state type (ResourceOperationalStateType). Tracks the operational state of the resource, such as enable, disable and so on.
place	A related place ref or value (RelatedPlaceRefOrValue). Related Entity reference. A related place defines a place described by reference or by value linked to a specific entity. The polymorphic attributes @type, @schemaLocation & @referredType are related to the place entity and not the RelatedPlaceRefOrValue class itself.
relatedParty	A list of related parties (RelatedParty [*]). Related Entity reference. A related party defines party or party role linked to a specific entity.
resourceCharacteristic	A list of characteristics (Characteristic [*]). Describes a given characteristic of an object or entity through a name/value pair.
resourceRelationship	A list of resource relationships (ResourceRelationship [*]). Linked resources to the one instantiate, such as [bundled] if the resource is a bundle and you want to describe the bundled resources inside this bundle; [reliesOn] if the resource needs another already owned resource to rely on (e.g. an option on an already owned mobile access resource) [targets] or [isTargeted] (depending on the way of expressing the link) for any other kind of links that may be useful.
resourceSpecification	A resource specification reference (ResourceSpecificationRef). The ResourceSpecification is required to realize a ProductSpecification.
resourceStatus	A resource status type (ResourceStatusType). Tracks the resource status of the resource, such as standby, alarm, available, reserved, suspended and so on.
resourceVersion	A string. A field that identifies the specific version of an instance of a resource.
startOperatingDate	A date time (DateTime). A date time(DateTime). The date from which the resource is operating.

usageState A resource usage state type (ResourceUsageStateType). Tracks the usage state of the resource, such as idle, active, busy and so on.

AttachmentRefOrValue sub-resource

An attachment by value or by reference. For AttachmentRefOrValue, the attribute type, schemaLocation and referredType are related to the contained entity and not to AttachmentRefOrValue itself.

@referredType A string. The actual type of the target instance when needed for disambiguation.

description A string. A narrative text describing the content of the attachment.

href A string. URI for this Attachment.

id A string. Unique identifier for this particular attachment.

url A string. Uniform Resource Locator, is a web page address (a subset of URI).

name A string. The name of the attachment.

attachmentType A string. Attachment type such as video, picture.

content A base 64 (Base64). The actual contents of the attachment object, if embedded, encoded as base64.

contentType A string. Attachment mime type such as extension file for video, picture and document.

size A quantity (Quantity). The size of the attachment.

validFor A time period. The period of time for which the attachment is valid.

Characteristic sub-resource

Describes a given characteristic of an object or entity through a name/value pair.

characteristicRelationship A list of characteristic relationships (CharacteristicRelationship [*]). Another Characteristic that is related to the current Characteristic;.

id A string. Unique identifier of the characteristic.

name A string. Name of the characteristic.

value An any (Any). The value of the characteristic.

valueType A string. Data type of the value of the characteristic.

CharacteristicRelationship sub-resource

Another Characteristic that is related to the current Characteristic;.

id	A string. Unique identifier of the characteristic.
relationshipType	A string. The type of relationship.

Feature sub-resource

Applicable configuration features for a resource specification.

constraint	A list of constraint references (ConstraintRef [*]). This is a list of feature constraints.
featureCharacteristic	A list of characteristics (Characteristic [1..*]). This is a list of Characteristics for a particular applicable feature of a resource.
featureRelationship	A list of feature relationships (FeatureRelationship [*]). Configuration feature.
id	A string. Unique identifier of the feature.
isBundle	A boolean. True if this is a feature group. Default is false.
isEnabled	A boolean. True if this feature is enabled. Default is true.
name	A string. This is the name for the feature.

FeatureRelationship sub-resource

Configuration feature.

id	A string. Unique identifier of the target feature.
name	A string. This is the name of the target feature.
relationshipType	A string. This is the type of the feature relationship.
validFor	A time period. The period for which this feature relationship is valid.

Note sub-resource

Extra information about a given entity.

author	A string. Author of the note.
date	A date time (DateTime). Date of the note.
id	A string. Identifier of the note within its containing entity (may or may not be globally unique, depending on provider implementation).
text	A string. Text of the note.

Quantity sub-resource

An amount in a given unit.

amount A float. Numeric value in a given unit.

units A string. Unit.

RelatedParty sub-resource

Related Entity reference. A related party defines party or party role linked to a specific entity.

@referredType A string. The actual type of the target instance when needed for disambiguation.

href A string. Reference of the related entity.

id A string. Unique identifier of a related entity.

name A string. Name of the related entity.

role A string. Role played by the related party.

RelatedPlaceRefOrValue sub-resource

Related Entity reference. A related place defines a place described by reference or by value linked to a specific entity. The polymorphic attributes @type, @schemaLocation & @referredType are related to the place entity and not the RelatedPlaceRefOrValue class itself.

@referredType A string. The actual type of the target instance when needed for disambiguation.

href A string. Unique reference of the place.

id A string. Unique identifier of the place.

name A string. A user-friendly name for the place, such as "Paris Store", "London Store", "Main Home".

role A string.

ResourceRefOrValue sub-resource

A resource to be created defined by value or existing defined by reference. The polymorphic attributes @type, @schemaLocation & @referredType are related to the product entity and not the RelatedProductRefOrValue class itself.

@referredType A string. The actual type of the target instance when needed for disambiguation.

href A string. The URI for the object itself.

id A string. Identifier of an instance of the resource. Required to be unique within the resource type. Used in URIs as the identifier for specific instances of a type.

name A string. A string used to give a name to the resource.

category	A string. Category of the concrete resource. e.g Gold, Silver for MSISDN concrete resource.
description	A string. free-text description of the resource.
endOperatingDate	A date time (DateTime). A date time(DateTime). The date till the resource is operating.
resourceVersion	A string. A field that identifies the specific version of an instance of a resource.
startOperatingDate	A date time (DateTime). A date time(DateTime). The date from which the resource is operating.
activationFeature	A list of features (Feature [*]). Applicable configuration features of a resource for activation.
administrativeState	A resource administrative state type (ResourceAdministrativeStateType). Tracks the administrative state of the resource, such as locked, unlocked, shutdown and so on.
attachment	A list of attachment ref or values (AttachmentRefOrValue [*]). the attribute type,schemaLocation and referredType are related to the contained entity and not to AttchmentRefOrValue itself.
note	A list of notes (Note [*]). Extra information about a given entity.
operationalState	A resource operational state type (ResourceOperationalStateType). Tracks the operational state of the resource, such as enable, disable and so on.
place	A related place ref or value (RelatedPlaceRefOrValue). Related Entity reference. A related place defines a place described by reference or by value linked to a specific entity. The polymorphic attributes @type, @schemaLocation & @referredType are related to the place entity and not the RelatedPlaceRefOrValue class itself.
relatedParty	A list of related parties (RelatedParty [*]). Related Entity reference. A related party defines party or party role linked to a specific entity.
resourceCharacteristic	A list of characteristics (Characteristic [*]). Describes a given characteristic of an object or entity through a name/value pair.
resourceRelationship	A list of resource relationships (ResourceRelationship [*]). Linked resources to the one instantiate, such as [bundled] if the resource is a bundle and you want to describe the bundled resources inside this bundle; [reliesOn] if the resource needs another already owned resource to rely on (e.g. an option on an already owned mobile access resource) [targets] or [isTargeted] (depending on the way of expressing the link) for any other kind of links that may be useful.
resourceSpecification	A resource specification reference (ResourceSpecificationRef). The

ResourceSpecification is required to realize a ProductSpecification.

resourceStatus	A resource status type (ResourceStatusType). Tracks the resource status of the resource, such as standby, alarm, available, reserved, suspended and so on.
usageState	A resource usage state type (ResourceUsageStateType). Tracks the usage state of the resource, such as idle, active, busy and so on.

ResourceRelationship sub-resource

Linked resources to the one instantiate, such as [bundled] if the resource is a bundle and you want to describe the bundled resources inside this bundle; [reliesOn] if the resource needs another already owned resource to rely on (e.g. an option on an already owned mobile access resource) [targets] or [isTargeted] (depending on the way of expressing the link) for any other kind of links that may be useful.

relationshipType	A string. Type of the resource relationship, such as [bundled] if the resource is a bundle and you want to describe the bundled resources inside this bundle; [reliesOn] if the resource needs another already owned resource to rely on (e.g. an option on an already owned mobile access resource) [targets] or [isTargeted] (depending on the way of expressing the link) for any other kind of links that may be useful.
resource	A resource ref or value (ResourceRefOrValue). A resource to be created defined by value or existing defined by reference. The polymorphic attributes @type, @schemaLocation & @referredType are related to the product entity and not the RelatedProductRefOrValue class itself.

ConstraintRef relationship

Constraint reference. The Constraint resource represents a policy/rule applied to an entity or entity spec.

@referredType	A string. The (class) type of the referred constraint.
href	A string. Hyperlink reference to the target constraint.
id	A string. reference id to the target constraint.
name	A string. Name given to the constraint.
version	A string. constraint version.

ResourceSpecificationRef relationship

Resource Specification reference: The ResourceSpecification is required to realize a ProductSpecification.

@referredType	A string. The actual type of the target instance when needed for disambiguation.
href	A string. Reference of the resource specification.
id	A string. Unique identifier of the resource specification.

name	A string. Name of the requiredResourceSpecification.
version	A string. Resource specification version.

Json representation sample

We provide below the json representation of an example of a 'Resource' resource object

```
{
  "id": "8044",
  "href": "http://server:port/resourceInventoryManagement/resource/8044",
  "description": "This is a MSISDN resource with the category Premium and with a reserved resourceStatus for
organisations.",
  "category": "Premium",
  "value": "0170112231",
  "endOperatingDate": "2022-07-04T08:00.000Z",
  "name": "MobileNumber xx",
  "administrativeState": "locked",
  "operationalState": "enable",
  "usageState": "active",
  "resourceStatus": "reserved",
  "relatedParty": [
    {
      "href": "https://server:port/tmf-api/partyManagement/v4/individual/456",
      "id": "456",
      "name": "John Doe",
      "role": "user",
      "@referredType": "Individual"
    }
  ],
  "note": [
    {
      "text": "something about this resource"
    }
  ],
  "place": {
    "id": "9912",
    "href": "https://host:port/geographicAddressManagement/v4/geographicAddress/9912",
    "@type": "PlaceRef",
    "@referredType": "GeographicAddress"
  },
  "resourceRelationship": [
    {
      "relationshipType": "contains",
      "resource": {
        "id": "44",
        "href": "http://server:port/resourceInventoryManagement/resource/44"
      }
    }
  ],
  "resourceSpecification": {
    "id": "4",
    "href": "http://server:port/resourceCatalogManagement/resourceSpecification/4",
    "@referredType": "LogicalResourceSpecification"
  }
}
```



```
},
"startOperatingDate": "2020-03-04T00:00.000Z",
"version": "business v2",
"@type": "MSISDN",
"@schemaLocation": "http://server:port/MSISDN_Resource.schema.json",
"@baseType": "Resource"
}
```

Notification Resource Models

4 notifications are defined for this API


Notifications related to Resource:

- ResourceCreateEvent
- ResourceAttributeValueChangeEvent
- ResourceStateChangeEvent
- ResourceDeleteEvent

The notification structure for all notifications in this API follow the pattern depicted by the figure below.

A notification event resource (depicted by "SpecificEvent" placeholder) is a sub class of a generic Event structure containing at least an id of the event occurrence (eventId), an event timestamp (eventTime), and the name of the resource (eventType).

This notification structure owns an event payload structure ("SpecificEventPayload" placeholder) linked to the resource concerned by the notification using the resource name as access field ("resourceName" placeholder).

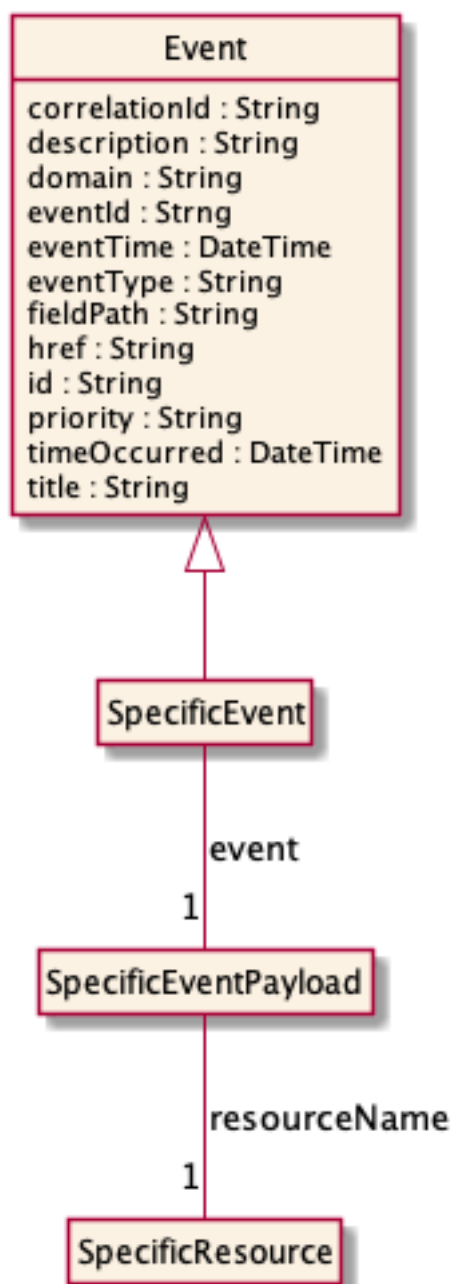

Resource Create Event

Notification ResourceCreateEvent case for resource Resource

Json representation sample

We provide below the json representation of an example of a 'ResourceCreateEvent' notification event object

```

{
  "eventId": "00001",
  "eventTime": "2015-11-16T16:42:25-04:00",
  "eventType": "ResourceCreateEvent",
  "event": {

```

```
"resource" :  
  {  
    -- SEE Resource RESOURCE SAMPLE --  
  }  
}
```

Resource Attribute Value Change Event

Notification ResourceAttributeValueChangeEvent case for resource Resource

Json representation sample

We provide below the json representation of an example of a 'ResourceAttributeValueChangeEvent' notification event object

```
{  
  "eventId":"00001",  
  "eventTime":"2015-11-16T16:42:25-04:00",  
  "eventType":"ResourceAttributeValueChangeEvent",  
  "event": {  
    "resource" :  
      {  
        -- SEE Resource RESOURCE SAMPLE --  
      }  
  }  
}
```

Resource State Change Event

Notification ResourceStateChangeEvent case for resource Resource

Json representation sample

We provide below the json representation of an example of a 'ResourceStateChangeEvent' notification event object

```
{  
  "eventId":"00001",  
  "eventTime":"2015-11-16T16:42:25-04:00",  
  "eventType":"ResourceStateChangeEvent",  
  "event": {  
    "resource" :  
      {  
        -- SEE Resource RESOURCE SAMPLE --  
      }  
  }  
}
```

Resource Delete Event

Notification ResourceDeleteEvent case for resource Resource

Json representation sample

We provide below the json representation of an example of a 'ResourceDeleteEvent' notification event object

```
{
  "eventId": "00001",
  "eventTime": "2015-11-16T16:42:25-04:00",
  "eventType": "ResourceDeleteEvent",
  "event": {
    "resource":
      {-- SEE Resource RESOURCE SAMPLE --}
  }
}
```

API OPERATIONS

Remember the following Uniform Contract:

Operation on Entities	Uniform API Operation	Description
Query Entities	GET Resource	GET must be used to retrieve a representation of a resource.
Create Entity	POST Resource	POST must be used to create a new resource
Partial Update of an Entity	PATCH Resource	PATCH must be used to partially update a resource
Remove an Entity	DELETE Resource	DELETE must be used to remove a resource

Filtering and attribute selection rules are described in the TMF REST Design Guidelines.

Notifications are also described in a subsequent section.

Operations on Resource

List resources

GET `/resource?fields=...&{filtering}`

Description

This operation list resource entities.

Attribute selection is enabled for all first level attributes.

Filtering may be available depending on the compliance level supported by an implementation.

Usage Samples

Here's an example of a request for retrieving a list of Resource(s). The given criteria is the category (Premium), @type (MSISDN) and state (idle).

Request
<pre>GET /tmf- api/resourceInventoryManagement/v4/resource?fields=id,href,value,@type,category,usageState&category=Premium&usageState=idle&@type=MSISDN Accept: application/json</pre>
Response
<pre>200 { "id": "444", "href": "http://server:port/resourceInventoryManagement/logicalResource/444", "category": "Premium", "value": "0170123456", "usageState": "idle", "@type": "MSISDN" }</pre>

Retrieve resource

GET /resource/{id}?fields=...&{filtering}

Description

This operation retrieves a resource entity.

Attribute selection is enabled for all first level attributes.

Filtering on sub-resources may be available depending on the compliance level supported by an implementation.

Usage Samples

Here's an example of a request for retrieving a LogicalResource for use case 1. The given criteria is the Resource id 444.

Request

GET /tmf-api/resourceInventoryManagement/v4/resource/444
 Accept: application/json

Response

200

```
{
  "id": "444",
  "href": "http://server:port/resourceInventoryManagement/logicalResource/444",
  "description": "This is a MSISDN resource with the category Premium and with an unlocked administrativeState.",
  "category": "Premium",
  "value": "0170123456",
  "administrativeState": "unlocked",
  "operationalState": "disable",
  "usageState": "idle",
  "resourceStatus": "available",
  "resourceSpecification": {
    "id": "4",
    "href": "http://server:port/resourceCatalogManagement/resourceSpecification/4",
    "@referredType": "LogicalResourceSpecification"
  },
  "resourceCharacteristic": [
    {
      "name": "premiumValue",
      "valueType": "string",
      "value": "gold"
    }
  ],
  "relatedParty": [
    {
      "href": "https://server:port/tmf-api/partyManagement/v4/individual/456",
      "id": "456",
      "name": "John Doe",
      "role": "user",
      "@referredType": "Individual"
    }
  ],
  "@type": "MSISDN",
  "@schemaLocation": "http://server:port/MSISDN.schema.json",
  "@baseType": "Resource"
}
```

Here's an example of a request for retrieving a PhysicalResource for use case 1. The given criteria is the Resource id 42.

Request

GET /tmf-api/resourceInventoryManagement/v4/resource/42
 Accept: application/json

Response

200

```
{
  "id": "42",
  "href": "http://server:port/resourceInventoryManagement/resource/42",
  "publicIdentifier": "07455559833",
  "name": "RouterXX",
  "administrativeState": "unlocked",
  "operationalState": "enable",
  "usageState": "idle",
  "resourceStatus": "available",
  "serialNumber": "12444545544",
  "versionNumber": "1.22",
  "manufactureDate": "05-04-2017T00:00.000Z",
  "resourceSpecification": {
    "id": "4",
    "href": "http://server:port/resourceCatalogManagement/resourceSpecification/4",
    "@referredType": "PhysicalResourceSpecification"
  },
  "resourceRelationship": [
    {
      "relationshipType": "contains",
      "resource": {
        "id": "44",
        "href": "http://server:port/resourceInventoryManagement/resource/44"
      }
    }
  ],
  "relatedParty": [
    {
      "href": "https://server:port/tmf-api/partyManagement/v4/individual/456",
      "id": "456",
      "name": "John Doe",
      "role": "user",
      "@referredType": "Individual"
    }
  ],
  "resourceAttachment": [
    {
      "id": "123",
      "href": "http://server:port/documentManagement/document/123"
    }
  ],
  "note": [
    {
```



```

    "text": "something about this resource"
  }
},
"place": {
  "id": "9912",
  "href": "https://host:port/geographicAddressManagement/v4/geographicAddress/9912",
  "@type": "PlaceRef",
  "@referredType": "GeographicAddress"
},
"@type": "Equipment ",
"@schemaLocation": "http://server:port/partyManagement/schema/Equipment.schema.json",
"@baseType": "Resource"
}

```

Create resource

POST /resource

Description

This operation creates a resource entity.

Mandatory and Non Mandatory Attributes

The following tables provide the list of mandatory and non mandatory attributes when creating a Resource, including any possible rule conditions and applicable default values. Notice that it is up to an implementer to add additional mandatory attributes.

Mandatory Attributes	Rule
name	
href	
id	

Non Mandatory Attributes	Rule
activationFeature	
administrativeState	
attachment	
category	
description	
endOperatingDate	
note	
operationalState	
place	
relatedParty	
resourceCharacteristic	
resourceRelationship	
resourceSpecification	
resourceStatus	

Non Mandatory Attributes	Rule
resourceVersion	
startOperatingDate	
usageState	

Usage Samples

Here's an example of a request for creating a LogicalResource for use case 2 - the resulting resource ID is 444.

Request

POST /tmf-api/resourceInventoryManagement/v4/resource

Content-Type: application/json

```
{
  "category": "Premium",
  "value": "0170123456",
  "administrativeState": "unlocked",
  "operationalState": "disable",
  "usageState": "idle",
  "resourceStatus": "available",
  "resourceSpecification": {
    "id": "4",
    "href": "http://server:port/resourceCatalogManagement/resourceSpecification/4",
    "@referredType": "LogicalResourceSpecification"
  },
  "resourceCharacteristic": [
    {
      "name": "premiumValue",
      "valueType": "string",
      "value": "gold"
    }
  ],
  "relatedParty": [
    {
      "href": "https://server:port/tmf-api/partyManagement/v4/individual/456",
      "id": "456",
      "name": "John Doe",
      "role": "user",
      "@referredType": "Individual"
    }
  ],
  "@type": "MSISDN",
  "@schemaLocation": "http://server:port/MSISDN.schema.json",
  "@baseType": "Resource"
}
```

Response

```

201
{
  "id": "444",
  "href": "http://server:port/resourceInventoryManagement/logicalResource/444",
  "category": "Premium",
  "value": "0170123456",
  "administrativeState": "unlocked",
  "operationalState": "disable",
  "usageState": "idle",
  "resourceStatus": "available",
  "resourceSpecification": {
    "id": "4",
    "href": "http://server:port/resourceCatalogManagement/resourceSpecification/4",
    "@referredType": "LogicalResourceSpecification"
  },
  "resourceCharacteristic": [
    {
      "name": "premiumValue",
      "valueType": "string",
      "value": "gold"
    }
  ],
  "relatedParty": [
    {
      "href": "https://server:port/tmf-api/partyManagement/v4/individual/456",
      "id": "456",
      "name": "John Doe",
      "role": "user",
      "@referredType": "Individual"
    }
  ],
  "@type": "MSISDN",
  "@schemaLocation": "http://server:port/MSISDN.schema.json",
  "@baseType": "Resource"
}

```

Patch resource

PATCH /resource/{id}

Description

This operation allows partial updates of a resource entity. Support of json/merge (<https://tools.ietf.org/html/rfc7386>) is mandatory, support of json/patch (<http://tools.ietf.org/html/rfc5789>) is optional.

Note: If the update operation yields to the creation of sub-resources or relationships, the same rules concerning mandatory sub-resource attributes and default value settings in the POST operation applies to the PATCH operation. Hence these tables are not repeated here.

Patchable and Non Patchable Attributes

The tables below provide the list of patchable and non patchable attributes, including constraint rules on their usage.

Patchable Attributes	Rule
activationFeature	
administrativeState	
attachment	
category	
description	
endOperatingDate	
name	
note	
operationalState	
place	
relatedParty	
resourceCharacteristic	
resourceRelationship	
resourceSpecification	
resourceStatus	
resourceVersion	
startOperatingDate	
usageState	

Non Patchable Attributes	Rule
href	
id	

Usage Samples

Here's an example of a request for updating a PhysicalResource for use case 2 - Change value of the resourceStatus for resource id 42.

Request
PATCH /tmf-api/resourceInventoryManagement/v4/resource/42 Content-Type: merge-patch/json <pre>{ "resourceStatus": "reserved" }</pre>
Response

200

```

{
  "id": "42",
  "href": "http://server:port/resourceInventoryManagement/resource/42",
  "publicIdentifier": "07455559833",
  "name": "RouterXX",
  "administrativeState": "unlocked",
  "operationalState": "enable",
  "usageState": "idle",
  "resourceStatus": "reserved",
  "serialNumber": "12444545544",
  "versionNumber": "1.22",
  "manufactureDate": "05-04-2017T08:00.000Z",
  "resourceSpecification": {
    "id": "4",
    "href": "http://server:port/resourceCatalogManagement/resourceSpecification/4",
    "@referredType": "PhysicalResourceSpecification"
  },
  "resourceRelationship": [
    {
      "type": "contains",
      "resource": {
        "id": "44",
        "href": "http://server:port/resourceInventoryManagement/resource/44"
      }
    }
  ],
  "relatedParty": [
    {
      "href": "https://server:port/tmf-api/partyManagement/v4/individual/456",
      "id": "456",
      "name": "John Doe",
      "role": "user",
      "@referredType": "Individual"
    }
  ],
  "resourceAttachment": [
    {
      "id": "123",
      "href": "http://server:port/documentManagement/document/123"
    }
  ],
  "note": [
    {
      "text": "something about this resource"
    }
  ],
  "place": {
    "id": "9912",
    "href": "https://host:port/geographicAddressManagement/v4/geographicAddress/9912",
    "@type": "PlaceRef",
    "@referredType": "GeographicAddress"
  }
}

```

```
},
"@type": "Equipment",
"@schemaLocation": "http://server:port/partyManagement/schema/Equipment.schema.json",
"@baseType": "Resource"
}
```

Delete resource

DELETE /resource/{id}

Description

This operation deletes a resource entity.

Usage Samples

Here's an example of a request for deleting a resource.

Request
DELETE /tmf-api/resourceInventoryManagement/v4/resource/444
Response
204

API NOTIFICATIONS

For every single of operation on the entities use the following templates and provide sample REST notification POST calls.

It is assumed that the Pub/Sub uses the Register and UnRegister mechanisms described in the REST Guidelines reproduced below.

Register listener

POST /hub

Description

Sets the communication endpoint address the service instance must use to deliver information about its health state, execution state, failures and metrics. Subsequent POST calls will be rejected by the service if it does not support multiple listeners. In this case DELETE /api/hub/{id} must be called before an endpoint can be created again.

Behavior

Returns HTTP/1.1 status code 204 if the request was successful.

Returns HTTP/1.1 status code 409 if request is not successful.

Usage Samples

Here's an example of a request for registering a listener.

Request
POST /api/hub Accept: application/json {"callback": "http://in.listener.com"}
Response
201 Content-Type: application/json Location: /api/hub/42 {"id": "42", "callback": "http://in.listener.com", "query": null}

Unregister listener

DELETE /hub/{id}

Description

Clears the communication endpoint address that was set by creating the Hub.

Behavior

Returns HTTP/1.1 status code 204 if the request was successful.

Returns HTTP/1.1 status code 404 if the resource is not found.

Usage Samples

Here's an example of a request for un-registering a listener.

Request
DELETE /api/hub/42 Accept: application/json
Response
204

Publish Event to listener

POST /client/listener

Description

Clears the communication endpoint address that was set by creating the Hub.

Provides to a registered listener the description of the event that was raised. The /client/listener url is the callback url passed when registering the listener.

Behavior

Returns HTTP/1.1 status code 201 if the service is able to set the configuration.

Usage Samples

Here's an example of a notification received by the listener. In this example “EVENT TYPE” should be replaced by one of the notification types supported by this API (see Notification resources Models section) and EVENT BODY refers to the data structure of the given notification type.

Request
<pre>POST /client/listener Accept: application/json { "event": { EVENT BODY }, "eventType": "EVENT_TYPE" }</pre>
Response
201

For detailed examples on the general TM Forum notification mechanism, see the TMF REST Design Guidelines.

Acknowledgements

Version History

Version Number	Date	Release led by:	Description
1.0	14-Apr-2017	Pierre Gauthier TM Forum pgauthier@tmforum.org Mariano Belaunde Orange Labs	First Release of the Document.
2.0	06-Nov-2018	Mariano Belaunde Orange Labs	Alignment with Guidelines 3.0
4.0.0	28-May-2020	Thomas Braun Telekom IT	Based on the TMF Open API Common Data Model
4.0.1	20-Jul-2020	Adrienne Walcott	Updated to reflect TM Forum Approved Status

Release History

Release Number	Date	Release led by:	Description
Pre-production	28-May-2020	Thomas Braun Telekom IT	Based on the TMF Open API Common Data Model
Production	20-Jul-2020	Adrienne Walcott	Updated to reflect TM Forum Approved Status

Contributors to Document

Thomas Braun, Deutsche Telekom	Pierre Gauthier, TM Forum
--------------------------------	---------------------------