

Exercise: Integrate SQL and spark pools in Azure Synapse Analytics

3 minutes

In the following exercise, we will explore integrating SQL and Apache Spark pools in Azure Synapse Analytics.

Integrating SQL and Apache Spark pools in Azure Synapse Analytics

You want to write to a dedicated SQL pool after performing data engineering tasks in Spark, then reference the SQL pool data as a source for joining with Apache Spark DataFrames that contain data from other files.

You decide to use the Azure Synapse Apache Spark to Synapse SQL connector to efficiently transfer data between Spark pools and SQL pools in Azure Synapse.

Transferring data between Apache Spark pools and SQL pools can be done using JavaDataBaseConnectivity (JDBC). However, given two distributed systems such as Apache Spark and SQL pools, JDBC tends to be a bottleneck with serial data transfer.

The Azure Synapse Apache Spark pool to Synapse SQL connector is a data source implementation for Apache Spark. It uses the Azure Data Lake Storage Gen2 and PolyBase in SQL pools to efficiently transfer data between the Spark cluster and the Synapse SQL instance.

1. If we want to use the Apache Spark pool to Synapse SQL connector (sqlanalytics), one option is to create a temporary view of the data within the DataFrame. Execute the code below in a new cell to create a view named `top_purchases`:

Python

```
# Create a temporary view for top purchases
topPurchases.createOrReplaceTempView("top_purchases")
```

We created a new temporary view from the `topPurchases` dataframe that we created earlier and which contains the flattened JSON user purchases data.

2. We must execute code that uses the Apache Spark pool to Synapse SQL connector in Scala. To do so, we add the `%%spark` magic to the cell. Execute the code below in a new cell to read from the `top_purchases` view:

Java


```
%%spark
// Make sure the name of the SQL pool (SQLPool01 below) matches the
// name of your SQL pool.
val df = spark.sqlContext.sql("select * from top_purchases")
df.write.sqlanalytics("SQLPool01.wwi.TopPurchases",
Constants.INTERNAL)
```

⚠ Note


The cell may take over a minute to execute. If you have run this command before, you will receive an error stating that "There is already an object named..." because the table already exists.

After the cell finishes executing, let's take a look at the list of SQL pool tables to verify that the table was successfully created for us.

3. **Leave the notebook open**, then navigate to the **Data** hub (if not already selected).

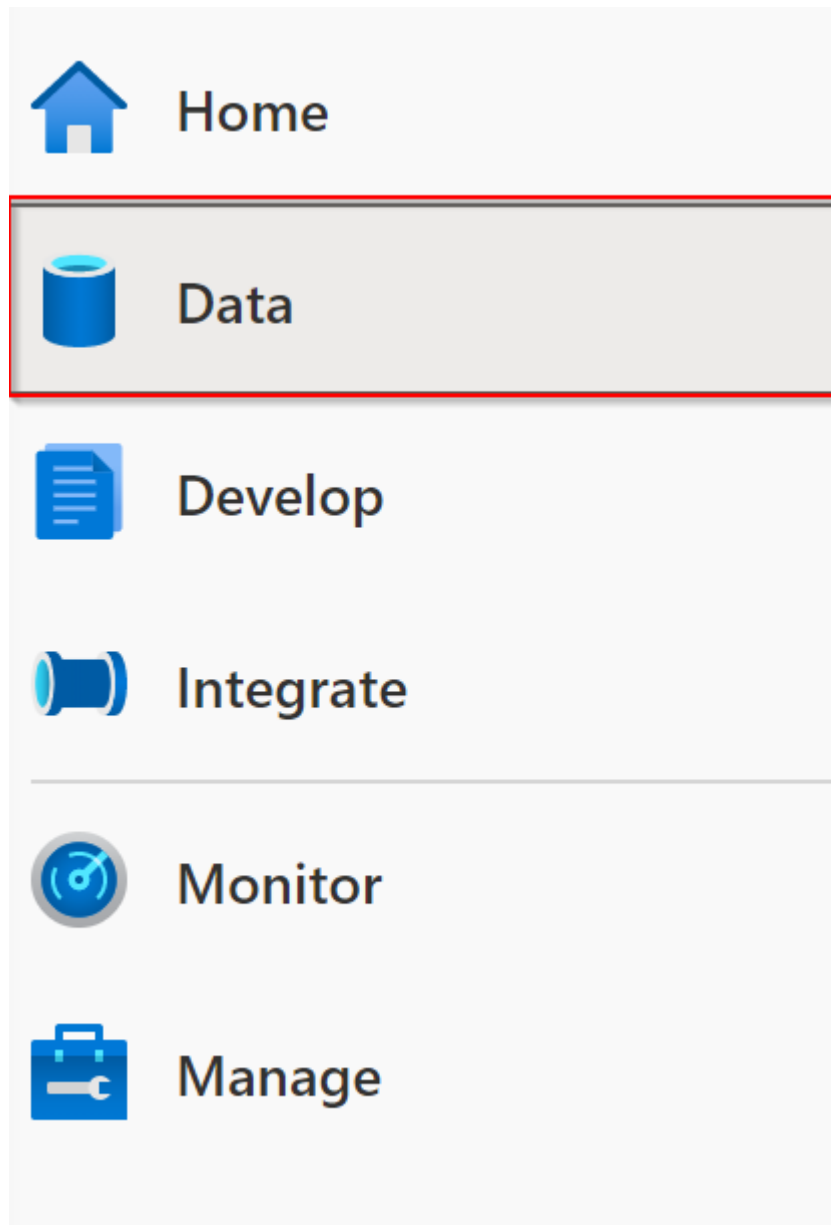

4. Select the **Workspace** tab (1), expand the SQL pool, select the **ellipses (...)** on Tables (2) and select **Refresh** (3). Expand the **wwi.TopPurchases** table and columns (4).

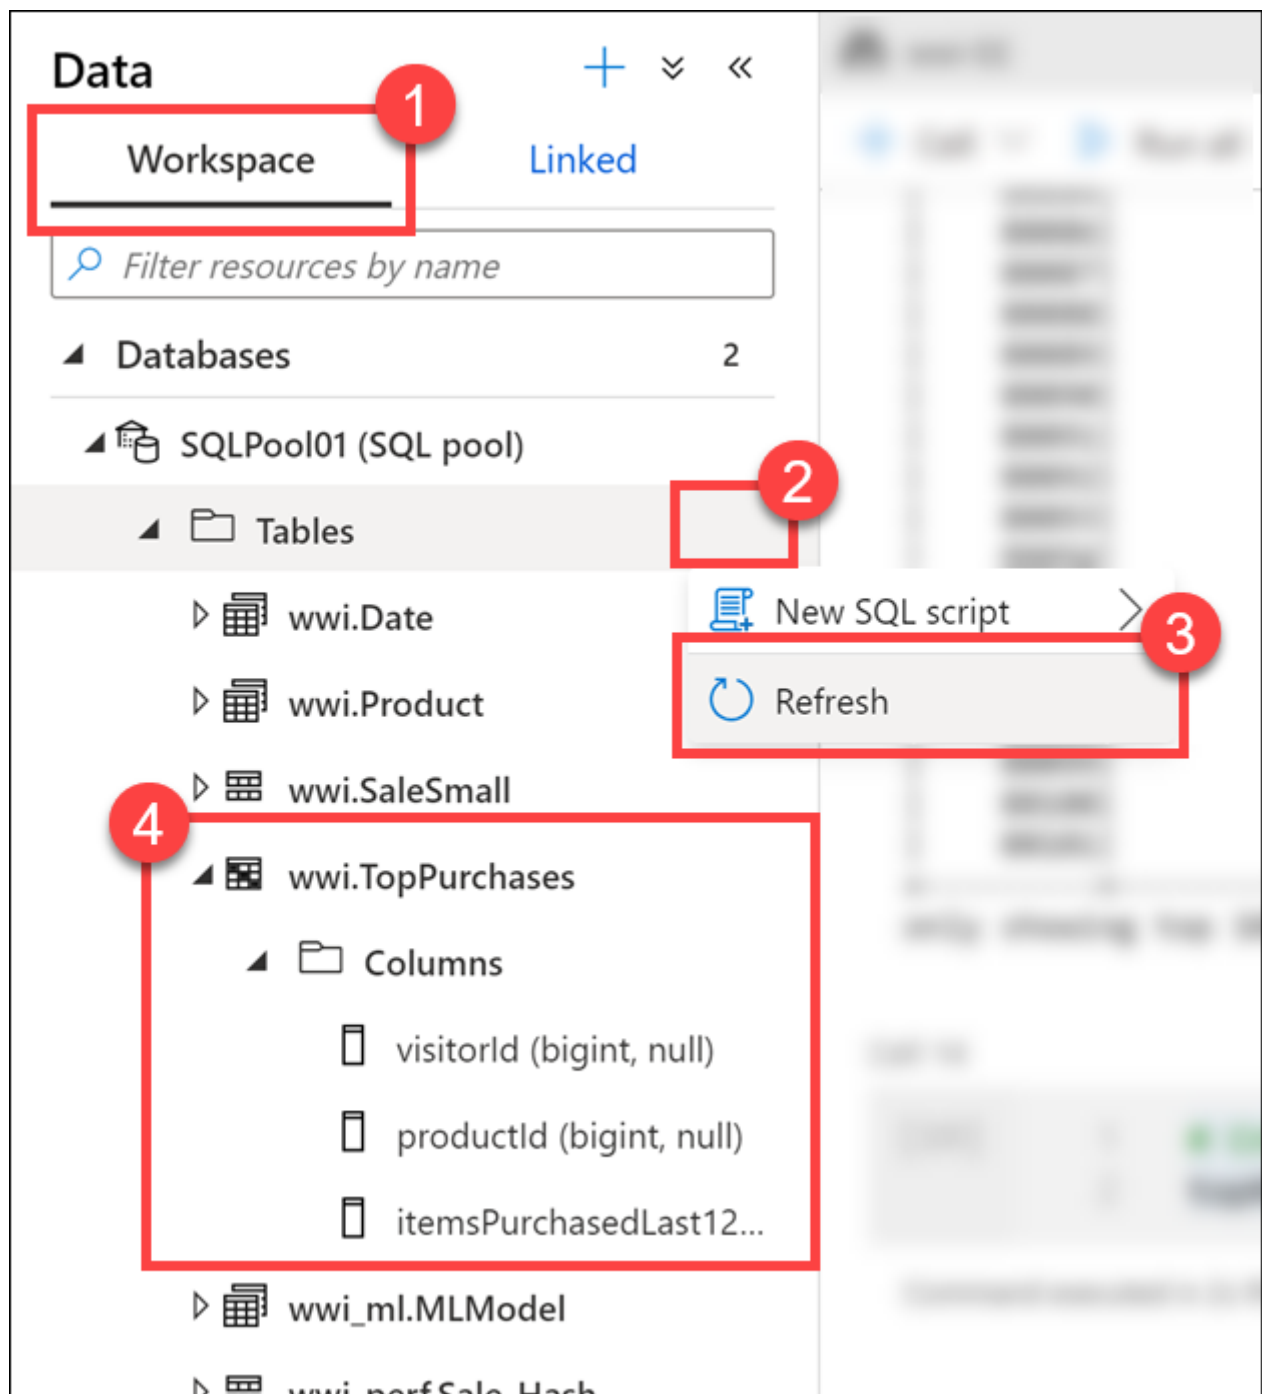

As you can see, the `wwi.TopPurchases` table was automatically created for us, based on the derived schema of the Apache Spark DataFrame. The Apache Spark pool to Synapse SQL connector was responsible for creating the table and efficiently loading the data into it.

5. **Return to the notebook** and execute the code below in a new cell to read sales data from all the Parquet files located in the `sale-small/Year=2019/Quarter=Q4/Month=12/` folder:

Python

```
dfsales = spark.read.load('abfss://wwi-02@' + datalake + '.dfs.-  
core.windows.net/sale-  
small/Year=2019/Quarter=Q4/Month=12/*/*.parquet', format='parquet')  
display(dfsales.limit(10))
```

! Note

It can take over 3 minutes for this cell to execute.

The `dataLake` variable we created in the first cell is used here as part of the file path.

Cell 16

```
1 dfsales = spark.read.load('abfss://wwi-02@' + dataLake + '.dfs.core.windows.net/sale-small/Year=2019/Quarter=Q4/Month=12/*/*.parquet', format='parquet')
2 display(dfsales.limit(10))
```

Command executed in 4s 570ms by joel on 09-10-2020 21:12:35.868 -04:00

> Job execution Succeeded Spark 3 executors 12 cores [View in monitoring](#) [Open Spark UI](#)

View Table Chart

TransactionId	CustomerId	ProductId	Quantity	Price	TotalAmount
0ce3b96c-2553-46db-823c-158d...	5	1327	3	28.77	86.31
0ce3b96c-2553-46db-823c-158d...	5	4257	2	22.95	45.9
0ce3b96c-2553-46db-823c-158d...	5	3388	2	19.88	39.76
0ce3b96c-2553-46db-823c-158d...	5	3861	2	27.86	55.72
0ce3b96c-2553-46db-823c-158d...	5	47	3	22.06	66.18
0ce3b96c-2553-46db-823c-158d...	5	214	1	36.24	36.24
0ce3b96c-2553-46db-823c-158d...	5	195	1	24.14	24.14
0ce3b96c-2553-46db-823c-158d...	5	134	3	29.16	87.48
0ce3b96c-2553-46db-823c-158d...	5	59	2	29.03	58.06
8469dff5-8251-4a3f-8550-5c532...	14	4213	3	37.87	113.61

Compare the file path in the cell above to the file path in the first cell. Here we are using a relative path to load **all December 2019 sales** data from the Parquet files located in `sale-small`, vs. just December 31, 2010 sales data.

Next, let's load the `TopSales` data from the SQL pool table we created earlier into a new Apache Spark DataFrame, then join it with this new `dfsales` DataFrame. To do so, we must once again use the `%%spark` magic on a new cell since we'll use the Apache Spark pool to Synapse SQL connector to retrieve data from the SQL pool. Then we need to add the DataFrame contents to a new temporary view so we can access the data from Python.

6. Execute the code below in a new cell to read from the `TopSales` SQL pool table and save it to a temporary view:

Java

```
%%spark
// Make sure the name of the SQL pool (SQLPool01 below) matches the
// name of your SQL pool.
val df2 = spark.read.sqlanalytics("SQLPool01.wwi.TopPurchases")
df2.createTempView("top_purchases_sql")

df2.head(10)
```

```
Cell 17
1 %%spark
2 // Make sure the name of the SQL pool (SQLPool01 below) matches the name of your SQL pool.
3 val df2 = spark.read.sqlanalytics("SQLPool01.wwi.TopPurchases")
4 df2.createTempView("top_purchases_sql")
5 df2.head(10)
```

Command executed in 10s 658ms by joel on 09-10-2020 20:28:20.300 -04:00

Job execution Succeeded Spark 3 executors 12 cores [View in monitoring](#) [Open Spark UI](#)

```
df2: org.apache.spark.sql.DataFrame = [visitorId: bigint, productId: bigint ... 1 more field]
res5: Array[org.apache.spark.sql.Row] = Array([112814,4817,81], [112814,4336,91], [112814,874,18], [112814,128,96], [112814,1184,53], [112814,1807,90], [112814,2973,60], [112814,1852,83], [112814,1191,70], [112814,4845,4])
```

The cell's language is set to Scala by using the `%%spark` magic (1) at the top of the cell. We declared a new variable named `df2` as a new DataFrame created by the `spark.read.sqlanalytics` method, which reads from the `TopPurchases` table (2) in the SQL pool. Then we populated a new temporary view named `top_purchases_sql` (3). Finally, we showed the first 10 records with the `df2.head(10)` line (4). The cell output displays the DataFrame values (5).

7. Execute the code below in a new cell to create a new DataFrame in Python from the `top_purchases_sql` temporary view, then display the first 10 results:

```
Python

dfTopPurchasesFromSql = sqlContext.table("top_purchases_sql")

display(dfTopPurchasesFromSql.limit(10))
```

```
Cell 18
1 dfTopPurchasesFromSql = sqlContext.table("top_purchases_sql")
2
3 display(dfTopPurchasesFromSql.limit(10))
```

Command executed in 10s 320ms by joel on 09-10-2020 20:40:45.435 -04:00

Job execution Succeeded Spark 3 executors 12 cores [View in monitoring](#) [Open Spark UI](#)

View **Table** Chart

visitorId	productId	itemsPurchasedLast12Months
118119	886	83
118119	2284	61
118119	1353	20
118119	4258	91
118119	2197	97
118119	3351	80
118119	3138	34
118119	2024	54
118120	2177	20
118120	831	28

8. Execute the code below in a new cell to join the data from the sales Parquet files and the TopPurchases SQL pool:

Python

```
inner_join = dfsales.join(dfTopPurchasesFromSql,
    (dfsales.CustomerId == dfTopPurchasesFromSql.visitorId) & (df-
sales.ProductId == dfTopPurchasesFromSql.productId))

inner_join_agg = (inner_join.select("CustomerId","TotalAmount","Quan-
tity","itemsPurchasedLast12Months","top_purchases_sql.productId")
    .groupBy(["CustomerId","top_purchases_sql.productId"])
    .agg(
        sum("TotalAmount").alias("TotalAmountDecember"),
        sum("Quantity").alias("TotalQuantityDecember"),
        sum("itemsPurchasedLast12Months").alias("TotalItemsPurchased-
Last12Months"))
    .orderBy("CustomerId") )

display(inner_join_agg.limit(100))
```

In the query, we joined the `dfsales` and `dfTopPurchasesFromSql` DataFrames, matching on `CustomerId` and `ProductId`. This join combined the TopPurchases SQL pool table data with the December 2019 sales Parquet data (1).

We grouped by the `CustomerId` and `ProductId` fields. Since the `ProductId` field name is ambiguous (it exists in both DataFrames), we had to fully qualify the `ProductId` name to refer to the one in the TopPurchases DataFrame (2).

Then we created an aggregate that summed the total amount spent on each product in December, the total number of product items in December, and the total product items purchased in the last 12 months (3).

Finally, we displayed the joined and aggregated data in a table view.

Feel free to select the column headers in the Table view to sort the result set.

Cell 20

1
2
3
4
5
6
7
8
9
10
11
12

```
inner_join = dfsales.join(dfTopPurchasesFromSql,
    (dfsales.CustomerId == dfTopPurchasesFromSql.visitorId) & (dfsales.ProductId == dfTopPurchasesFromSql.productId))

inner_join_agg = (inner_join.select("CustomerId", "TotalAmount", "Quantity", "itemsPurchasedLast12Months", "top_purchases_sql.productId")
    .groupBy(["CustomerId", "top_purchases_sql.productId"])
    .agg(
        sum("TotalAmount").alias("TotalAmountDecember"),
        sum("Quantity").alias("TotalQuantityDecember"),
        sum("itemsPurchasedLast12Months").alias("TotalItemsPurchasedLast12Months"))
    .orderBy("CustomerId") )

display(inner_join_agg.limit(100))
```

1
2
3
4

Command executed in 40s 941ms by joel on 09-10-2020 21:40:40.798 -04:00

> Job execution Succeeded Spark 3 executors 12 cores [View in monitor](#)

View

Table

Chart

CustomerId	productId	TotalAmountDecember	TotalQuantityDecember	TotalItemsPurchasedLast12Months
80034	70	34.32	1	73
80097	1160	105.04	4	46
80126	30	62.4	3	95
80145	4475	21.66	1	40
80167	4097	69.99	3	23
80168	169	77.58	2	45