


## File Copy Request Process

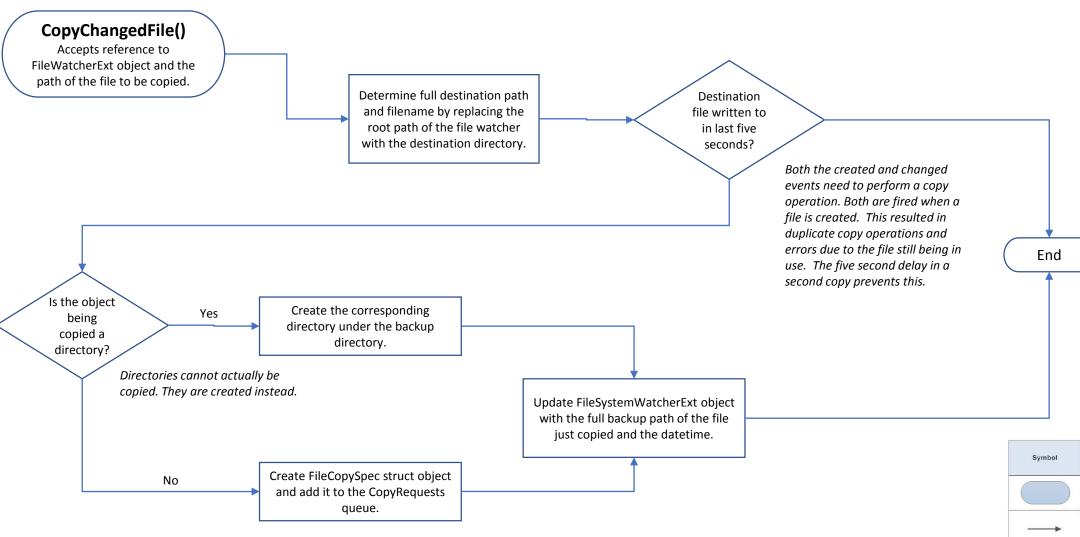

Using a custom struct allows for the file reference and the full destination path to be stored in the request queue. The timer event can then simply reference them. Storing the requests in the queue object allows the program to handle the requests asynchronously which also prevents file access errors.

Symbol	Name	Function
	Start/end	An oval represents a start or end point
	Arrows	A line is a connector that shows relationships between the representative shapes
	Input/Output	A parallelogram represents input or output
	Process	A rectangle represents a process
	Decision	A diamond indicates a decision