

CSX415_Project_flight_delay_cancellation_analysis

Ajeey Patil

5/7/2018

R Markdown

Data Cleaning done in load.project() data munging

```
#currdir <- getwd()
#install.packages('ProjectTemplate')
library(ProjectTemplate)
load.project()
```

Install Packages

```
#Example package for RMSE calculation in Regression Analysis
#devtools::install_github("ajeypatil/rmse")
#library(rmse)
```

Perform Exploratory Data Analysis

graphs stored in graph directory

```
source('src/01-EDA/CSX415_Project_ExploratoryDataAnalysis.R')
```

```
## Saving 7 x 5 in image
## Saving 7 x 5 in image
```

```
## Warning in rm(cancellationsdb): object 'cancellationsdb' not found
```

PreProcess Data

Remove zero variance columns

Test-Train split



```
source('src/02-PREPROCESS/CSX415_Project_process.R')
```


Modelling



Apply Model


Naive Bayes

```
source('src/03-MODELS/CSX415_Project_Data_Model_Naive.R')
#nb.model
#summary(nb.model)
plot(nb.model)
```

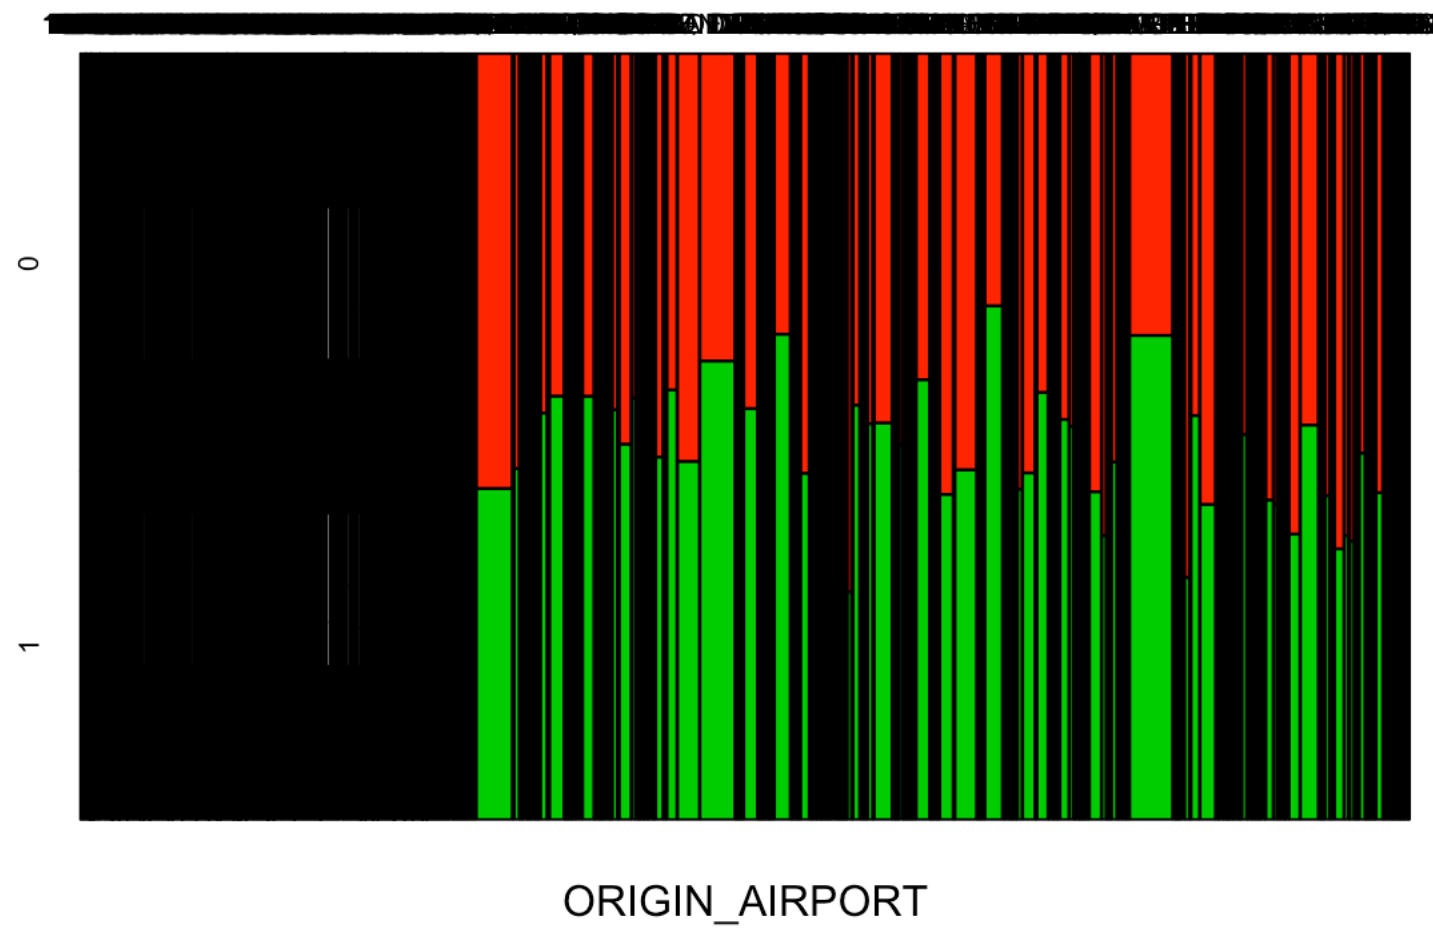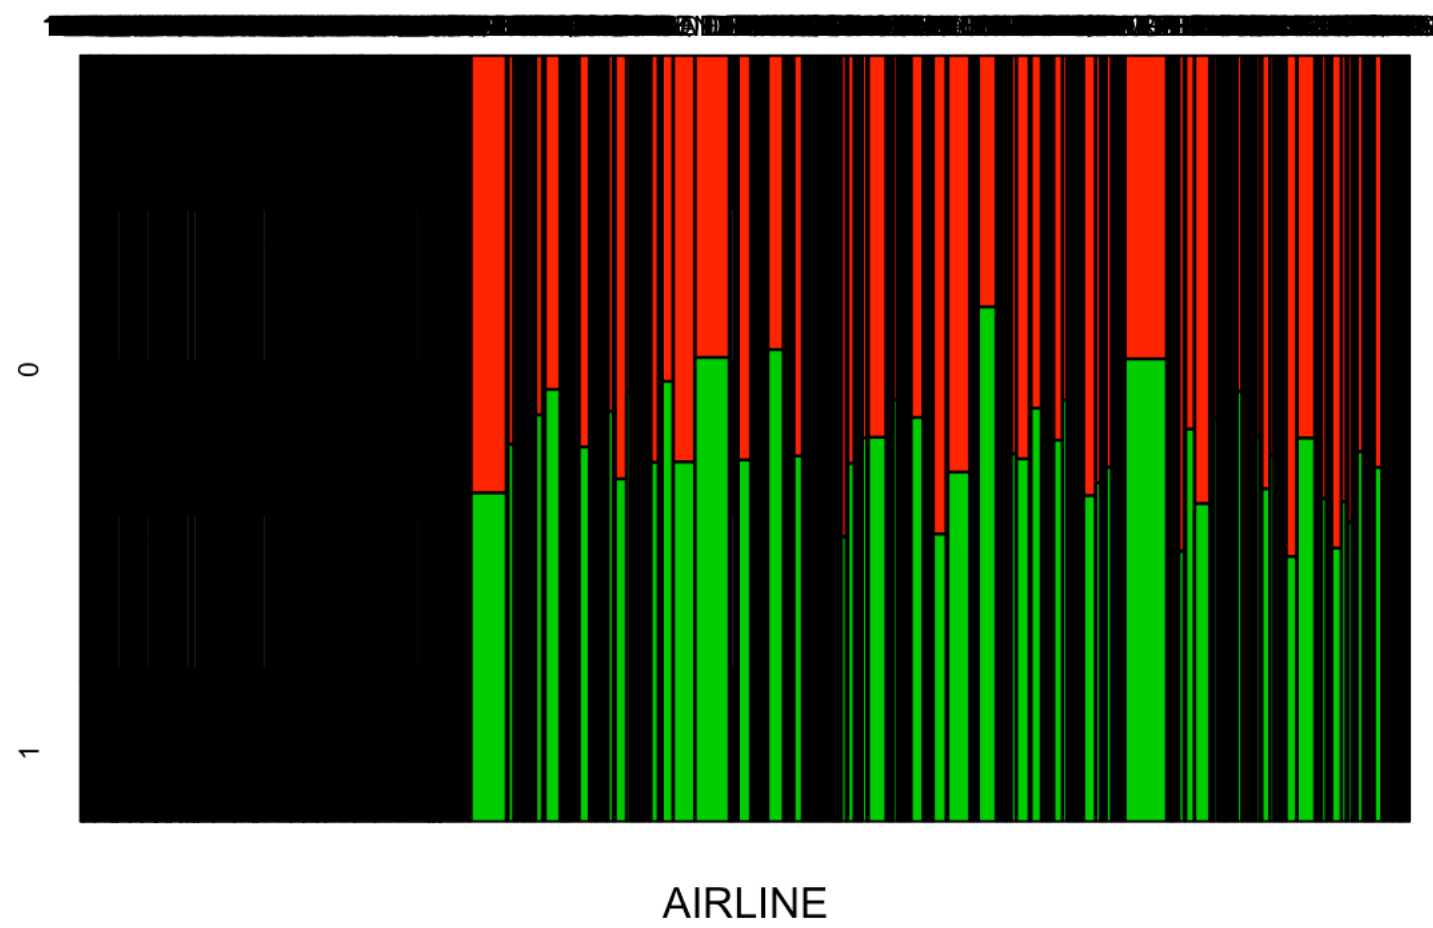

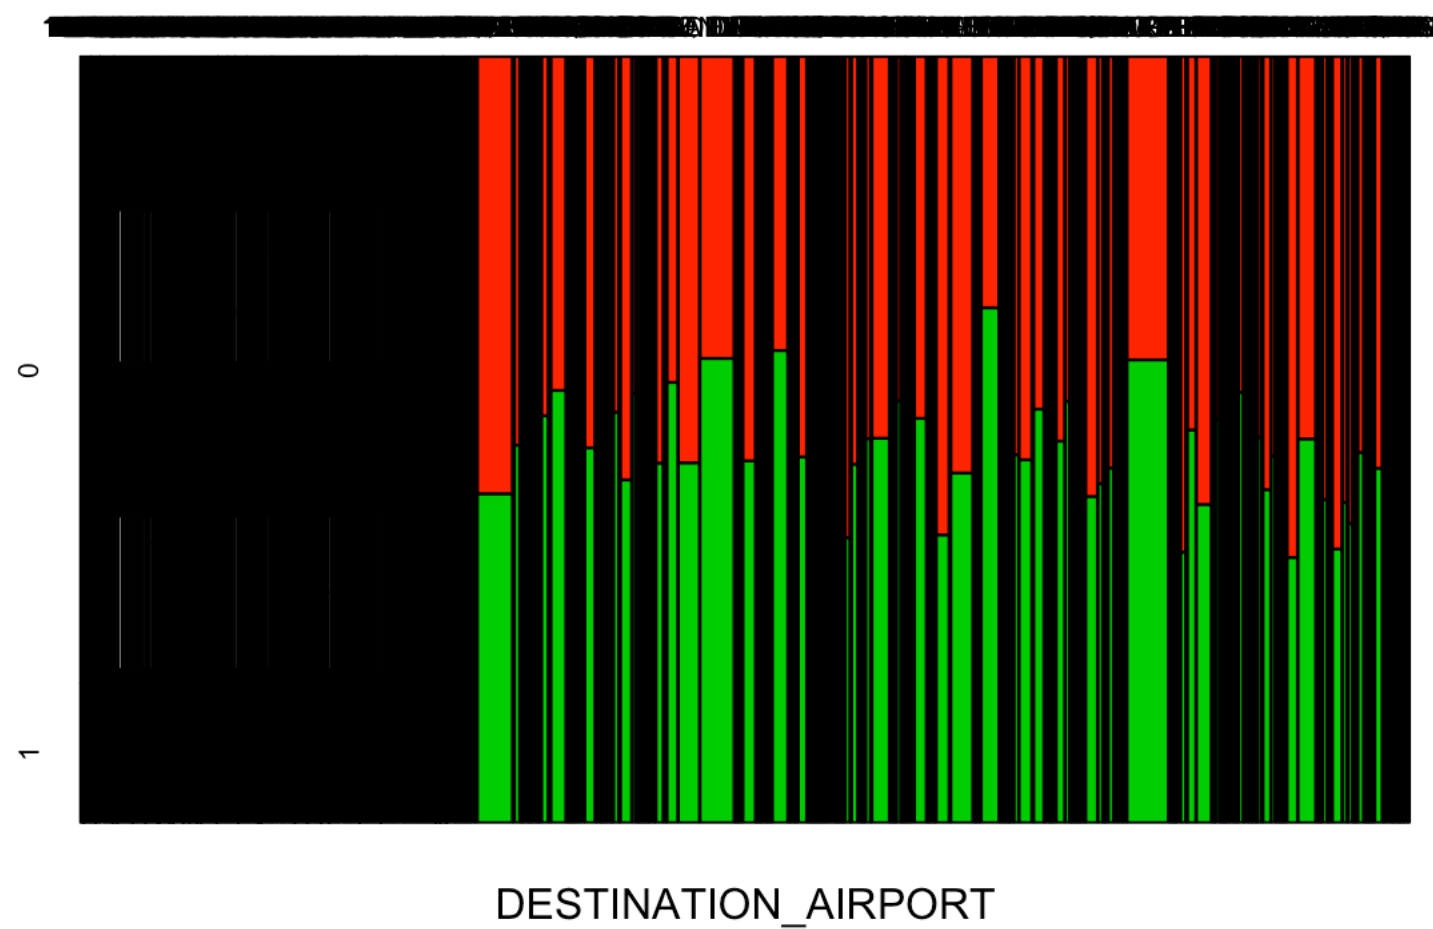

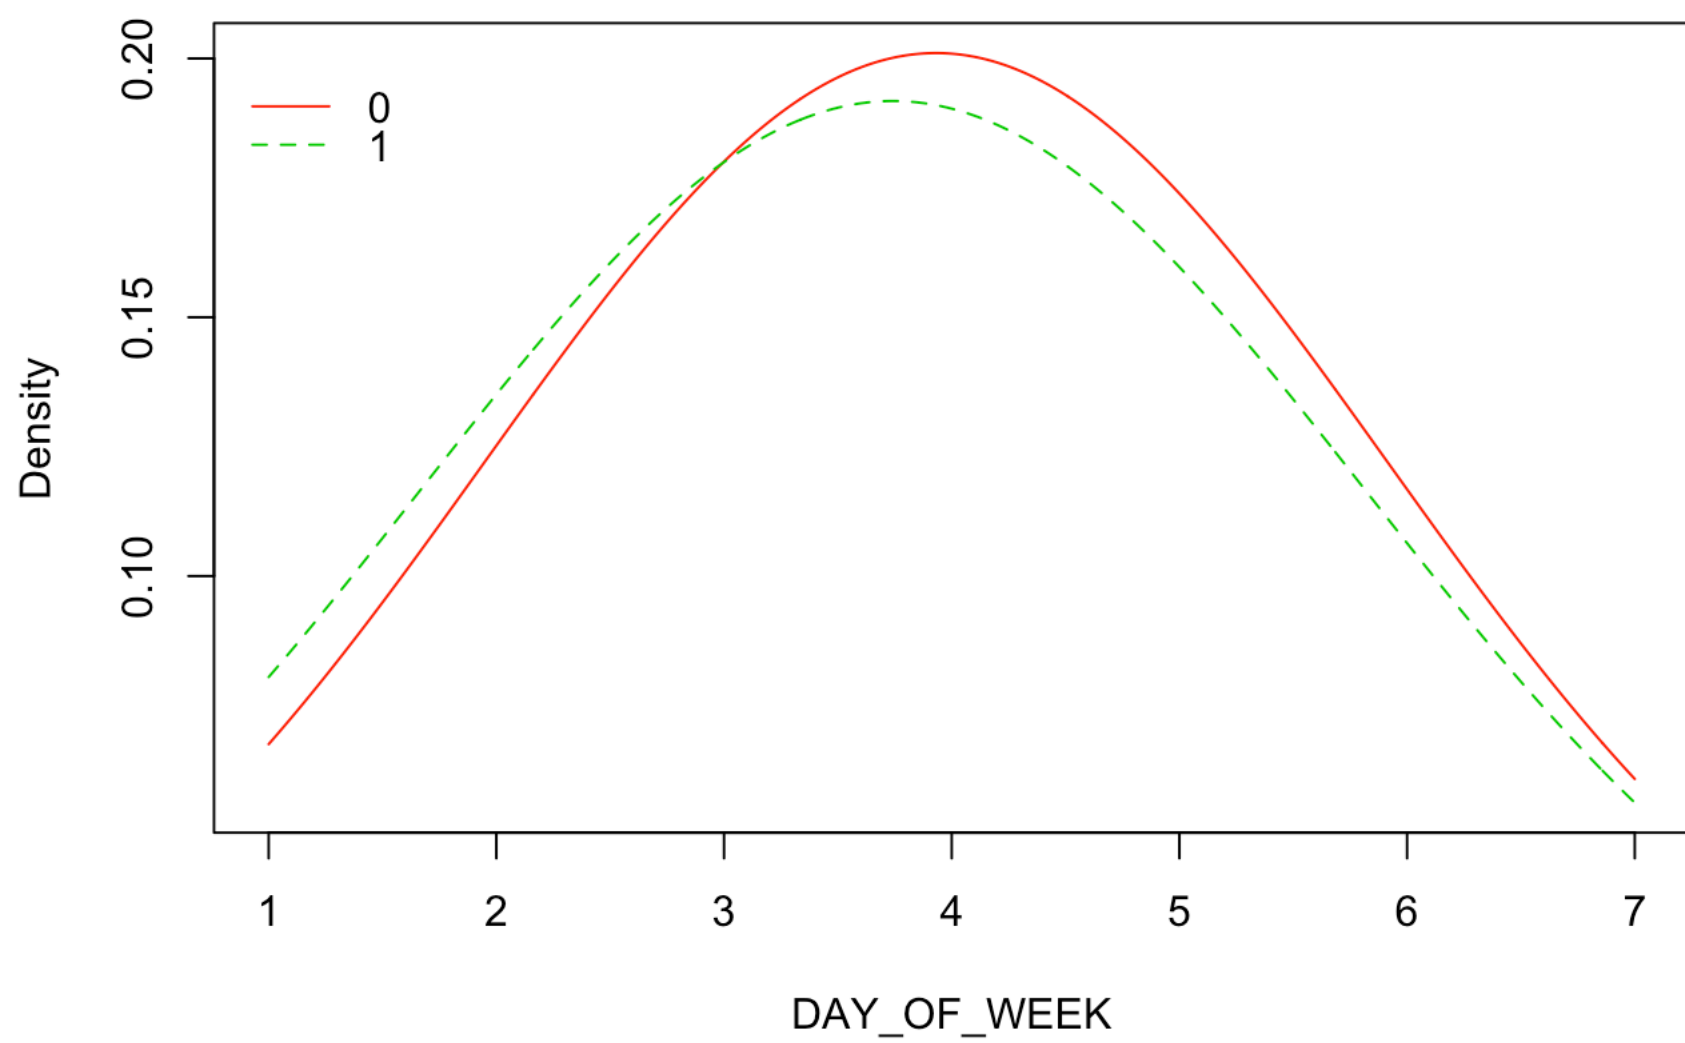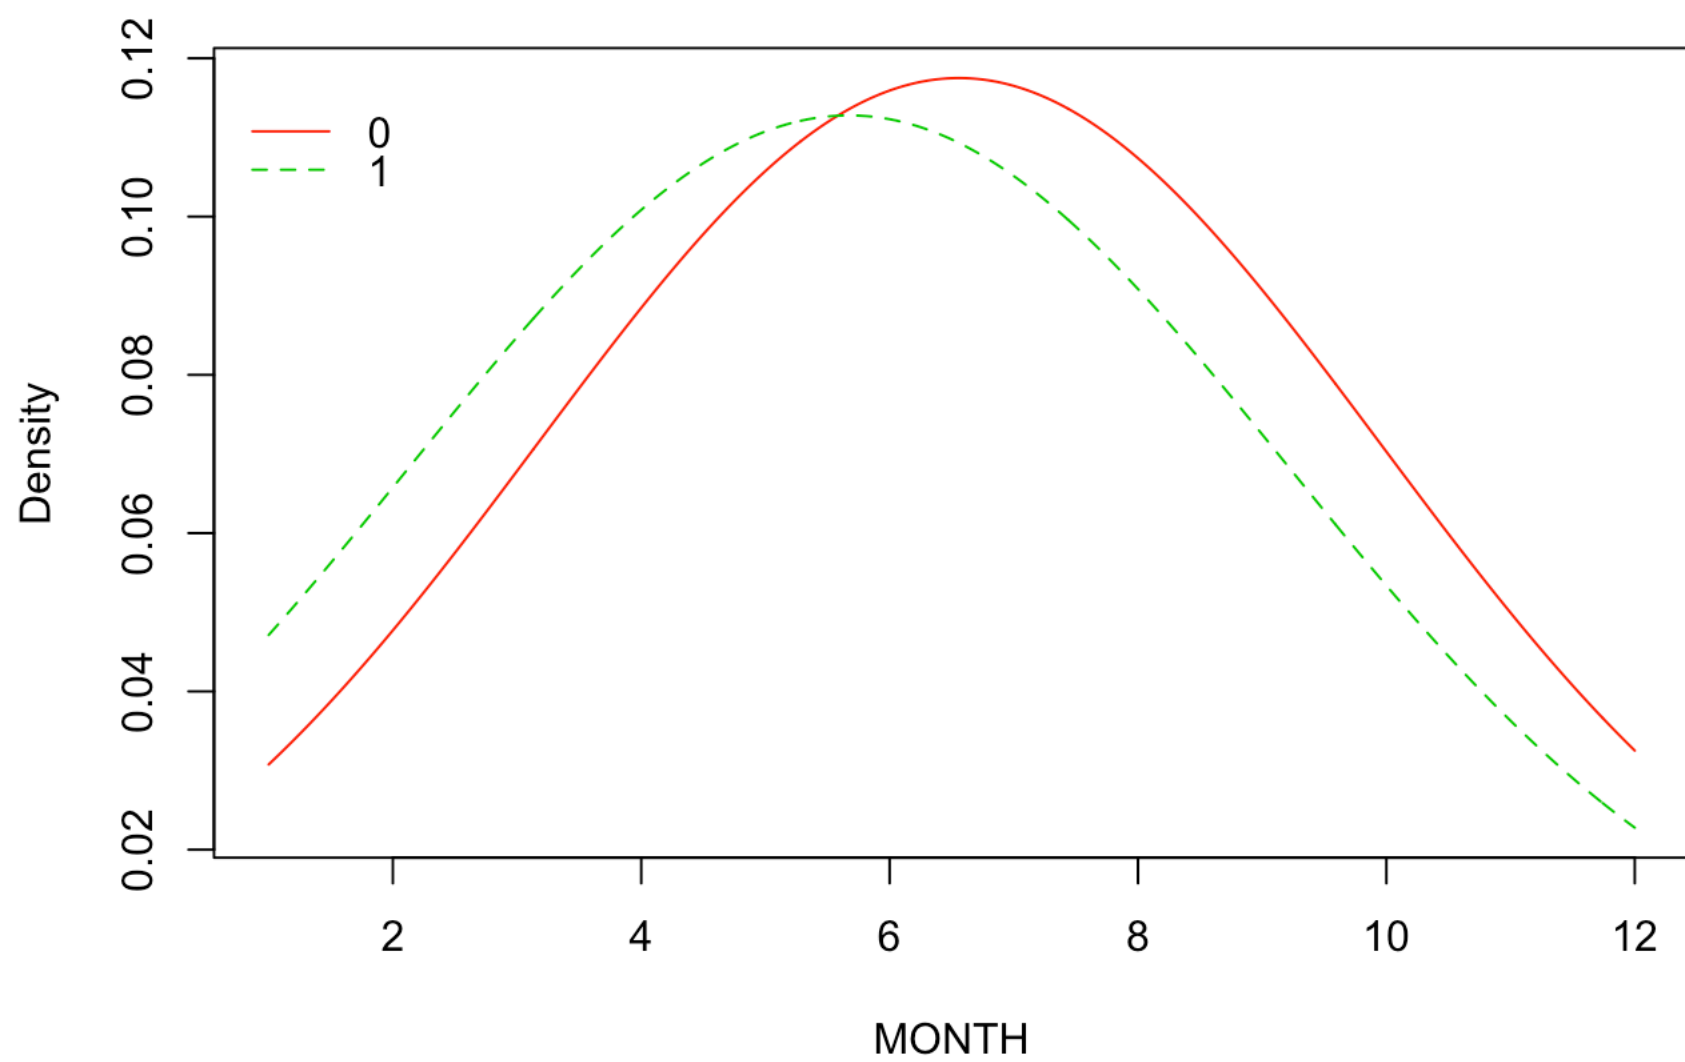

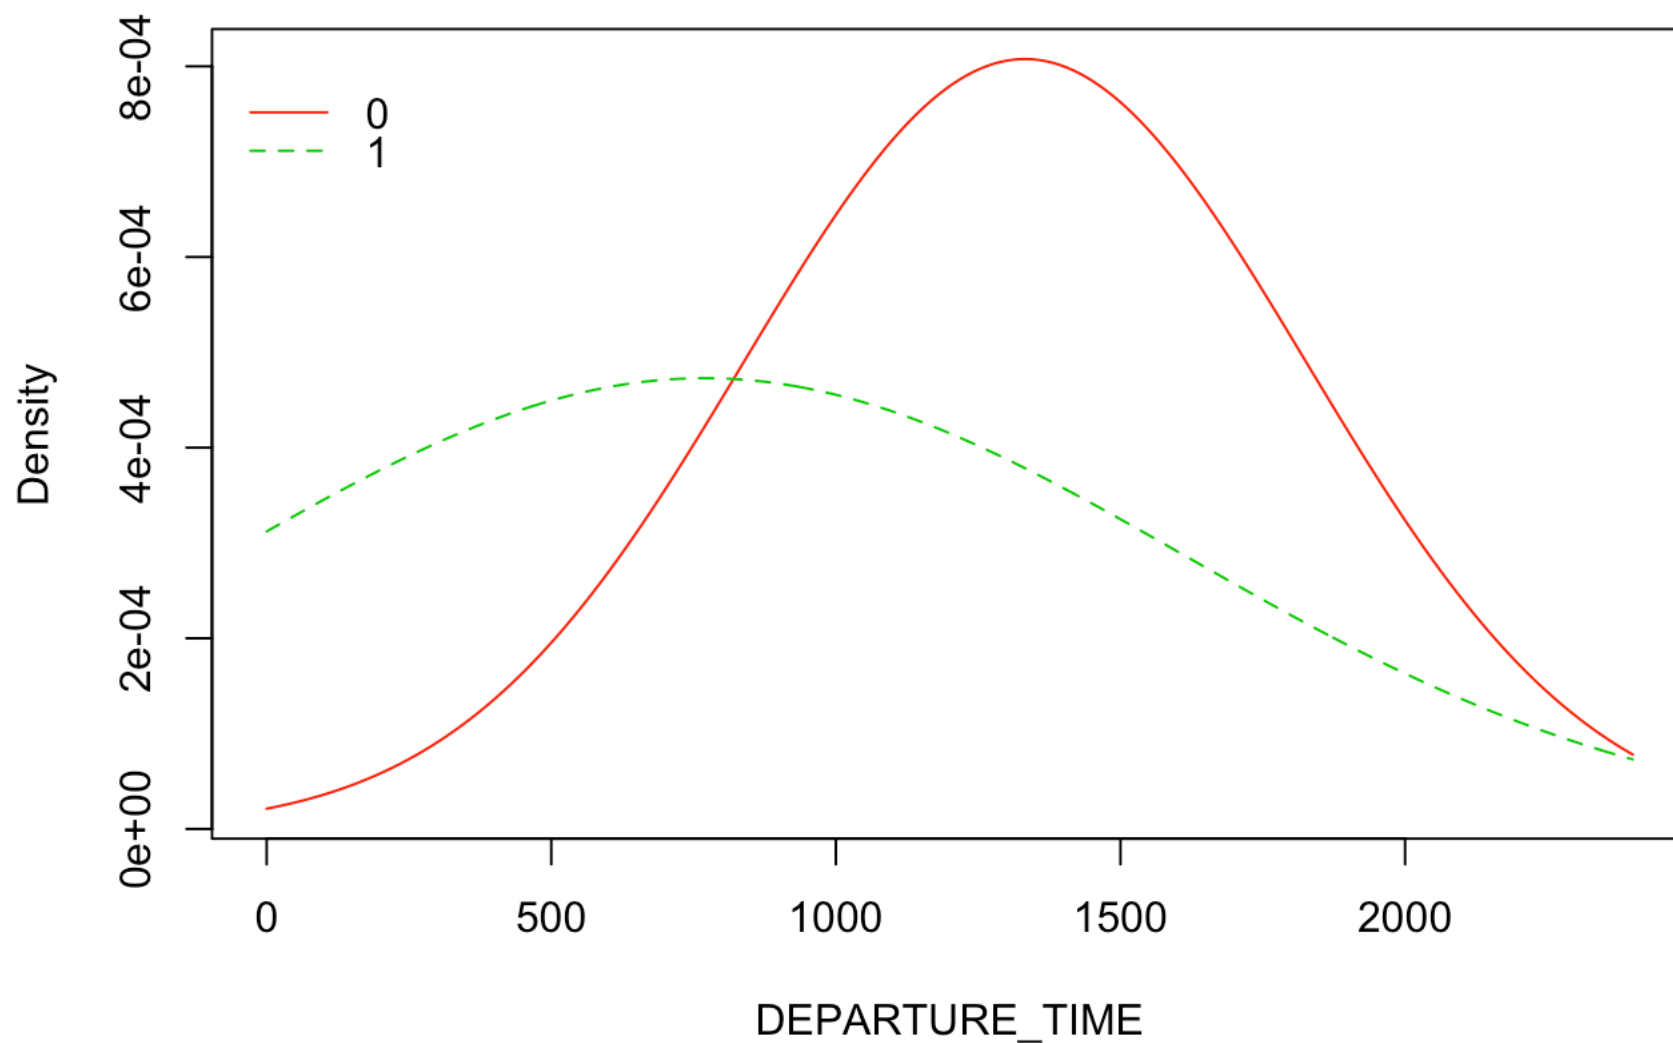


Logistic Regression model

```
# Logistic Regression model for flights data takes more than 10 hours
# to train, the trained model is saved but is 3.9 Gb in size (.rds)
# Also the ROC calculated is only 0.592, hence not using this model
#source('src/03-MODELS/CSX415_Project_Data_Model_LogisticRegression.R')
#glm.model
#summary(glm.model)
#plot.roc(TestData$DelayedOrCancelled,glm_predictions,print.auc=TRUE,main="GLM Model ROC")
```

Tree

```
source('src/03-MODELS/CSX415_Project_Data_Model_Tree.R')
#tree.model
#summary(tree.model)
#plot(tree.model)
plot.roc(TestData$DelayedOrCancelled,tr_predictions[,2],print.auc=TRUE,main="Tree Model ROC")
```

Tree Model ROC

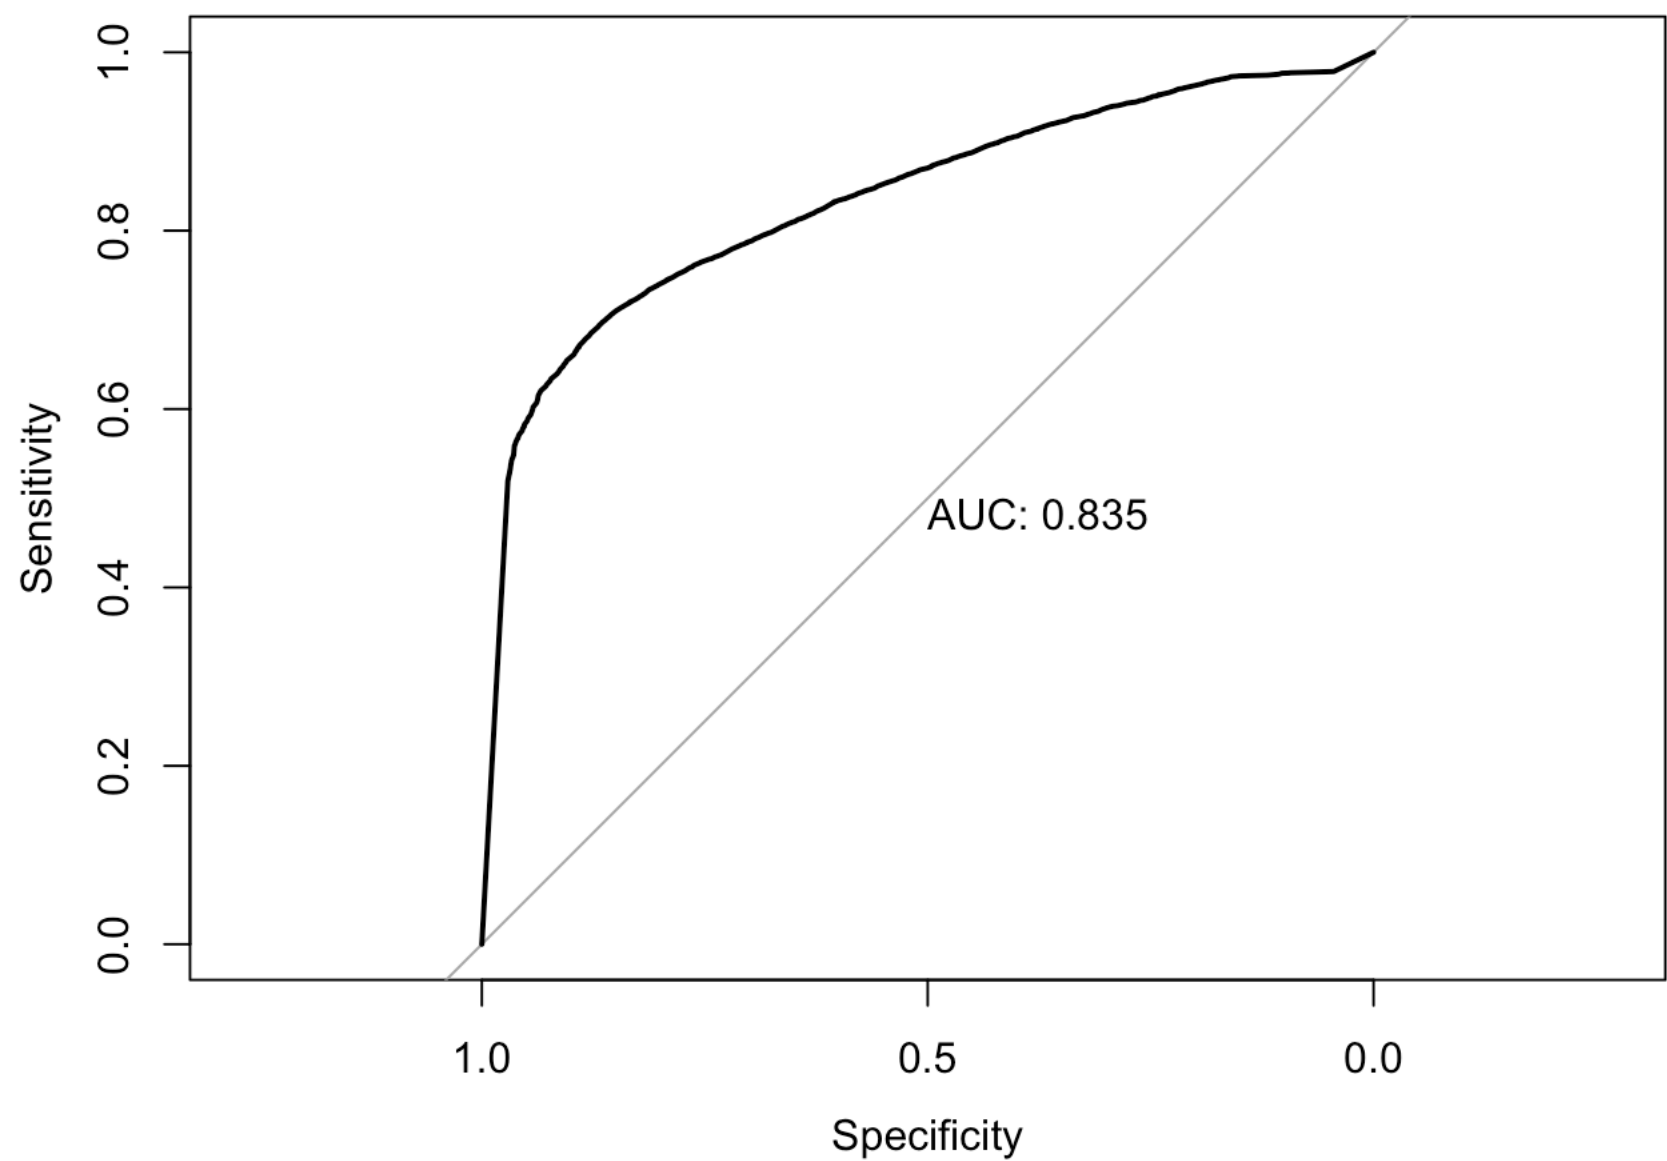

Model Evaluation

Naive Bayes Model Evaluation

```
confusionMatrix(TestData$DelayedOrCancelled,nb_predictions)
```

```
## Confusion Matrix and Statistics
##
##           Reference
## Prediction      0      1
##           0 25506  9951
##           1 12544 22913
##
##           Accuracy : 0.6828
##           95% CI : (0.6793, 0.6862)
##           No Information Rate : 0.5366
##           P-Value [Acc > NIR] : < 2.2e-16
##
##           Kappa : 0.3656
##           McNemar's Test P-Value : < 2.2e-16
##
##           Sensitivity : 0.6703
##           Specificity : 0.6972
##           Pos Pred Value : 0.7194
##           Neg Pred Value : 0.6462
##           Prevalence : 0.5366
##           Detection Rate : 0.3597
##           Detection Prevalence : 0.5000
##           Balanced Accuracy : 0.6838
##
##           'Positive' Class : 0
##
```

Tree Model Evaluation

```
tr_pred <- ifelse((tr_predictions[,2]>0.8), 1,0)
confusionMatrix(TestData$DelayedOrCancelled,tr_pred)
```

```
## Confusion Matrix and Statistics
##
##           Reference
## Prediction      0      1
##           0 32086  3371
##           1 12267 23190
##
##           Accuracy : 0.7795
##           95% CI : (0.7764, 0.7825)
##       No Information Rate : 0.6254
##       P-Value [Acc > NIR] : < 2.2e-16
##
##           Kappa : 0.559
##  McNemar's Test P-Value : < 2.2e-16
##
##           Sensitivity : 0.7234
##           Specificity : 0.8731
##       Pos Pred Value : 0.9049
##       Neg Pred Value : 0.6540
##           Prevalence : 0.6254
##       Detection Rate : 0.4525
##       Detection Prevalence : 0.5000
##       Balanced Accuracy : 0.7983
##
##           'Positive' Class : 0
##
```

Model Selection

Tree Model is more accurate and ROC is greater than 0.75 as required compared to Naive Bayes model.

.

Logistic Regression model takes long time to train and ROC is less than 0.65 hence not selecting Logistic Regression model also because saved model .rds is 3.9 Gb in size hence not suitable for deloyment

.

Comparing the metrics, the accuracy and Kappa values of Tree Model are greater than Naive Bayes Model

.

Conclusion:Tree Model satisfies the requirements criteria of

accuracy greater than 70% and ROC(AUC) greater than 0.65 and hence used for deployment