

IBM z/OS Connect EE V3.0

Developing Outbound API Requesters Applications



IBM Z
Wildfire Team –
Washington System Center

Table of Contents

| | |
|--|-----------|
| Overview | 4 |
| RESTful API Requester to a CICS RESTful API | 5 |
| <i>Generate the API requester artifacts from a Swagger document.....</i> | <i>5</i> |
| <i>Review the application programs</i> | <i>11</i> |
| <i>Compile and link-edit the application programs</i> | <i>15</i> |
| <i>Test the API requester application programs</i> | <i>16</i> |
| RESTful API Requester to a MQ One-Way RESTful API..... | 19 |
| <i>Generate the API requester artifacts from a Swagger document.....</i> | <i>19</i> |
| <i>Review the application programs</i> | <i>26</i> |
| <i>Compile and link-edit the application programs</i> | <i>28</i> |
| <i>Test the API requester application programs</i> | <i>29</i> |
| RESTful API Requester from a CICS application | 32 |
| <i>Generate the API requester artifacts from a Swagger document.....</i> | <i>32</i> |
| <i>Review the application programs</i> | <i>41</i> |
| <i>Compile and link-edit the application programs</i> | <i>44</i> |
| <i>Test the API requester application programs</i> | <i>45</i> |
| Summary | 49 |

General Exercise Information and Guidelines

- ✓ The Windows artifacts for this exercise are in directory *c:\z\apiRequester*. Open a DOS command prompt Window and go to this directory using a change directory command, e.g. *cd \z\apiRequester*
- ✓ Viewing or changing the contents of a file can easily be done by opening the Windows Explorer and going to directory *c:\z\apiRequester*. On this folder's display you can select a file and right mouse button click and select the *Open with EditPad Lite* option to open a file for viewing.
- ✓ This exercise requires using TSO user *USER1* and the TSO password for this user will be provided by the lab instructor.
- ✓ This exercise primarily uses data sets *USER1.ZCEE.CNTL* and *USER.ZCEE.SOURCE*.
- ✓ Please note that there may be minor differences between the screen shots in this exercise versus what you see when performing this exercise. These differences should not impact the completion of this exercise.
- ✓ Any time you have any questions about the use of IBM z/OS Explorer, 3270 screens, features or tools do not hesitate to ask the instructor for assistance.


Important: The REST API provider applications used in this exercise access a CICS container application and MQ. These APIs were developed using the instructions provided in other exercises in this workshop. The REST API providers could have just as easily have been anywhere in the cloud on any remote system as long as the Swagger document for the REST API was available.

Overview

These exercises demonstrate the steps required to enable COBOL programs to invoke RESTful APIs. There are two samples provided to do this. One sample uses RESTful APIs to access a CICS program and the other uses RESTful APIs to interact with an MQ queue. Note that even though these APIs are hosted in z/OS Connect EE server these same steps could be followed to access APIs hosted anywhere in the cloud.

The process starts with the Swagger document that describes the API which the COBOL program will invoke. The Swagger document is used by the z/OS Connect EE build toolkit to (1) generate the COBOL copy books included in the COBOL program to invoke the API (2) as well as an API requester archive file (ARA) which is deployed to a z/OS Connect EE server.

The diagram shows this process at a high level. The copy books generated by the z/OS Connect EE build toolkit will be integrated into a COBOL program to provide (1) the COBOL representation of the request and response messages and to identify (2) the HTTP method to be used in the RESTful request. The API requester archive file will be deployed to a z/OS Connect EE server and used to convert (1) the COBOL request and response messages to JSON messages and to invoke (2) the outbound RESTful request and wait for the response.

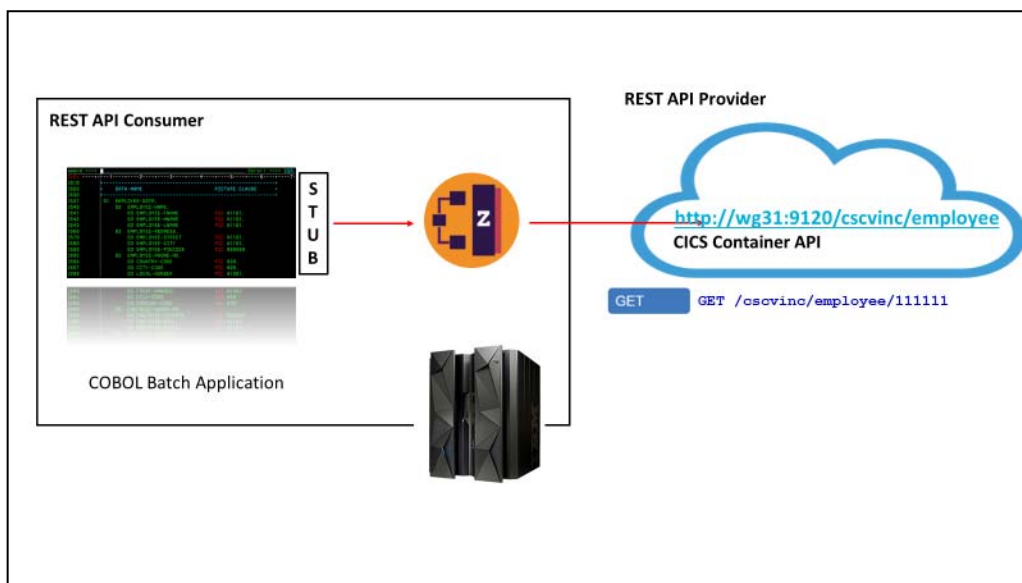

In this exercise the COBOL program will be compiled and executed in a batch environment. The only differences between batch and CICS and IMS is the configuration required for connecting to the z/OS Connect EE server. Consult the z/OS Connect EE Knowledge Center for information how this is done for CICS and IMS.

If you have completed either the developing APIs exercise for MVS Batch, DB2 or MQ you can start with section *RESTful API Requester to a CICS* on page 5.

RESTful API Requester to a CICS RESTful API

In this section an API requester will be developed and tested where the target API accesses a CICS Container application. The batch programs will insert records (POST), retrieve records (GET), update record (PUT) and delete records (DELETE) in a VSAM data set.

Generate the API requester artifacts from a Swagger document

The first step is to use the API's Swagger document to generate the artifacts required for the COBOL API client application and the API requester archive file. The Swagger document was obtained from the server where the API is hosted. All the files mention in this section are in directory *c:/z/apiRequester/cscvinc* on your workstation.

The z/OS Connect EE build toolkit (ZCONBT) is a Java application shipped with z/OS Connect EE as a zip file and can be installed on a workstation or in OMVS. Anywhere a Java runtime is available. In this exercise the build toolkit will on Windows.

1. Begin by reviewing the API's Swagger document for the CICS container-based API. Using a CICS container has implications which will be explored later. In the meantime, this document identifies the types of HTTP methods supported as well as the path of each HTTP method. It also the contents each method's request JSON message and the response JSON message field contents and field types. This is the blueprint for invoking the

```
{
  "swagger": "2.0",
  "info": {
    "description": "",
    "version": "1.0.0",
    "title": "cscvinc"
  },
  "basePath": "/cscvinc",
  "schemes": [
    "https",
    "http"
  ],
  "consumes": [
    "application/json"
  ],
  "produces": [
    "application/json"
  ],
  "paths": {
    "/employee": {
      "post": {
        "operationId": "postCscvincService",
        "parameters": [
          {
            "in": "body",
            "name": "postCscvincService_request",
            "description": "request body",
            "required": true,
            "schema": {
              "$ref": "#/definitions/postCscvincService_request"
            }
          }
        ]
      }
    }
  }
}
```

Tech-Tip: Instructions for installing the z/OS Connect EE build toolkit can be found at URL https://www.ibm.com/support/knowledgecenter/en/SS4SVW_3.0.0/com.ibm.zosconnect.doc/installing/bt_install.html

API.

- ___2. Next review the input parameters that will be passed to the z/OS Connect EE build toolkit in a properties file. This file is *cscvinc.properties* see its below:

```
apiDescriptionFile=./cscvinc.json 1
dataStructuresLocation=./syslib 2
apiInfoFileLocation=./syslib 3
logFileDirectory=./logs 4
language=COBOL 5
connectionRef=cscvincAPI 6
requesterPrefix=csc 7
```

1. Identifies the Swagger document that describes the API
2. Provides the directory where the generated COBOL copybooks representing the request and response messages will be written.
3. Provides the directory where the generated COBOL copybook with invocation details of the API will be written.
4. Provides the directory where a log file will be written.
5. Identifies the target language.
6. Identifies the corresponding *zosconnect_endpointConnection* element define in the z/OS Connect EE server's server.xml file.
7. Provides a 3-character prefix to be used for all generated copybooks

- ___3. View file *cscvincAPI.bat* which contains this one line.

```
c:\z\zconbt\bin\zconbt.bat -p=./cscvinc.properties -f=./cscvinc.ara
```

This is batch command file that when executed invokes the z/OS Connect EE build toolkit (*zconbt*). The -p switch identifies the input properties file and the -f switch identifies the name of the generate API requester archive file. The API requester archive (ARA) file will be deployed and made available to the z/OS Connect EE server in directory *.../resources/zosconnect/apiRequesters*.

- ___4. On the workstation desktop, locate the *Command Prompt* icon and double click on it to open a DOS session that will allow commands to be entered.

- ___5. Use the change directory command (cd) to change to directory *C:\z\api\Requester\cscvinc*, e.g.

```
cd c:\z\apiRequester\cscvinc
```

6. Enter command **cscvincAPI.bat** in the DOS command prompt window and you should see output like the below:

```
BAQB0000I: z/OS Connect Enterprise Edition Build Toolkit Version 1.2 (20200408-1120).
BAQB0008I: Creating API requester archive from configuration file ./cscvinc.properties.
BAQB0040I: The generated API requester is automatically named cscvincapi_1.0.0 based on the title
cscvincapi and version 1.0.0 of the API to be called.
BAQB0015I: Start processing operation (operationId: getCscvincSelectService, relativePath:
/employee/{employee}, method: GET).
DFHPI9586W A reserved word "address" has been detected in the input document, it has been changed to
"Xaddress".
DFHPI9586W A reserved word "date" has been detected in the input document, it has been changed to
"Xdate".
BAQB0016I: Successfully processed operation (operationId: getCscvincSelectService, relativePath:
/employee/{employee}, method: GET).
BAQB0015I: Start processing operation (operationId: putCscvincUpdateService, relativePath:
/employee/{employee}, method: PUT).
DFHPI9586W A reserved word "address" has been detected in the input document, it has been changed to
"Xaddress".
DFHPI9586W A reserved word "date" has been detected in the input document, it has been changed to
"Xdate".
BAQB0016I: Successfully processed operation (operationId: putCscvincUpdateService, relativePath:
/employee/{employee}, method: PUT).
BAQB0015I: Start processing operation (operationId: postCscvincInsertService, relativePath:
/employee/{employee}, method: POST).
DFHPI9586W A reserved word "address" has been detected in the input document, it has been changed to
"Xaddress".
BAQB0016I: Successfully processed operation (operationId: postCscvincInsertService, relativePath:
/employee/{employee}, method: POST).
BAQB0015I: Start processing operation (operationId: deleteCscvincDeleteService, relativePath:
/employee/{employee}, method: DELETE).
BAQB0016I: Successfully processed operation (operationId: deleteCscvincDeleteService, relativePath:
/employee/{employee}, method: DELETE).

Total 4 operation(s) (success: 4, ignored: 0) defined in api description file: ./cscvinc.json
----- Successfully processed operation(s) -----
operationId: getCscvincSelectService, basePath: /cscvincapi, relativePath: /employee/{employee},
method: GET
- request data structure : CSC00Q01
- response data structure : CSC00P01
- api info file : CSC00I01

operationId: putCscvincUpdateService, basePath: /cscvincapi, relativePath: /employee/{employee},
method: PUT
- request data structure : CSC01Q01
- response data structure : CSC01P01
- api info file : CSC01I01

operationId: postCscvincInsertService, basePath: /cscvincapi, relativePath: /employee/{employee},
method: POST
- request data structure : CSC02Q01
- response data structure : CSC02P01
- api info file : CSC02I01

operationId: deleteCscvincDeleteService, basePath: /cscvincapi, relativePath: /employee/{employee},
method: DELETE
- request data structure : CSC03Q01
- response data structure : CSC03P01
- api info file : CSC03I01

BAQB0009I: Successfully created API requester archive file ./cscvinc.ara.
```

Note that each HTTP method defined in the Swagger document will cause the generation of up to three copy books. One for the request message(Q01), one for the response message(P01) and one for the API details(I01). The copy book names are based on the *requesterPrefix* property (e.g. *csc*) and use an ascending sequence number sequence to differentiate between methods. Also note that there may be fewer than three copy books generated. For example, if there is no response message or no request message for a specific method a copy book may not be generated.

7. Now explore a sample snippet of the copy book for the request message of a PUT method. Use *EditPad Lite* to open file `c:\z\apiRequester\cscvinc\syslib\CSC00Q01`. Scroll down until you see something like the code below.

```

06 RespBody.
  09 cscvincSelectServiceOp-num      PIC S9(9) COMP-5 SYNC.
  09 cscvincSelectServiceOperatio.
  12 Container1.
    15 RESPONSE-CONTAINER2-num      PIC S9(9) COMP-5 SYNC.
    15 RESPONSE-CONTAINER.
      18 CEIBRESP-num                PIC S9(9) COMP-5 SYNC.
      18 CEIBRESP                    PIC S9(8) DISPLAY.
      18 CEIBRESP2-num              PIC S9(9) COMP-5 SYNC.
      18 CEIBRESP2                  PIC S9(8) DISPLAY.
      18 userIDentity-num            PIC S9(9) COMP-5 SYNC.
      18 userIDentity.
        21 userIDentity2-length      PIC S9999 COMP-5 SYNC.
        21 userIDentity2             PIC X(8).
      18 fileArea2-num              PIC S9(9) COMP-5 SYNC.
      18 fileArea.
        21 employeeNumber-num        PIC S9(9) COMP-5 SYNC.
        21 employeeNumber.
          24 employeeNumber2-length  PIC S9999 COMP-5 SYNC.
          24 employeeNumber2         PIC X(6).
        21 employeeName-num          PIC S9(9)COMP-5 SYNC.
        21 employeeName.
          24 employeeName2-length    PIC S9999 COMP-5 SYNC.
          24 employeeName2           PIC X(20).

```

Note that each variable has an associated length (e.g. *employeeNumber2-length*). The length of a variable is required since there is no delimiter between the variables in storage. The runtime needs to know the size of a variable at execution time so the request and response messages can be properly converted to and from JSON name/value pairs.

For this API, the Swagger document included an additional variable for the number of occurrences of a variable, (e.g. *employeeNumber-num*). In this exercise we will set the number of each variable to one.

Tech-Tip: This additional variable was included for this API because the target program is a CICS container enabled program and a CICS channel can have multiple occurrences of the same container. The z/OS Connect EE API requester support needs to know number of each variable is being sent (and returned). This behavior is not unique to CICS.

The corresponding response message (`c:\z\apiRequester\cscvinc\syslib\CSC00P01`) will have a similar layout.

8. The corresponding API information copy book (`c:\z\apiRequester\cscvinc\syslib\CSC00I01`) has contents providing the API name and the path to be used for the method:

```

03 BAQ-APINAME                PIC X(255)
   VALUE 'cscvincapi_1.0.0'.
03 BAQ-APINAME-LEN            PIC S9(9) COMP-5 SYNC
   VALUE 16.
03 BAQ-APIPATH                PIC X(255)
   VALUE '%2Fcscvincapi%2Femployee%2F%7Bemployee%7D'.
03 BAQ-APIPATH-LEN            PIC S9(9) COMP-5 SYNC
   VALUE 41.
03 BAQ-APIMETHOD              PIC X(255)
   VALUE 'GET'.
03 BAQ-APIMETHOD-LEN          PIC S9(9) COMP-5 SYNC
   VALUE 3.

```

Deploy the API Requester Archive file to the z/OS Connect EE server

Next make the API requester archive file available to the z/OS Connect EE server.

The API requester archive (ARA) file needs to be deployed to the API requester directory. In this case the target directory is `/var/ats/zosconnect/servers/zceeapir/resources/zosconnect/apiRequesters`.

1. Open a DOS command session and change to directory `c:\z\apiRequester\cscvinc`, e.g **cd c:\z\apiRequester\cscvinc**
2. Use the z/OS Connect EE RESTful administrative interface to deploy the ARA files by using the cURL command embedded in command file `deployCscvinc.bat`. Invoke this command file to deploy the cscvinc API archive file.

```

c:\z\apiRequester\cscvinc>curl -X POST --user Fred:fredpwd --data-binary @cscvinc
c.ara --header "Content-Type: application/zip" --insecure https://wg31.washingt
on.ibm.com:9483/zosConnect/apiRequesters
{"name": "cscvincapi_1.0.0", "version": "1.0.0", "description": "", "status": "Started", "
apiRequesterUrl": "https://wg31.washington.ibm.com:9483/zosConnect/apiRequeste
rs/cscvinc_1.0.0", "connection": "cscvincAPI"}

```

Tech-Tip: If a REST client tool like cURL or Postman was not available then ARA file could have been deployed using FTP to upload the file in binary mode to the *apiRequesters* directory.

Tech-Tip: If an ARA needs to be redeployed, the cURL command with a PUT method can be used to stop the API requester
curl -X PUT --user Fred:fredpwd --insecure https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters/cscvinc_1.0.0?status=stopped
 And the cURL command with a DELETE method can be used to delete the API requester.
curl -X DELETE --user Fred:fredpwd --insecure https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters/cscvinc_1.0.0
 otherwise the redeployment of the ARA file will fail.

3. The z/OS Connect EE server has the configuration below already included.

```
<server description="API Requester">
  <!-- Enable features -->
  <featureManager>
    <feature>zosconnect:apiRequester-1.0</feature>
  </featureManager>

  <zosconnect_endpointConnection id="cscvincAPI"          1
    host="http://wg31.washington.ibm.com"
    port="9120"
    basicAuthRef="myBasicAuth"
    connectionTimeout="10s"
    receiveTimeout="20s" />

  <zosconnect_authData id="myBasicAuth"          2
    user="Fred"
    password="fredpwd" />

</server>
```

1. Identifies the system which hosts the target API as well as any security information and time out parameters. Note that the ID of this element matches the value *connectionRef* property used when the ARA was generated by the z/OS Connect build toolkit.
2. The target server uses basic authentication, so we are simply provided a user identity and password. The password can be encrypted in the server.xml file or TLS used for security.

Tech-Tip: The *endpointConnection* element specifies the host and port of the target API provider. This z/OS Connect server performs the conversion of the COBOL data structure to JSON and then acts as a JSON REST client to the target API provider. Which for this example, is the same z/OS Connect server. The REST client loops back to itself when invoking the API. This would rarely happen in a real-world environment. This is why this host and port is also used by the API requester client in its environment variables.

Move the COBOL copy books to a MVS data set

Next make the generated COBOL copy books available for including into the COBOL program.

The generated COBOL copy books need to be available in an MVS data set which is included in the compiler SYSLIB concatenation sequence. In the data set is *USER1.ZCEE. SOURCE*. Use a DOS command prompt session and the commands below to move the copy books file to this data set. Authenticate as user USER1 (password USER1).

1. Open a DOS command prompt and use the change directory command to go to directory C:\z\apiRequester\cscvinc\syslib, e.g. **cd \z\apiRequester\cscvinc\syslib**
2. Start a file transfer session with the WG31 host using the *ftp* command, e.g. **ftp wg31**

- ___3. Logon as USER1 and then use the *cd* command to change to directory to data set *USER1.ZCEE.SOURCE*, e.g.
cd zcee.source
- ___4. Toggle prompting off by entering command **prompt**
- ___5. Perform multiple put requests by using the multiple put command, **mput csc***
- ___6. When the last transfer has completed enter the **quit** command.


```
c:\z\apiRequester\cscvinc>cd syslib
c:\z\apiRequester\cscvinc\syslib>ftp wg31.washington.ibm.com
Connected to wg31.washington.ibm.com.
220-FTP 16:26:23 on 2018-02-15.
220 Connection will close if idle for more than 200 minutes.
User (wg31.washington.ibm.com:(none)): user1
331 Send password please. user1
Password:
230 USER1 is logged on. Working directory is "USER1.".
ftp> cd zcee.source
250 The working directory "USER1.ZCEE.SOURCE" is a partitioned data set
ftp> prompt
Interactive mode Off .
ftp> mput csc*
200 Port request OK.
125 Storing data set USER1.ZCEE.SOURCE(CSC00I01)
250 Transfer completed successfully.
ftp: 533 bytes sent in 0.32Seconds 1.66Kbytes/sec.
200 Port request OK.
sent in 0.10Seconds 110.89Kbytes/sec.
200 Port request OK.
.....
125 Storing data set USER1.ZCEE.SOURCE(CSC03P01)
250 Transfer completed successfully.
ftp: 7393 bytes sent in 0.32Seconds 22.89Kbytes/sec.
200 Port request OK.
125 Storing data set USER1.ZCEE.SOURCE(CSC03Q01)
250 Transfer completed successfully.
ftp: 1132 bytes sent in 0.40Seconds 2.80Kbytes/sec.
ftp> quit
```

Review the application programs

Now that the copy books have been generated and are available in a data set the next step is compile and link edit the application programs. The source for the application programs is in USER1.ZCEE.SOURCE. Member DELTA1 invokes the DELETE method, member GETAPI invokes the GET method, POSTAPI invokes the POST method and PUTAPI invokes the PUT method.

Tech-Tip: Data set USER1.ZCEE.SOURCE can be accessed either by using the IBM z/OS Explorer or by using the Personal Communication icon on the desktop and logging on to TSO and use ISPF option 3.4 to access this data set. If you have any questions about either method, ask the instructor.

1. Back in the IBM z/OS Explorer session switch to the *Remote System Explorer* perspective and expand data set *USER1.ZCEE.SOURCE* in the *Remote System view* to display a list of its members.

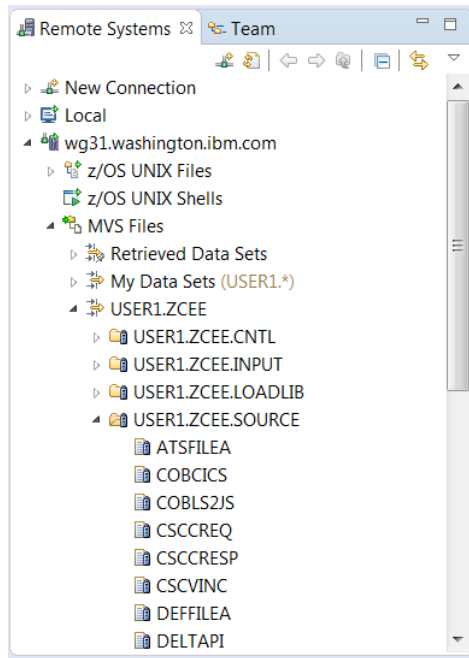

2. Begin by reviewing the application programs GETAPI. Open member *GETAPI* in *USER1.ZCEE.SOURCE* and review its contents by selecting the member and right- mouse button clicking and selecting the *Open* option. Scroll down until you see these lines of code.

These lines of code copy into the source the required z/OS Connect EE copy book (BAQRINFO) and the copy books generated by the z/OS Connect EE build tool kit. If when you generated the copy book earlier in the exercise and the sequence number used for the GET method was not 00, e.g. the **CSC00** prefix, then you need to change the COBOL source to match sequence generated when you invoke the ZCONBT tool.

```
* Copy API Requester required copybook
COPY BAQRINFO.

* Request and Response
01 API-REQUEST.
   COPY CSC00Q01.
01 API_RESPONSE.
   COPY CSC00P01.

* Structure with the API information
01 API-INFO-OPER1.
   COPY CSC00I01.
```

3. Scroll down further until you find this code which provides the contents of the request message.

```

*-----*
* Set up the data for the API Requester call                                *
*-----*
      MOVE employee of PARM-DATA TO employee IN API-REQUEST.
      MOVE LENGTH of employee in API-REQUEST to
        employee-length IN API-REQUEST.

*-----*
* Initialize API Requester PTRs & LENs                                    *
*-----*
* Use pointer and length to specify the location of
* request and response segment.
* This procedure is general and necessary.
      SET BAQ-REQUEST-PTR TO ADDRESS OF API-REQUEST.
      MOVE LENGTH OF API-REQUEST TO BAQ-REQUEST-LEN.
      SET BAQ-RESPONSE-PTR TO ADDRESS OF API_RESPONSE.
      MOVE LENGTH OF API_RESPONSE TO BAQ-RESPONSE-LEN.

```

The *GET* method only requires one variable and it is provided as a path parameter, e.g. `/cscvinc/employee/{numb}`.

4. Scroll down further and you will the call to the z/OS Connect API requester stub module.

```

*-----*
* Call the communication stub                                            *
*-----*
* Call the subsystem-supplied stub code to send
* API request to zCEE
      CALL COMM-STUB-PGM-NAME USING
        BY REFERENCE  API-INFO-OPER1
        BY REFERENCE  BAQ-REQUEST-INFO
        BY REFERENCE  BAQ-REQUEST-PTR
        BY REFERENCE  BAQ-REQUEST-LEN
        BY REFERENCE  BAQ-RESPONSE-INFO
        BY REFERENCE  BAQ-RESPONSE-PTR
        BY REFERENCE  BAQ-RESPONSE-LEN.
* The BAQ-RETURN-CODE field in 'BAQRINFO' indicates whether this
* API call is successful.

```

Note that the parameters are being passed by reference. This means that the z/OS Connect API requester stub will have direct access to the program storage for both accessing data and making changes (i.e. the response message).

5. Scroll down further and you will see the code where the application displays the results in the response message.

```

IF BAQ-SUCCESS THEN
  DISPLAY "EmployeeNumber: " employeeNumber2 of API_RESPONSE
  DISPLAY "EmployeeName:   " employeeName2 of API_RESPONSE
  DISPLAY "Address:        " Xaddress2 of API_RESPONSE
  DISPLAY "Phone:          " phone2   of API_RESPONSE
  DISPLAY "Date:           " Xdate2   of API_RESPONSE
  DISPLAY "Amount:         " amount2   of API_RESPONSE
  MOVE CEIBRESP of API_RESPONSE to EIBRESP
  MOVE CEIBRESP2 of API_RESPONSE to EIBRESP2
  DISPLAY "EIBRESP:        " EIBRESP
  DISPLAY "EIBRESP2:       " EIBRESP2
  DISPLAY "USERID:         " userIdentity2

```

Close member *GETAPI* and open member *POSTAPI*. The code for this program is very similar to the code for *GETAPI* with the exception that all variables are provided in a JSON request message. Scroll down and find the code below.

```

*-----*
* Set up the data for the API Requester call                                *
*-----*
  MOVE 1 to cscvincInsertServiceOp-num in API-REQUEST
  REQUEST2-num in API-REQUEST
  fileArea2-num in API-REQUEST
  employeeNumber-num in API-REQUEST
  employeeName-num in API-REQUEST
  Xaddress-num in API-REQUEST
  phoneNumber-num in API-REQUEST
  startDate-num in API-REQUEST
  amount-num in API-REQUEST.

  MOVE employeeNumber of PARM-DATA TO employeeNumber2
                                IN API-REQUEST.
  MOVE LENGTH of employeeNumber2 in API-REQUEST to
    employeeNumber2-length IN API-REQUEST.

  MOVE "John" TO employeeName2 IN API-REQUEST.
  MOVE LENGTH of employeeName2 in API-REQUEST to
    employeeName2-length IN API-REQUEST.

```

In this case the number of occurrences of a property must be provided and the property value moved to the request copy book.

6. Explore members *DELTAPI* and *PUTAPI* and their corresponding copy books to see the code which is common (variable housekeeping, calls to the z/OS Connect stub, etc.) regardless of the method being invoked.

Compile and link-edit the application programs

The applications programs now are ready to be compiled and link edited.

1. Submit the job in member **CSCVINC** in data set *USER1.ZCEE.CNTL*.

```
//COMPILE EXEC IGYWCL,LNGPRFX=SYS1.ECOBOL,PARM.COBOLE='NODYNAM
//COBOL.SYSIN DD DISP=SHR,DSN=USER1.ZCEE.SOURCE(POSTAPI)
//COBOL.SYSLIB DD DISP=SHR,DSN=USER1.ZCEE.SOURCE
//
// DD DISP=SHR,DSN=ZCEE30.SBAQCOB
//LKED.SYSLMOD DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB(POSTAPI)
//COMPILE EXEC IGYWCL,LNGPRFX=SYS1.ECOBOL,PARM.COBOLE='NODYNAM
//COBOL.SYSIN DD DISP=SHR,DSN=USER1.ZCEE.SOURCE(GETAPI)
//COBOL.SYSLIB DD DISP=SHR,DSN=USER1.ZCEE.SOURCE
//
// DD DISP=SHR,DSN=ZCEE30.SBAQCOB
//LKED.SYSLMOD DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB(GETAPI)
//COMPILE EXEC IGYWCL,LNGPRFX=SYS1.ECOBOL,PARM.COBOLE='NODYNAM
//COBOL.SYSIN DD DISP=SHR,DSN=USER1.ZCEE.SOURCE(PUTAPI)
//COBOL.SYSLIB DD DISP=SHR,DSN=USER1.ZCEE.SOURCE
//
// DD DISP=SHR,DSN=ZCEE30.SBAQCOB
//LKED.SYSLMOD DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB(PUTAPI)
//COMPILE EXEC IGYWCL,LNGPRFX=SYS1.ECOBOL,PARM.COBOLE='NODYNAM
//COBOL.SYSIN DD DISP=SHR,DSN=USER1.ZCEE.SOURCE(DELTAPI)
//COBOL.SYSLIB DD DISP=SHR,DSN=USER1.ZCEE.SOURCE
//
// DD DISP=SHR,DSN=ZCEE30.SBAQCOB
//LKED.SYSLMOD DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB(DELTAPI)
```

Note that the CALL statement in each of this program uses a variable for the program name z/OS Connect EE stub program (BAQCSTUB). This means that this program will be dynamically linked at execution. The load module library containing BAQCSTUB (ZCEE30.SBAQLIB) must be available in the STEPLIB concatenation sequence when the program is executed.

This job should complete with a zero-return code.

Tech Tip: To submit a job when using the IBM z/OS Explorer select the member and right mouse button click and select the *Submit* option. Or if the member is currently opened simply right mouse button click and select the *Submit* option. Click the **Locate Job** button on the *Job Confirmation* pop-up. This will display the job output in the *Retrieved Job* section under *JES* in the *Remote Systems* view. The job's output can be viewed right mouse button clicking and selecting the *Open* option.

Test the API requester application programs

The JCL to execute these programs can be found in USER1.ZCEE.CNTL, the member names in this data set match the program names. The members are DELTAPI, GETAPI, POSTAPI and PUTAPI.

1. Submit the job in member **GETAPI** in *USER1.ZCEE.CNTL*.

```
//GETAPI EXEC PGM=GETAPI,PARM='111111'
//STEPLIB DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB
// DD DISP=SHR,DSN=ZCEE30.SBAQLIB
//SYSPRINT DD SYSOUT=*
//CEEOPPTS DD *
        POSIX(ON),
        ENVAR("BAQURI=wg31.washington.ibm.com",
        "BAQPORT=9120")
```

2. The job should complete with a condition code of 200 and have the following output for SYSPRINT.

```
EmployeeNumber: 111111
EmployeeName: C. BAKER
Address: OTTAWA, ONTARIO
Phone: 51212003
Date: 26 11 81
Amount: $0011.00
EIBRESP: 00000000
EIBRESP2: 00000000
USERID: CICSUSER
HTTP CODE: 000000200
```

3.

Tech-Tip: An HTTP code of 200 indicates success. For an explanation of HTTP codes see URL https://en.wikipedia.org/wiki/List_of_HTTP_status_codes

3. Change the PARM='111111' to PARM='000000' and resubmit. This time should receive a 404 return code and the output should look like this:

```
Error code: 000000404
Error
msg:{"cscvincSelectServiceOperationResponse":{"Container1":{"RESPONSE_CONTAINER":{"CEIBRESP2":80,"fileArea":{"date":"","employeeName":"","amount":"","address":"","phone":"","employeeNumber":"000000"},"userIdentity":"CICSUSER","CEIBRESP":13}}}}
```

The EIBRESP and EIBRESP2 values are from a CICS program and the response codes received when a EXEC CICS READ fails with a *Not Found* condition.

The target API was developed using z/OS Connect and had a response code mapping that checked the values of EIBRESP and EIBRESP2 and if this error occurred, the API was to return an HTTP 404 return code.

Edit Response 404

Response code: **404 - Not Found** Description: **Not Found**

Define rules that indicate whether to use this response code and apply its response mapping, if defined.

| Rule | Field | Operator | Value | Logic | Buttons |
|--------|---|----------|-------|-------|-------------|
| Rule 1 | :/Container1/RESPONSE_CONTAINER/CEIBRESP | = | 13 | AND | Up, Down, X |
| Rule 2 | :/Container1/RESPONSE_CONTAINER/CEIBRESP2 | = | 80 | | Up, Down, X |

Summary
Rule 1 AND Rule 2

OK Cancel

4. Submit the job in member **POSTAPI** in *USER1.ZCEE.CNTL*.

5. The job should complete with a condition code of 200 and have the following output for SYSPRINT.

```
EIBRESP:    00000000
EIBRESP2:   00000000
USERID:     CICSUSER
HTTP CODE:  0000000200
```

This job added a record for employee 323232.

6. Edit member **GETAPI** and change the *PARM* value to **323232** and submit the job.

```
EmployeeNumber: 323232
EmployeeName:   John
Address:        Apex
Phone:          0065
Date:           11 22 65
Amount:         $1000.65
EIBRESP:        00000000
EIBRESP2:       00000000
USERID:         CICSUSER
HTTP CODE:      0000000200
```

7. Member **DELTAPI** in *USER.ZCEE.CNTL* will delete a record and **PUTAPI** will update an existing record. Submit these jobs and observe the results. Or if you want to modify the request messages in POSTAPI and PUTAPI and recompile and relink these programs and observe the results when different values are provided.

The available records are listed below:

| numb | name | addrx | Phone | datex | amount |
|--------|---------------------|-----------------------|----------|----------|-----------|
| 000100 | S. D. BORMAN | SURREY, ENGLAND | 32156778 | 26 11 81 | \$0100.11 |
| 000102 | J. T. CZAYKOWSKI | WARWICK, ENGLAND | 98356183 | 26 11 81 | \$1111.11 |
| 000104 | M. B. DOMBEY | LONDON, ENGLAND | 12846293 | 26 11 81 | \$0999.99 |
| 000106 | A. I. HICKSON | CROYDON, ENGLAND | 19485673 | 26 11 81 | \$0087.71 |
| 000111 | ALAN TULIP | SARATOGA, CALIFORNIA | 46120753 | 01 02 74 | \$0111.11 |
| 000762 | SUSAN MALAIKA | SAN JOSE, CALIFORNIA | 22312121 | 01 06 74 | \$0000.00 |
| 000983 | J. S. TILLING | WASHINGTON, DC | 34512120 | 21 04 75 | \$9999.99 |
| 001222 | D.J.VOWLES | BOBLINGEN, GERMANY | 70315551 | 10 04 73 | \$3349.99 |
| 001781 | TINA J YOUNG | SINDELFINGEN, GERMANY | 70319990 | 21 06 77 | \$0009.99 |
| 003210 | B.A. WALKER | NICE, FRANCE | 12345670 | 26 11 81 | \$3349.99 |
| 003214 | PHIL CONWAY | SUNNYVALE, CAL. | 34112120 | 00 06 73 | \$0009.99 |
| 003890 | BRIAN HARDER | NICE FRANCE | 00000000 | 28 05 74 | \$0009.99 |
| 004004 | JANET FOUCHE | DUBLIN, IRELAND | 71112121 | 02 11 73 | \$1259.99 |
| 004445 | DR. P. JOHNSON | SOUTH BEND, S.DAK. | 61212120 | 26 11 81 | \$0009.99 |
| 004878 | ADRIAN JONES | SUNNYVALE, CALIF. | 32212120 | 10 06 73 | \$5399.99 |
| 005005 | A. E. DALTON | SAN FRANCISCO, CA. | 00000001 | 01 08 73 | \$0009.99 |
| 005444 | ROS READER | SARATOGA, CALIF. | 67712120 | 20 10 74 | \$0809.99 |
| 005581 | PETE ROBBINS | BOSTON, MASS. | 41312120 | 11 04 74 | \$0259.99 |
| 006016 | SIR MICHAEL ROBERTS | NEW DELHI, INDIA | 70331211 | 21 05 74 | \$0009.88 |
| 006670 | IAN HALL | NEW YORK, N.Y. | 21212120 | 31 01 75 | \$3509.88 |
| 006968 | J.A.L. STAINFORTH | WARWICK, ENGLAND | 56713821 | 26 11 81 | \$0009.88 |
| 007007 | ANDREW WHARMBY | STUTTGART, GERMANY | 70311000 | 10 10 75 | \$5009.88 |
| 007248 | M. J. AYRES | REDWOOD CITY, CALF. | 33312121 | 11 10 75 | \$0009.88 |
| 007779 | MRS. A. STEWART | SAN JOSE, CALIF. | 41512120 | 03 01 75 | \$0009.88 |
| 009000 | P. E. HAVERCAN | WATERLOO, ONTARIO | 09876543 | 21 01 75 | \$9000.00 |
| 100000 | M. ADAMS | TORONTO, ONTARIO | 03415121 | 26 11 81 | \$0010.00 |
| 111111 | C. BAKER | OTTAWA, ONTARIO | 51212003 | 26 11 81 | \$0011.00 |
| 200000 | S. P. RUSSELL | GLASGOW, SCOTLAND | 63738290 | 26 11 81 | \$0020.00 |
| 222222 | DR E. GRIFFITHS | FRANKFURT, GERMANY | 20034151 | 26 11 81 | \$0022.00 |
| 300000 | V. J. HARRIS | NEW YORK, U.S. | 64739801 | 26 11 81 | \$0030.00 |
| 333333 | J.D. HENRY | CARDIFF, WALES | 78493020 | 26 11 81 | \$0033.00 |
| 400000 | C. HUNT | MILAN, ITALY | 25363738 | 26 11 81 | \$0040.00 |
| 444444 | D. JACOBS | CALGARY, ALBERTA | 77889820 | 26 11 81 | \$0044.00 |
| 500000 | P. KINGSLEY | MADRID, SPAIN | 44454640 | 26 11 81 | \$0000.00 |
| 555555 | S.J. LAZENBY | KINGSTON, N.Y. | 39944420 | 26 11 81 | \$0005.00 |
| 600000 | M.F. MASON | DUBLIN, IRELAND | 12398780 | 26 11 81 | \$0010.00 |
| 666666 | R. F. WALLER | LA HULPE, BRUSSELS | 42983840 | 26 11 81 | \$0016.00 |
| 700000 | M. BRANDON | DALLAS, TEXAS | 57984320 | 26 11 81 | \$0002.00 |
| 777777 | L.A. FARMER | WILLIAMSBURG, VIRG. | 91876131 | 26 11 81 | \$0027.00 |
| 800000 | P. LUPTON | WESTEND, LONDON | 24233389 | 26 11 81 | \$0030.00 |
| 888888 | P. MUNDY | NORTHAMPTON, ENG. | 23691639 | 26 11 81 | \$0038.00 |
| 900000 | D.S. RENSHAW | TAMPA, FLA. | 35668120 | 26 11 81 | \$0040.00 |
| 999999 | ANJI STEVENS | RALEIGH, N.Y. | 84591639 | 26 11 81 | \$0049.00 |

Summary

You have use the z/OS Connect build toolkit to generate an API requester archive file and the COBOL copy books that must be included in the COBOL application program when accessing the API requester archive file in a z/OS Connect server. The COBOL applications have been compiled and link-edited and the target API has been tested using various RESTful methods

RESTful API Requester to a MQ One-Way RESTful API

In this section an API requester will be developed and tested where the target API accesses a MQ queue. The batch programs will be put messages (POST) to the queue, do non-destructive gets (GET) and destructive gets (DELETE) of messages from the same queue.

Generate the API requester artifacts from a Swagger document

The first step is to use the API's Swagger document to generate the artifacts required for the COBOL API client application and the API requester archive file. The Swagger document was obtained from the server where the API is hosted. All the files mention in this section are in directory `c:/z/apiRequester/mqapi` on your workstation.

The z/OS Connect EE build toolkit (ZCONBT) is a Java application shipped with z/OS Connect EE as a zip file and can be installed on a workstation or in OMVS. Anywhere a Java runtime is available. In this exercise the build toolkit will on Windows.

Tech-Tip: Instructions for installing the z/OS Connect EE build toolkit can be found at URL https://www.ibm.com/support/knowledgecenter/en/SS4SVW_3.0.0/com.ibm.zosconnect.doc/installing/bt_install.html

1. Begin by reviewing the API's Swagger document for the MQ one-way API. This document identifies the types of HTTP methods supported as well as the path of each HTTP method. It also the contents each method's request JSON message and the response JSON message field contents and field types. This is the blue print for invoking the API.

```
{
  "swagger": "2.0",
  "info": {
    "description": "",
    "version": "1.0.0",
    "title": "mqapi"
  },
  "basePath": "/mqapi",
  "schemes": [
    "https",
    "http"
  ],
  "consumes": [
    "application/json"
  ],
  "produces": [
    "application/json"
  ],
  "paths": {
    "/queue": {
      "get": {
        "tags": [
          "mqapi"
        ],
        "operationId": "getMqGet",
        "parameters": [
```

2. Next review the input parameters that will be passed to the z/OS Connect EE build toolkit in a properties file. This file is *mqapi.properties* see its below:

```
apiDescriptionFile=./mqapi.json 1
dataStructuresLocation=./syslib 2
apiInfoFileLocation=./syslib 3
logFileDirectory=./logs 4
language=COBOL 5
connectionRef=mqapi 6
requesterPrefix=mq 7
```

1. Identifies the Swagger document that describes the API
2. Provides the directory where the generated COBOL copybooks representing the request and response messages will be written.
3. Provides the directory where the generated COBOL copybook with invocation details of the API will be written.
4. Provides the directory where a log file will be written.
5. Identifies the target language.
6. Identifies the corresponding *zosconnect_endpointConnection* element define in the z/OS Connect EE server's server.xml file.
7. Provides a 3-character prefix to be used for all generated copybooks

3. View file *mqAPI.bat* which contains this one line.

```
c:\z\zconbt\bin\zconbt.bat -p=./mqapi.properties -f=./mqapi.ara
```

This is batch command file that when executed invokes the z/OS Connect EE build toolkit (*zconbt*). The -p switch identifies the input properties file and the -f switch identifies the name of the generate API requester archive file. The API requester archive (ARA) file will be uploaded and make available to the z/OS Connect EE server in directory *.../resources/zosconnect/apiRequesters*.

4. On the workstation desktop, locate the *Command Prompt* icon and double click on it to open a DOS session that will allow commands to be entered.

5. Use the change directory command (cd) to change to directory *apiRequester/mqapi*, e.g.

```
cd c:\z\apiRequester\mqapi
```

6. Enter command *mqAPI.bat* in the DOS command prompt window and you should see output like the below:

```
c:\z\apiRequester\mqapi>c:\z\software\zconbt\bin\zconbt.bat -p=./mqapi.properties -
f=./mqapi.ara
BAQB0000I: z/OS Connect Enterprise Edition Build Toolkit Version 1.2 (20200408-1120).
BAQB0008I: Creating API requester archive from configuration file ./mqapi.properties.
BAQB0040I: The generated API requester is automatically named mqapi_1.0.0 based on the title
mqapi and version 1.0.0 of the API to be called.
BAQB0015I: Start processing operation (operationId: getMqGetService, relativePath: /queue,
method: GET).
BAQB0016I: Successfully processed operation (operationId: getMqGetService, relativePath:
/queue, method: GET).
BAQB0015I: Start processing operation (operationId: postMqPutService, relativePath: /queue,
method: POST).
BAQB0016I: Successfully processed operation (operationId: postMqPutService, relativePath:
/queue, method: POST).

Total 2 operation(s) (success: 2, ignored: 0) defined in api description file: ./mqapi.json
----- Successfully processed operation(s) -----
operationId: getMqGetService, basePath: /mqapi, relativePath: /queue, method: GET
- request data structure : No data structure needs to be generated.
- response data structure : MQ000P01
- api info file : MQ000I01

operationId: postMqPutService, basePath: /mqapi, relativePath: /queue, method: POST
- request data structure : MQ001Q01
- response data structure : No data structure needs to be generated.
- api info file : MQ001I01

BAQB0009I: Successfully created API requester archive file ./mqapi.ara.
```

Note that each HTTP method defined in the Swagger document will normally cause the generation of up to three copy books. One for the request message(Q01), one for the response message(P01) and one for the API details(I01). For this API only two copy books were generated for the messages. One for either the request message or one for the response message. In this case the API did not require both types for any method. Also note that the copy book names are based on the *requesterPrefix* property (e.g. *mq*) and use an ascending sequence number sequence to differentiate between methods.

Important: The sequence numbers assigned to a copy book seem to be arbitrary. When you compile the sample programs later in this exercise verify the copy books included for a particular method has the same sequence numbers as generated when you invoke the toolkit.

7. Now explore a sample snippet of the copy book for the request message of a PUT method. Use *EditPad Lite* to open file `c:\z\apiRequester\mqapi\syslib\MQ001Q01`. Scroll down until you see something like the code below.

```

06 ReqBody.
  09 MQMESSAGE2-num          PIC S9(9) COMP-5 SYNC.
  09 MQMESSAGE.
    12 STAT-num              PIC S9(9) COMP-5 SYNC.
    12 STAT.
      15 STAT2-length        PIC S9999 COMP-5 SYNC.
      15 STAT2                PIC X(1).
    12 NUMB-num              PIC S9(9) COMP-5 SYNC.
    12 NUMB.
      15 NUMB2-length        PIC S9999 COMP-5 SYNC.
      15 NUMB2                PIC X(6).
    12 NAME-num              PIC S9(9) COMP-5 SYNC.
    12 NAME.
      15 NAME2-length        PIC S9999 COMP-5 SYNC.

```

Note that each variable has an associated length (e.g. *STAT2-length*). The length of a variable is required since there is no delimiter between the variables in storage. The runtime needs to know the size of a variable at execution time so the request and response messages can be properly converted to and from JSON name/value pairs.

A response message (`c:\z\apiRequester\mqapi\syslib\MQ000P01`) will have a similar layout.

8. An API information copy book (`c:\z\apiRequester\mqapi\syslib\MQ001I01`) has contents providing the API name and the path to be used for the method:

```

03 BAQ-APINAME                PIC X(255)
  VALUE 'mqapi_1.0.0'.
03 BAQ-APINAME-LEN            PIC S9(9) COMP-5 SYNC
  VALUE 11.
03 BAQ-APIPATH                PIC X(255)
  VALUE '%2Fmqapi%2Fqueue'.
03 BAQ-APIPATH-LEN            PIC S9(9) COMP-5 SYNC
  VALUE 16.
03 BAQ-APIMETHOD              PIC X(255)
  VALUE 'GET'.
03 BAQ-APIMETHOD-LEN          PIC S9(9) COMP-5 SYNC
  VALUE 3.

```

Deploy the API Requester Archive file to the z/OS Connect EE server

Next make the API requester archive file available to the z/OS Connect EE server.

The API requester archive (ARA) file needs to be deployed to the API requester directory. In this case the target directory is `/var/ats/zosconnect/servers/zceeapir/resources/zosconnect/apiRequesters`.

1. Open a DOS command session and change to directory `C:\z\apiRequester\mqapi`, e.g ***cd***
`|z\apiRequester\mqapi`
4. Use the z/OS Connect EE RESTful administrative interface to deploy the ARA files by using the `cURL` command embedded in command file `deployMqapi.bat`. Invoke this command file to deploy the MQ API archive file.

```
c:\z\apiRequester\mqapi>curl -X POST --user Fred:fredpwd --data-binary @mqapi.ara
--header "Content-Type: application/zip" --insecure
https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters
{"name":"mqapi_1.0.0","version":"1.0.0","description":"","status":"Started"
,"apiRequesterUrl":"https://wg31.washington.ibm.com:9483/zosConnect/apiReque
sters/mqapi_1.0.0","connection":"mqapi"}
```

Tech-Tip: If a REST client tool like `cURL` or Postman was not available then ARA file could have been deployed using FTP to upload the file in binary mode to the *apiRequesters* directory.

Tech-Tip: If an ARA needs to be redeployed, the `cURL` command with a `PUT` method can be used to stop the API requester

```
curl -X PUT --user Fred:fredpwd --insecure
```

```
https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters/mqapi_1.0.0?status=stopped
```

And the `cURL` command with a `DELETE` method can be used to delete the API requester.

```
curl -X DELETE --user Fred:fredpwd --insecure
```

```
https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters/mqapi_1.0.0
```

otherwise the redeployment of the ARA file will fail.

2. The z/OS Connect EE server where the API requester will be installed has the configuration below in its server.xml file.

```
<server description="API Requester">
  <!-- Enable features -->
  <featureManager>
    <feature>zosconnect:apiRequester-1.0</feature>
  </featureManager>

  <zosconnect_endpointConnection id="mqapi" 1
    host="http://wg31.washington.ibm.com"
    port="9120"
    basicAuthRef="myBasicAuth"
    connectionTimeout="10s"
    receiveTimeout="20s" />

  <zosconnect_authData id="myBasicAuth" 2
    user="Fred"
    password="fredpwd" />

</server>
```

1. Identifies the system which hosts the target API as well as any security information and time out parameters. Note that the ID of this element matches the value *connectionRef* property used when the ARA was generated by the z/OS Connect build toolkit.
2. The target server uses basic authentication, so we are simply provided a user identity and password. The password can be encrypted and/or TLS can be used for security.

Tech-Tip: The host and port in the *endpointConnection* element specifies the host and port of the target API provider. Normally the z/OS Connect server performs the conversion of the COBOL data structure to JSON and then acts as a JSON REST client to the target API provider. In this exercise the target API provider is the same z/OS Connect server. This is why this host and port is also used by the batch API requester client in its environment variables.

Move the COBOL copy books to a MVS data set

Next make the generated COBOL copy books available for including into the COBOL program.

The generated COBOL copy books need to be available in an MVS data set which is included in the compiler SYSLIB concatenation sequence. In the data set is *USER1.ZCEE.SOURCE*. Use a DOS command prompt session and the commands below to move the copy books file to this data set. Authenticate as user USER1 (password USER1).

- ___1. Open a DOS command prompt and use the change directory command to go to directory C:\z\apiRequester\filequeue\syslib, e.g. **cd |z\apiRequester\mqapi\syslib**
- ___2. Start a file transfer session with the WG31 host using the *ftp* command, e.g. **ftp wg31**
- ___3. Logon as USER1 and then use the *cd* command to change to directory to data set *USER1.ZCEE.SOURCE*, e.g. **cd zcee.source**
- ___4. Toggle prompting off by entering command **prompt**
- ___5. Perform multiple put request by using the multiple put command, **mput imq***
- ___6. When the last transfer has completed enter the **quit** command.

```
c:\z\apiRequester\cscvinc>cd syslib
c:\z\apiRequester\cscvinc\syslib>ftp wg31.washington.ibm.com
Connected to wg31.washington.ibm.com.
220-FTP 16:26:23 on 2018-02-15.
220 Connection will close if idle for more than 200 minutes.
User (wg31.washington.ibm.com:(none)): user1
331 Send password please. user1
Password:
230 USER1 is logged on. Working directory is "USER1.".
ftp> cd zcee.source
250 The working directory "USER1.ZCEE.SOURCE" is a partitioned data set
ftp> prompt
Interactive mode Off .
ftp> mput MQ*
200 Port request OK.
125 Storing data set USER1.ZCEE.SOURCE(MQ000I01)
250 Transfer completed successfully.
ftp: 533 bytes sent in 0.32Seconds 1.66Kbytes/sec.
200 Port request OK.
sent in 0.10Seconds 110.89Kbytes/sec.
200 Port request OK.
.....
125 Storing data set USER1.ZCEE.SOURCE(MQ01I01)
250 Transfer completed successfully.
ftp: 7393 bytes sent in 0.32Seconds 22.89Kbytes/sec.
ftp> quit
```

Review the application programs

Now that the copy books have been generated and are available in a data set the next step is compile and link edit the application programs. The source for the application programs are in *USER1.ZCEE.SOURCE*. Member DELMQAPI invokes the DELETE method, member GETMQAPI invokes the GET method and PSTMQAPI invokes the POST method. No changes need to be made to these programs.

Tech-Tip: Data set USER1.ZCEE.SOURCE can be accessed either by using the IBM z/OS Explorer filter or by using the Personal Communication icon on the desktop and logging on to TSO and use ISPF option 3.4 to access this data set. If you have any questions about either method ask the instructor.

1. Begin by reviewing the application programs MQGET. Browse data set *USER1.ZCEE.SOURCE* and open member MQGET. Scroll down until you see these lines of code.

```
* Copy API Requester required copybook
COPY BAQRINFO.

* Request and Response
01 API-REQUEST.
   10 FILLER                      PIC X(1).
01 API_RESPONSE.
   COPY MQ000P01.
* Structure with the API information
01 API-INFO-OPER1.
   COPY MQ000I01.
```

These lines of code copy into the source the required z/OS Connect EE copy book (BAQRINFO) and the copy books generated by the z/OS Connect EE build tool kit. If when you generated the copy book earlier in the exercise and the sequence number used for the GET method was not 02 then you need to change the COBOL source to match sequence generated when you invoke the ZCONBT tool.

2. Scroll down further and you will the call to the z/OS Connect API requester stub module.

```
*-----*
* Call the communication stub                                     *
*-----*
* Call the subsystem-supplied stub code to send
* API request to zCEE
  CALL COMM-STUB-PGM-NAME USING
      BY REFERENCE  API-INFO-OPER1
      BY REFERENCE  BAQ-REQUEST-INFO
      BY REFERENCE  BAQ-REQUEST-PTR
      BY REFERENCE  BAQ-REQUEST-LEN
      BY REFERENCE  BAQ-RESPONSE-INFO
      BY REFERENCE  BAQ-RESPONSE-PTR
      BY REFERENCE  BAQ-RESPONSE-LEN.
* The BAQ-RETURN-CODE field in 'BAQRINFO' indicates whether this
* API call is successful.
```

Note that the parameters are being passed by reference. This means that the z/OS Connect API requester stub will have direct access to the program storage for both accessing data and making changes (i.e. the response message).

3. Scroll down further and you will see the code where the application displays the results in the response message.

```
IF BAQ-SUCCESS THEN
  DISPLAY "NUMB:  " numb    of API_RESPONSE
  DISPLAY "NAME:  " name    of API_RESPONSE
  DISPLAY "ADDRX: " addrx   of API_RESPONSE
  DISPLAY "PHONE: " phone   of API_RESPONSE
  DISPLAY "DATEX: " datex   of API_RESPONSE
  DISPLAY "AMOUNT: " amount  of API_RESPONSE
  DISPLAY "HTTP CODE: " BAQ-STATUS-CODE
```

4. Exit member *MQGET* and open member *MQPUT*. The code for this program is very similar to the code for *MQGET* with the exception that all variables are provided in a JSON request message. Scroll down and find the code below.

```
*-----*
* Set up the data for the API Requester call      *
*-----*

MOVE 1 to MQMESSAGE2-num.
MOVE "837367" TO numb2 IN API-REQUEST.
MOVE LENGTH of numb2 in API-REQUEST to
      numb2-length IN API-REQUEST.

MOVE "John" TO name2 IN API-REQUEST.
MOVE LENGTH of name2 in API-REQUEST to
      name2-length IN API-REQUEST.

MOVE "Apex" TO addrx2 IN API-REQUEST.
MOVE LENGTH of addrx2 in API-REQUEST to
      addrx2-length IN API-REQUEST.

MOVE "0065" TO phone2 IN API-REQUEST.
MOVE LENGTH of phone2 in API-REQUEST to
      phone2-length IN API-REQUEST.

MOVE "11 22 65" TO datex2 IN API-REQUEST.
MOVE LENGTH of datex2 in API-REQUEST to
      datex2-length IN API-REQUEST.

MOVE "$1000.65" TO amount2 IN API-REQUEST.
MOVE LENGTH of amount2 in API-REQUEST to
      amount2-length IN API-REQUEST.
```

In this case the length of the property value and finally the property value moved to the request copy book.

Compile and link-edit the application programs

The applications programs now are ready to be compiled and link-edited.

- ___1. Submit the job in member **APIRMQ** in data set *USER1.ZCEE.CNTL*.

```
//USER1S JOB MSGCLASS=H,NOTIFY=&SYSUID
//* JCLLIB ORDER=SYS1.ECOBOL.SIGYPROC
//COMPILE EXEC IGYWCL,LNGPRFX=SYS1.ECOBOL,PARM.COBOL='NODYNAM'
//COBOL.SYSIN DD DISP=SHR,DSN=USER1.ZCEE.SOURCE(MQGET)
//COBOL.SYSLIB DD DISP=SHR,DSN=USER1.ZCEE.SOURCE
//          DD DISP=SHR,DSN=ZCEE30.SBAQCOB
//LKED.SYSLMOD DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB(MQGET)
//COMPILE EXEC IGYWCL,LNGPRFX=SYS1.ECOBOL,PARM.COBOL='NODYNAM'
//COBOL.SYSIN DD DISP=SHR,DSN=USER1.ZCEE.SOURCE(MQPUT)
//COBOL.SYSLIB DD DISP=SHR,DSN=USER1.ZCEE.SOURCE
//          DD DISP=SHR,DSN=ZCEE30.SBAQCOB
//LKED.SYSLMOD DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB(MQPUT)
```

Note that the CALL statement in each of this program uses a variable for the program name z/OS Connect EE stub program (BAQCSTUB). This means that this program will be dynamically linked at execution. The load module library containing BAQCSTUB (ZCEE30.SBAQLIB) must be available in the STEPLIB concatenation sequence when the program is executed.

The execution of this job should complete with at most a 4-return code.

Test the API requester application programs

The JCL to execute these programs can be found in `USER1.ZCEE.CNTL`, the member names in this data set match the program names. The members are `DLTMQAPI`, `GETMQAPI` and `PSTMQAPI`.

1. Submit the job in member **MQGET** in *USER1.ZCEE.CNTL*.

```
//GETAPI EXEC PGM=MQGET
//STEPLIB DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB
// DD DISP=SHR,DSN=ZCEE30.SBAQLIB
//SYSPRINT DD SYSOUT=*
//CEEOPTS DD *
  POSIX(ON),
  ENVAR("BAQURI=wg31.washington.ibm.com",
    "BAQPORT=9120")
```

2. The job should complete with a condition of 200 (HTTP success) and have the following output for SYSPRINT.

```
NUMB: 000100
NAME: S. D. BORMAN
ADDRX: SURREY, ENGLAND
PHONE: 32156778
DATEX: 26 11 81
AMOUNT: $0100.11
HTTP CODE: 0000000200
```

Tech-Tip: An HTTP code of 200 indicates success. For an explanation of HTTP codes see URL https://en.wikipedia.org/wiki/List_of_HTTP_status_codes


3. Member **MQPUT** in *USER.ZCEE.CNTL* will invokes a POST HTTP method which will put a message on the queue. Submit this job for execution and observe the results. The POST method for this API does not return a response message.

```
HTTP CODE: 0000000204
```

Tech-Tip: An HTTP code of 204 indicates that the server processed the request and is not returning any content. For an explanation of HTTP codes see URL https://en.wikipedia.org/wiki/List_of_HTTP_status_codes

4. Confirm by opening the *MQExplorer* icon on the desktop and browsing the messages in the *ZCONN2.DEFAULT.MQZCEE.QUEUE* queue.

- Select *QMZ1* under **Queue Managers** and right mouse button click
- Select the *Connect* option.
- Once connected, expand the *Queues* folder and select *ZCONN2.DEFAULT.MQZCEE.QUEUE* and right mouse button click and select the *Browse Messages* option.

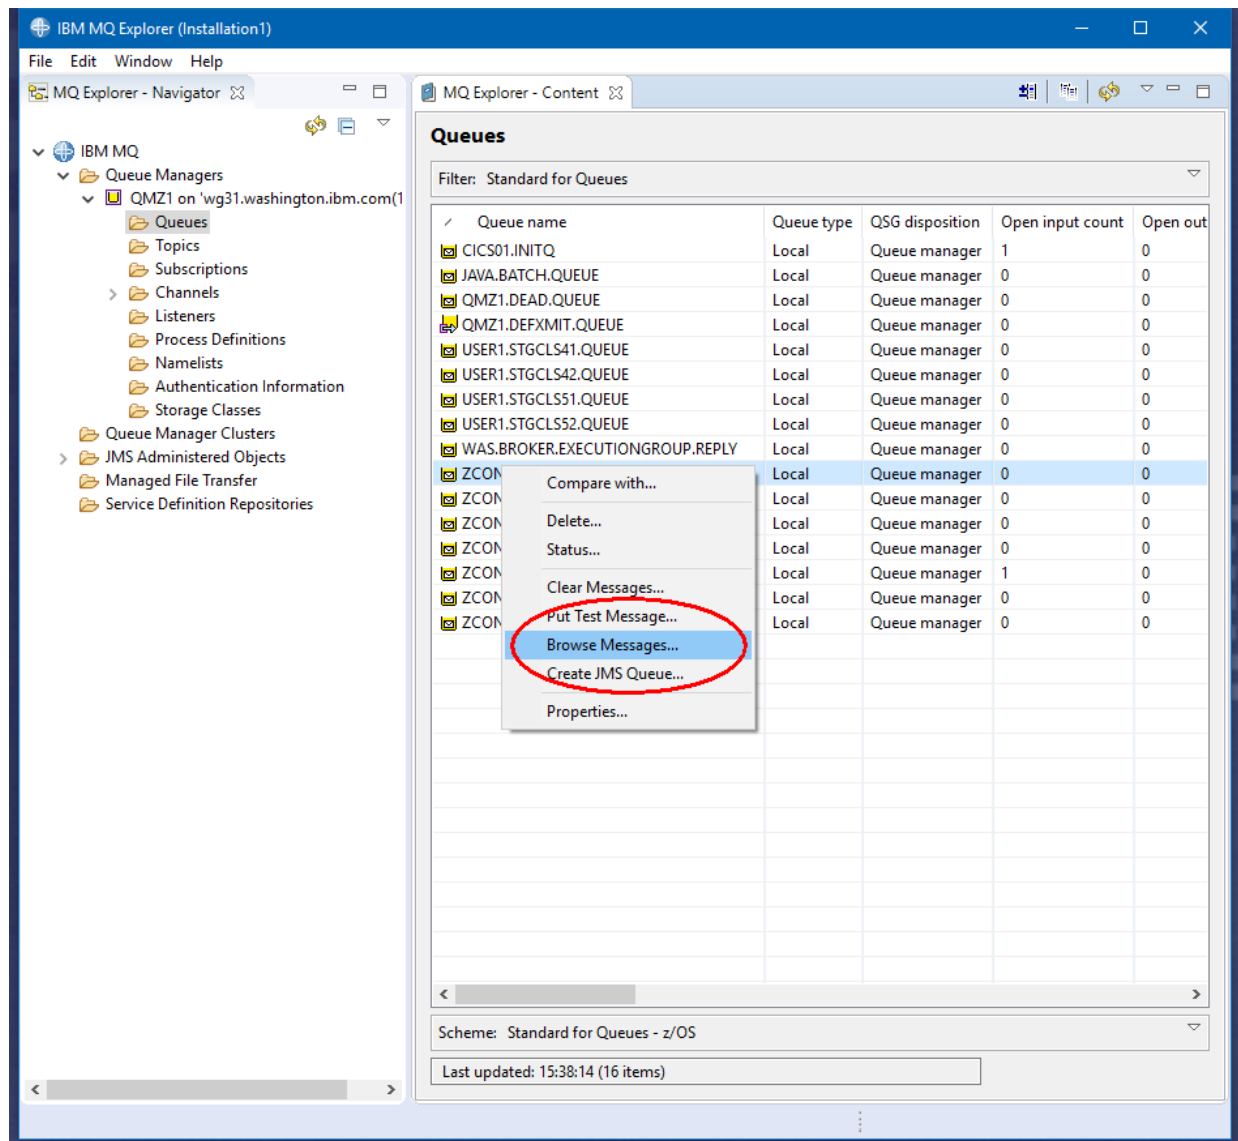

5. You see a list of the messages currently in the queue, something like the list below:

Message browser

Queue Manager Name: QMZ1
Queue Name: ZCONN2.DEFAULT.MQZCEE.QUEUE

| Position | Put date/time | User identifier | Put application name | Format | Total length | Data length | Message data |
|----------|-------------------------|-----------------|----------------------|--------|--------------|-------------|---------------------|
| 1 | Jul 23, 2019 3:34:46 PM | ATSSERV | ZCEEAPIR | | 260 | 80 | 837367John |
| 2 | Feb 2, 2017 6:16:44 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 000100S. D. BORMAN |
| 3 | Feb 2, 2017 6:17:27 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 000102J. T. CZAYKOV |
| 4 | Feb 2, 2017 6:17:44 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 000104M. B. DOMBEY |
| 5 | Feb 2, 2017 6:18:02 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 000106A. I. HICKSON |
| 6 | Feb 2, 2017 6:18:30 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 000111ALAN TULIP |
| 7 | Feb 2, 2017 6:18:45 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 000762SUSAN MALA |
| 8 | Feb 2, 2017 6:19:06 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 000983J. S. TILLING |
| 9 | Feb 2, 2017 6:19:22 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 001222D.J.VOWLES |
| 10 | Feb 2, 2017 6:19:36 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 001781TINA J YOUNG |
| 11 | Feb 2, 2017 6:20:07 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 003210B.A. WALKER |
| 12 | Feb 2, 2017 6:29:33 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 003214PHIL CONWA |
| 13 | Feb 2, 2017 6:29:49 PM | MITCHJ | MQ Explorer 9.0.0 | MQSTR | 122 | 122 | 003890BRIAN HARDE |

Scheme: Standard for Messages

Last updated: 15:40:50 (44 items)

i All available messages on the queue have been browsed. Press the refresh button for new messages.

? Refresh Close

RESTful API Requester from a CICS application

In this section a CICS based API requester will be developed and tested. The target API accessed from the CICS application is used to approve loan requests. The API uses the contents of JSON request to determine if a loan can be approved. The results are returned in a response message including the explanation if the loan is denied.

The rules for rejecting a loan can be for any one of the following:

- If the credit score of the borrower is less than 300.
- If the yearly repayment amount is more than 30% of the borrower's income.
- If the income of the borrower is less than \$24,000.
- If the age of the borrower is more than 65 years.
- The loan amount is more than \$1,000,000.

Generate the API requester artifacts from a Swagger document

The first step is to use the API's Swagger document to generate the artifacts required for the COBOL API client application and the API requester archive file. The Swagger document was obtained from the server where the API is hosted. All the files mention in this section are in directory *c:/z/apiRequester/miniloan* on your workstation.

The z/OS Connect EE build toolkit (ZCONBT) is a Java application shipped with z/OS Connect EE as a zip file and can be installed on a workstation or in OMVS. Anywhere a Java runtime is available. In this exercise the build toolkit will on Windows.

9. Begin by reviewing the API's Swagger document for the API. This document identifies the types of HTTP methods supported as well as the path of each HTTP method. It also the contents each method's request JSON message and the response JSON message field contents and field types. This is the blue print for invoking the API.

```
{
  "swagger": "2.0",
  "info": {
    "description": "",
    "version": "1.0.0",
    "title": "miniloancics"
  },
  "basePath": "/miniloancics",
  "schemes": [
    "https",
    "http"
  ],
  "consumes": [
    "application/json"
  ],
  "produces": [
    "application/json"
  ],
  "paths": {
    "/loan": {
      "post": {
        "tags": [
          "miniloancics"
        ]
      }
    }
  }
}
```

Tech-Tip: Instructions for installing the z/OS Connect EE build toolkit can be found at URL https://www.ibm.com/support/knowledgecenter/en/SS4SVW_3.0.0/com.ibm.zosconnect.doc/installing/bt_install.html

10. Next review the input parameters that will be passed to the z/OS Connect EE build toolkit in a properties file. This file is *miniloan.properties*, see its contents below:

```
apiDescriptionFile=miniloan.json 1
dataStructuresLocation=./syslib 2
apiInfoFileLocation=./syslib 3
logFileDirectory=./logs 4
language=COBOL 5
connectionRef=miniloancicsAPI 6
requesterPrefix=min 7
```

1. Identifies the Swagger document that describes the API
2. Identifies the location where the generated COBOL copybooks representing the request and response messages will be written.
3. Identifies the location where the generated COBOL copybook with invocation details of the API will be written.
4. Provides the location where a log file will be written.
5. Identifies the target language.
6. Identifies the corresponding *zosconnect_endpointConnection* element define in the z/OS Connect EE server's server.xml file.
7. Provides a 3-character prefix to be used for all generated copybooks

11. View file *miniloanAPI.bat* which contains this one line.

```
c:\z\zconbt\bin\zconbt.bat -p=./miniloan.properties -f=./miniloan.ara
```

This is batch command file that when executed invokes the z/OS Connect EE build toolkit (*zconbt*). The *-p* switch identifies the input properties file and the *-f* switch identifies the name of the generate API requester archive file. The API requester archive (ARA) file will be deployed and made available to the z/OS Connect EE server in directory *.../resources/zosconnect/apiRequesters*.

12. On the workstation desktop, locate the *Command Prompt* icon and double click on it to open a DOS session that will allow commands to be entered.

13. Use the change directory command (*cd*) to change to directory *C:\z\api\Requester\cscvinc*, e.g.

```
cd c:\z\apiRequester\miniloan
```

14. Enter command *miniloanAPI.bat* in the DOS command prompt window and you should see output like the below:

```
c:\z\apiRequester\miniloan>c:\z\software\zconbt\bin\zconbt.bat -p=./miniloan.properties -
f=./miniloan.ara
BAQB0000I: z/OS Connect Enterprise Edition Build Toolkit Version 1.2 (20200408-1120).
BAQB0008I: Creating API requester archive from configuration file ./miniloan.properties.
BAQB0040I: The generated API requester is automatically named miniloan_1.0.0 based on the title
miniloan and version 1.0.0 of the API to be called.
BAQB0015I: Start processing operation (operationId: postMiniloanService, relativePath: /loan, method:
POST).
BAQB0016I: Successfully processed operation (operationId: postMiniloanService, relativePath: /loan,
method: POST).

Total 1 operation(s) (success: 1, ignored: 0) defined in api description file: miniloan.json
----- Successfully processed operation(s) -----
operationId: postMiniloanService, basePath: /miniloan, relativePath: /loan, method: POST
- request data structure   : MIN00Q01
- response data structure  : MIN00P01
- api info file            : MIN00I01

BAQB0009I: Successfully created API requester archive file ./miniloan.ara.
```

Note that each HTTP method defined in the Swagger document will cause the generation of up to three copy books. One for the request message(Q01), one for the response message(P01) and one for the API details(I01). The copy book names are based on the *requesterPrefix* property (e.g. *MIN*) and use an ascending sequence number sequence to differentiate between methods. Also note that there may be fewer than three copy books generated. For example, if there is no response message or no request message for a specific method a copy book may not be generated.

Important: The sequence numbers assigned to a copy book seem to be arbitrary. When you compile the sample programs later in this exercise verify the copy books included for a particular method has the same sequence numbers as generated when you invoke the toolkit.

15. Now explore a sample snippet of the copy book for the request message of a POST method. Use *EditPad Lite* to open file `c:\z\apiRequester\miniloan\syslib\MIN00Q01`. Scroll down until you see something like the code below.

```

06 ReqBody.
  09 MINILOAN-COMMAREA2-num          PIC S9(9) COMP-5 SYNC.
  09 MINILOAN-COMMAREA.
    12 name-num                      PIC S9(9) COMP-5 SYNC.
    12 name.
      15 name2-length                PIC S9999 COMP-5 SYNC.
      15 name2                      PIC X(20).
    12 creditScore-num               PIC S9(9) COMP-5 SYNC.
    12 creditScore                   PIC 9(18) DISPLAY.
    12 yearlyIncome-num              PIC S9(9) COMP-5 SYNC.
    12 yearlyIncome                  PIC 9(18) DISPLAY.
    12 age-num                      PIC S9(9) COMP-5 SYNC.
    12 age                          PIC 9(10) DISPLAY.
    12 amount-num                   PIC S9(9) COMP-5 SYNC.
    12 amount                       PIC 9(18) DISPLAY.
    12 effectiveDate-num            PIC S9(9) COMP-5 SYNC.
    12 effectiveDate.
      15 effectiveDate2-length       PIC S9999 COMP-5 SYNC.
      15 effectiveDate2             PIC X(8).
    12 yearlyRepayment-num          PIC S9(9) COMP-5 SYNC.
    12 yearlyRepayment              PIC 9(18) DISPLAY.

```

Note that each variable has an associated length (e.g. *name2-length*). The length of a variable is required since there is no delimiter between the variables in storage. The runtime needs to know the size of a variable at execution time, so the request and response messages can be properly converted to and from JSON name/value pairs.

For this API, the Swagger document included an additional variable for the number of occurrences of a variable, (e.g. *name-num*). In this exercise we will set the number of each variable to one.

The corresponding response message (`c:\z\apiRequester\miniloan\syslib\MIN00P01`) will have a similar layout.

16. The corresponding API information copy book (`c:\z\apiRequester\miniloan\syslib\MIN00I01`) has contents providing the API name and the path to be used for the method:

```

03 BAQ-APINAME                PIC X(255)
   VALUE 'miniloancics_1.0.0'.
03 BAQ-APINAME-LEN            PIC S9(9) COMP-5 SYNC
   VALUE 18.
03 BAQ-APIPATH                PIC X(255)
   VALUE '%2Fminiloancics%2Floan'.
03 BAQ-APIPATH-LEN            PIC S9(9) COMP-5 SYNC
   VALUE 22.
03 BAQ-APIMETHOD              PIC X(255)
   VALUE 'POST'.
03 BAQ-APIMETHOD-LEN          PIC S9(9) COMP-5 SYNC
   VALUE 4.

```

Deploy the API Requester Archive file to the z/OS Connect EE server

Next make the API requester archive file available to the z/OS Connect EE server.

The API requester archive (ARA) file needs to be deployed to the API requester directory. In this case the target directory is `/var/ats/zosconnect/servers/zceeapir/resources/zosconnect/apiRequesters`.

5. Open a DOS command session and change to directory `c:\z\apiRequester\cscvinc`, e.g **cd c:\z\apiRequester\cscvinc**

6. Use the z/OS Connect EE RESTful administrative interface to deploy the ARA files by using the cURL command embedded in command file `deployMiniloan.bat`. Invoke this command file to deploy the miniloan API archive file.

```

C:\z\apiRequester\miniloan>curl -X POST --user user1:user1 --data-binary @miniloan.ara --header "Content-Type: application/zip" --insecure https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters/miniloan
{"name": "miniloancics_1.0.0", "version": "1.0.0", "description": "", "status": "Started", "apiRequesterUrl": "https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters/miniloancics_1.0.0", "connection": "miniloancicsAPI"}

```

Tech-Tip: If a REST client tool like cURL or Postman was not available then ARA file could have been deployed using FTP to upload the file in binary mode to the `apiRequesters` directory.

Tech-Tip: If an ARA needs to be redeployed, the cURL command with a PUT method can be used to stop the API requester

curl -X PUT --user USER1:USER1 --insecure

https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters/miniloan_1.0.0?status=stopped

And the cURL command with a DELETE method can be used to delete the API requester.

curl -X DELETE --user USER1:USER1 --insecure

https://wg31.washington.ibm.com:9483/zosConnect/apiRequesters/miniloan_1.0.0

otherwise the redeployment of the ARA file will fail.

7. The z/OS Connect EE server where the API requester will be installed has the configuration below.

```
<server description="API Requester">
  <!-- Enable features -->
  <featureManager>
    <feature>zosconnect:apiRequester-1.0</feature>
  </featureManager>

  <zosconnect_endpointConnection id="miniloancicsAPI"          1
    host="https://wg31.washington.ibm.com"
    port="9120"
    basicAuthRef="myBasicAuth"
    connectionTimeout="10s"
    receiveTimeout="20s" />


  <zosconnect_authData id="myBasicAuth"          2
    user="Fred"
    password="fredpwd" />

</server>
```

1. Identifies the system which hosts the target API as well as any security information and time out parameters. Note that the ID of this element matches the value *connectionRef* property used when the ARA was generated by the z/OS Connect build toolkit.
2. Identifies the system which hosts the target API as well as any security information and time out parameters. Note that the ID of this element matches the value *connectionRef* property used when the ARA was generated by the z/OS Connect build toolkit.

Tech-Tip: Explicitly defining the apiRequesters element for an API Requester prevents use of the RESTful administrative interface to manage the API requester.

8. The API requester stubs uses the BAQURIMP resource defined to CICS to locate the z/OS Connect EE server where the request will be sent.

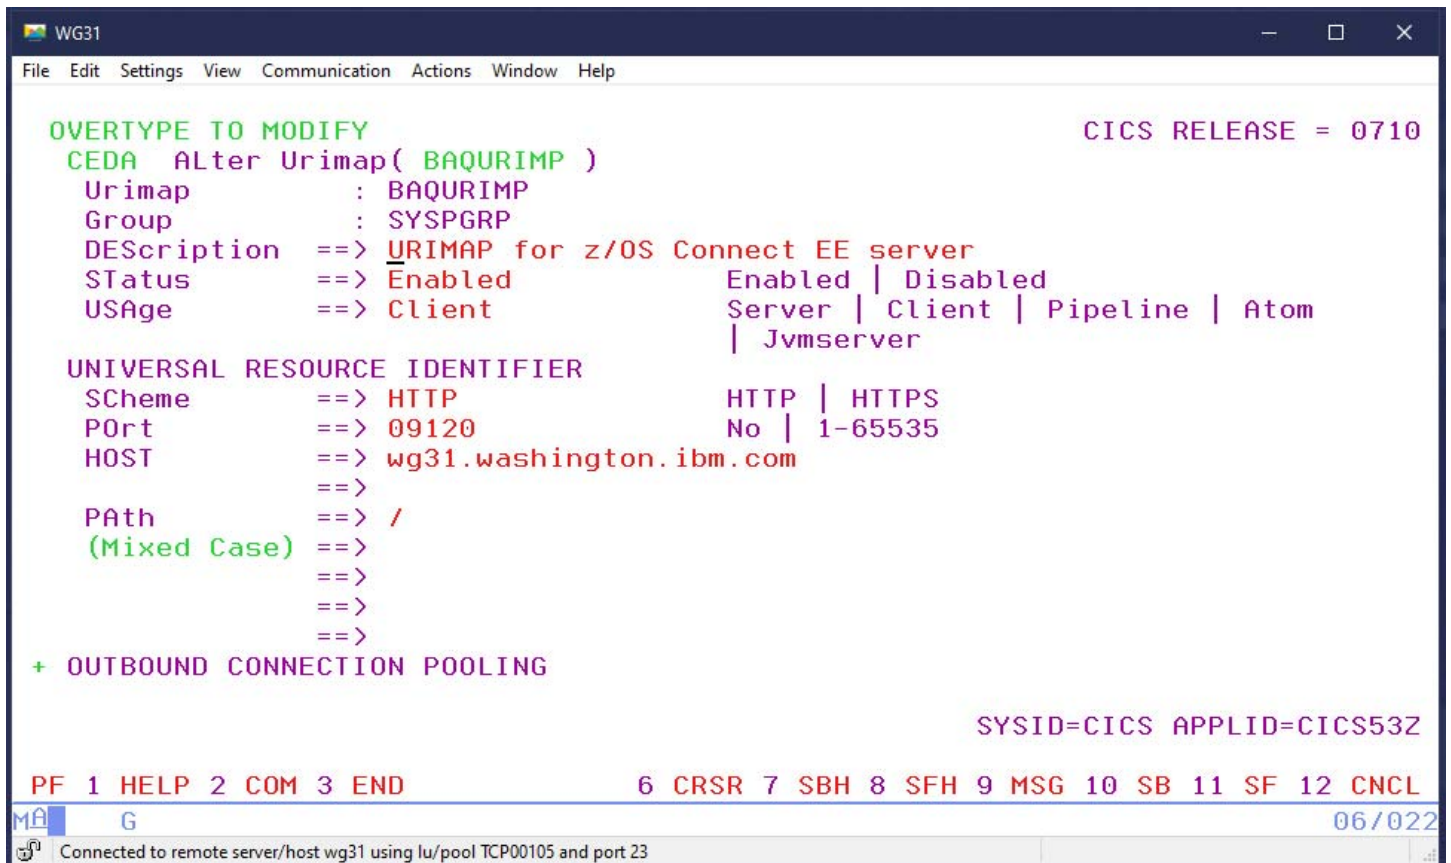

```

WG31
File Edit Settings View Communication Actions Window Help

OVERTYPE TO MODIFY                                CICS RELEASE = 0710
CEDA ALTER Urimap( BAQURIMP )
  Urimap      : BAQURIMP
  Group       : SYSPGRP
  Description ==> URIMAP for z/OS Connect EE server
  Status      ==> Enabled          Enabled | Disabled
  USAge       ==> Client          Server | Client | Pipeline | Atom
                                   | Jvmserver
  UNIVERSAL RESOURCE IDENTIFIER
  Scheme      ==> HTTP            HTTP | HTTPS
  Port       ==> 09120          No | 1-65535
  HOST       ==> wg31.washington.ibm.com
  Path       ==> /
  (Mixed Case) ==>
  ==>
  ==>
  ==>
+ OUTBOUND CONNECTION POOLING

SYSID=CICS APPLID=CICS53Z

PF 1 HELP 2 COM 3 END          6 CRSR 7 SBH 8 SFH 9 MSG 10 SB 11 SF 12 CNCL
MA G                          06/022
Connected to remote server/host wg31 using lu/pool TCP00105 and port 23

```

Move the COBOL copy books to a MVS data set

Next make the generated COBOL copy books available for including into the COBOL program.

The generated COBOL copy books need to be available in an MVS data set which is included in the compiler SYSLIB concatenation sequence. In the data set is *USER1.ZCEE.SOURCE*. Use a DOS command prompt session and the commands below to move the copy books file to this data set. Authenticate as user USER1 (password USER1).

- ___7. Open a DOS command prompt and use the change directory command to go to directory C:\z\apiRequester\cscvinc\syslib, e.g. **cd |z\apiRequester|miniloan\syslib**
- ___8. Start a file transfer session with the WG31 host using the *ftp* command, e.g. **ftp wg31**
- ___9. Logon as USER1 and then use the *cd* command to change to directory to data set *USER1.ZCEE.SOURCE*, e.g. **cd zcee.source**
- ___10. Toggle prompting off by entering command **prompt**
- ___11. Perform multiple put requests by using the multiple put command, **mput min***
- ___12. When the last transfer has completed enter the **quit** command.


```
c:\z\apiRequester\miniloan>cd syslib
c:\z\apiRequester\miniloan\syslib>ftp wg31.washington.ibm.com
Connected to wg31.washington.ibm.com.
220-FTP 16:26:23 on 2018-02-15.
220 Connection will close if idle for more than 200 minutes.
User (wg31.washington.ibm.com:(none)): user1
331 Send password please. user1
Password:
230 USER1 is logged on. Working directory is "USER1.".
ftp> cd zcee.source
250 The working directory "USER1.ZCEE.SOURCE" is a partitioned data set
ftp> prompt
Interactive mode Off .
ftp> mput MIN*
200 Port request OK.
125 Storing data set USER1.ZCEE.SOURCE(MIN00I01)
250 Transfer completed successfully.
ftp: 544 bytes sent in 0.00Seconds 544000.00Kbytes/sec.
200 Port request OK.
125 Storing data set USER1.ZCEE.SOURCE(MIN00P01)
250 Transfer completed successfully.
ftp: 13081 bytes sent in 0.00Seconds 13081000.00Kbytes/sec.
200 Port request OK.
125 Storing data set USER1.ZCEE.SOURCE(MIN00Q01)
250 Transfer completed successfully.
ftp: 6980 bytes sent in 0.00Seconds 6980000.00Kbytes/sec.
ftp> quit
```


Review the application programs

Now that the copy books have been generated and are available in a data set the next step is compile and link edit the application program.

Tech-Tip: Data set `USER1.ZCEE.SOURCE` can be accessed either by using the IBM z/OS Explorer filter or by using the Personal Communication icon on the desktop and logging on to TSO and use ISPF option 3.4 to access this data set. If you have any questions about either method, ask the instructor.

1. Back in the IBM z/OS Explorer session switch to the *Remote System Explorer* perspective (see page **Error! Bookmark not defined.**) and expand data set `USER1.ZCEE.SOURCE` in the *Remote System* view to display a list of its members.

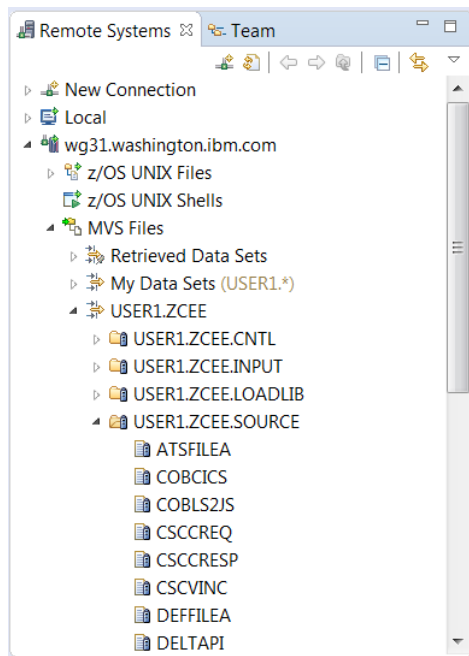

2. Begin by reviewing the application programs `LOANAPIR`. Open member `LOANAPIR` in `USER1.ZCEE.SOURCE` and review its contents by selecting the member and right- mouse button clicking and selecting the *Open* option. Scroll down until you see these lines of code.

These lines of code copy into the source the required z/OS Connect EE copy book (BAQRINFO) and the copy books generated by the z/OS Connect EE build tool kit.

```
* Copy API Requester required copybook
COPY BAQRINFO.

* Request and Response
01 API-REQUEST.
   COPY MIN01Q01.
01 API_RESPONSE.
   COPY MIN01P01.
* Structure with the API information
01 API-INFO-OPER1.
   COPY MIN01I01.
```

Scroll down further until you find this code which sets the contents of the request message and invoke the API.

```

WHEN DFHENTER
  MOVE NAMEI      to NAME2 in API-REQUEST
  MOVE LENGTH of NAME2 in API-REQUEST to
    NAME2-length in API-REQUEST
  MOVE AGEI       to AGE in API-REQUEST
  MOVE CRDSCREI   to CREDITSCORE in API-REQUEST
  MOVE INCOMEI    to YEARLYINCOME in API-REQUEST
  MOVE AMOUNTI    to AMOUNT      in API-REQUEST
  MOVE YRPAYMNTI
    To YEARLYREPAYMENT in API-REQUEST
  MOVE 1 to MINILOAN-COMMAREA2-num IN API-REQUEST
  MOVE 1 to NAME-num              IN API-REQUEST
  MOVE 1 to CREDITSCORE-num       IN API-REQUEST
  MOVE 1 to YEARLYINCOME-num      IN API-REQUEST
  MOVE 1 to AGE-num               IN API-REQUEST
  MOVE 1 to AMOUNT-num            IN API-REQUEST
  MOVE 1 to YEARLYREPAYMENT-num   IN API-REQUEST
  PERFORM INVOKE-API

```

___3. Scroll down further to see the CICS commands to display the results on the screen.

```

IF BAQ-SUCCESS THEN
  IF APPROVED2 in API-RESPONSE = 'T'
    MOVE 'Loan approved' to approvedo
  ELSE
    MOVE 'Loan not approved' to approvedo
  END-IF
  MOVE UID2      TO UIDO
  MOVE MESSAGES2(1) TO MSG1O
  MOVE MESSAGES2(2) TO MSG2O
  MOVE MESSAGES2(3) TO MSG3O
  MOVE MESSAGES2(4) TO MSG4O
  MOVE MESSAGES2(5) TO MSG5O
  MOVE MESSAGES2(6) TO MSG6O
  MOVE MESSAGES2(7) TO MSG7O
  MOVE MESSAGES2(8) TO MSG8O
  MOVE MESSAGES2(9) TO MSG9O
ELSE
  ....
  END-IF.
EXEC CICS SEND CONTROL ERASE END-EXEC
EXEC CICS SEND MAP('MINIMAP')
  MAPSET('MINIMAP')
  FREEKB ERASE END-EXEC
EXEC CICS RETURN TRANSID ('APIR')
  COMMAREA (COMMAREA-BUFFER) END-EXEC.

```

4. Scroll down further and you will the call to the z/OS Connect API requester stub module.

```

      INVOKE-API SECTION.
*-----*
* Initialize API Requester PTRs & LENSs                                     *
*-----*
* Use pointer and length to specify the location of
* request and response segment.
* This procedure is general and necessary.
      SET BAQ-REQUEST-PTR TO ADDRESS OF API-REQUEST
      MOVE LENGTH OF API-REQUEST TO BAQ-REQUEST-LEN
      SET BAQ-RESPONSE-PTR TO ADDRESS OF API-RESPONSE
      MOVE LENGTH OF API-RESPONSE TO BAQ-RESPONSE-LEN

*-----*
* Call the communication stub                                           *
*-----*
* Call the subsystem-supplied stub code to send
* API request to zCEE
      CALL COMM-STUB-PGM-NAME USING
          BY REFERENCE    API-INFO-OPER1
          BY REFERENCE    BAQ-REQUEST-INFO
          BY REFERENCE    BAQ-REQUEST-PTR
          BY REFERENCE    BAQ-REQUEST-LEN
          BY REFERENCE    BAQ-RESPONSE-INFO
          BY REFERENCE    BAQ-RESPONSE-PTR
          BY REFERENCE    BAQ-RESPONSE-LEN.
* The BAQ-RETURN-CODE field in 'BAQRINFO' indicates whether this
* API call is successful.
      CHECK-API-ERROR SECTION.
* Some error happened in API, z/OS Connect EE server
* or communication stub. 'BAQ-STATUS-CODE' and
* 'BAQ-STATUS-MESSAGE' contain the detailed information
* of this error.
      DISPLAY "Error code: " BAQ-STATUS-CODE
      DISPLAY "Error msg:" BAQ-STATUS-MESSAGE
      MOVE BAQ-STATUS-CODE TO EM-CODE
      MOVE BAQ-STATUS-MESSAGE TO EM-DETAIL
      EVALUATE TRUE
* When error happens in API, BAQ-RETURN-CODE is BAQ-ERROR-IN-API.
* BAQ-STATUS-CODE is the HTTP response code of API.
      WHEN BAQ-ERROR-IN-API
          MOVE 'API' TO EM-ORIGIN
* When error happens in server, BAQ-RETURN-CODE is
* BAQ-ERROR-IN-ZCEE
* BAQ-STATUS-CODE is the HTTP response code of
* z/OS Connect EE server.
      WHEN BAQ-ERROR-IN-ZCEE
          MOVE 'ZCEE' TO EM-ORIGIN
* When error happens in communication stub, BAQ-RETURN-CODE is
* BAQ-ERROR-IN-STUB, BAQ-STATUS-CODE is the error code of STUB.
      WHEN BAQ-ERROR-IN-STUB
          MOVE 'STUB' TO EM-ORIGIN
      END-EVALUATE

```

Note that the parameters are being passed by reference. This means that the z/OS Connect API requester stub will have direct access to the program storage for both accessing data and making changes (i.e. the response message).

Compile and link-edit the application programs

The applications programs now are ready to be compiled and link edited.

2. Submit the job in member **LOANAPIR** in data set *USER1.ZCEE.CNTL*.

Note that the CALL statement in each of this program uses a variable for the program name z/OS Connect EE stub program (BAQCSTUB). This means that this program will be dynamically linked at execution. The load module library containing the CICS version of BAQCSTUB (SBAQLIB1) must be available in the DFHRPL concatenation sequence when the program is executed.

```
//COMPILE EXEC IGYWCL,LNGPRFX=IGY610,
// PARM.COBOLE='LIB,NODYNAM,CICS,SIZE(4000K)'
//COBOL.STEPLIB DD
//
//          DD DISP=SHR,DSN=CICSTS54.CICS.SDFHLOAD
//COBOL.SYSIN DD DISP=SHR,DSN=USER1.ZCEE.SOURCE(LOANAPIR)
//COBOL.SYSLIB DD DISP=SHR,DSN=USER1.ODM.JCL
//
//          DD DISP=SHR,DSN=USER1.ZCEE.SOURCE
//
//          DD DISP=SHR,DSN=ZCEE30.SBAQCOB
//
//          DD DISP=SHR,DSN=CICSTS54.CICS.SDFHCOB
//LKED.SYSLMOD DD DISP=SHR,DSN=USER1.ZCEE.LOADLIB(LOANAPIR)
//LKED.CICSLIB DD DISP=SHR,DSN=CICSTS54.CICS.SDFHLOAD
//LKED.SYSIN DD *
INCLUDE CICSLIB(DFHELII)
```

This job should complete with a zero-return code.

Tech Tip: To submit a job when using the IBM z/OS Explorer select the member and right mouse button click and select the *Submit* option. Or if the member is currently opened simply right mouse button click and select the *Submit* option. Click the **Locate Job** button on the *Job Confirmation* pop-up. This will display the job output in the *Retrieved Job* section under *JES* in the *Remote Systems* view. The job's output can be viewed right mouse button clicking and selecting the *Open* option.

Test the API requester application programs

1. In a new or existing 3270 session start a session with CICS, clear the screen and enter CICS transaction **CEDF** to start a CICS execution diagnostic facility (EDF).
2. Clear the screen again and enter CICS transaction **APIR**.

```

WG31
File Edit View Communication Actions Window Help
TRANSACTION: APIR PROGRAM: LOANAPIR TASK: 0000212 APPLID: CICS53Z DISPLAY: 00
STATUS: PROGRAM INITIATION

EIBTIME      = 84719
EIBDATE      = 0119198
EIBTRNID     = 'APIR'
EIBTASKN     = 212
EIBTRMID     = '0115'

EIBCPOSN     = 5
EIBCALEN     = 0
EIBAID       = X'7D'
EIBFN        = X'0000'
EIBRCODE     = X'000000000000'
EIBDS        = '.....'
+ EIBREQID    = '.....'

ENTER: CONTINUE

PF1 : UNDEFINED      PF2 : SWITCH HEX/CHAR      PF3 : END EDF SESSION
PF4 : SUPPRESS DISPLAYS  PF5 : WORKING STORAGE      PF6 : USER DISPLAY
PF7 : SCROLL BACK      PF8 : SCROLL FORWARD      PF9 : STOP CONDITIONS
PF10: PREVIOUS DISPLAY  PF11: EIB DISPLAY          PF12: UNDEFINED

MA  E 19/026
Connected to remote server/host wg31 using lu/pool TCP00115 and port 23

```

3. Use the **F9** key to set a stop condition. Set a stop on **EXEC CICS WEB OPEN** commands.

```

WG31
File Edit View Communication Actions Window Help
TRANSACTION: APIR PROGRAM: LOANAPIR TASK: 0000212 APPLID: CICS53Z DISPLAY: 00
DISPLAY ON CONDITION:-

COMMAND:          EXEC CICS web open
OFFSET:           X'.....'
LINE NUMBER:      .....
CICS EXCEPTIONAL CONDITION: ERROR
ANY CICS CONDITION NO
TRANSACTION ABEND YES
NORMAL TASK TERMINATION YES
ABNORMAL TASK TERMINATION YES

DLI ERROR STATUS: ..
ANY DLI ERROR STATUS


ENTER: CURRENT DISPLAY

PF1 : UNDEFINED      PF2 : UNDEFINED      PF3 : UNDEFINED
PF4 : SUPPRESS DISPLAYS  PF5 : WORKING STORAGE      PF6 : USER DISPLAY
PF7 : UNDEFINED      PF8 : UNDEFINED      PF9 : UNDEFINED
PF10: UNDEFINED      PF11: UNDEFINED      PF12: REMEMBER DISPLAY


MA  E 04/048
Connected to remote server/host wg31 using lu/pool TCP00115 and port 23

```

4. Use the **F4** key to suppress the intervening EDF displays. Eventually EDF will stop on a task termination screen. Ensure the *Reply* is set to **Yes** and press **Enter** to continue.

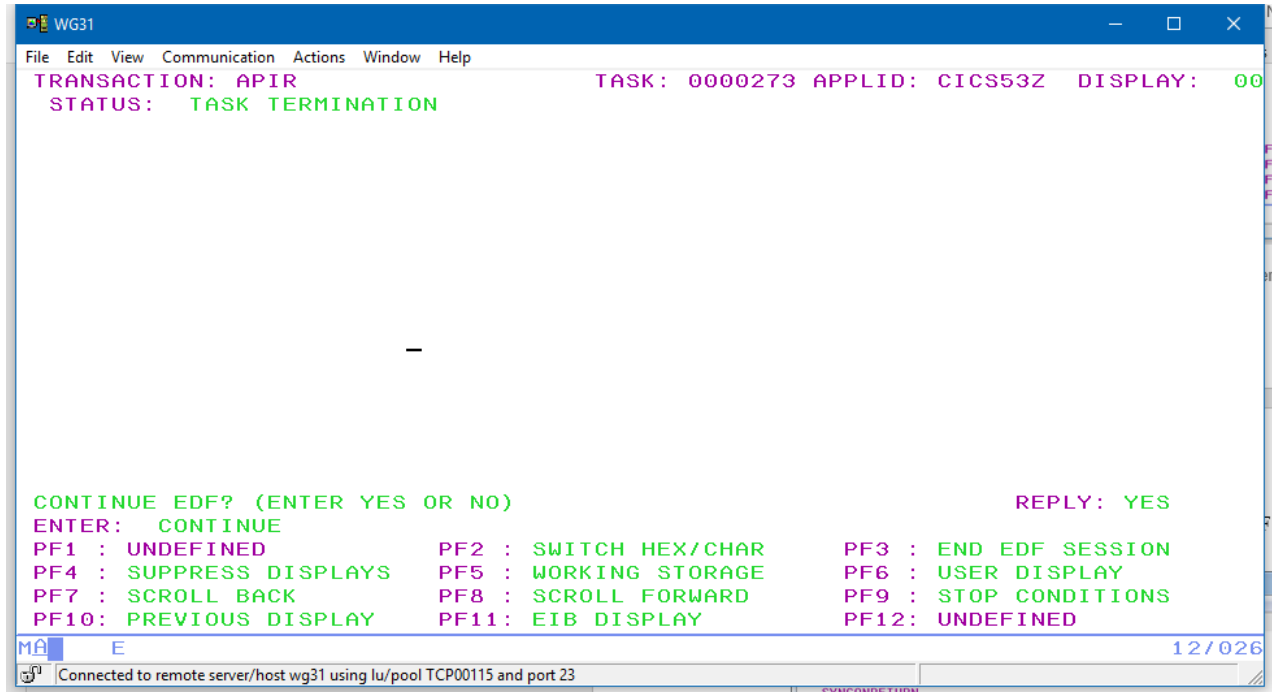

5. Enter the information shown below and press **Enter**.

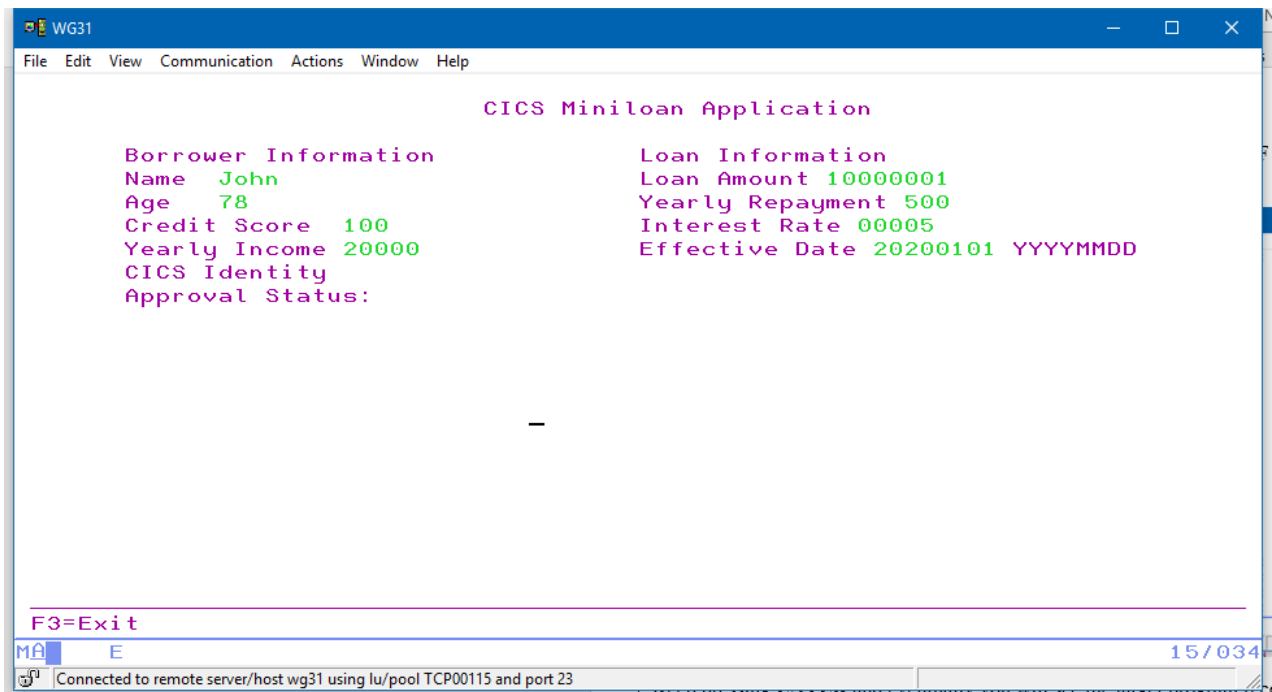

6. Suppress the EDF displays again using the **F4** key. Eventually there will be *EXEC CICS WEB OPEN* request.

The screenshot shows a terminal window titled 'WG31' with a menu bar (File, Edit, View, Communication, Actions, Window, Help). The main display area contains the following text:

```

TRANSACTION: APIR PROGRAM: LOANAPIR TASK: 0000280 APPLID: CICS53Z DISPLAY: 00
STATUS: ABOUT TO EXECUTE COMMAND
EXEC CICS WEB OPEN
  URIMAP ('BAQURIMP')
  SESSTOKEN ('.....')
  NOHANDLE

```

Below this, there is a horizontal line and then the text:

```

LINE:00032400 EIBFN=X'3818'

```

At the bottom, there is a list of function keys:

```

ENTER: CONTINUE
PF1 : UNDEFINED PF2 : SWITCH HEX/CHAR PF3 : UNDEFINED
PF4 : SUPPRESS DISPLAYS PF5 : WORKING STORAGE PF6 : USER DISPLAY
PF7 : SCROLL BACK PF8 : SCROLL FORWARD PF9 : STOP CONDITIONS
PF10: PREVIOUS DISPLAY PF11: EIB DISPLAY PF12: ABEND USER TASK

```

The status bar at the bottom shows 'MA E' and '11/031'. A small icon on the left indicates 'Connected to remote server/host wg31 using lu/pool TCP00115 and port 23'.

7. Keep pressing the **Enter** key until the *EXEC CICS WEB WRITE* EDF screen is displayed.

The screenshot shows a terminal window titled 'WG31' with a menu bar (File, Edit, View, Communication, Actions, Window, Help). The main display area contains the following text:

```

TRANSACTION: APIR PROGRAM: LOANAPIR TASK: 0000280 APPLID: CICS53Z DISPLAY: 00
STATUS: ABOUT TO EXECUTE COMMAND
EXEC CICS WEB WRITE
  HTTPHEADER ('zCEE-APIRequester-Metadata')
  NAMELENGTH (26)
  VALUE ('zCEE-APIRequester-Path=%2Fminiloancics%2Floan&zCEE-APIRequester'...)
  VALUELENGTH (75)
  SESSTOKEN ('.....')
  NOHANDLE

```

Below this, there is a horizontal line and then the text:

```

LINE:00079100 EIBFN=X'380E'

```

At the bottom, there is a list of function keys:

```

ENTER: CONTINUE
PF1 : UNDEFINED PF2 : SWITCH HEX/CHAR PF3 : UNDEFINED
PF4 : SUPPRESS DISPLAYS PF5 : WORKING STORAGE PF6 : USER DISPLAY
PF7 : SCROLL BACK PF8 : SCROLL FORWARD PF9 : STOP CONDITIONS
PF10: PREVIOUS DISPLAY PF11: EIB DISPLAY PF12: ABEND USER TASK

```

The status bar at the bottom shows 'MA E' and '15/025'. A small icon on the left indicates 'Connected to remote server/host wg31 using lu/pool TCP00115 and port 23'.

8. Press the **Enter** key until the *EXEC CICS WEB CONVERSE* EDF screen is displayed.

```

WG31
File Edit View Communication Actions Window Help
TRANSACTION: APIR PROGRAM: LOANAPIR TASK: 0000280 APPLID: CICS53Z DISPLAY: 00
STATUS: ABOUT TO EXECUTE COMMAND
EXEC CICS WEB CONVERSE
  SESSTOKEN ('.....')
  PATH ('/zosConnect/apiRequesters/miniloancics_1.0.0')
  PATHLENGTH (44)
  METHOD (636)
  FROM ('.....JOHN ..... 100..... '...')
  FROMLENGTH (142)
  MEDIATYPE ('application/octet-stream.....')
  SET (X'165E0678') AT X'1570A73C'
  TOLength (6338)
  STATUSCODE (0)
  STATUSTEXT ('.....v{..y.n.....y...j.....yH..t.....t.nzT&n...n.....'...)
  STATUSLEN (256)
  NOHANDLE

LINE: 00036000 EIBFN=X'381C'

ENTER: CONTINUE
PF1 : UNDEFINED PF2 : SWITCH HEX/CHAR PF3 : UNDEFINED
PF4 : SUPPRESS DISPLAYS PF5 : WORKING STORAGE PF6 : USER DISPLAY
PF7 : SCROLL BACK PF8 : SCROLL FORWARD PF9 : STOP CONDITIONS
PF10: PREVIOUS DISPLAY PF11: EIB DISPLAY PF12: ABEND USER TASK

Mâ E 01/001
Connected to remote server/host wg31 using lu/pool TCP00115 and port 23

```

9. Keep pressing **Enter** until the results of the loan application is displayed.

```

WG31
File Edit View Communication Actions Window Help

CICS Miniloan Application

Borrower Information      Loan Information
Name JOHN                 Loan Amount 10000001
Age 78                   Yearly Repayment 500
Credit Score 100         Interest Rate 00005
Yearly Income 20000       Effective Date 20200101 YYYYMMDD
CICS Identity CICSUSER
Approval Status: Loan not approved

The age exceeds the maximum.
The loan cannot exceed 1000000
Credit score below 200
The yearly income is lower than the basic request

F3=Exit

Mâ E 05/014
Connected to remote server/host wg31 using lu/pool TCP00115 and port 23

```

10. Repeat loan applications with and/or without EDF to see the results of various scenarios.

Summary

You have use the z/OS Connect build toolkit to generate an API requester archive file and the COBOL copy books that must be included in the COBOL application program when accessing the API requester archive file in a z/OS Connect server. The COBOL applications have been compiled and link edited, and the target API has been tested using various RESTful methods