

SERVER & SERVICES -LAB

ASSIGN IP ADDRESS ROUTERS AND CLIENT PC:-

The screenshot displays a network lab environment with a router configuration window and a Windows VM setup.

Router Configuration (Left Window):

```
ROUTER
ROUTER(config)#exit
ROUTER#
*Aug 30 03:54:09.564: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#sh ip int bri
Interface      IP-Address      OK? Method Status      Prot
-----
Ethernet0/0    172.16.0.1      YES manual  up          up
Ethernet0/1    8.0.0.1         YES manual  up          up
Ethernet0/2    50.0.0.1        YES manual  up          up
Ethernet0/3    unassigned      YES TFTP   down        down

ROUTER#conf t
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#do wr
Building configuration...
[OK]
ROUTER(config)#
ROUTER(config)#exit
ROUTER#
*Aug 30 03:56:33.308: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#
```

Windows VM Setup (Right Window):

The Windows VM is running with the following network configuration:

- Local Area Connection Properties:** Internet Protocol (TCP/IP) Properties.
- General Tab:** Use the following IP address: 50.0.0.10, Subnet mask: 255.0.0.0, Default gateway: 50.0.0.1.
- DNS Tab:** Preferred DNS server: 8.8.8.8.
- Details Tab:** Local Area Connection, LAN or High-Speed Internet.

Network Diagram (Bottom):

The diagram shows a physical connection between the router and the Windows VM. The router interface is labeled "e0" and the VM interface is labeled "Win". The IP address 50.0.0.10 is assigned to the VM interface. The DNS server 8.8.8.8 is also shown.

System Information (Bottom Bar):

- Temperature: 31°C Sunny
- Search bar
- Taskbar: Start, Network Connections, Local Area Connection, Mozilla Firefox, IIS Windows Server, 5:54 AM
- System tray: Physical connection, OPPO K13 5G 79E6 Internet access, 0:00, START, 10:25 30-08-2026

ASSIGN IP ADDRESS FOR LINUX & WINDOWS SERVER:-

The screenshot displays a virtualization environment with two QEMU instances: QEMU (Linux-1) and QEMU (Winserver). The Linux instance's terminal shows the output of the `ifconfig` command for the `eth0` interface, indicating it is configured with IP `172.16.0.10`. The Windows instance shows the Server Manager Dashboard with the Network Connections window open, displaying the Ethernet adapter 'Network 3' with IP `172.16.0.20`. The 'Internet Protocol Version 4 (TCP/IPv4) Properties' dialog box is open, showing the 'Use the following IP address' option selected, with IP address `172.16.0.20`, Subnet mask `255.255.0.0`, and Default gateway `172.16.0.1`. The 'Preferred DNS server' and 'Alternate DNS server' fields are empty. The 'Validate settings upon exit' checkbox is unchecked. The 'Advanced...' button is visible. The Windows taskbar at the bottom shows the time as 5:00 AM on 30-08-2026, and the system tray shows the temperature as 31°C Sunny.

```
ifconfig
eth0: Link encap:Ethernet HWaddr 50:93:4C:01:AD:00
      inet addr:172.16.0.10 Bcast:172.16.255.255 Mask:255.255.0.0
      UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
      RX packets:203 errors:0 dropped:0 overruns:0 frame:0
      TX packets:496 errors:0 dropped:0 overruns:0 carrier:0
      collisions:0 txqueuelen:1000
      RX bytes:30711 (29.9 KiB) TX bytes:153007 (149.4 KiB)

lo:    Link encap:Local Loopback
      inet addr:127.0.0.1 Mask:255.0.0.0
      UP LOOPBACK RUNNING MTU:16436 Metric:1
      RX packets:0 errors:0 dropped:0 overruns:0 frame:0
      TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
      collisions:0 txqueuelen:0
      RX bytes:0 (0.0 B) TX bytes:0 (0.0 B)
```

Server & Services

31°C Sunny

Search

10:30 30-08-2026


INSTALL THE IIS SERVICE AT WIN SERVER & WEB PAGE NOTE EDIT AT LINUX SERVER:-

The screenshot displays a virtualization environment with two main windows:

- QEMU (Linux-1):** A terminal window showing a command prompt. The text "HOTSTAR" is visible at the top. Below it, a message states "This file is located in /home/hthttpd". At the bottom, a command is executed: `/home/hthttpd/index.html 1/2 50%`.
- QEMU (Winserver):** A Windows Server 2016 interface. The "Server Manager" dashboard is open, showing the "Add Roles and Features Wizard". The "Server Roles" tab is selected, and the "Web Server (IIS)" role is being installed. The wizard shows a list of roles, including "Active Directory Federation Services", "Active Directory Lightweight Directory Services", "Active Directory Rights Management Services", "Device Health Attestation", "DHCP Server", "DNS Server", "Fax Server", "File and Storage Services (1 of 12 installed)", "Host Guardian Service", "Hyper-V", "MultiPoint Services", "Network Policy and Access Services", "Print and Document Services", "Remote Access", "Remote Desktop Services", "Volume Activation Services", "Web Server (IIS) (8 of 43 installed)", "Windows Deployment Services", "Windows Server Essentials Experience", and "Windows Server Update Services". The "Web Server (IIS)" role is selected, and the "Install" button is visible.

The bottom of the screen shows a taskbar with various application icons, including the Start button, Search, and several open applications. The system clock indicates 10:37 AM on 30-08-2026.



AT CLIENT PC END TO REACH THE LINUX AND WEB SERVER PAGE'S VIA SERVER IP ADDRESS OUTPUT:-

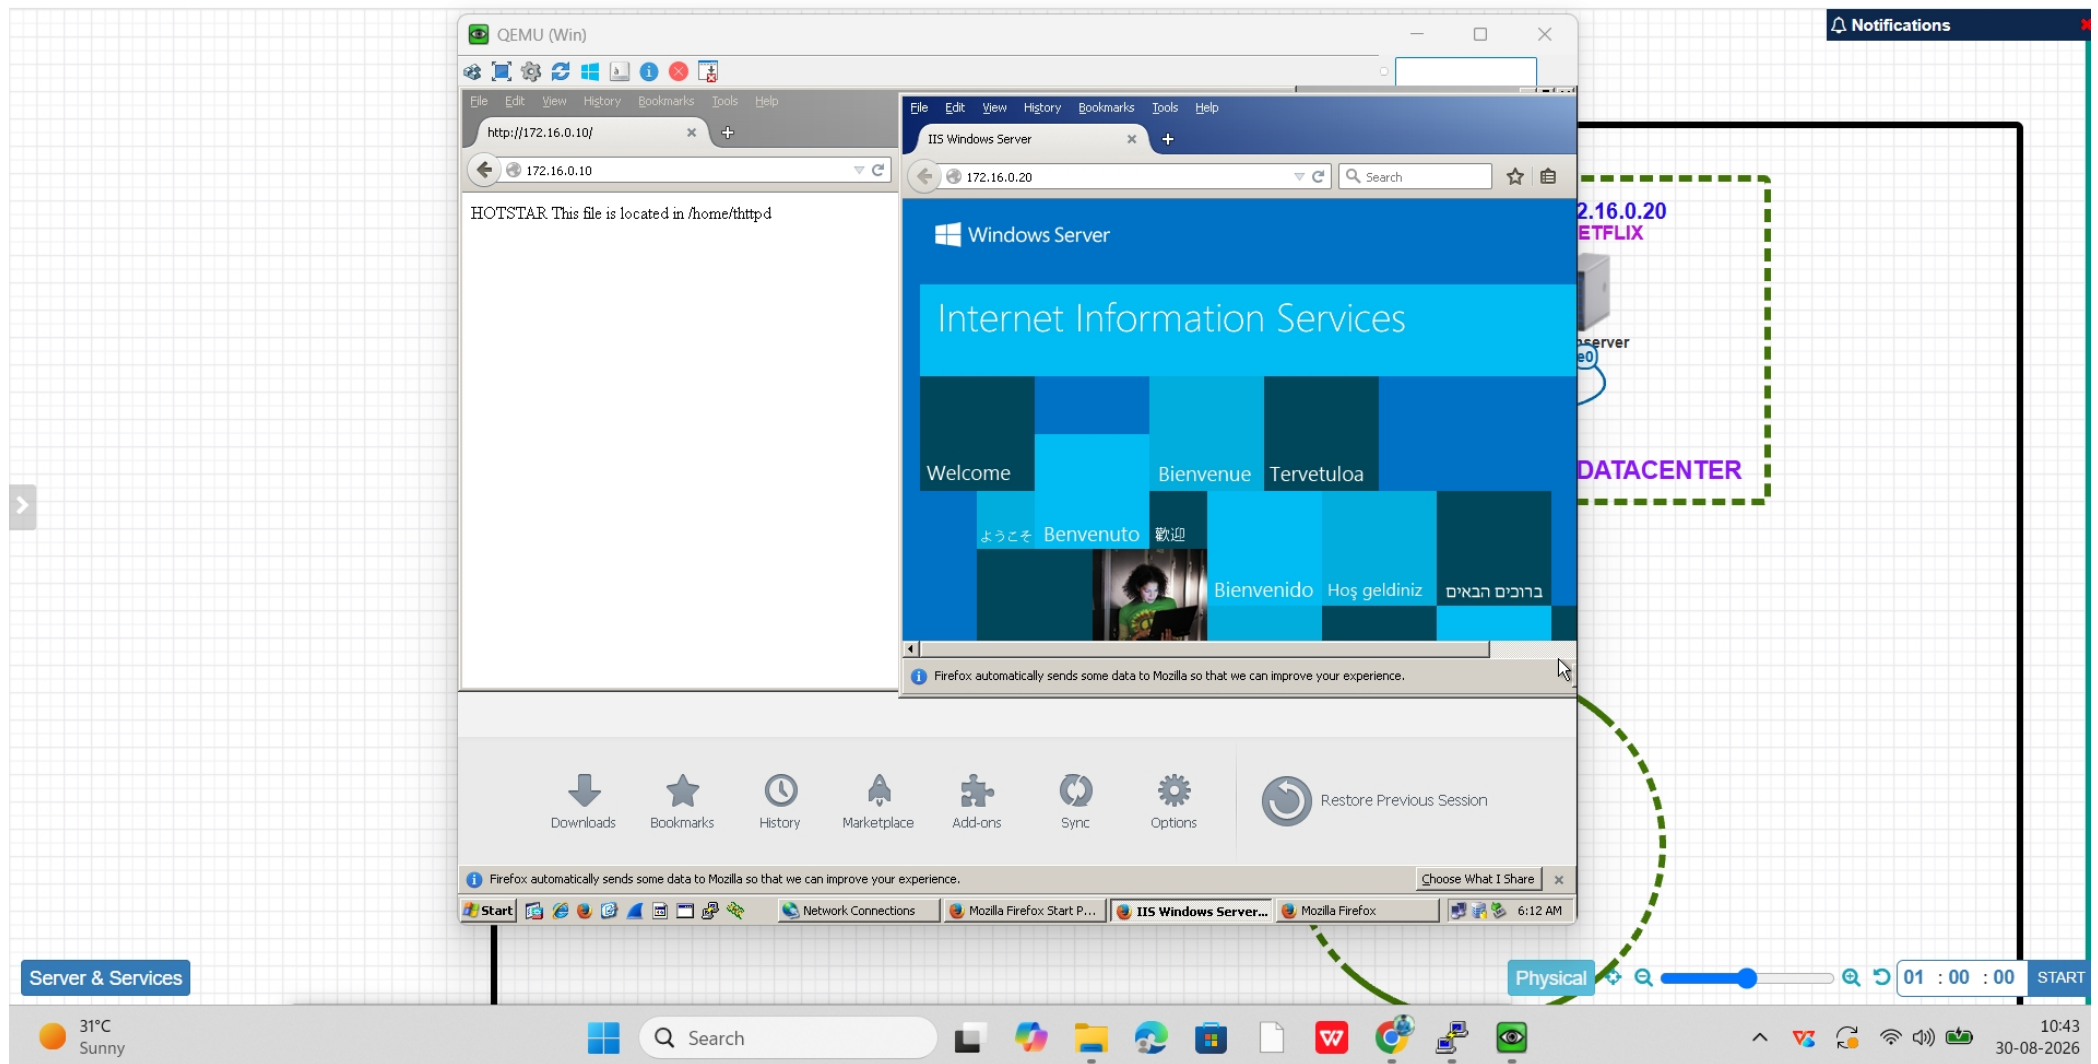

ASSIGN THE IP ADDRESS FOR DNS SERVER:-

The screenshot displays a QEMU virtual machine environment. In the background, a web browser shows the URL `labs.surennetwork.com/leg`. The main window is a Windows desktop with a taskbar containing icons for This PC, Network, Recycle Bin, Firefox, Google Chrome, Logoff, and PuTTY. A 'Network Connections' window is open, showing 'Ethernet Network 3' with an 'Intel(R) PRO/1000 MT Network Controller'. The 'Ethernet Properties' window is open, and the 'Internet Protocol Version 4 (TCP/IPv4) Properties' dialog box is in the foreground. In this dialog, the 'Use the following IP address' option is selected, with the IP address set to `8.8.8.8`, the subnet mask to `255.0.0.0`, and the default gateway to `8.0.0.1`. The 'Use the following DNS server addresses' option is also selected, with both preferred and alternate DNS servers set to `. . .`. The 'Validate settings upon exit' checkbox is unchecked. The taskbar at the bottom shows the system clock as 5:21 AM on 8/30/2026. A 'Server & Services' panel at the bottom left shows a temperature of 31°C and 'Sunny' weather. A 'Physical' panel at the bottom right shows a timer at 01:00:00 and a 'START' button. A green dashed line connects the IP address `8.8.8.8` in the dialog box to a label `8.8.8.8` in the Physical panel. In the background, a diagram shows a server labeled '72.16.0.20 NETFLIX' connected to a 'DATA CENTER'.

AFTER INSTALLED THE DNS SERVICE CREATE THE DNS RECORD FOR LINUX & WIN SERVER:-

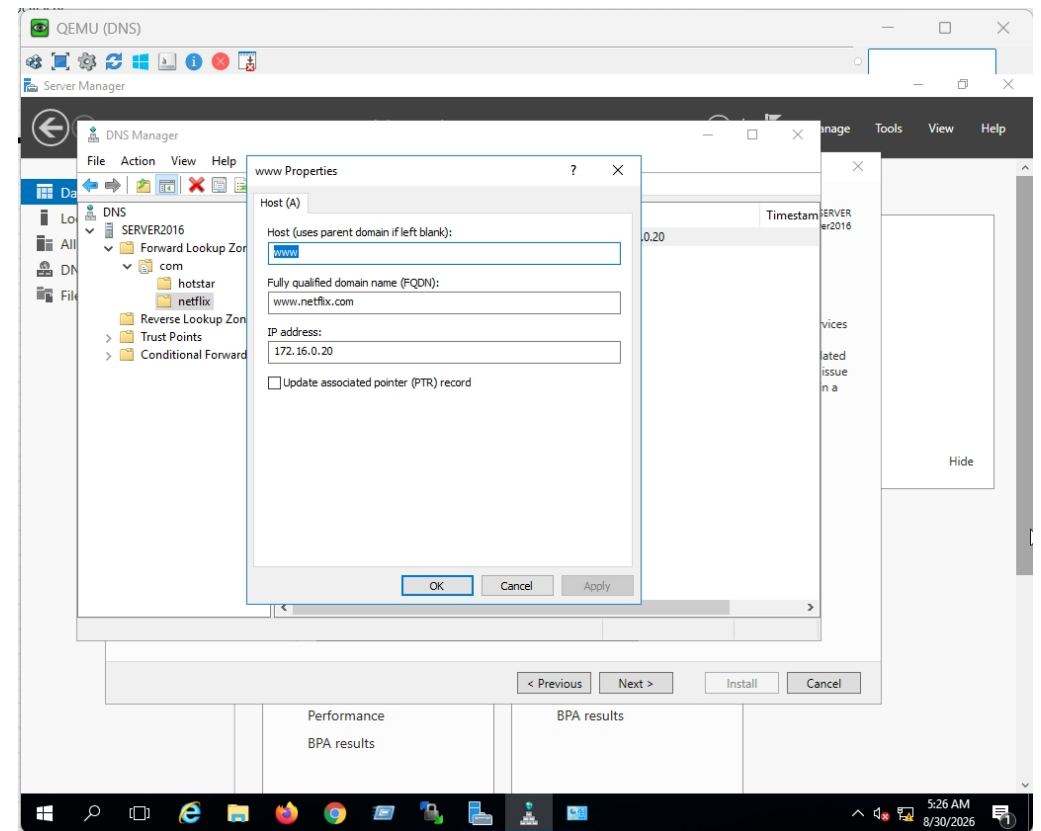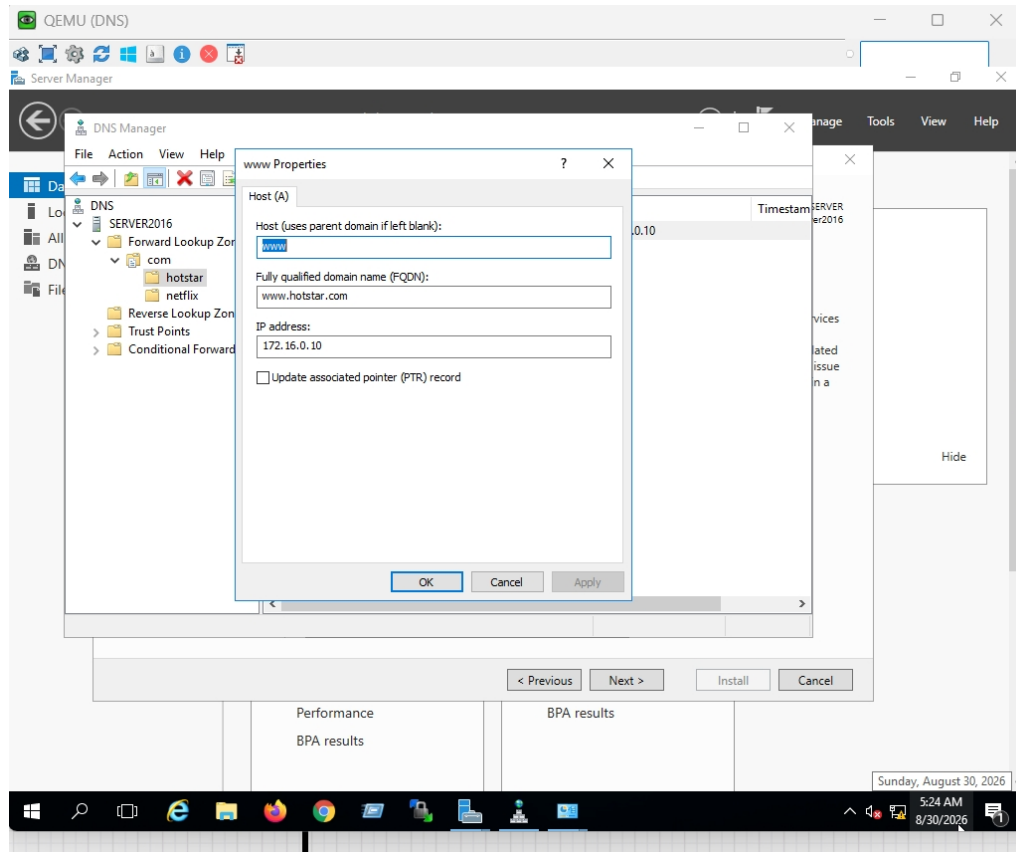

AT CLIENT PC END TO REACH THE LINUX AND WEB SERVER PAGE'S VIA DOMAIN NAME OUTPUT:-

The screenshot displays a client PC interface with a QEMU (Win) window open. Inside the QEMU window, there are two browser windows. The left browser window shows the Hotstar website with the message "HOTSTAR This file is located in /home/hthttpd". The right browser window shows the IIS Windows Server website with the title "Internet Information Services" and various welcome messages in different languages. Below the browser windows, there is a taskbar with icons for Start, Network Connections, Mozilla Firefox, and IIS Windows Server. A green dashed line connects the IIS Windows Server window to a network topology diagram on the right. The diagram shows a server labeled "2.16.0.20" and "NETFLIX" connected to a "server" icon, which is then connected to a "DATACENTER" box. The bottom of the screen shows a Windows taskbar with a search bar, system tray icons, and a clock showing 10:46 on 30-08-2026.