

Task 10

- ❖ Network Account
 - Region: Mumbai (ap-south-1)
- ❖ Application Account
 - Region: Hyderabad (ap-south-2)
- ❖ Step 1: IAM SETUP (BOTH Region)
 - Create a 1 IAM Group
 - Attach EC2, VPC, S3 full access policies
 - Create IAM User
 - Add user to group
 - Verify console access
- ❖ STEP 2: NETWORK ACCOUNT – MUMBAI VPC
 - Create 1 VPC
 - Create 1 Public Subnet
 - Attach Internet Gateway
 - Configure route table
 - EC2 (Bastion)
 - Launch 1 EC2 in Public Subnet
 - Assign Public IP
 - Name: bastion-mum
 - Security Group:
 - SSH (22) from your IP
- ❖ STEP 3: APPLICATION ACCOUNT – HYDERABAD VPC
 - Create 1 VPC
 - Create 1 Private Subnet
 - Do NOT attach Internet Gateway
 - Configure route table
 - EC2 (Application Server)
 - Launch 1 EC2 in Private Subnet
 - No Public IP
 - Security Group:
 - SSH (22) from Mumbai VPC CIDR
 - TELNET (23) from Mumbai VPC CIDR

Capture screenshots

❖ STEP 4: VPC PEERING

Peering Setup

- Create cross-region VPC Peering
- Accept peering in Application Account
- Update route tables in both VPCs
- Verify peering status is Active

❖ STEP 5: REMOVE VPC PEERING

- Delete VPC Peering connection
- Remove peering routes from both VPC route tables
- TAKE screenshots for confirm

❖ STEP 6: TRANSIT GATEWAY

Transit Gateway Setup

- Create Transit Gateway in Network Account (Mumbai)
- Attach Mumbai VPC
- Create cross-account attachment for Hyderabad VPC
- Accept attachment in Application Account
- Configure Transit Gateway route table
- Update VPC route tables in both accounts

Take screenshot

❖ STEP 7 (ANY ONE REGION)

- Create S3 bucket
- Upload ACC logo
- Verify object access
- Share the object access link with me for verification
- Capture screenshot
- Delete object
- Delete bucket




Solution:

Login to your AWS account with credentials and required verification.

(<https://signin.aws.amazon.com/>)

My account – AWS Management Console- Sign in

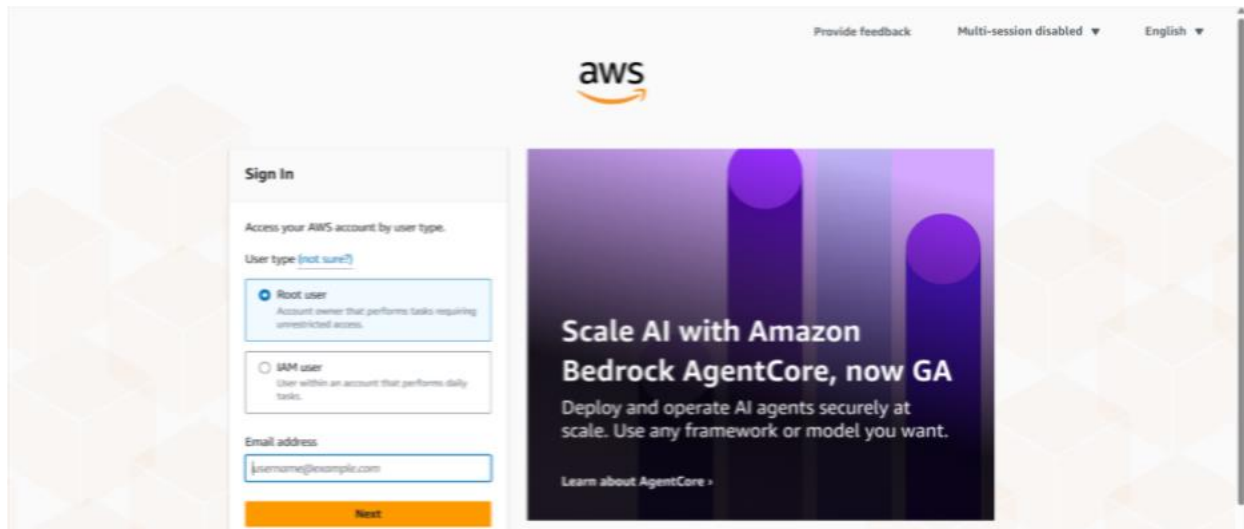

1. Create IAM Group

Network Group

- Console - IAM - User groups - Create group
- Name: network-group
- Attach Policies:
 - *AmazonEC2FullAccess*
 - *AmazonVPCFullAccess*
- Create group

The screenshot shows the AWS IAM console for the 'network-group' user group. The left sidebar contains the 'Identity and Access Management (IAM)' menu with options like Dashboard, Access management, User groups, Users, Roles, Policies, Identity providers, Account settings, Root access management, Temporary delegation requests, Access reports, Access Analyzer, Resource analysis, and Unused access. The main content area shows the 'network-group' summary with creation time 'January 06, 2026, 10:42 (UTC+05:30)' and ARN 'arn:aws:iam::798974631771:group/network-group'. The 'Permissions' tab is active, showing two attached policies: 'AmazonEC2FullAccess' and 'AmazonVPCFullAccess', both of type 'AWS managed' and attached to 1 entity each.

Application Group

- Console - IAM - User groups - Create group
- Name: network-group
- Attach Policies:
 - *AmazonEC2FullAccess*
 - *AmazonVPCFullAccess*
 - *AmazonS3FullAccess*
- Create group

The screenshot shows the AWS IAM console for the 'application-group' user group. The left sidebar is the same as the previous screenshot. The main content area shows the 'application-group' summary with creation time 'January 06, 2026, 10:44 (UTC+05:30)' and ARN 'arn:aws:iam::798974631771:group/application-group'. The 'Permissions' tab is active, showing three attached policies: 'AmazonEC2FullAccess' (attached to 2 entities), 'AmazonS3FullAccess' (attached to 1 entity), and 'AmazonVPCFullAccess' (attached to 2 entities), all of type 'AWS managed'.

2. Create IAM User

- IAM → Users - Create user - Network-user
- Enable:
 - AWS Management Console access
- Set password

- Create user

IAM > Users > Create user

Step 2

Set permissions

Step 3

Review and create

Step 4

Retrieve password

User details

User name

network-user

The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and +, -, @, _ (hyphen)

☒ Provide user access to the AWS Management Console - optional

In addition to console access, users with `SignInLocalDevelopmentAccess` permissions can use the same console credentials for programmatic access without the need for access keys.

Console password

☐ Autogenerated password

You can view the password after you create the user.

☒ Custom password

Enter a custom password for the user.

- Must be at least 8 characters long
- Must include at least three of the following mix of character types: uppercase letters (A-Z), lowercase letters (a-z), numbers (0-9), and symbols ! @ # \$ % ^ & * () _ + - (hyphen) = [] { } ' "

☐ Show password

☐ Users must create a new password at next sign-in - Recommended

Users automatically get the `IAMUserChangePassword` policy to allow them to change their own password.

If you are creating programmatic access through access keys or service-specific credentials for AWS CodeCommit or Amazon Keyspaces, you can generate them after you create this IAM user. [Learn more](#)

IAM > Users > Create user

Step 1

Specify user details

Step 2

Set permissions

Step 3

Review and create

Step 4

Retrieve password

Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)

Permissions options

☒ Add user to group

Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.

☐ Copy permissions

Copy all group memberships, attached managed policies, and inline policies from an existing user.

☐ Attach policies directly

Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

User groups (1/2)

Search

< 1 >

⚙

Group name	Users	Attached policies	Created
☐ application-group	0	AmazonEC2FullAccess , AmazonVPCE...	2026-01-06 (7 minutes ago)
☒ network-group	0	AmazonEC2FullAccess and AmazonV...	2026-01-06 (9 minutes ago)

► Set permissions boundary - optional

Cancel

Previous

Next

aws

Search

[Alt+S]

United States (N. Virginia)

network-user

Console Home

Reset to default layout

Add widgets

Recently visited

EC2

View all services

Applications (0)

Region: US East (N. Virginia)

Select Region

us-east-1 (Current Region)

Find applications

Name	Description	Region	Originati
Access denied to servicecatalog:ListApplications			

Diagnose with Amazon Q

Go to myApplications

Welcome to AWS

AWS Health

Cost and usage

Getting started with

Current month

Cost breakdown

CloudShell

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Repeat Same for Application user

- IAM → Users - Create user - Application-user
- Enable:
 - AWS Management Console access
- Set password
- Create user

IAM > Users > Create user

Step 2

Set permissions

Step 3

Review and create

Step 4

Retrieve password

User details

User name

application-user

The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and + = , @ _ - (hyphen)

☒ Provide user access to the AWS Management Console - optional

In addition to console access, users with `SignInLocalDevelopmentAccess` permissions can use the same console credentials for programmatic access without the need for access keys.

Console password

☐ Autogenerated password

You can view the password after you create the user.

☒ Custom password

Enter a custom password for the user.

- Must be at least 8 characters long
- Must include at least three of the following mix of character types: uppercase letters (A-Z), lowercase letters (a-z), numbers (0-9), and symbols ! @ # \$ % ^ & * () _ + - (hyphen) = [] { } | '

☐ Show password

☐ Users must create a new password at next sign-in - Recommended

Users automatically get the `IAMUserChangePassword` policy to allow them to change their own password.

If you are creating programmatic access through access keys or service-specific credentials for AWS CodeCommit or Amazon Keyspaces, you can generate them after you create this IAM user. [Learn more](#)

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

IAM > Users > Create user

Step 2

Set permissions

Step 3

Review and create

Step 4

Retrieve password

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)

Permissions options

☒ Add user to group

Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.

☐ Copy permissions

Copy all group memberships, attached managed policies, and inline policies from an existing user.

☐ Attach policies directly

Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

User groups (1/2)

Search

☒

application-group

0

AmazonEC2FullAccess, AmazonS3Ful...

2026-01-06 (16 minutes ago)

☐

network-group

1

AmazonEC2FullAccess and AmazonV...


2026-01-06 (18 minutes ago)

Set permissions boundary - optional

Cancel


Previous

Next

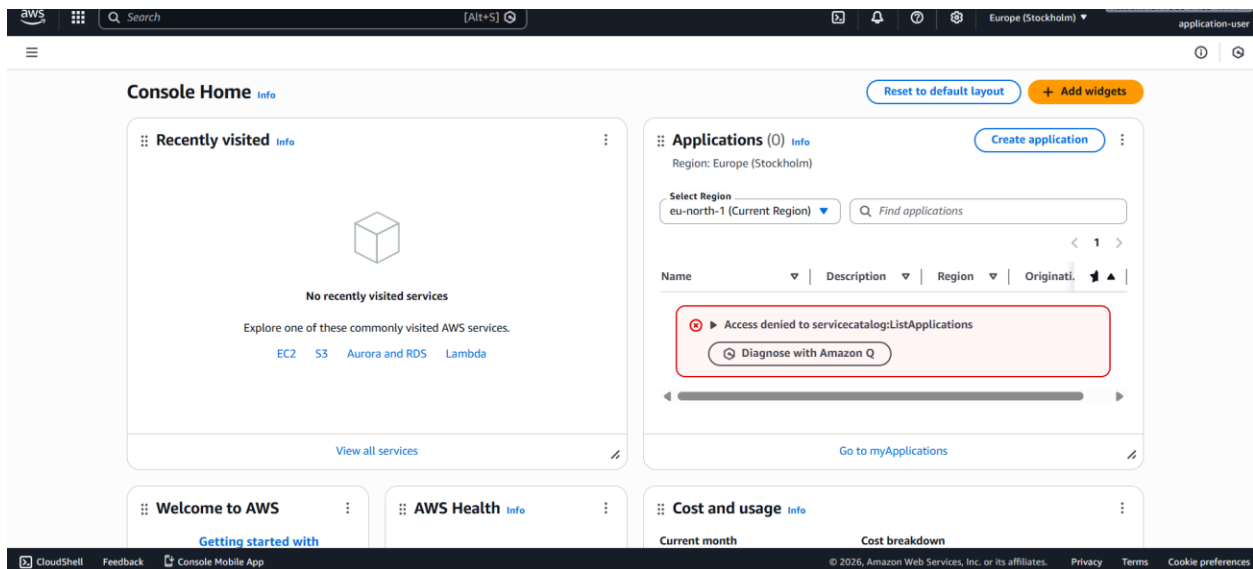

3. NETWORK ACCOUNT – MUMBAI VPC

- VPC - Create VPC
- Name: mumbai -vpc
- IPv4 CIDR: 10.0.0.0/16

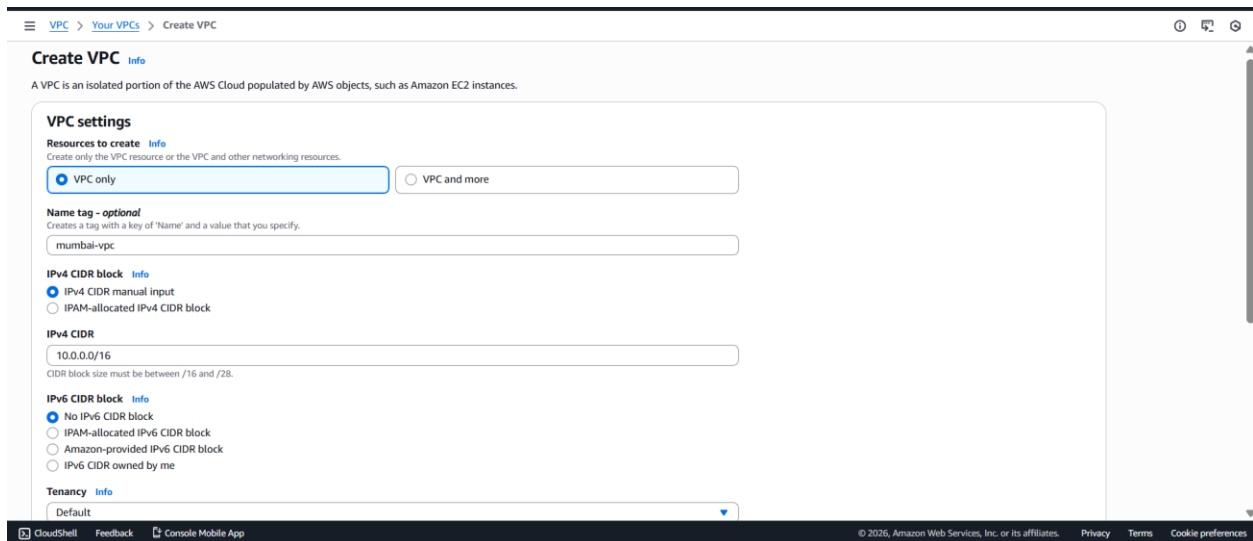

Create Public Subnet

- Subnets - Create subnet
- Name: mumbai-public-subnet
- AZ: ap-south-1a

- CIDR: 10.0.1.0/24

VPC > Subnets > Create subnet

Subnet settings

Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name
Create a tag with a key of 'Name' and a value that you specify.
mumbai-public-subnet
The name can be up to 256 characters long.

Availability Zone [Info](#)
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
Asia Pacific (Mumbai) / ap-south-1a

IPv4 VPC CIDR block [Info](#)
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
10.0.0.0/16

IPv4 subnet CIDR block
10.0.1.0/24 256 IPs
< > ^ v

Tags - optional

Key	Value - optional	
Name	mumbai-public-subnet	Remove

Attach Internet Gateway

- Internet Gateways → Create
- Name: mumbai-igw
- Attach to mumbai-vpc

VPC > Internet gateways > igw-0293ed8d72317bf96

igw-0293ed8d72317bf96 / mumbai-igw

Details [Info](#)

Internet gateway ID igw-0293ed8d72317bf96	State Attached	VPC ID vpc-0a2cd3c2137a2567f1 mumbai-vpc	Owner 798974631771
--	-------------------	---	-----------------------

Tags (1)

Key	Value
Name	mumbai-igw

Configure Route Table

- Route Tables - Edit routes
- Add Route:
 - Destination: 0.0.0.0/0
 - Target: Internet Gateway

- Associate public subnet

VPC > Route tables > rtb-07d0102f388c8f3c3

rtb-07d0102f388c8f3c3 / mumbai-vpc-public

You have successfully updated subnet associations for rtb-07d0102f388c8f3c3 / mumbai-vpc-public.

Details

Route table ID rtb-07d0102f388c8f3c3	Main No	Explicit subnet associations subnet-09dfde08b5015f444 / mumbai-public-subnet	Edge associations -
VPC vpc-0acdc3c2137a2567f mumbai-vpc	Owner ID 798974631771		

Routes (2)

Destination	Target	Status	Propagated	Route Origin
0.0.0.0/0	igw-0293ed8d72317bf96	Active	No	Create Route
10.0.0.0/16	local	Active	No	Create Route Table

Launch EC2 (Bastion Host)

- EC2 - Launch instance
- Name: bastion-mumbai
- AMI: Amazon Linux 2
- Instance type: t2.micro
- Network:
 - VPC: mumbai-vpc
 - Subnet: public subnet
 - Auto-assign Public IP: ENABLE
- Security Group (Bastion)
- Inbound rules:
 - SSH (22) - Your Public IP only

EC2 > Instances > Launch an instance

It seems like you may be new to launching instances in EC2. Take a walkthrough to learn about EC2, how to launch instances and about best practices.

Launch an instance

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags

Name: bastion-mumbai

Application and OS Images (Amazon Machine Image)

Search: Search our full catalog including 1000s of application and OS images

Quick Start

Amazon Linux, macOS, Ubuntu, Windows, Red Hat, SUSE Linux, Debian

Summary

Number of instances: 1

Software Image (AMI): Amazon Linux 2023.9.2

Virtual server type (instance type): t2.micro

Firewall (security group): New security group

Storage (volumes): 1 volume(s) - 8 GiB

Launch instance

Instances

> Launch an instance

Security group name - required

bastion-mumbai-sg

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, spaces, and _-/[]@!~+=&(){}*

Description - required

launch-wizard-1 created 2026-01-06T05:50:43.602Z

Inbound Security Group Rules

▼ Security group rule 1 (TCP, 22, 111.125.244.2/32)

Type

TCP~~Remove~~

Port range

22

Source type

My IP~~Add security group rule~~

Description - optional

e.g. SSH for admin desktop

► Advanced network configuration

▼ Configure storage

Summary

Number of instances1

Software Image (AMI)
Amazon Linux 2023 AMI 2023.9.2...read more
ami-00ca570c1b6d79f36

Virtual server type (instance type)
t2.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel

Launch instance

Preview code

- VPC - Create VPC
- Name: hyderabad-vpc
- IPv4 CIDR: 10.1.0.0/16

☰ VPC > Your VPCs > Create VPC

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings

Resources to create [Info](#)
Create only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional
Creates a tag with a key of 'Name' and a value that you specify.

hydrabad-vpc

IPv4 CIDR block [Info](#)
☒ IPv4 CIDR manual input
☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR
10.1.0.0/16
CIDR block size must be between /16 and /28.

IPv6 CIDR block [Info](#)
☒ No IPv6 CIDR block
☐ IPAM-allocated IPv6 CIDR block
☐ Amazon-provided IPv6 CIDR block
☐ IPv6 CIDR owned by me

Tenancy [Info](#)
Default

Create Private Subnet

- Name: hyd-private-subnet
- CIDR: 10.1.1.0/24

☰ VPC > Subnets > Create subnet

Subnet settings

Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name
Create a tag with a key of 'Name' and a value that you specify.

hyd-private-subnet
The name can be up to 256 characters long.

Availability Zone [Info](#)
Choose the zone in which your subnet will reside, or let Amazon choose one for you.

Asia Pacific (Singapore) / apse1-az2 (ap-southeast-1a)

IPv4 VPC CIDR block [Info](#)
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.

10.1.0.0/16

IPv4 subnet CIDR block
10.1.1.0/24 256 IPs

▼ **Tags - optional**

Key	Value - optional	
Q Name	Q hyd-private-subnet	Remove

Route Table

- NO Internet Gateway
- Only local route

VPC
Route tables
Create route table

Create route table

A route table specifies how packets are forwarded between the subnets within your VPC, the internet, and your VPN connection.

Route table settings

Name - optional

Create a tag with a key of 'Name' and a value that you specify.

hyd-private-route

VPC

The VPC to use for this route table.

vpc-0964e7eb188d41ae3 (hydrabad-vpc)

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name

Value - optional

Q hyd-private-route

Remove

Add new tag

You can add 49 more tags.

Cancel
Create route table

Launch EC2 (Application Server)

- ❖ Name: app-server-hyd
- ❖ Subnet: Private
- ❖ Public IP: Disabled
- ❖ Security Group
- ❖ Inbound rules:
- ❖ SSH (22) → Mumbai VPC CIDR (10.0.0.0/16)
- ❖ TELNET (23) → Mumbai VPC CIDR

EC2
Instances
Launch an instance

Launch instance

Name and tags

Name

application-server-hyd

Add additional tags

Application and OS Images (Amazon Machine Image)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Q Search our full catalog including 1000s of application and OS images.

Quick Start

Amazon Linux

macOS

Ubuntu

Windows

Red Hat

SUSE Linux

Debian

Browse more AMIs

Amazon Machine Image (AMI)

Amazon Linux 2023 kernel-6.1 AMI

ami-05f071c65e32875a8 (64-bit (x86), uefi-preferred) / ami-0083aa2b4fd35d431 (64-bit (Arm), uefi)

Virtualization: hvm ENA enabled: true Root device type: ebs

Free tier eligible

Summary

Number of instances

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.9.2...read more

ami-05f071c65e32875a8

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel
Launch instance
Preview code

EC2 > Instances > Launch an instance

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

abc [Create new key pair](#)

▼ Network settings [Info](#)

VPC - *required* [Info](#)

vpc-0964e7eb188d41ae3 (hydrabad-vpc) [10.1.0.0/16](#) [Create new VPC](#)

Subnet [Info](#)

subnet-042e1681104e90c15 hyd-private-subnet [Create new subnet](#)

VPC: vpc-0964e7eb188d41ae3 Owner: 798974631771
Availability Zone: ap-southeast-1a (apse1-a2) Zone type: Availability Zone
IP addresses available: 251 CIDR: 10.1.1.0/24

Auto-assign public IP [Info](#)

Disable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group ☐ Select existing security group

*Security group name - *required**

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.9.2...[read more](#)
ami-05f071c65e32875a8

Virtual server type (instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel [Launch instance](#) [Preview code](#)

EC2 > Instances > Launch an instance

reserved instances
Dedicated Hosts
Capacity Reservations
Capacity Manager [New](#)

▼ Images

AMIs
AMI Catalog

▼ Elastic Block Store

Volumes
Snapshots
Lifecycle Manager

▼ Network & Security

Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces

▼ Load Balancing

Load Balancers
Target Groups

inbound security group rules

▼ Security group rule 1 (TCP, 22, 10.0.0.0/16) [Remove](#)

Type	Protocol	Port range
ssh	TCP	22

Source type [Info](#) Source [Info](#) Description - optional [Info](#)

Custom [Add CIDR, prefix list or security gr](#) e.g. SSH for admin desktop

10.0.0.0/16 [X](#)

▼ Security group rule 2 (TCP, 23, 10.0.0.0/16) [Remove](#)

Type	Protocol	Port range
Custom TCP	TCP	23

Source type [Info](#) Source [Info](#) Description - optional [Info](#)

Custom [Add CIDR, prefix list or security gr](#) e.g. SSH for admin desktop

10.0.0.0/16 [X](#)

[Add security group rule](#)

► Advanced network configuration

▼ Summary

Number of instances [Info](#)

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.9.2...[read more](#)
ami-05f071c65e32875a8

Virtual server type (instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel [Launch instance](#) [Preview code](#)

5. VPC PEERING (cross – region)

Create Peering (Mumbai)

- VPC - Peering Connections - Create
- Requester VPC: Mumbai
- Acceptor VPC: Hyderabad
- Region:

VPC > Peering connections > Create peering connection

10.0.0.0/16 Associated

Select another VPC to peer with

Account

☒ My account

☐ Another account

Region

☐ This Region (ap-south-1)

☒ Another Region

Asia Pacific (Singapore) (ap-southeast-1)

VPC ID (Accepter)

vpc-0964e7eb188d41ae3

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name

Value - optional

Q my-cross-peering-connection

Remove

Add new tag

You can add 49 more tags.

Cancel Create peering connection

VPC > Peering connections

Peering connections (1) Info

Find peering connections by attribute or tag

Name	Peering connection ID	Status	Requester VPC	Accepter VPC	Requester CIDRs	Accepter CIDRs
my-cross-peering-connection	pcx-035c5ff111d27b54b	Pending acceptance	vpc-0acdc3c2137a2567f / mum...	vpc-0964e7eb188d41ae3	10.0.0.0/16	-

Accept Request

VPC > Peering connections

Peering connections (1) Info

Find peering connections by attribute or tag

Name	Peering connection ID	Status	Requester VPC	Accepter VPC	Requester CIDRs	Accepter CIDRs
-	pcx-035c5ff111d27b54b	Active	vpc-0acdc3c2137a2567f	vpc-0964e7eb188d41ae3 / hyd...	10.0.0.0/16	-

VPC > Peering connections

Peering connections (1) Info

Find peering connections by attribute or tag

Name	Peering connection ID	Status	Requester VPC	Accepter VPC	Requester CIDRs	Accepter CIDRs
my-cross-peering-connection	pcx-035c5ff111d27b54b	Active	vpc-0acdc3c2137a2567f / mum...	vpc-0964e7eb188d41ae3	10.0.0.0/16	-

Update Route Tables

Mumbai Route Table

- Destination: 10.1.0.0/16
- Target: Peering Connection

VPC > Route tables > rtb-07d0102f388c8f3c3 > Edit routes

Edit routes

Destination	Target	Status	Propagated	Route Origin
10.0.0.0/16	local	Active	No	CreateRouteTable
Q 0.0.0.0/0	local			
	Internet Gateway	Active	No	CreateRoute
	igw-0293ed8d72317bf96			
Q 10.1.0.0/16	Peering Connection	-	No	CreateRoute
	pcx-035c5ff111d27b54b			

Add route

Cancel Preview Save changes

Hyderabad Route Table

- Destination: 10.0.0.0/16
- Target: Peering Connection

VPC > Route tables > rtb-0a1382f6e9ac502b4 > Edit routes

Edit routes

Destination	Target	Status	Propagated	Route Origin
10.1.0.0/16	local	Active	No	CreateRouteTable
	local			
Q 10.0.0.0/16	Peering Connection	-	No	CreateRoute
	pcx-035c5ff111d27b54b			

Add route

Cancel Preview Save changes

6. REMOVE VPC PEERING

Delete Peering Connection

VPC > Peering connections

Virtual private cloud

- Your VPCs
- Subnets
- Route tables
- Internet gateways
- Egress-only internet gateways
- DHCP option sets
- Elastic IPs
- Managed prefix lists
- NAT gateways

Peering connections (1) [Info](#)

Find peering connections by attribute or tag

Name	Peering connection ID	Status	Requester VPC	Accepter VPC	Requester CIDRs	Accepter CIDRs
my-cross-peering-connection	pcx-035c5ff111d27b54b	Deleting	vpc-0acdc3c2137a2567f / mum...	vpc-0964e7eb188d41ae3	-	-

Select a peering connection above

VPC > Peering connections

Peering connections (1) [Info](#)

Find peering connections by attribute or tag

Name	Peering connection ID	Status	Requester VPC	Accepter VPC	Requester CIDRs	Accepter CIDRs
-	pcx-035c5ff111d27b54b	Deleted	vpc-0acdc3c2137a2567f	vpc-0964e7eb188d41ae3 / hyd...	-	-

Select a peering connection above

Route Tables – Private EC2

VPC > Route tables > rtb-0a1382f6e9ac502b4 > Edit routes

Edit routes

Destination	Target	Status	Propagated	Route Origin
10.1.0.0/16	local	Active	No	CreateRouteTable
	local			

[Add route](#)

[Cancel](#) [Preview](#) [Save changes](#)

Public EC2

VPC > Route tables > rtb-07d0102f388c8f3c3 > Edit routes

Edit routes

Destination	Target	Status	Propagated	Route Origin
10.0.0.0/16	local	Active	No	CreateRouteTable
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute
	igw-0293ed8d72317bf96			

[Add route](#)

[Cancel](#) [Preview](#) [Save changes](#)

7. TRANSIT GATEWAY

Create Transit Gateway (Mumbai)

- VPC - Transit Gateways - Create
- Name: my-tgw

☰ [VPC](#) > [Transit gateways](#) > Create transit gateway ⓘ 📄

Create transit gateway ⓘ

A transit gateway (TGW) is a network transit hub that interconnects attachments (VPCs and VPNs) within the same AWS account or across AWS accounts.

Details - *optional*

Name tag
Creates a tag with the key set to Name and the value set to the specified string.

my-tgw

Description ⓘ
Set the description of your transit gateway to help you identify it in the future.

TGW for connection of VPC from different AZ

Configure the transit gateway

Amazon side Autonomous System Number (ASN) ⓘ

ASN

☒ DNS support ⓘ

☐ Security Group Referencing support ⓘ

☒ VPN ECMP support ⓘ

☒ Default route table association ⓘ

☒ Default route table propagation ⓘ

☐ Multicast support ⓘ

Attach Mumbai VPC

- TGW Attachments - Create
- VPC: Mumbai VPC

Cross-Account Attachment

- Create attachment from Mumbai TGW
- Enter Hyderabad VPC & Account ID
- Accept in Application Account

VPC > Transit gateway attachments > Create transit gateway attachment

Name tag - optional
Creates a tag with the key set to Name and the value set to the specified string.

tgw

Transit gateway ID [Info](#)
tgw-0d2af4dc073037e45

Attachment type [Info](#)
Peering connection

Peering connection attachment
Select and configure your peering connection attachment.

Account [Info](#)
☐ My account
☒ Other account

Account ID
Add 12 digits AWS account number (without hyphen) of the transit gateway you are peering with.
Enter AWS account number

Region [Info](#)
Asia Pacific (Singapore) (ap-southeast-1)

Transit gateway (accepter) [Info](#)
tgw-attach-0f850717b6586838f

VPC > Transit gateway attachments

Transit gateway attachments (2) [Info](#) [Actions](#) [Create transit gateway attachment](#)

Find transit gateway attachment by attribute or tag

☐	Name	Transit gateway attachment ID	Transit gateway ID	State	Resource type	Resource ID	Association route
☐	tgw-all	tgw-attach-0ad6507756904e3fa	tgw-0d2af4dc073037e45	Initiating request	Peering	tgw-04803d35f0ea57c0f	-
☐	my-tgw-mum	tgw-attach-099130599401e4277	tgw-0d2af4dc073037e45	Available	VPC	vpc-0acdc3c2137a2567f	tgw-rtb-0721a0a1

Select a transit gateway attachment

VPC > Transit gateway attachments

Transit gateway attachments (2) [Info](#) [Actions](#) [Create transit gateway attachment](#)

Find transit gateway attachment by attribute or tag

☐	Name	Transit gateway attachment ID	Transit gateway ID	State	Resource type	Resource ID	Ass
☐	tgw-attach-0ad6507756904e3fa	tgw-04803d35f0ea57c0f	tgw-04803d35f0ea57c0f	Pending acceptance	Peering	tgw-0d2af4dc073037e45	-
☐	hyd	tgw-attach-0f850717b6586838f	tgw-04803d35f0ea57c0f	Available	VPC	vpc-0964e7eb188d41ae3	tgw

Select a transit gateway attachment

VPC > Transit gateway attachments

VPC dashboard < [AWS Global View](#) [Filter by VPC](#)

Virtual private cloud

- Your VPCs
- Subnets
- Route tables
- Internet gateways
- Egress-only internet gateways
- DHCP option sets

Transit gateway attachments (2) [Info](#) [Actions](#) [Create transit gateway attachment](#)

Find transit gateway attachment by attribute or tag

☐	Name	Transit gateway attachment ID	Transit gateway ID	State	Resource type	Resource ID	Ass
☐	tgw-attach-0ad6507756904e3fa	tgw-04803d35f0ea57c0f	tgw-04803d35f0ea57c0f	Available	Peering	tgw-0d2af4dc073037e45	tgw
☐	hyd	tgw-attach-0f850717b6586838f	tgw-04803d35f0ea57c0f	Available	VPC	vpc-0964e7eb188d41ae3	tgw

Select a transit gateway attachment

Update Route Tables

- Mumbai VPC Route Table

- Destination: 10.1.0.0/16
- Target: TGW

☰ VPC > Route tables > rtb-07d0102f388c8f3c3 > Edit routes 🔍

Edit routes

Destination	Target	Status	Propagated	Route Origin	
10.0.0.0/16	local	Active	No	CreateRouteTable	
0.0.0.0/0	Internet Gateway	Active	No	CreateRoute	<button>Remove</button>
10.1.0.0/16	Transit Gateway	-	No	CreateRoute	<button>Remove</button>

- Hyderabad VPC Route Table
 - Destination: 10.0.0.0/16
 - Target: TGW

☰ VPC > Route tables > rtb-0a1382f6e9ac502b4 > Edit routes 🔍

Edit routes

Destination	Target	Status	Propagated	Route Origin	
10.1.0.0/16	local	Active	No	CreateRouteTable	
10.0.0.0/16	Transit Gateway	-	No	CreateRoute	<button>Remove</button>

8. S3 BUCKET

- S3 - Create bucket
- Bucket name: acc-logo-bucket
- Disable block public access (for test only)

Amazon S3 > Buckets > Create bucket

application-user

Create bucket info

Buckets are containers for data stored in S3.

General configuration

AWS Region

Asia Pacific (Singapore) ap-southeast-1

Bucket type info

☒ General purpose

Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ Directory

Recommended for specialized low-latency use cases supported by AWS Availability Zones or data residency use cases supported by AWS Local Zones.

Bucket name info

acc-logo-bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

Object Ownership info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

Amazon S3 > Buckets > Create bucket

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

⚠ Turning off block all public access might result in this bucket and the objects within becoming public

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☐ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

• Upload image file

Upload succeeded

For more information, see the Files and folders table.

After you navigate away from this page, the following information is no longer available.

Summary

Destination

s3://acc-logo-bucket

Succeeded

1 file, 22.8 KB (100.00%)

Failed

0 files, 0 B (0%)

Files and folders

Configuration

Files and folders (1 total, 22.8 KB)

Find by name

Name	Folder	Type	Size	Status	Error
Applied Cloud computing.jpg	-	image/jpeg	22.8 KB	Succeeded	-

- Make object public

Amazon S3 > Buckets > acc-logo-bucket > Make public

Make public Info

The make public action enables public read access in the object access control list (ACL) settings. [Learn more](#).

The object you've specified already has public read access enabled in the object access control list settings.

When public read access is enabled and not blocked by Block Public Access settings, anyone in the world can access the specified objects.

Specified objects


Find objects by name

Name	Type	Last modified	Size
Applied Cloud computing.jpg	jpg	January 6, 2026, 15:03:08 (UTC+05:30)	22.8 KB

[Cancel](#) [Make public](#)

Share Object URL:

(<https://acc-logo-bucket.s3.ap-southeast-1.amazonaws.com/Applied+Cloud+computing.jpg>)

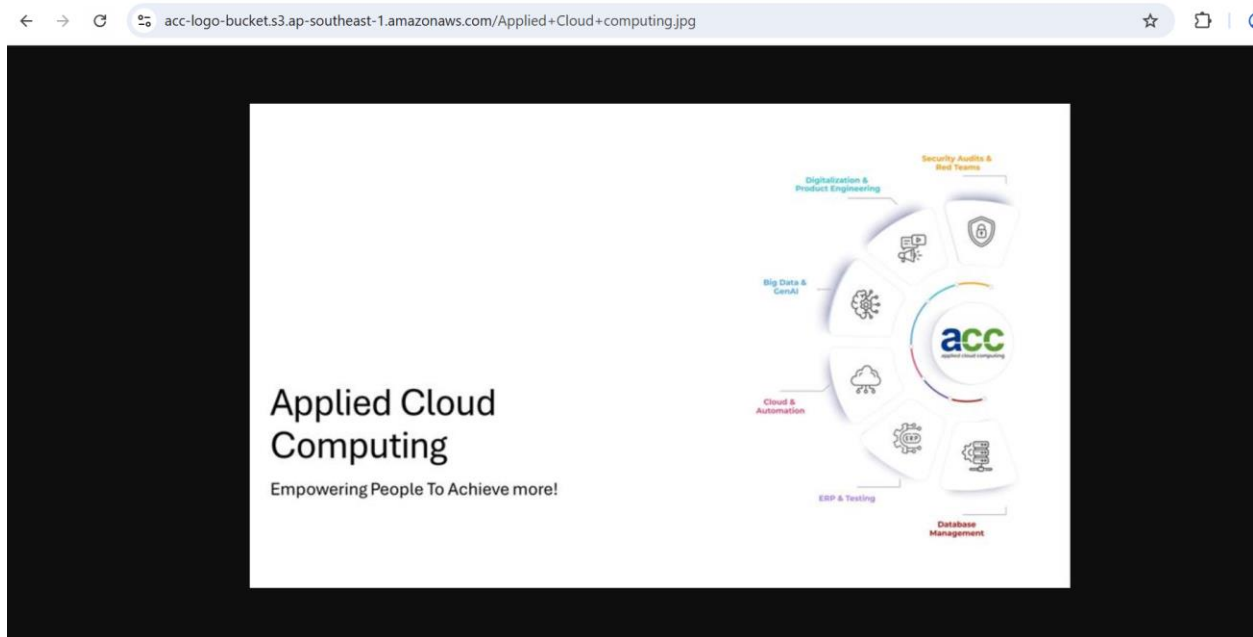

Delete after Verification

Object Deletion:

Successfully deleted objects
View details below.

After you navigate away from this page, the following information is no longer available.

Summary

Source
s3://acc-logo-bucket

Successfully deleted
1 object, 22.8 KB

Failed to delete
0 objects

Failed to delete

Configuration

Failed to delete (0)

Name	Folder	Type	Last modified	Size	Error
No objects failed to delete.					

Bucket Deletion:

Successfully deleted bucket "acc-logo-bucket"

Storage

Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

Create a bucket

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

Create bucket

How it works

aws

Introduction to Amazon S3 | Amazon Web Services

Pricing

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

Estimate your monthly bill using the [AWS](#)
