

knn

September 28, 2018

1 k-Nearest Neighbor (kNN) exercise

Complete and hand in this completed worksheet (including its outputs and any supporting code outside of the worksheet) with your assignment submission. For more details see the [assignments page](#) on the course website.

The kNN classifier consists of two stages:

- During training, the classifier takes the training data and simply remembers it
- During testing, kNN classifies every test image by comparing to all training images and transferring the labels of the k most similar training examples
- The value of k is cross-validated

In this exercise you will implement these steps and understand the basic Image Classification pipeline, cross-validation, and gain proficiency in writing efficient, vectorized code.

In [1]: *# Run some setup code for this notebook.*

```
import random
import numpy as np
from cs682.data_utils import load_CIFAR10
import matplotlib.pyplot as plt

from __future__ import print_function

# This is a bit of magic to make matplotlib figures appear inline in the notebook
# rather than in a new window.
%matplotlib inline
plt.rcParams['figure.figsize'] = (10.0, 8.0) # set default size of plots
plt.rcParams['image.interpolation'] = 'nearest'
plt.rcParams['image.cmap'] = 'gray'

# Some more magic so that the notebook will reload external python modules;
# see http://stackoverflow.com/questions/1907993/autoreload-of-modules-in-ipython
%load_ext autoreload
%autoreload 2
```

In [2]: *# Load the raw CIFAR-10 data.*

```
cifar10_dir = 'cs682/datasets/cifar-10-batches-py'
```

```

# Cleaning up variables to prevent loading data multiple times (which may cause memory
try:
    del X_train, y_train
    del X_test, y_test
    print('Clear previously loaded data.')
except:
    pass

```

```

X_train, y_train, X_test, y_test = load_CIFAR10(cifar10_dir)

```

```

# As a sanity check, we print out the size of the training and test data.
print('Training data shape: ', X_train.shape)
print('Training labels shape: ', y_train.shape)
print('Test data shape: ', X_test.shape)
print('Test labels shape: ', y_test.shape)

```

```

Training data shape: (50000, 32, 32, 3)

```

```

Training labels shape: (50000,)

```

```

Test data shape: (10000, 32, 32, 3)

```

```

Test labels shape: (10000,)

```

```

In [3]: # Visualize some examples from the dataset.

```

```

# We show a few examples of training images from each class.

```

```

classes = ['plane', 'car', 'bird', 'cat', 'deer', 'dog', 'frog', 'horse', 'ship', 'truck']

```

```

num_classes = len(classes)

```

```

samples_per_class = 7

```

```

for y, cls in enumerate(classes):
    idxs = np.flatnonzero(y_train == y)
    idxs = np.random.choice(idxs, samples_per_class, replace=False)
    for i, idx in enumerate(idxs):
        plt_idx = i * num_classes + y + 1
        plt.subplot(samples_per_class, num_classes, plt_idx)
        plt.imshow(X_train[idx].astype('uint8'))
        plt.axis('off')
        if i == 0:
            plt.title(cls)
plt.show()

```



```
In [4]: # Subsample the data for more efficient code execution in this exercise
num_training = 5000
mask = list(range(num_training))
X_train = X_train[mask]
y_train = y_train[mask]
```

```
num_test = 500
mask = list(range(num_test))
X_test = X_test[mask]
y_test = y_test[mask]
```

```
In [5]: # Reshape the image data into rows
X_train = np.reshape(X_train, (X_train.shape[0], -1))
X_test = np.reshape(X_test, (X_test.shape[0], -1))
print(X_train.shape, X_test.shape)
```

```
(5000, 3072) (500, 3072)
```

```
In [6]: from cs682.classifiers import KNearestNeighbor
```

```
# Create a kNN classifier instance.
# Remember that training a kNN classifier is a noop:
# the Classifier simply remembers the data and does no further processing
classifier = KNearestNeighbor()
classifier.train(X_train, y_train)
```

We would now like to classify the test data with the kNN classifier. Recall that we can break down this process into two steps:

1. First we must compute the distances between all test examples and all train examples.
2. Given these distances, for each test example we find the k nearest examples and have them vote for the label


Lets begin with computing the distance matrix between all training and test examples. For example, if there are N_{tr} training examples and N_{te} test examples, this stage should result in a $N_{te} \times N_{tr}$ matrix where each element (i,j) is the distance between the i -th test and j -th train example.

First, open `cs682/classifiers/k_nearest_neighbor.py` and implement the function `compute_distances_two_loops` that uses a (very inefficient) double loop over all pairs of (test, train) examples and computes the distance matrix one element at a time.

```
In [7]: # Open cs682/classifiers/k_nearest_neighbor.py and implement
        # compute_distances_two_loops.
        #print(X_train)
        # Test your implementation:
        dists = classifier.compute_distances_two_loops(X_test)
        print(dists.shape)
```

(500, 5000)

```
In [8]: # We can visualize the distance matrix: each row is a single test example and
        # its distances to training examples
        plt.imshow(dists, interpolation='none')
        plt.show()
```

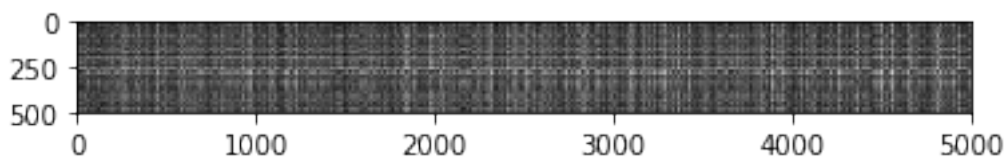

Inline Question #1: Notice the structured patterns in the distance matrix, where some rows or columns are visible brighter. (Note that with the default color scheme black indicates low distances while white indicates high distances.)

- What in the data is the cause behind the distinctly bright rows?
- What causes the columns?

Your Answer: The data that causes the distinctly bright rows are the data points in the train data that are far away from the test data. The columns are caused by data points on the test data that are far from the train data

```
In [9]: # Now implement the function predict_labels and run the code below:
# We use k = 1 (which is Nearest Neighbor).
y_test_pred = classifier.predict_labels(dists, k=1)

# Compute and print the fraction of correctly predicted examples
num_correct = np.sum(y_test_pred == y_test)
accuracy = float(num_correct) / num_test
print('Got %d / %d correct => accuracy: %f' % (num_correct, num_test, accuracy))
```

Got 137 / 500 correct => accuracy: 0.274000

You should expect to see approximately 27% accuracy. Now lets try out a larger k, say k = 5:

```
In [10]: y_test_pred = classifier.predict_labels(dists, k=5)
num_correct = np.sum(y_test_pred == y_test)
accuracy = float(num_correct) / num_test
print('Got %d / %d correct => accuracy: %f' % (num_correct, num_test, accuracy))
```

Got 139 / 500 correct => accuracy: 0.278000

You should expect to see a slightly better performance than with k = 1.

Inline Question 2 We can also other distance metrics such as L1 distance. The performance of a Nearest Neighbor classifier that uses L1 distance will not change if (Select all that apply): 1. The data is preprocessed by subtracting the mean. 2. The data is preprocessed by subtracting the mean and dividing by the standard deviation. 3. The coordinate axes for the data are rotated. 4. None of the above.

Your Answer: The data is preprocessed by subtracting the mean and dividing by the standard deviation

Your explanation: This is because l1 distance is by subtacting the distance between train and test data. hence, when the data is preprocessed, its posriton will change and hence the mean corresponding to them will also change. By dividing it by the standard deviation, you are scaling down, hence it would effectively be the same.

```
In [11]: # Now lets speed up distance matrix computation by using partial vectorization
# with one loop. Implement the function compute_distances_one_loop and run the
# code below:
dists_one = classifier.compute_distances_one_loop(X_test)

# To ensure that our vectorized implementation is correct, we make sure that it
# agrees with the naive implementation. There are many ways to decide whether
# two matrices are similar; one of the simplest is the Frobenius norm. In case
# you haven't seen it before, the Frobenius norm of two matrices is the square
# root of the squared sum of differences of all elements; in other words, reshape
# the matrices into vectors and compute the Euclidean distance between them.
difference = np.linalg.norm(dists - dists_one, ord='fro')
print('Difference was: %f' % (difference, ))
if difference < 0.001:
```

```

        print('Good! The distance matrices are the same')
    else:
        print('Uh-oh! The distance matrices are different')

```

Difference was: 0.000000

Good! The distance matrices are the same

```

In [12]: # Now implement the fully vectorized version inside compute_distances_no_loops
         # and run the code
         dists_two = classifier.compute_distances_no_loops(X_test)

```

```

         # check that the distance matrix agrees with the one we computed before:
         difference = np.linalg.norm(dists - dists_two, ord='fro')
         print('Difference was: %f' % (difference, ))
         if difference < 0.001:
             print('Good! The distance matrices are the same')
         else:
             print('Uh-oh! The distance matrices are different')

```

Difference was: 0.000000

Good! The distance matrices are the same

```

In [13]: # Let's compare how fast the implementations are

```

```

def time_function(f, *args):
    """
    Call a function f with args and return the time (in seconds) that it took to execute.
    """
    import time
    tic = time.time()
    f(*args)
    toc = time.time()
    return toc - tic

```

```

two_loop_time = time_function(classifier.compute_distances_two_loops, X_test)
print('Two loop version took %f seconds' % two_loop_time)

```

```

one_loop_time = time_function(classifier.compute_distances_one_loop, X_test)
print('One loop version took %f seconds' % one_loop_time)

```

```

no_loop_time = time_function(classifier.compute_distances_no_loops, X_test)
print('No loop version took %f seconds' % no_loop_time)

```

```

# you should see significantly faster performance with the fully vectorized implementation

```

Two loop version took 32.560608 seconds

One loop version took 36.555758 seconds

No loop version took 0.202962 seconds

1.0.1 Cross-validation

We have implemented the k-Nearest Neighbor classifier but we set the value $k = 5$ arbitrarily. We will now determine the best value of this hyperparameter with cross-validation.

```
In [14]: num_folds = 5
         k_choices = [1, 3, 5, 8, 10, 12, 15, 20, 50, 100]
         #k_choices = [1, 3]
         k_to_accuracies = {}
         accuracy = np.zeros((10, 5), dtype=np.float)
         X_train_folds = []
         y_train_folds = []

         X_train_folds = np.array_split(X_train, num_folds)
         y_train_folds = np.array_split(y_train, num_folds)
         #X_train_folds = np.array(X_train_folds)
         #y_train_folds = np.array(y_train_folds)
         n = X_train.shape[0]/num_folds

         for i in range(len(k_choices)):
             obj = KNearestNeighbor()
             for j in range(num_folds):
                 temp_train_x = np.concatenate((X_train_folds[:j]+X_train_folds[j+1:]))
                 #print(temp_train_x.shape)
                 temp_train_y = np.concatenate((y_train_folds[:j]+y_train_folds[j+1:]))
                 temp_test_x = X_train_folds[j]
                 temp_test_y = y_train_folds[j]
                 obj.train(temp_train_x, temp_train_y)
                 dists = obj.compute_distances_two_loops(temp_test_x)
                 pred = obj.predict_labels(dists, k=k_choices[i])
                 num_correct = np.sum(pred == temp_test_y)
                 accuracy[i][j] = float(num_correct)/n
                 k_to_accuracies[k_choices[i]] = accuracy[i]

#####
# TODO:
# Split up the training data into folds. After splitting, X_train_folds and
# y_train_folds should each be lists of length num_folds, where
# y_train_folds[i] is the label vector for the points in X_train_folds[i].
# Hint: Look up the numpy array_split function.
#####
# Your code
#####
#                                     END OF YOUR CODE
#####

# A dictionary holding the accuracies for different values of k that we find
# when running cross-validation. After running cross-validation,
# k_to_accuracies[k] should be a list of length num_folds giving the different
# accuracy values that we found when using that value of k.
```

```

#####
# TODO:
# Perform k-fold cross validation to find the best value of k. For each
# possible value of k, run the k-nearest-neighbor algorithm num_folds times,
# where in each case you use all but one of the folds as training data and the
# last fold as a validation set. Store the accuracies for all fold and all
# values of k in the k_to_accuracies dictionary.
#####
# Your code
#####
#                                     END OF YOUR CODE
#####

# Print out the computed accuracies
for k in k_choices:
    for accuracy in k_to_accuracies[k]:
        print('k = %d, accuracy = %f' % (k, accuracy))
#print(k_to_accuracies, accuracy)

k = 1, accuracy = 0.263000
k = 1, accuracy = 0.257000
k = 1, accuracy = 0.264000
k = 1, accuracy = 0.278000
k = 1, accuracy = 0.266000
k = 3, accuracy = 0.239000
k = 3, accuracy = 0.249000
k = 3, accuracy = 0.240000
k = 3, accuracy = 0.266000
k = 3, accuracy = 0.254000
k = 5, accuracy = 0.248000
k = 5, accuracy = 0.266000
k = 5, accuracy = 0.280000
k = 5, accuracy = 0.292000
k = 5, accuracy = 0.280000
k = 8, accuracy = 0.262000
k = 8, accuracy = 0.282000
k = 8, accuracy = 0.273000
k = 8, accuracy = 0.290000
k = 8, accuracy = 0.273000
k = 10, accuracy = 0.265000
k = 10, accuracy = 0.296000
k = 10, accuracy = 0.276000
k = 10, accuracy = 0.284000
k = 10, accuracy = 0.280000
k = 12, accuracy = 0.260000

```



```

k = 12, accuracy = 0.295000
k = 12, accuracy = 0.279000
k = 12, accuracy = 0.283000
k = 12, accuracy = 0.280000
k = 15, accuracy = 0.252000
k = 15, accuracy = 0.289000
k = 15, accuracy = 0.278000
k = 15, accuracy = 0.282000
k = 15, accuracy = 0.274000
k = 20, accuracy = 0.270000
k = 20, accuracy = 0.279000
k = 20, accuracy = 0.279000
k = 20, accuracy = 0.282000
k = 20, accuracy = 0.285000
k = 50, accuracy = 0.271000
k = 50, accuracy = 0.288000
k = 50, accuracy = 0.278000
k = 50, accuracy = 0.269000
k = 50, accuracy = 0.266000
k = 100, accuracy = 0.256000
k = 100, accuracy = 0.270000
k = 100, accuracy = 0.263000
k = 100, accuracy = 0.256000
k = 100, accuracy = 0.263000

```


```

In [15]: # plot the raw observations
        for k in k_choices:
            accuracies = k_to_accuracies[k]
            plt.scatter([k] * len(accuracies), accuracies)

        #plot the trend line with error bars that correspond to standard deviation
        accuracies_mean = np.array([np.mean(v) for k,v in sorted(k_to_accuracies.items())])
        accuracies_std = np.array([np.std(v) for k,v in sorted(k_to_accuracies.items())])
        plt.errorbar(k_choices, accuracies_mean, yerr=accuracies_std)
        plt.title('Cross-validation on k')
        plt.xlabel('k')
        plt.ylabel('Cross-validation accuracy')
        plt.show()

```

The history saving thread hit an unexpected error (OperationalError('database is locked',)).Hi.

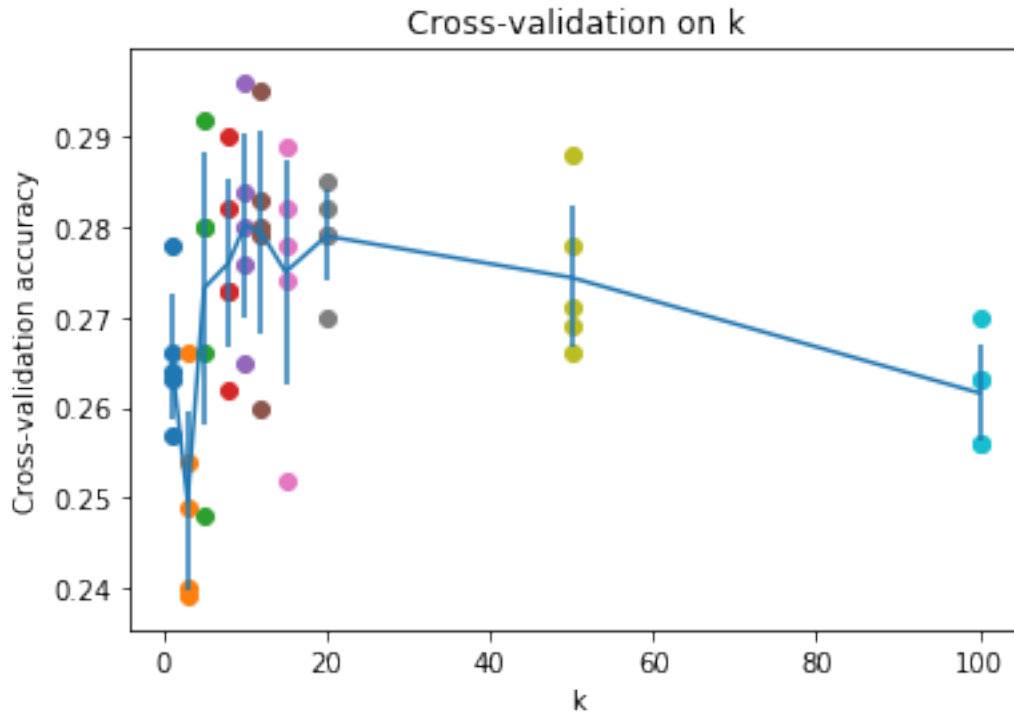

```
In [27]: # Based on the cross-validation results above, choose the best value for k,
# retrain the classifier using all the training data, and test it on the test
# data. You should be able to get above 28% accuracy on the test data.
best_k = 10

classifier = KNearestNeighbor()
classifier.train(X_train, y_train)
y_test_pred = classifier.predict(X_test, k=best_k)

# Compute and display the accuracy
num_correct = np.sum(y_test_pred == y_test)
accuracy = float(num_correct) / num_test
print('Got %d / %d correct => accuracy: %f' % (num_correct, num_test, accuracy))

Got 141 / 500 correct => accuracy: 0.282000
```

Inline Question 3 Which of the following statements about k -Nearest Neighbor (k -NN) are true in a classification setting, and for all k ? Select all that apply. 1. The training error of a 1-NN will always be better than that of 5-NN. 2. The test error of a 1-NN will always be better than that of a 5-NN. 3. The decision boundary of the k -NN classifier is linear. 4. The time needed to classify a test example with the k -NN classifier grows with the size of the training set. 5. None of the above.

Your Answer: The training error of 1-NN will always be better than that of 5-NN; The time needed to classify a test example with the k-NN classifier grows with the size of the training set

Your explanation: Since it uses only 1 closest neighbour, the error is often low when compared with 5NN. higher the number of values in the dataset, it takes more time because it has to compare each test point with with more train data.