



United International University (UIU)

Dept. of Computer Science and Engineering (CSE)

Mid Exam Year: 2022

Trimester: Spring

Course: CSE 2215/CSI 217 Data Structure and Algorithms I

Total Marks: 30, Time: 1 hour 45 min

(Any examinee found adopting unfair means will be expelled from the trimester / program as per UIU disciplinary rules)

There are **FOUR** questions. Answer all of them. Figures in the right-hand margin indicate full marks.

1. a) How do the ascending order Merge Sort algorithm and Quick Sort algorithm (upto first partition) work on the following data? [5]

y p z x r s

Here, x =last two digits of your student id+1, $y=x+3$, $z=x+y$, $p=y+z$, $r=x+2$, $s=y+9$

- b) Discuss the time complexity of the following algorithm. [2]

```
sum=0;
for(i=1; i<=n; i++){
    for(j=1; j<=i; j++){
        sum=sum+i+j;
    }
}
printf("%d", sum);
```

2. a) Find the memory location of $A[15][20]$ if $\text{loc}(A[5][10])=8000+c$, where c =last four digits of your student id. Assume row-wise memory is allocated in the double array $A[50][60]$, where each double data is 8 bytes. [3]

- b) How does the Binary Search algorithm work for the following data? Also find the total number of element comparisons needed in this case. [3]

Input Data: t r p z y x


Search Key=y

Here, x =last two digits of your student id, $y=x+3$, $z=x+y$, $p=y+z$, $r=z+p$, and $t=p+r$

- c) If $f(n)=kn^2-3$, prove that $f(n)=O(n^2)$. Here, k =last digit of your student id+2. [2]


3. a) Answer the following questions for the doubly linked list as shown below, where p = last two digits of your student id + 7, $q = p+4$, $r = p+q$, $s = r-3$, $t = r+s$. [3]

- head \rightarrow next \rightarrow next \rightarrow value = ?
- last \rightarrow prev \rightarrow next \rightarrow value = ?
- temp \rightarrow prev \rightarrow prev \rightarrow prev = ?
- temp \rightarrow next \rightarrow prev \rightarrow prev \rightarrow value = ?
- last \rightarrow prev \rightarrow prev \rightarrow next \rightarrow value = ?

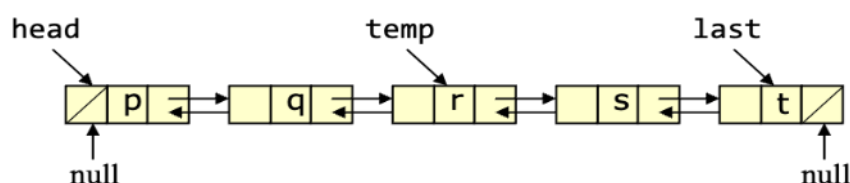

b) Assume that you are given a single linked list as shown below. Write the statements to perform the following: [5]

- i) To insert 40 in between 33 and 47.
- ii) To delete 14 from the list.
- iii) To make a linear circular linked list from the current list.



4. a) Show the status of a STACK implemented by a linear linked list for the operations given below. Here, $x = \text{last digit of your student id} + 5$, $y = x + 3$, and $z = y + x$. [2]

Push($x+y$), Push($y+z$), Pop(), Push($y*z$), Push($x*y$), Pop(), Pop()

b) Show the effect of each the statements given in the following code using a Stack. [3]

```

#include<stdio.h>
#include<string.h>
int top=-1;
char Stack[4]={'\0'};
int main(){
    char Str1[4]={'\0'};
    char Str2[4]={'\0'};
    int i;
    strcpy(Str1, "CSE");
    for(i=0; i<3; ++i){
        Push(Str1[i]);
    }
    for(i=0; i<3; ++i){
        Str2[i]=Pop();
    }
    printf("%s", Str2);
    return 0;
}

```

```

void Push(char x){
    Stack[++top]=x;
    return;
}

```

```

char Pop(void){
    return Stack[top--];
}

```

c) Write an algorithm to display the data stored in a double linked list in reverse order. Assume only head pointer is given for the linked list. [2]