QuickDine: deployment and evaluation supplement

Verified 18 October 2026, Asia/Dhaka. This supplement updates tasks 4 and 5 and supersedes older statements that owner/admin browser checks and hosted timings were unavailable. It does not establish genuine-user recruitment or adoption.

Deployment and software baseline

• Frontend: https://quick-dine-jade.vercel.app/

• Express API: https://quickdine-api-d604.onrender.com/

• Readiness: https://quickdine-api-d604.onrender.com/health/ready

• Reviewed application commit: `e60f030a78851bdbfd0891c62a533e4aafe1100a` on main.

• Vercel production deployment: `dpl_DJSJyBqtsK5oCdJgMmV193r2anV5`, READY on that commit when inspected.

• CI run 39046386549: both jobs passed and two coverage artifacts were published. Its logs show 42/42 API tests and 47/47 frontend tests, 89/89 (100%). API line coverage is 97.78%; frontend line coverage is 91.14%. These are CI results, not a new local rerun.


Live owner/admin smoke test

The owner used a separate browser session from the administrator. Only the explicitly labelled synthetic QA venue was modified. Its final status is rejected/suspended; its two reservations are cancelled and completed, with zero confirmed QA reservations. Fixture records remain for traceability and are excluded from operational dataset counts. Account passwords and session tokens are not included in the evidence.

Check	Expected	Observed	Result
owner-submission	pending	Registration Pending Approval; 6 seats	Pass
pending-public-discovery	0 matching restaurants	0 Restaurants Available for exact QA name	Pass
admin-approval-and-public-discovery	approved and 1 matching public restaurant	APPROVED; 1 Restaurant Available	Pass
owner-capacity-update	6 -> 8 seats persisted	Owner profile 8; fresh public availability 8	Pass
competing-five-guest-bookings	only one of two five-guest submissions fits an eight-seat slot	B confirmed GR-09E7EFF1; owner lists exactly one confirmed booking; A not confirmed	Pass
overcapacity-rejection	five more guests rejected when three seats remain	Only 3 seats are available for this time slot	Pass
owner-protected-capacity-edit	capacity reduction below five confirmed guests rejected	Capacity cannot be lower than confirmed reservations	Pass
owner-admin-role-guards	owner denied admin dashboard and admin API	Access Denied UI; Access denied, admin role required API	Pass
owner-cancellation	confirmed reservation becomes cancelled	GR-09E7EFF1 CANCELLED; no complete/cancel controls	Pass
owner-cancellation-releases-capacity	19:00 availability returns from 3 to 8	19:00 8 seats on 2026-10-19	Pass
owner-completion	two-guest reservation becomes completed and controls disappear	GR-A67B1F0A COMPLETED; GR-09E7EFF1 CANCELLED	Pass
admin-suspension	QA restaurant hidden; owner sees rejection	Admin REJECTED; public No Restaurants Found; owner Registration Denied	Pass
admin-reapproval	public discovery and owner dashboard restored	1 public restaurant; owner APPROVED with terminal booking history intact	Pass

Check	Expected	Observed	Result
owner-logout-revocation	owner dashboard and bookings API require login	Login to continue; Not authorized; please sign in	Pass
final-fixture-suspension	QA fixture rejected and hidden	Admin REJECTED; public 0 restaurants	Pass
owner-login-and-refresh	same QA account and suspended venue state restored after login and reload	QA owner session restored; Registration Denied for suspended QA venue	Pass
admin-analytics	updated totals and both terminal QA booking statuses visible	11 venues; 9 total bookings; QA completion COMPLETED and QA cancellation CANCELLED	Pass

Raw checks: owner/admin smoke JSON. The two competing forms were submitted together by the browser driver; precise server-arrival simultaneity was not measured. Their persisted result and the subsequent explicit overcapacity rejection support this experiment, not a proof for every possible race. Automated transaction tests supply additional coverage.

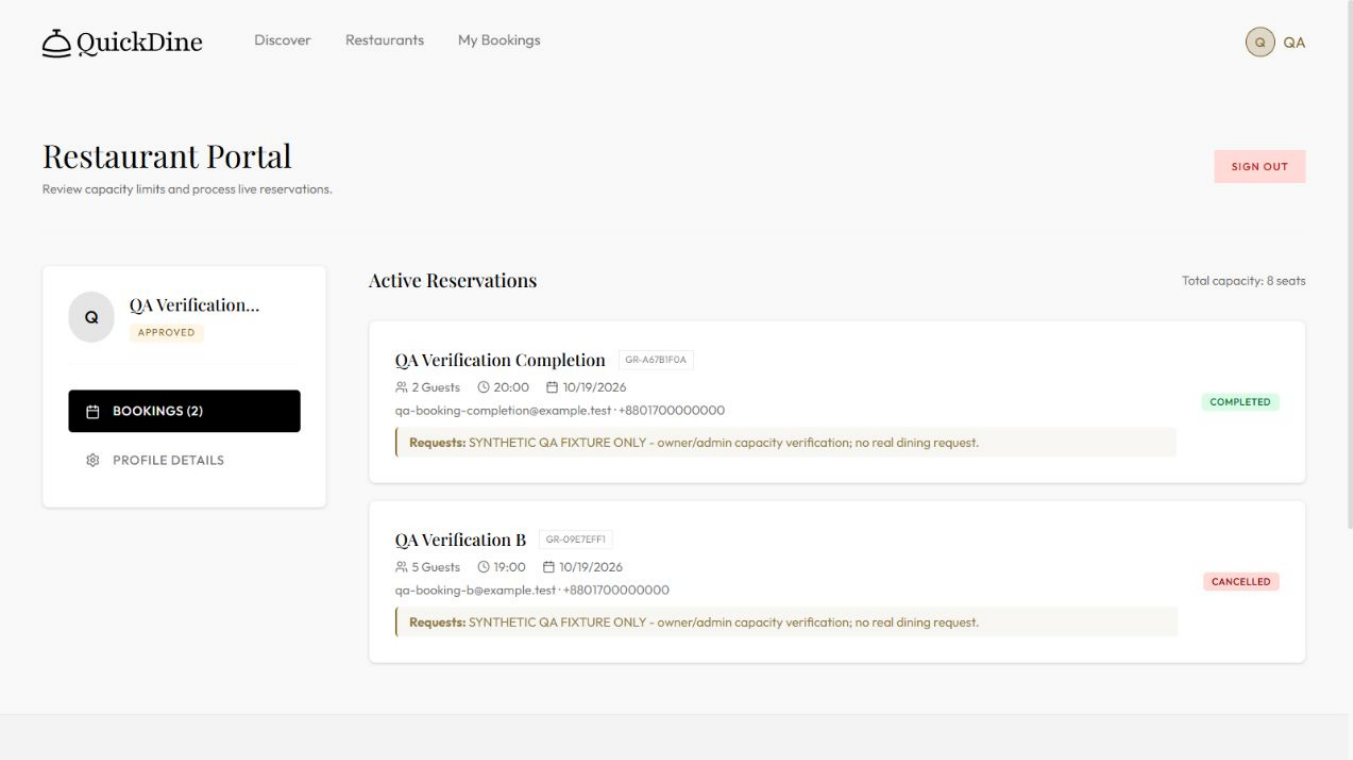

Existing hosted dataset and provenance

The data source is the configured deployed MongoDB Atlas database. The user cannot identify which old records came from genuine customers versus seed/demo activity. We therefore report actual persisted application records with unknown provenance, and do not rename them as pilot participants.

After excluding explicit QA records, the audit contains **11 users, 10 restaurants and 5 bookings**: two confirmed and three cancelled. Stored booking creation timestamps span 10–28 August 2026; that range is not a verified participant-observation period. The final audit excluded 2 QA users, 1 QA restaurant and 4 QA bookings. No personal contacts or user IDs are exported by the audit.

The provenance check found **3 identities matching the committed seed script**, linked to **3 of the five operational bookings**. Matching used exact seed email identities internally; only aggregate counts are exported. The other records are unverified, not automatically genuine customers. This strengthens the reason to keep any genuine-user pilot claim open.

Capacity correctness

The read-only audit independently summed persisted confirmed guest counts and compared them with direct Render availability responses, without calling the application's capacity helper. Across today and tomorrow, **110/110 operational restaurant slots matched (100% agreement)**. There were **0 occupied operational slots** in this future-date comparison: these results alone do not exercise subtraction from nonzero allocations. The two historical confirmed slot groups were independently audited and neither exceeded current capacity; public date validation prevents claiming those old dates as live availability comparisons.

The separate deployed synthetic experiment supplied the missing occupied-slot case: **20/20 QA slots matched**, including one occupied slot. Eight seats minus five confirmed guests produced three available seats; a further party of five was rejected. Owner cancellation released the five seats. A separate two-guest reservation was completed through the owner UI. These are QA workflow results, not real-customer booking/adoption statistics.

Evidence: initial Atlas audit, occupied QA audit, final Atlas audit.

Sustained hosted response-time measurements

Measurements ran from 2026-10-18T06:59:27.932Z to 2026-10-18T10:51:42.886Z (UTC; add six hours for Asia/Dhaka). Each of three concurrency levels ran for five measured minutes, after ten warm-up requests excluded from the percentiles. Each worker was paced to at most one request/second; total configured concurrency never exceeded five. The workload alternated cuisine discovery and availability, using both the Vercel same-origin proxy and direct Render API against the eight existing approved non-QA restaurant records. Complete response bodies were consumed and checked.

Accepted phase windows:

• 1 workers: 2026-10-18T06:59:36.631Z through last request 2026-10-18T07:04:36.315Z; 300.428 measured seconds.

• 3 workers: 2026-10-18T07:04:43.002Z through last request 2026-10-18T07:09:42.757Z; 300.256 measured seconds.

• 5 workers: 2026-10-18T10:46:42.424Z through last request 2026-10-18T10:51:42.333Z; 300.427 measured seconds.

The original five-worker attempt was interrupted on the measurement client: four failed requests recorded roughly an hour each despite ten-second timeout configuration. The cause was not independently diagnosed. That entire phase (1,342 requests, four failures) is retained in the interrupted summary and its raw samples, and excluded from the accepted table. The complete five-worker phase was rerun later with a client-heartbeat guard. This interruption is not classified as a measured server outage. Different run windows can have different network/host conditions; the phases are not a single continuous 15-minute experiment. An additional twenty-second restaurant-discovery timeout occurred before the accepted repeat; it had no measured workload samples and is retained in its diagnostic record.

2633/2633 measured requests succeeded; 0 HTTP/schema/timeout errors. Percentiles include all completed measured attempts, including failures if any; warm-up samples and the explicitly invalid timing attempt are reported separately.

Workers	Measured seconds	Requests	Errors	Achieved requests/s	p50 ms	p95 ms	p99 ms
1	300.428	298	0	0.992	702.82	780.73	980.02
3	300.256	892	0	2.971	697.98	763.82	965.13
5	300.427	1443	0	4.803	718.02	885.02	1906.92

Workers	Target	Requests	Errors	p50 ms	p95 ms	p99 ms
1	vercel-proxy	149	0	709.83	821.36	980.02
1	direct-render	149	0	701.5	767.69	810.27
3	vercel-proxy	446	0	700.72	783.78	1113
3	direct-render	446	0	678.58	747.03	768.29
5	vercel-proxy	722	0	716.63	923.17	1878.85

Workers	Target	Requests	Errors	p50 ms	p95 ms	p99 ms
5	direct-render	721	0	718.85	791.45	2018.22

Environment: Windows, Node v24.12.0, 12th Gen Intel(R) Core(TM) i5-1235U, 7.7 GiB RAM, user computer in Asia/Dhaka, WAN requests to Vercel and Render, with MongoDB Atlas behind the API. Measurements include client, network, hosting and database time; they do not isolate server compute time. Observed cache-control was no-store for all successful saved samples.

Raw evidence: run summary, per-request samples. The accepted five-worker repeat is also retained in its own summary.

Reproduction

From server, using Node 24 and locked dependencies:

```
npm ci
node scripts/hosted-evaluation.mjs
node --env-file=.env scripts/audit-hosted-capacity.mjs --require-cleanup
node scripts/build-verification-report.mjs
```

Optional printable export requires Python with ReportLab: `python scripts/render-verification-report.py`. The PDF is written to `output/pdf/QuickDine_Verification_Supplement_2026-10-18.pdf` at repository root.

The measurement and audit commands generate fresh timestamped files and refuse to overwrite evidence. The report builder regenerates this historical supplement from its committed 18 October input files; it does not silently substitute later measurements. To reproduce the accepted historical summary from its source runs, run `node scripts/assemble-hosted-results.mjs` before the report builder.

The hosted workload is public/read-only and needs no credentials. The database audit requires the user's existing MONGODB_URI, connects with autoIndex/autoCreate disabled, and contains no insert/update/delete operation. Replaying the browser QA journey requires distinct owner/admin sessions and explicit Terms approval for new accounts. Do not replay it against unrelated restaurant records. The report builder verifies saved request counts, response outcomes and fixture cleanup before generating this document. A later run must update dates and filenames consistently rather than silently relabelling this historical record.

Interpretation and limits

These are measured hosted timings and persisted-data consistency results, an advance over the earlier synthetic local benchmark. They are not maximum sustainable throughput, open-loop stress testing, long-term availability, or proof of real-user effectiveness. There is one run per load level, a small dataset, a paced read-only request mix, unknown customer provenance, and shared live-system/client activity (including the separate QA verification). Initial discovery/warm-up timings are retained separately; cold-start extremes and write contention need dedicated controlled experiments. The larger originally proposed 1/5/10/20-user staging matrix with three repetitions has not been performed.

Task 4's owner/admin smoke gap is closed for the recorded flows. Task 5 now has reproducible deployed-data capacity checks and sustained hosted measurements, alongside the existing literature review and its eight future improvements. If the lecturer requires verified genuine-customer data, that empirical requirement remains open until provenance or a consented pilot is supplied; a synthetic fixture cannot satisfy it. The provenance record template lists the factual evidence needed to close that specific empirical gap.