



a Go package for presentations

DECK: a package for presentations

Deck is a package written in Go

That uses a singular markup language

With elements for text, lists, code, and graphics

All layout and sizes are expressed as percentages

Clients are interactive or create formats like PDF or SVG

Servers use a RESTful API to list, upload, stop, start, remove decks

Elements

text element

Hello, World (plain text)

A block of text, word-wrapped to a specified width. You may specify the size, font, line spacing, color, and opacity.

```
package main

import "fmt"

func main() {
    fmt.Println("hello, world")
}
```

list element

- Point A
- Point B
- Point C
- Point D

- First item
- Second item
- The third item
- the last thing

- 1. This
- 2. That
- 3. The other
- 4. One more

```
<list xp="5" yp="70" sp="3"
    type="bullet"
    font="sans"
    color="rgb(0,127,0)">
    Point A
    Point B
    Point C
    Point D
```

```
<list xp="35" yp="70" sp="3"
    type="plain"
    font="serif"
    color="rgb(0,0,127)">
    First item
    Second item
    The third item
    the last thing
```

```
<list xp="70" yp="70" sp="3"
    type="number"
    font="mono"
    color="black">
    This
    This
    That
    The other
    One more
```

image element


height



width

rect element


height (relative to element or canvas width)

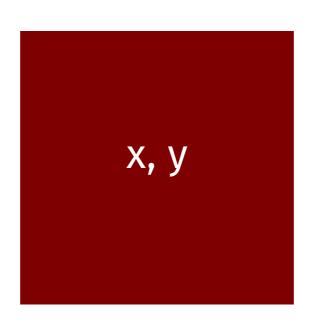

width


ellipse element

height (relative to element or canvas width)

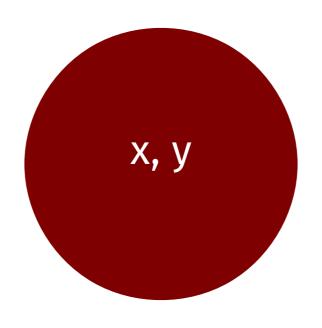


width

polygon element

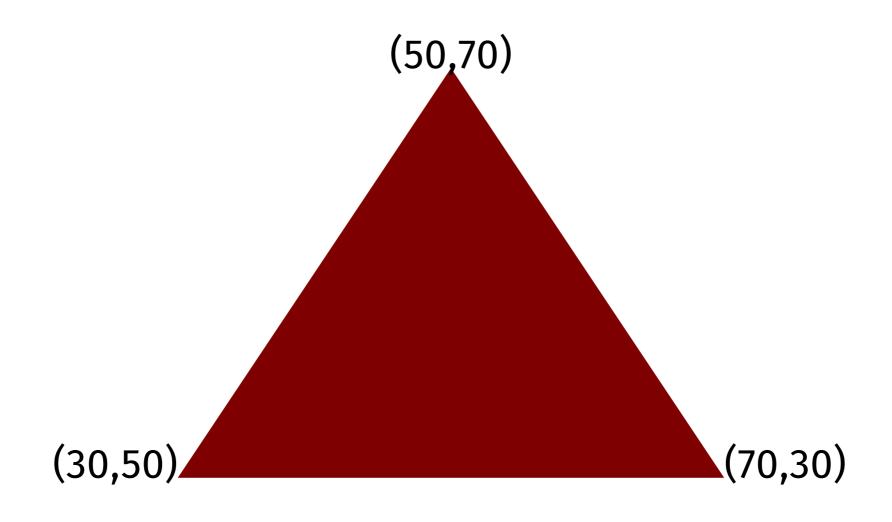

line element

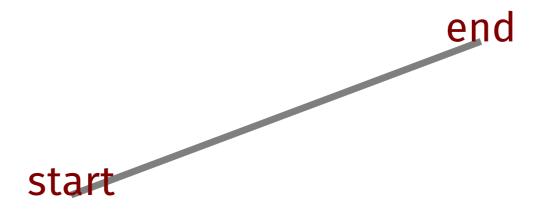

arc element

angle2 (90 deg)

x, y angle1 (0 deg)



Markup and Layout

```
Start the deck
                    <deck>
                      <canvas width="1024" height="768" />
Set the canvas size
Begin a slide
                      <slide bg="white" fg="black">
                           <image xp="70" yp="60" width="256" height="179" name="work.png" caption="Desk"/>
Place an image
Draw some text
                           <text xp="20" yp="80" sp="3" link="http://goo.gl/Wm05Ex">Deck elements</text>
Make a bullet list
                           <list xp="20" yp="70" sp="2" type="bullet">
                              text, list, image
                              line, rect, ellipse
                              arc, curve, polygon
End the list
                           </list>
                                    xp1="20" yp1="10" xp2="30" yp2="10"/>
Draw a line
                           ine
                                    xp="35" yp="10" wp="4" hr="75" color="rgb(127,0,0)"/>
Draw a rectangle
                           <rect
                           <ellipse xp="45" yp="10" wp="4" hr="75" color="rgb(0,127,0)"/>
Draw an ellipse
                                    xp="55" yp="10" wp="4" hp="3" a1="0" a2="180" color="rgb(0,0,127)"/>
Draw an arc
                           <arc
Draw a quadratic bezier
                                    xp1="60" yp1="10" xp2="75" yp2="20" xp3="70" yp3="10" />
                           <curve
                           <polygon xc=75 75 80" yc="8 12 10" color="rgb(0,0,127)"/>
Draw a polygon
End the slide
                      </slide>
End of the deck
                    </deck>
```

Anatomy of a Deck

Deck elements

- text, list, image
- line, rect, ellipse
- arc, curve, polygon




Desk


Text and List Markup

Common Attributes for text and list

```
horizontal percentage
хр
          vertical percentage
yp
          font size percentage
sp
          "bullet", "number" (list), "block", "code" (text)
type
          "left", "middle", "end"
align
color
          SVG names ("maroon"), or RGB "rgb(127,0,0)"
opacity percent opacity (0-100, transparent - opaque)
font
          "sans", "serif", "mono"
link
          URL
```


Scaling the canvas

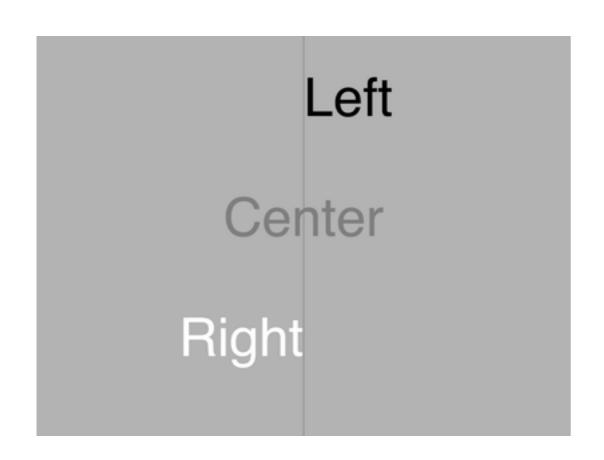

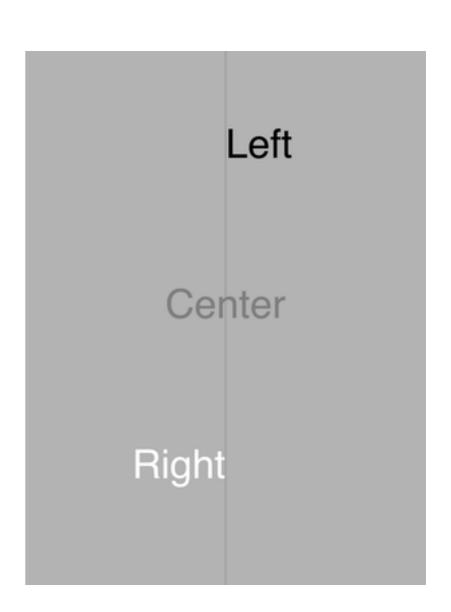

Landscape Portrait



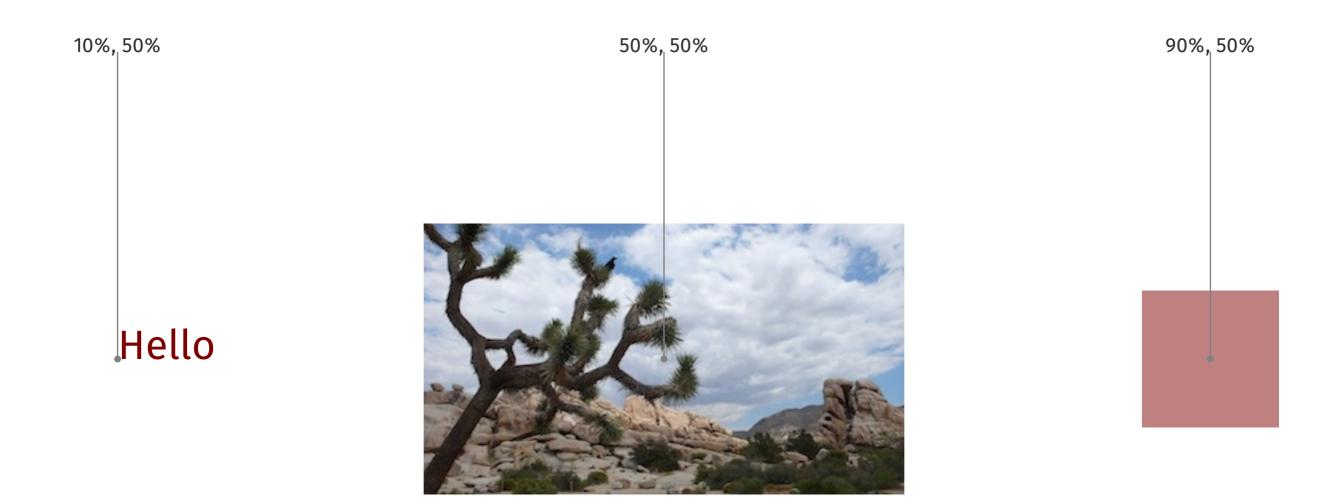

Percentage-based layout



Clients


```
package main
import (
    "github.com/ajstarks/deck"
    "log"
func main() {
    presentation, err := deck.Read("deck.xml", 1024, 768) // open the deck
    if err != nil {
       log.Fatal(err)
    for _, slide := range presentation.Slide { // for every slide...
        for _, t := range slide. Text { // process the text elements
            x, y, size := deck.Dimen(presentation.Canvas, t.Xp, t.Yp, t.Sp)
            slideText(x, y, size, t)
        for _, l := range slide.List { // process the list elements
            x, y, size := deck.Dimen(presentation.Canvas, l.Xp, l.Yp, l.Sp)
            slideList(x, y, size, l)
```




```
package main
                                            Generating a Barchart
import (
   "fmt"
   "github.com/ajstarks/deck/generate"
   "os"
type Bardata struct {
   label string
   value float64
func vmap(value float64, low1 float64, high1 float64, low2 float64, high2 float64) float64 {
   return low2 + (high2-low2)*(value-low1)/(high1-low1)
func main() {
   benchmarks := []Bardata{
       {"Macbook Air", 154.701}, {"MacBook Pro (2008)", 289.603}, {"BeagleBone Black", 2896.037}, {"Raspberry Pi", 5765.568},
   }
   maxdata := 5800.0
   ts := 2.5
   hts := ts / 2
   x, y := 10.0, 60.0
   bx1 := x + (ts * 12)
   bx2 := bx1 + 50.0
   linespacing := ts * 2.0
   deck := generate.NewSlides(os.Stdout, 0, 0)
   deck.StartDeck()
   deck.StartSlide("rgb(255,255,255)")
   deck.Text(x, y+20, "Go 1.1.2 Build and Test Times", "sans", ts*2, "black")
   for _, data := range benchmarks {
       deck.Text(x, y, data.label, "sans", ts, "rgb(100,100,100)")
       bv := vmap(data.value, 0, maxdata, bx1, bx2)
       deck.Line(bx1, y+hts, bv, y+hts, ts, "lightgray")
       deck.Text(bv+0.5, y+(hts/2), fmt.Sprintf("%.1f", data.value), "sans", hts, "rgb(127,0,0)")
       y -= linespacing
   deck.EndSlide()
   deck.EndDeck()
```

Go 1.1.2 Build and Test Times

Macbook Air MacBook Pro (2008) BeagleBone Black Raspberry Pi

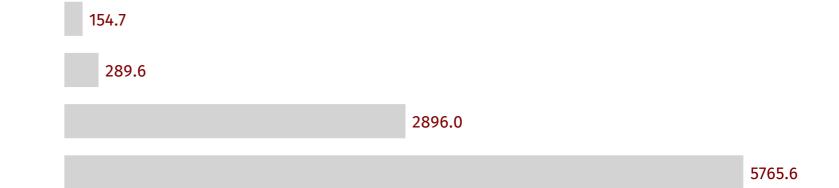



go get github.com/ajstarks/deck/cmd/vgdeck



go get github.com/ajstarks/deck/cmd/pdfdeck



go get github.com/ajstarks/deck/cmd/svgdeck

pdfdeck [options] file.xml...

- -sans, -serif, -mono [font] specify fonts
- -pagesize [w,h, or Letter, Legal, Tabloid, A2-A5, ArchA, Index, 4R, Widescreen]
- -stdout (output to standard out)
- -outdir [directory] directory for PDF output
- -fontdir [directory] directory containing font information
- -author [author name] set the document author
- -title [title text] set the document title
- -grid [percent] draw a percent grid on each slide

svgdeck [options] file.xml...

- -sans, -serif, -mono [font] specify fonts
- -pagesize [Letter, Legal, A3, A4, A5]
- -pagewidth [canvas width]
- -pageheight [canvas height]
- -stdout (output to standard out)
- -outdir [directory] directory for PDF output
- -title [title text] set the document title
- -grid [percent] draw a percent grid on each slide

vgdeck [options] file.xml...

- -loop [duration] loop, pausing [duration] between slides
- -slide [number] start at slide number
- -w [width] canvas width
- -h [height] canvas height
- -g [percent] draw a percent grid

vgdeck Commands

```
+, Ctrl-N, [Return]
                                      Next slide
-, Ctrl-P, [Backspace]
                                      Previous slide
^, Ctrl-A
                                      First slide
$, Ctrl-E
                                      Last slide
r, Ctrl-R
                                      Reload
x, Ctrl-X
                                      X-Ray
/, Ctrl-F [text]
                                      Search
s, Ctrl-S
                                      Save
                                      Quit
q
```

Deck Web API

sex -dir [start dir] -listen [address:port] -maxupload [bytes]

GET		List the API
GET	/deck/	List the content on the server
GET	<pre>/deck/?filter=[type]</pre>	List content filtered by deck, image, video
POST	<pre>/deck/content.xml?cmd=1s</pre>	Play a deck with the specified duration
POST	<pre>/deck/content.xml?cmd=stop</pre>	Stop playing a deck
POST	<pre>/deck/content.xml?slide=[num]</pre>	Play deck starting at a slide number
DELETE	/deck/content.xml	Remove content
POST	/upload/ Deck:content.xml	Upload content
POST	<pre>/table/ Deck:content.txt</pre>	Generate a table from a tab-separated list
POST	<pre>/table/?textsize=[size]</pre>	Specify the text size of the table
POST	/media/ Media:content.mov	Play the specified video

deck [command] [argument]

```
deck play file [duration]Play a deckdeck stopStop playing a deckdeck list [deck|image|video]List contentsdeck upload file...Upload contentdeck remove file...Remove contentdeck video filePlay videodeck table file [textsize]Make a table
```

```
$ deck upload *.jpg  # upload images

$ mkpicdeck *.jpg | deck upload /dev/stdin  # generate the slide show deck
$ deck play stdin  # play it
```

Display

is innovative
makes a product useful
is aesthetic
makes a product understandable
is unobtrusive
is honest
is long-lasting
is thorough down to the last detail
is environmentally-friendly
is as little design as possible

Controller

- > list
- > upload
- > play/stop
- > delete

Design Examples

hello, world

Top

Left

Right

30%

70%

Header (top 20%)

Summary (30%)

Detail (70%)

Footer (bottom 20%)

bullet

- Point A
- Point B
- Point C
- Point D

plain

First item

Second item

The third item

the last thing

number

- 1. This
- 2. That
- 3. The other
- 4. One more

</

BOS

Virgin America 351 Gate B38

4

8:35am

SFO

On Time

JFK



US Airways 1207 Gate C31C 5:35pm

Delayed

AAPL 503.73 -16.57 (3.18%)

AMZN 274.03 +6.09 (2.27%)

GOOG 727.58 -12.41 (1.68%)

Two Columns

One

Two

Three

Four



Tree and Sky

Five

Six

Seven


Eight



Rocks

build	compile packages and dependencies
clean	remove object files
env	print Go environment information
fix	run go tool fix on packages
fmt	run gofmt on package sources
get	download and install packages and dependencies
install	compile and install packages and dependencies
list	list packages
run	compile and run Go program
test	test packages
tool	run specified go tool
version	print Go version
vet	run go tool vet on packages


go

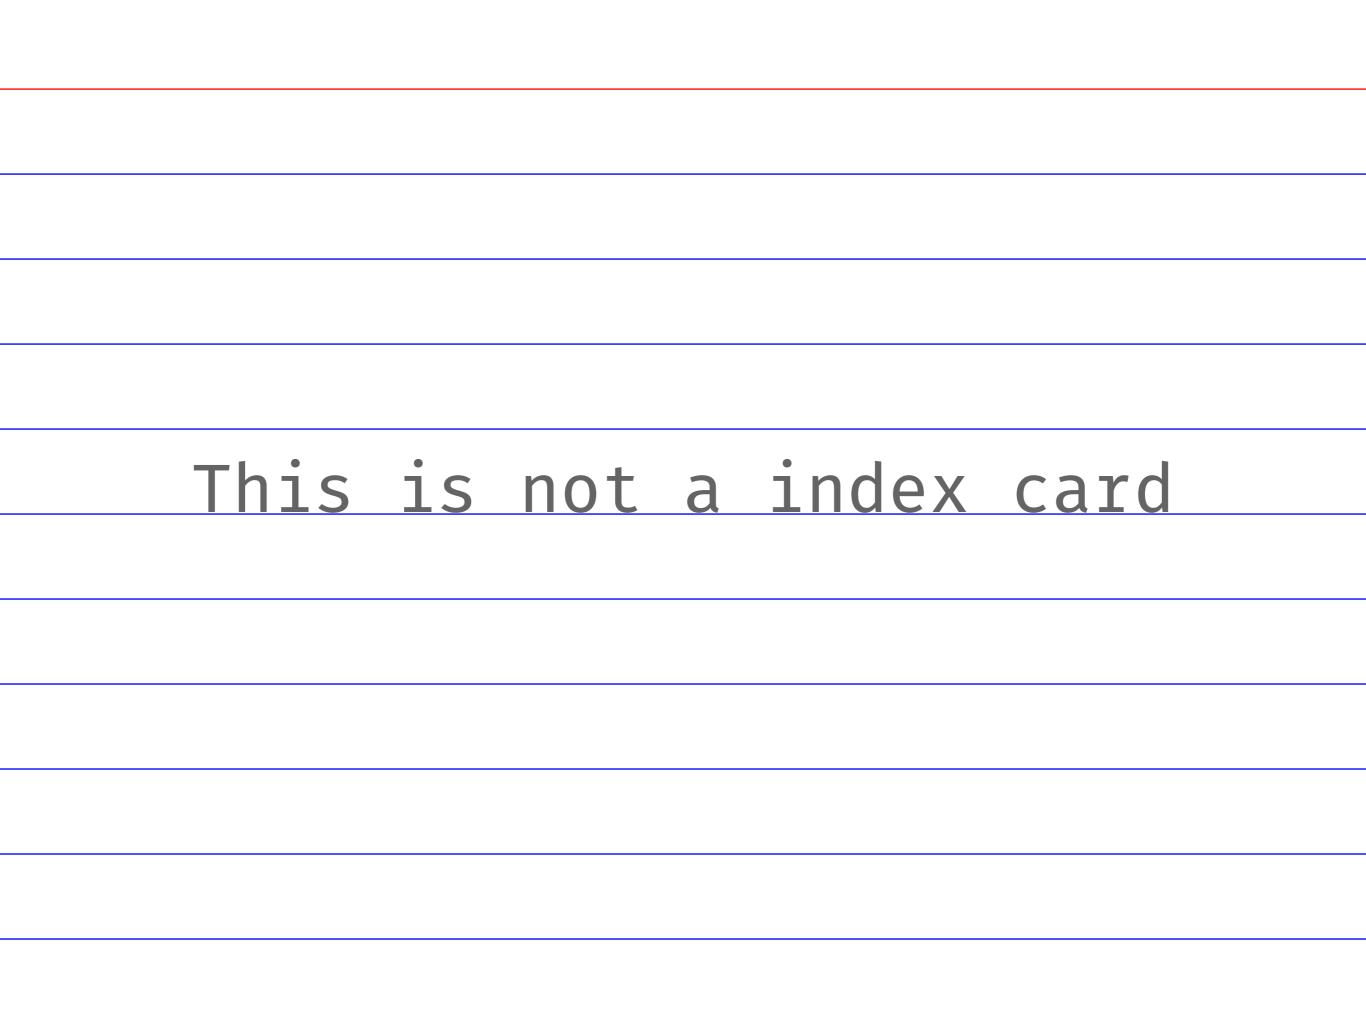

Rich Can't buy me love Bliss Worse Better Misery We have each other Poor

Code Output

```
package main
import (
    "github.com/ajstarks/svgo"
func main() {
   canvas := svg.New(os.Stdout)
   width, height := 500, 500
   a, ai, ti := 1.0, 0.03, 10.0
   canvas.Start(width, height)
    canvas.Rect(0, 0, width, height)
    canvas.Gstyle("font-family:serif;font-size:144pt")
   for t := 0.0; t <= 360.0; t += ti {
        canvas.TranslateRotate(width/2, height/2, t)
        canvas.Text(0, 0, "i", canvas.RGBA(255, 255, 255, a))
        canvas.Gend()
        a -= ai
    canvas.Gend()
    canvas.End()
```

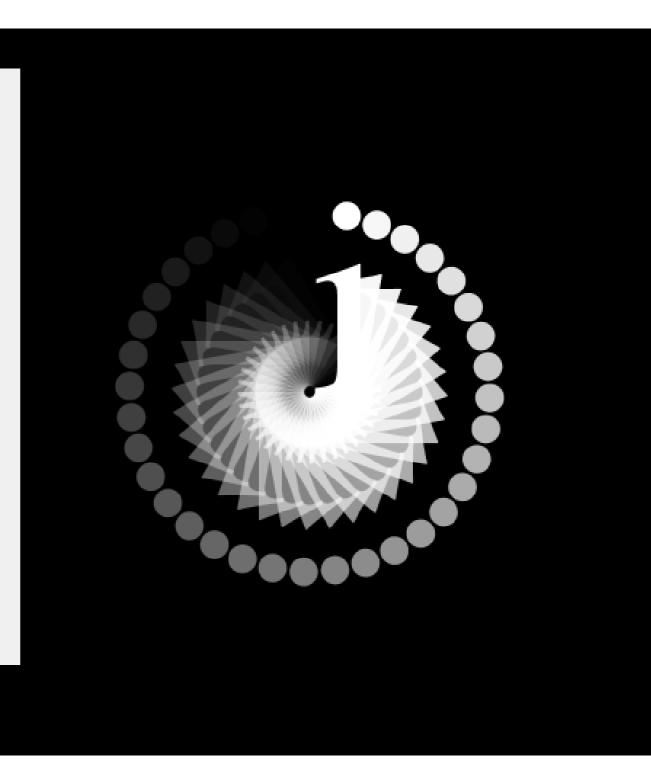

So, the next time you're about to make a subclass, think hard and ask yourself

what would Go do



Python and Ruby programmers come to Go because they don't have to surrender much expressiveness, but gain performance and get to play with concurrency.

Less is exponentially more Rob Pike



FOR, LO,

the winter is past,
the rain is over and gone;
The flowers appear on the earth;
the time for the singing of birds is come,
and the voice of the turtle is heard in our land.


Good Design

is innovative makes a product useful is aesthetic makes a product understandable is unobtrusive is honest is long-lasting is thorough down to the last detail is environmentally-friendly is as little design as possible



Dieter Rams

github.com/ajstarks/deck

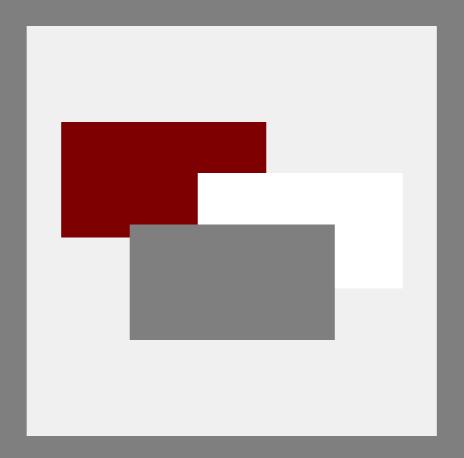

ajstarks@gmail.com @ajstarks