
# Deck

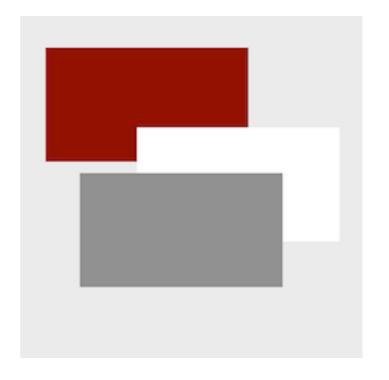

a Go package for presentations

#### DECK: a package for presentations

Deck is a package written in Go

That uses a singular markup language

With elements for text, lists, code, and graphics

All layout and sizes are expressed as percentages

Clients are interactive or create formats like PDF or SVG

Servers use a RESTful API for list, upload, stop, start, remove

### Elements

#### Hello, World

A block of text, word-wrapped to a specified width. You may specify size, font, color, and opacity.

```
package main
import "fmt"
func main() {
    fmt.Println("Hello, World")
}
```

<text>...</text>

#### bullet

- Point A
- Point B
- Point C
- Point D

#### plain

- First item
- Second item
- The third item
- the last thing

#### number

- 1. This
- 2. That
- 3. The other
- 4. One more


<list>...</list>



height


<image .../>

height (relative to element or canvas width)

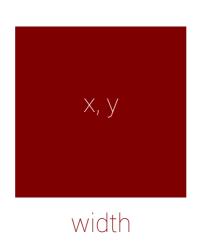

<rect .../>

height (relative to element or canvas width)



<ellipse .../>

<.../>

```
angle2 (90 deg)

x, y angle1 (0 deg)
```

<arc .../>

#### control



<curve .../>

Markup and Layout

```
Start the deck
                    <deck>
Set the canvas size
                      <canvas width="1024" height="768" />
Begin a slide
                      <slide bg="white" fg="black">
Place an image
                           <image xp="70" yp="60" width="256" height="179" name="work.png" caption="Desk"/>
Draw some text
                           <text xp="20" yp="80" sp="3" link="http://goo.gl/Wm05Ex">Deck elements</text>
Make a bullet list
                           <list xp="20" yp="70" sp="2" type="bullet">
                              text, list, image
                              line, rect, ellipse
                              arc, curve
End the list
                           </list>
Draw a line
                           ne
                                   xp1="20" yp1="10" xp2="30" yp2="10"/>
Draw a rectangle
                                   xp="35" yp="10" wp="4" hr="75" color="rqb(127,0,0)"/>
                           <rect
Draw an ellipse
                          <ellipse xp="45" yp="10" wp="4" hr="75" color="rgb(0,127,0)"/>
Draw an arc
                                   xp="55" yp="10" wp="4" hp="3" a1="0" a2="180" color="rgb(0,0,127)"/>
                           <arc
Draw a quadratic bezier
                                   xp1="60" yp1="10" xp2="75" yp2="20" xp3="70" yp3="10" />
                          <curve
End the slide
                      </slide>
End of the deck
                    </deck>
                                                                                  Anatomy of a Deck
```

#### Deck elements

- text, list, image
- line, rect, ellipse
- arc, curve



Desk

#### Text and List Markup

<text xp="..." yp="..." sp="...">

Position, size

Attributes

<list ... color="..." opacity="..." font="..." align="..." link="...">


#### Common Attributes for text and list

```
horizontal percentage
хp
           vertical percentage
ур
           font size percentage
sp
           "bullet", "number" (list), "block", "code" (text)
type
           "left", "middle", "end"
align
           SVG names ("maroon"), or RGB "rgb(127,0,0)"
color
opacity percent opacity (0-100, transparent - opaque)
           "sans", "serif", "mono"
font
           URL
link
```

#### Graphics Markup

```
xp1="5" yp1="75" xp2="20" yp2="70" sp="0.2"/>
<rect xp="10" yp="60" wp="15" hr="66.6" color="red"/>
<rect xp="15" yp="55" wp="10" hr="100" color="blue" opacity="30"/>
<ellipse xp="10" yp="35" wp="15" hr="66.66" color="green"/>
<ellipse xp="15" yp="30" wp="10" hr="100" color="blue" opacity="30"/>
<curve xp1="5" yp1="10" xp2="15" yp2="20" xp3="15" yp3="10" sp="0.3" color="red"/>
<arc xp="22" yp="10" wp="10" wp="10" al="0" a2="180" sp="0.2" color="blue"/>
```

1	0 2	0 30	) 4	0 5	0 6	0 7	0 8	0 9	0
90									
80									
70									
60									
50			P	ercer	nt Gr	id			
40									
30									
20									
10									
10									

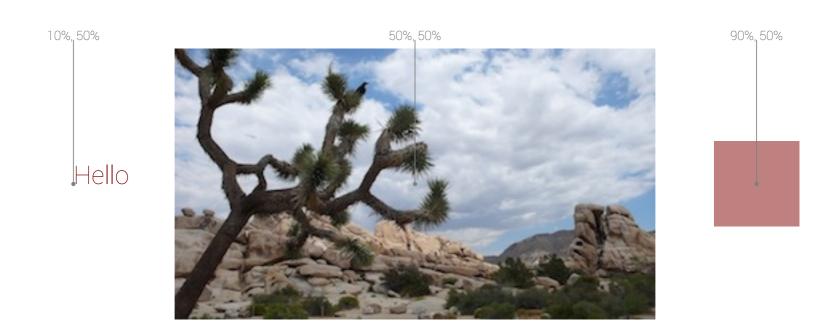

Percentage-based layout

#### bullet

- Point A
- Point B
- Point C
- Point D

#### plain

- First item
- Second item
- The third item
- the last thing


#### number

- 1. This
- 2. That
- 3. The other
- 4. One more

t>...</list>




```
package main
import (
  "log"
  "github.com/ajstarks/deck"
func main() {
  presentation, err := deck.Read("deck.xml", 1024, 768) // open the deck
  if err != nil {
     log.Fatal(err)
  for _, t := range slide. Text {
                            // process the text elements
        x, y, size := deck.Dimen(presentation.Canvas, t.Xp, t.Yp, t.Sp)
        slideText(x, y, size, t)
     x, y, size := deck.Dimen(presentation.Canvas, 1.Xp, 1.Yp, 1.Sp)
        slideList(x, y, size, 1)
```

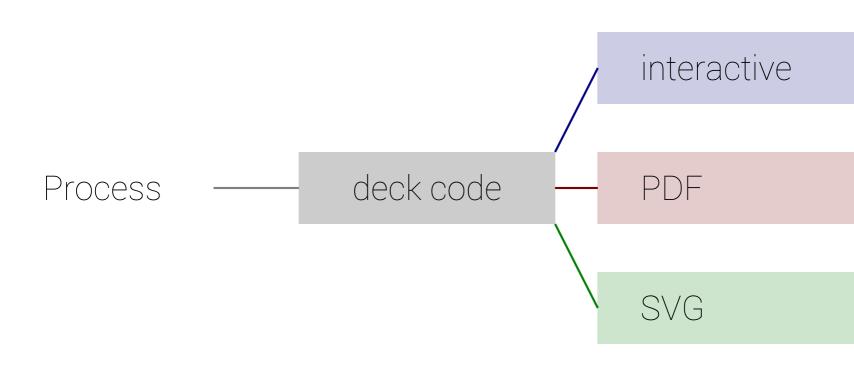


```
func main() {
    benchmarks := []Bardata{
        { "Macbook Air", 154.701 },
        {"MacBook Pro (2008)", 289.603},
        {"BeagleBone Black", 2896.037},
        {"Raspberry Pi", 5765.568},
    ts := 2.5
   hts := ts / 2
   x := 10.0
    bx1 := x + (ts * 12)
   bx2 := bx1 + 50.0
    y := 60.0
    maxdata := 5800.0
    linespacing := ts * 2.0
    text(x, y+20, "Go 1.1.2 Build and Test Times", ts*2, "black")
    for _, data := range benchmarks {
        text(x, y, data.label, ts, "rgb(100,100,100)")
        bv := vmap(data.value, 0, maxdata, bx1, bx2)
        line(bx1, y+hts, bv, y+hts, ts, "lightgray")
        text(bv+0.5, y+(hts/2), fmt.Sprintf("%.1f", data.value), hts, "rgb(127,0,0)")
       y -= linespacing
```

#### Go 1.1.2 Build and Test Times

Macbook Air MacBook Pro (2008) BeagleBone Black Raspberry Pi

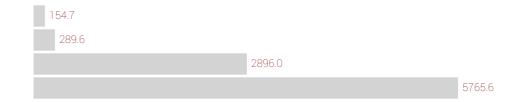

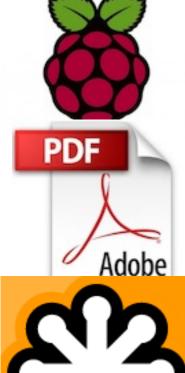

go get github.com/ajstarks/deck/cmd/vgdeck

go get github.com/ajstarks/deck/cmd/pdfdeck



go get github.com/ajstarks/deck/cmd/svgdeck

#### pdfdeck [options] file.xml...

- -sans, -serif, -mono [font] specify fonts
- -pagesize [w,h, or Letter, Legal, Tabloid, A2-A5, ArchA, Index, 4R, Widescreen]
- -stdout (output to standard out)
- -outdir [directory] directory for PDF output
- -fontdir [directory] directory containing font information
- -author [author name] set the document author
- -title [title text] set the document title
- -grid [percent] draw a percent grid on each slide

#### svgdeck [options] file.xml...

- -sans, -serif, -mono [font] specify fonts
- -pagesize [Letter, Legal, A3, A4, A5]
- -pagewidth [canvas width]
- -pageheight [canvas height]
- -stdout (output to standard out)
- -outdir [directory] directory for PDF output
- -title [title text] set the document title
- -grid [percent] draw a percent grid on each slide

#### vgdeck [options] file.xml...

- -loop [duration] loop, pausing [duration] between slides
- -slide [number] start at slide number
- -w [width] canvas width
- -h [height] canvas height
- -g [percent] draw a percent grid

#### vgdeck Commands

+, Ctrl-N, [Return]	Next slide
-, Ctrl-P, [Backspace]	Previous slide
^, Ctrl-A	First slide
\$, Ctrl-E	Last slide
r, Ctrl-R	Reload
x, Ctrl-X	X-Ray
/, Ctrl-F [text]	Search
s, Ctrl-S	Save
q	Quit

#### Deck Web API

sex -dir [start dir] -listen [address:port] -maxupload [bytes]

GET	/	List the API		
GET	/deck/	List the content on the server		
GET	/deck/?filter=[type]	List content filtered by deck, image, video		
POST	/deck/content.xml?cmd=1s	Play a deck with the specified duration		
POST	/deck/content.xml?cmd=stop	Stop playing a deck		
POST	/deck/content.xml?slide=[num]	Play deck starting at a slide number		
DELETE	/deck/content.xml	Remove content		
POST	/upload/ Deck:content.xml	Upload content		
POST	/table/ Deck:content.txt	Generate a table from a tab-separated list		
POST	/table/?textsize=[size]	Specify the text size of the table		
POST	/media/ Media:content.mov	Play the specified video		

#### deck [command] [argument]

```
deck play file [duration]
                                        Play a deck
                                        Stop playing a deck
deck stop
deck list [deck|image|video]
                                        List contents
                                        Upload content
deck upload file...
                                        Remove content
deck remove file...
                                        Play video
deck video file
deck table file [textsize]
                                        Make a table
$ deck upload *.jpg
                                        # upload images
$ mkpicdeck *.jpg | deck upload /dev/stdin
                                        # generate the slide show deck
$ deck play stdin
                                        # play it
```

#### Display





#### Controller

- > list
- > upload
- > play/stop
- > delete

### Design Examples

## hello, world

Тор

Left

# Right

ttom

20%

30%

70%

Header (top 20%) Detail Summary (30%)(70%)

Footer (bottom 20%)

# bullet

- Point A
- Point B
- Point C
- Point D

### plain First i

- First item
- Second item
- The third item
- D the last thing

# number

- 1. This
- 2. That
- 3. The other
- 4. One more

## <list>...</list>

BOS

Virgin America 351

Gate B38

8:35am

On Time

SFO



US Airways 1207

Gate C31C

5:35pm

Delayed

AAPL 503.73 -16.57 (3.18%)
AMZN 274.03 +6.09 (2.27%)

GOOG 727.58 -12.41 (1.68%)

#### Two Columns



build	compile packages and dependencies
clean	remove object files
env	print Go environment information
fix	run go tool fix on packages
fmt	run gofmt on package sources
get	download and install packages and dependencies
install	compile and install packages and dependencies
list	list packages
run	compile and run Go program
test	test packages
tool	run specified go tool
version	print Go version
vet	run go tool vet on packages


go





#### Code

```
package main
import (
    "github.com/ajstarks/svgo"
    "os"
func main() {
   canvas := svg.New(os.Stdout)
   width, height := 500, 500
   a, ai, ti := 1.0, 0.03, 10.0
   canvas.Start(width, height)
   canvas.Rect(0, 0, width, height)
   canvas.Gstyle("font-family:serif;font-size:144pt")
   for t := 0.0; t <= 360.0; t += ti {
       canvas.TranslateRotate(width/2, height/2, t)
       canvas.Text(0, 0, "i", canvas.RGBA(255, 255, 255, a))
       canvas.Gend()
       a -= ai
   canvas.Gend()
   canvas.End()
```

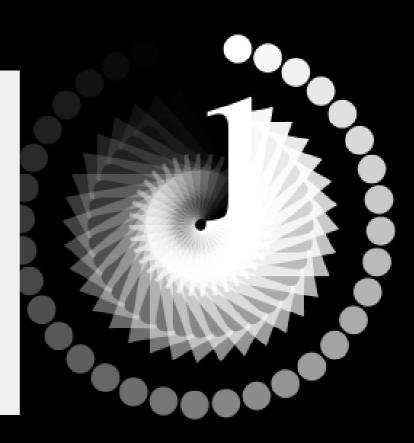

A few months ago, I had a look at the brainchild of a few serious

language, is a static typed, c lookalike, semicolon-less, self

It doesn't have one.

heavyweights working at Google. Their project, the Go programming

formatting, package managed, object oriented, easily parallelizable,

cluster fuck of genius with an unique class inheritance system.

#### The Go Programming Language

is a static typed,

c lookalike,

semicolon-less,

self formatting,

package managed,

object oriented,

easily parallelizable,

cluster fuck of genius

with an unique class inheritance system.

#### The Go Programming Language

is a static typed,

c lookalike,

semicolon-less,

self formatting,

package managed,

object oriented,

easily parallelizable,

cluster fuck of genius

with an unique class inheritance system.

#### The Go Programming Language

is a static typed, c lookalike, semicolon-less, self formatting, package managed, object oriented, easily parallelizable, cluster fuck of genius with an unique class inheritance system.

It doesn't have one.

So, the next time you're about to make a subclass, think hard and ask yourself

### what would Go do



Python and Ruby programmers come to Go because they don't have to surrender much expressiveness, but gain performance and get to play with concurrency.

Less is exponentially more Rob Pike



# FOR, LO,

the winter is past,
the rain is over and gone;
The flowers appear on the earth;
the time for the singing of birds is come,
and the voice of the turtle is heard in our land.

#### Good Design

is innovative

makes a product useful

is aesthetic

makes a product understandable

is unobtrusive

is honest

is long-lasting


is thorough down to the last detail

is environmentally-friendly

is as little design as possible



github.com/ajstarks/deck

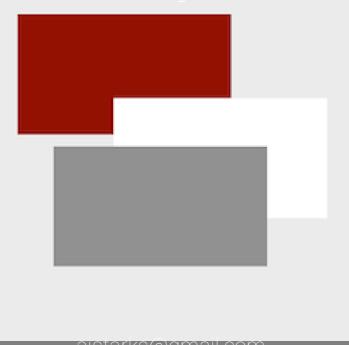

ajstarks@gmail.com @ajstarks