


We do that by selecting “Insert” and then “R” - this will allow us to add some new R code.

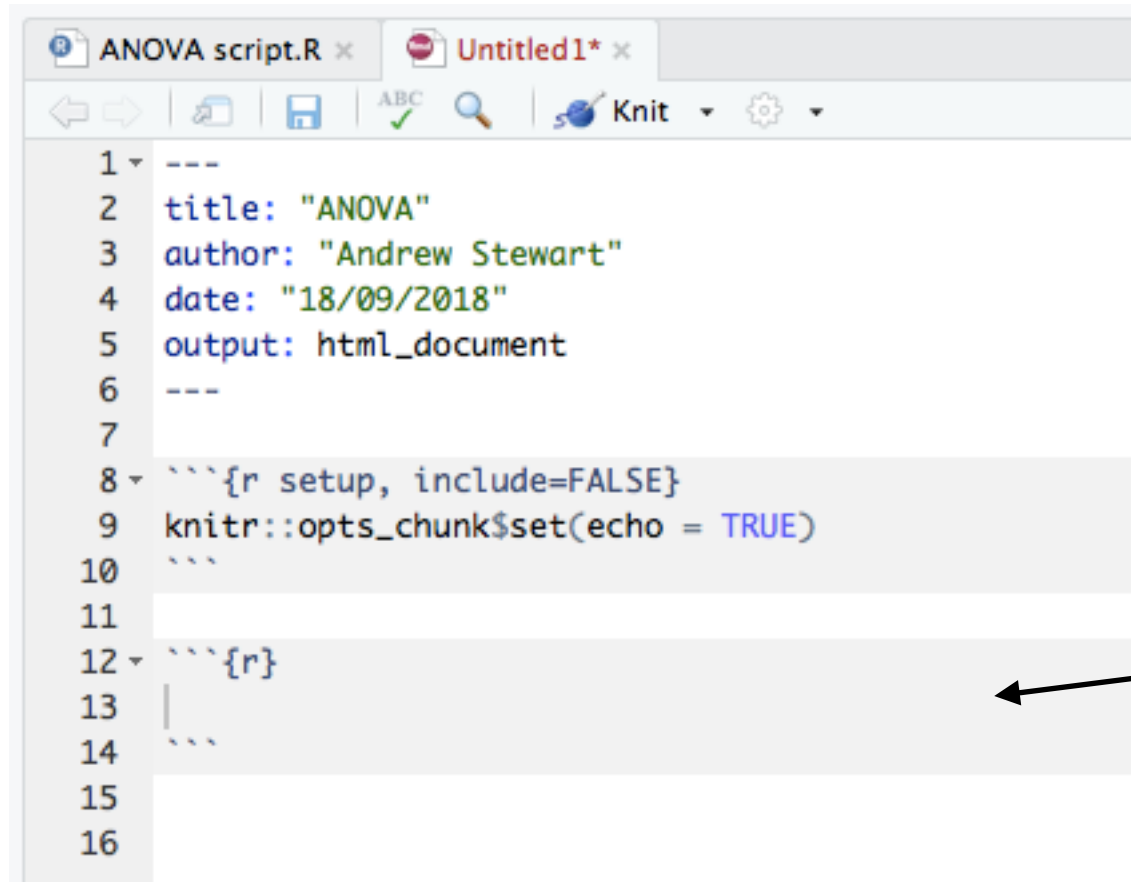

We can now insert our new R code here.

```
1 ---
2 title: "ANOVA"
3 author: "Andrew Stewart"
4 date: "18/09/2018"
5 output: html_document
6 ---
7
8 ```{r setup, include=FALSE}
9 knitr::opts_chunk$set(echo = TRUE)
10 ```
11
12 ```{r}
13 library(tidyverse)
14 ```
15
16 |
```

We load the tidyverse packages first.

But maybe we should precede that with some narrative (and a heading) explaining what we're doing.

```
1 ---
2 title: "ANOVA"
3 author: "Andrew Stewart"
4 date: "18/09/2018"
5 output: html_document
6 ---
7
8 ```{r setup, include=FALSE}
9 knitr::opts_chunk$set(echo = TRUE)
10 ```
11
12 ## This is my first R Markdown document
13
14 First we load the tidyverse.
15 ```{r}
16 library(tidyverse)
17 ```
18
```