



When you come to create a document using R Markdown, you'll first want to delete a lot of the example code that appears when you first start a new Markdown file:

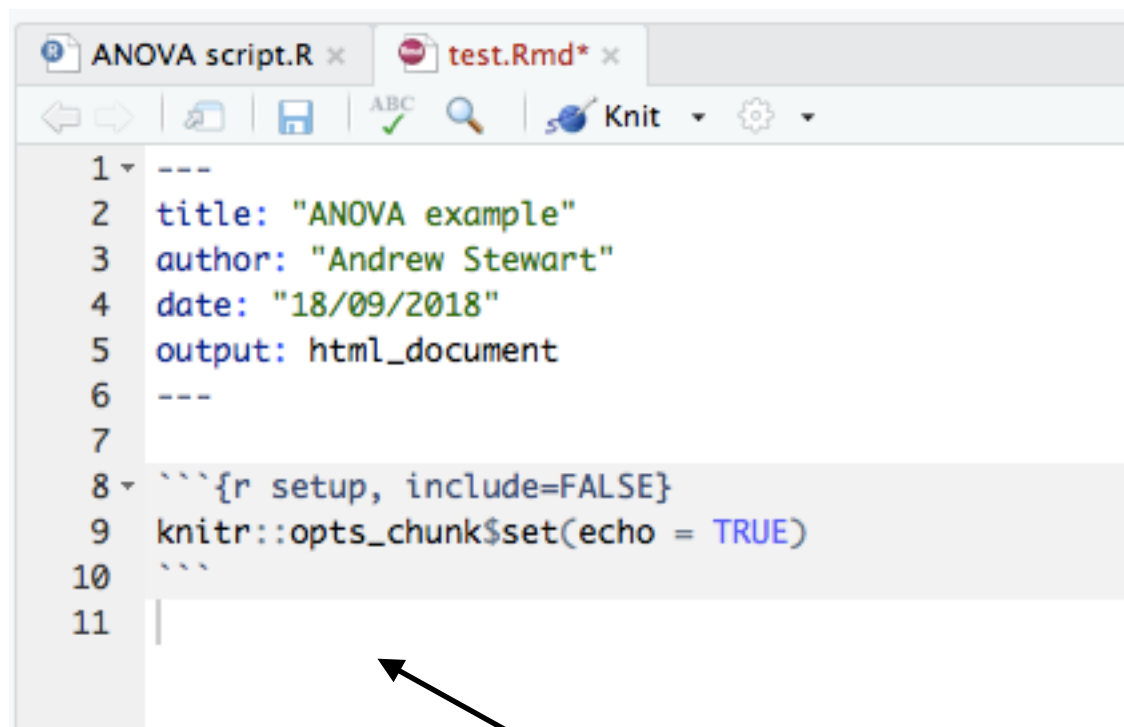


```
1 ---
2 title: "ANOVA example"
3 author: "Andrew Stewart"
4 date: "18/09/2018"
5 output: html_document
6 ---
7
8 ```{r setup, include=FALSE}
9 knitr::opts_chunk$set(echo = TRUE)
10 ```
11 |
```

We now want to paste in chunks of our R code here

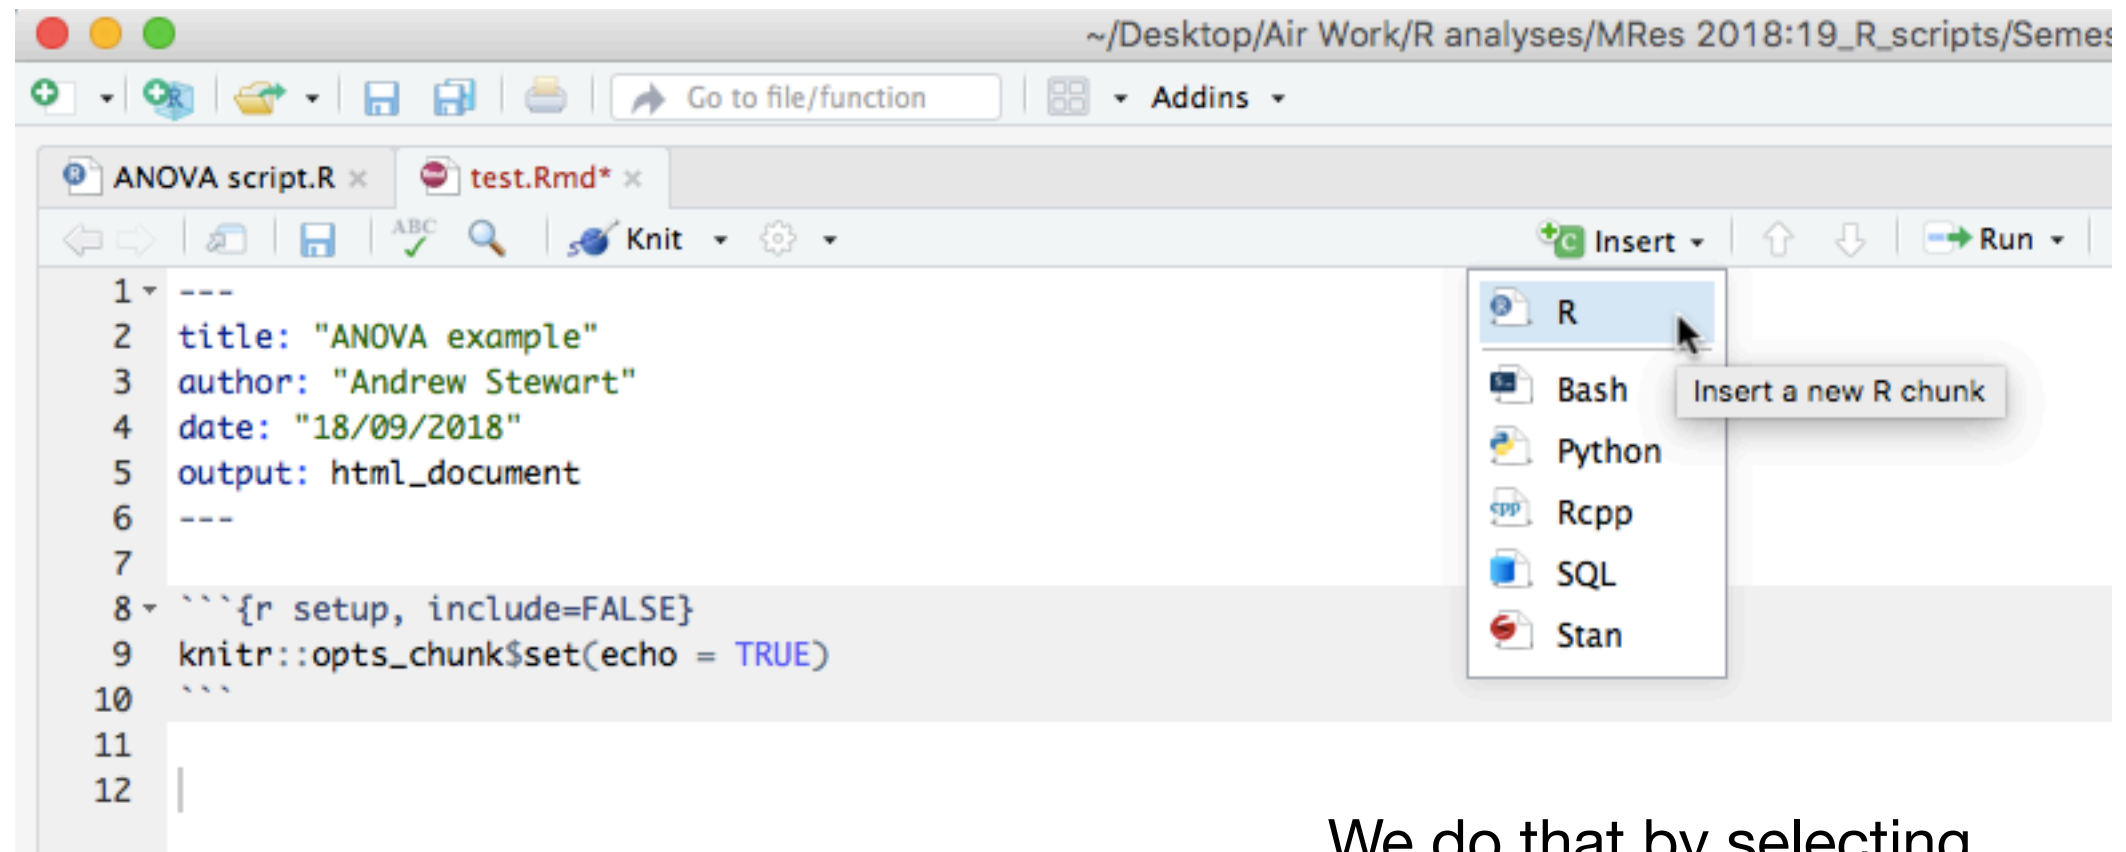

We do that by selecting “Insert” and then “R” - this will allow us to add some new R code.

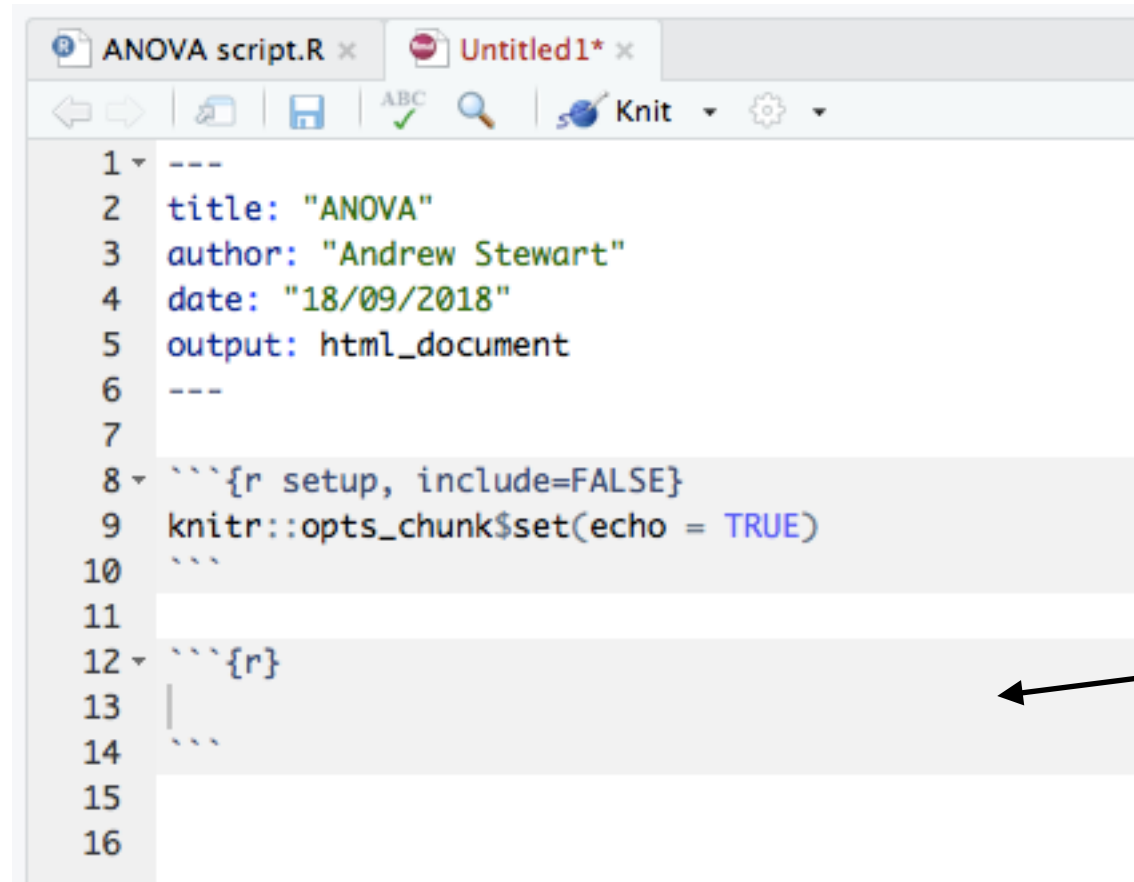

We can now insert our new R code here.