


- We can add an extra parameter to our ggplot code to set the BBC theme using `bbc_style()`:

```
my_plot <- mpg %>%  
  count(class) %>%  
  mutate(class = fct_reorder(class, n)) %>%  
  ggplot(aes(x = class, y = n, fill = class)) +  
  geom_col() +  
  coord_flip() +  
  guides(fill = FALSE) +  
  bbc_style()+  
  labs(title="Number of each type of car",  
        subtitle = "Data collected in the US, 1999-2008")
```

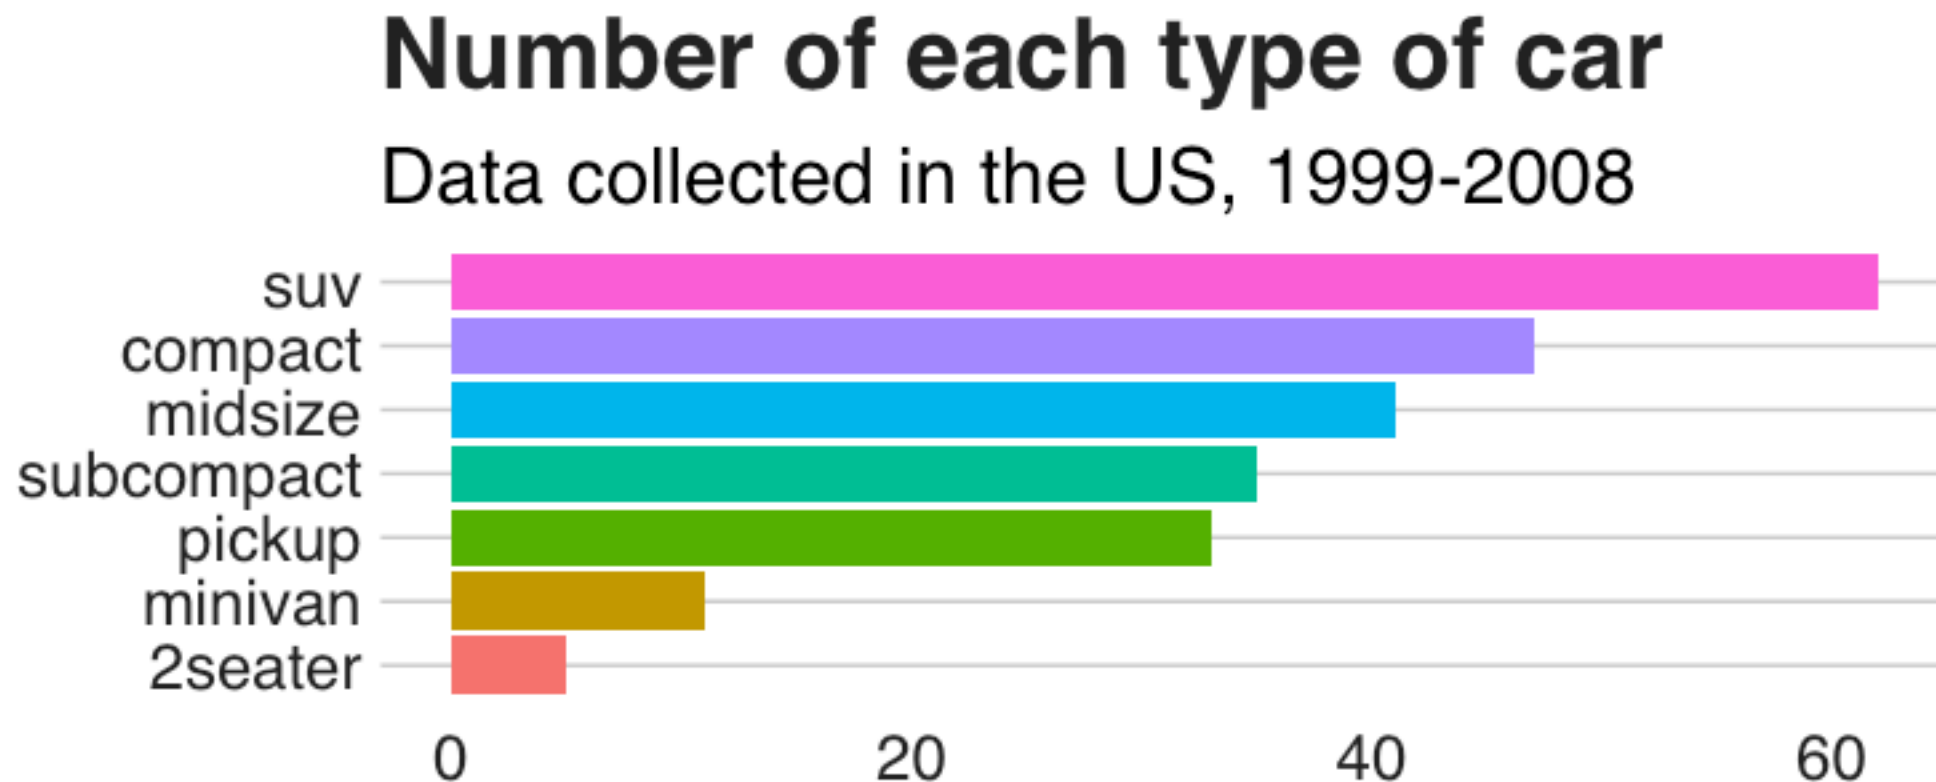

Version Control using git

- Have you ever added some code, or deleted something, or used a weird (accidental) keyboard shortcut and your once working script is now kaput?
- You need Version Control!
- Version control allows you to revert your script to a previous state (i.e., before you messed it up!)
- In RStudio, you can enable Version Control in a couple of ways - we're going to look at using git.
- The first thing you need to do is to set up git on your computer (may not work on cluster PCs):

<https://git-scm.com/downloads>