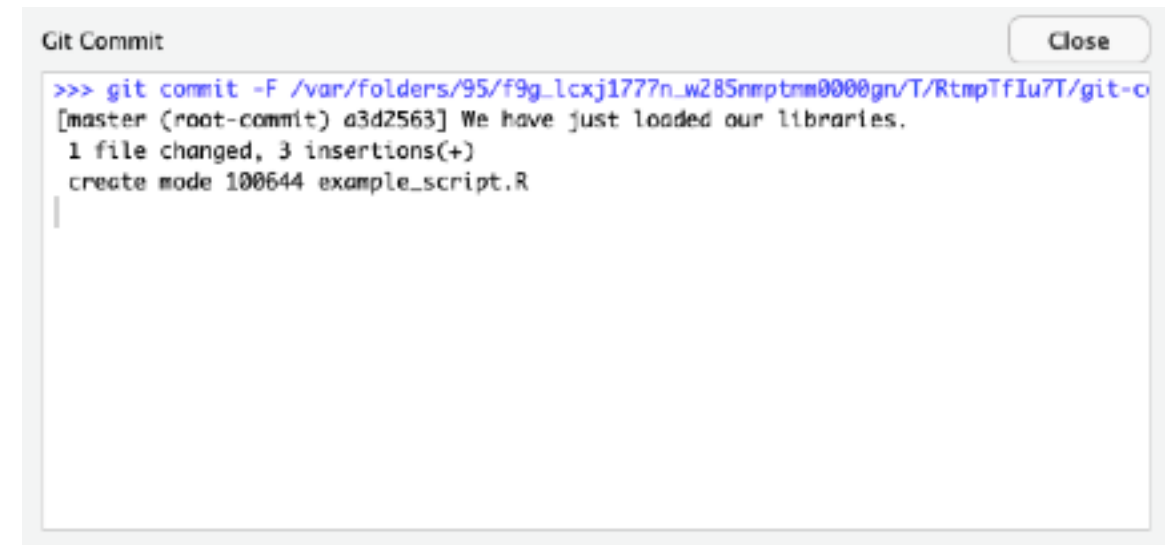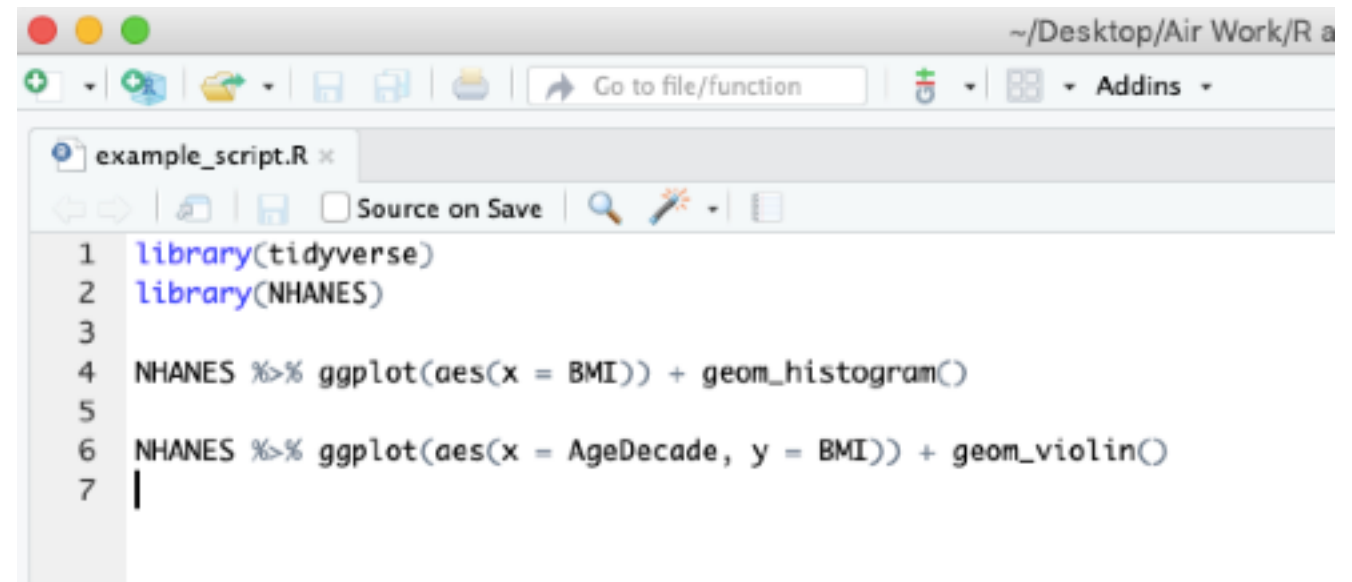- We get a summary of our Commit. OK, I'm going to add two more lines of code, save after each then, and will make a commit after each save. The first line of code will generate one plot, and the second line a different plot.

```
Git Commit                                                    Close
>>> git commit -F /var/folders/95/f9g_lcxj1777n_w285nmptmm0000gn/T/RtmpTfIu7T/git-c
[master (root-commit) a3d2563] We have just loaded our libraries.
 1 file changed, 3 insertions(+)
 create mode 100644 example_script.R
```

- My 'final' script looks this:

```
~/Desktop/Air Work/R a

example_script.R ×
                    Source on Save
1  library(tidyverse)
2  library(NHANES)
3
4  NHANES %>% ggplot(aes(x = BMI)) + geom_histogram()
5
6  NHANES %>% ggplot(aes(x = AgeDecade, y = BMI)) + geom_violin()
7  |
```

- But I can revert (i.e., go back) to a previous version of the script - go to the Version Control option in the Tool menu and click on "History". I can see each of my three commits…