


```
1 # First we need to load the packages we need - the following loads all packages within the
2 # tidyverse universe of packages (plus associated datasets)
3 library(tidyverse)
4
5 # One dataset that is included contains information about the characters in Star Wars
6 # You can just type the name of the dataset to see the first 10 lines
7 starwars
8
9 # You can open the full dataset in a Viewing window
10 View(starwars)
11
12 # This displays just the column called "name" in the dataset
13 starwars$name
14
15 # The length function tells us how many elements are in the list of names
16 length(starwars$name)
17
18 # This displays just the column called "homeworld" in the dataset
19 starwars$homeworld
20
21 # The unique functions gives us just the unique homeworlds
```

86:30 (Top Level) ↕ R Script ↕

Lots of comments explaining what each section of code does, and lots of white space.

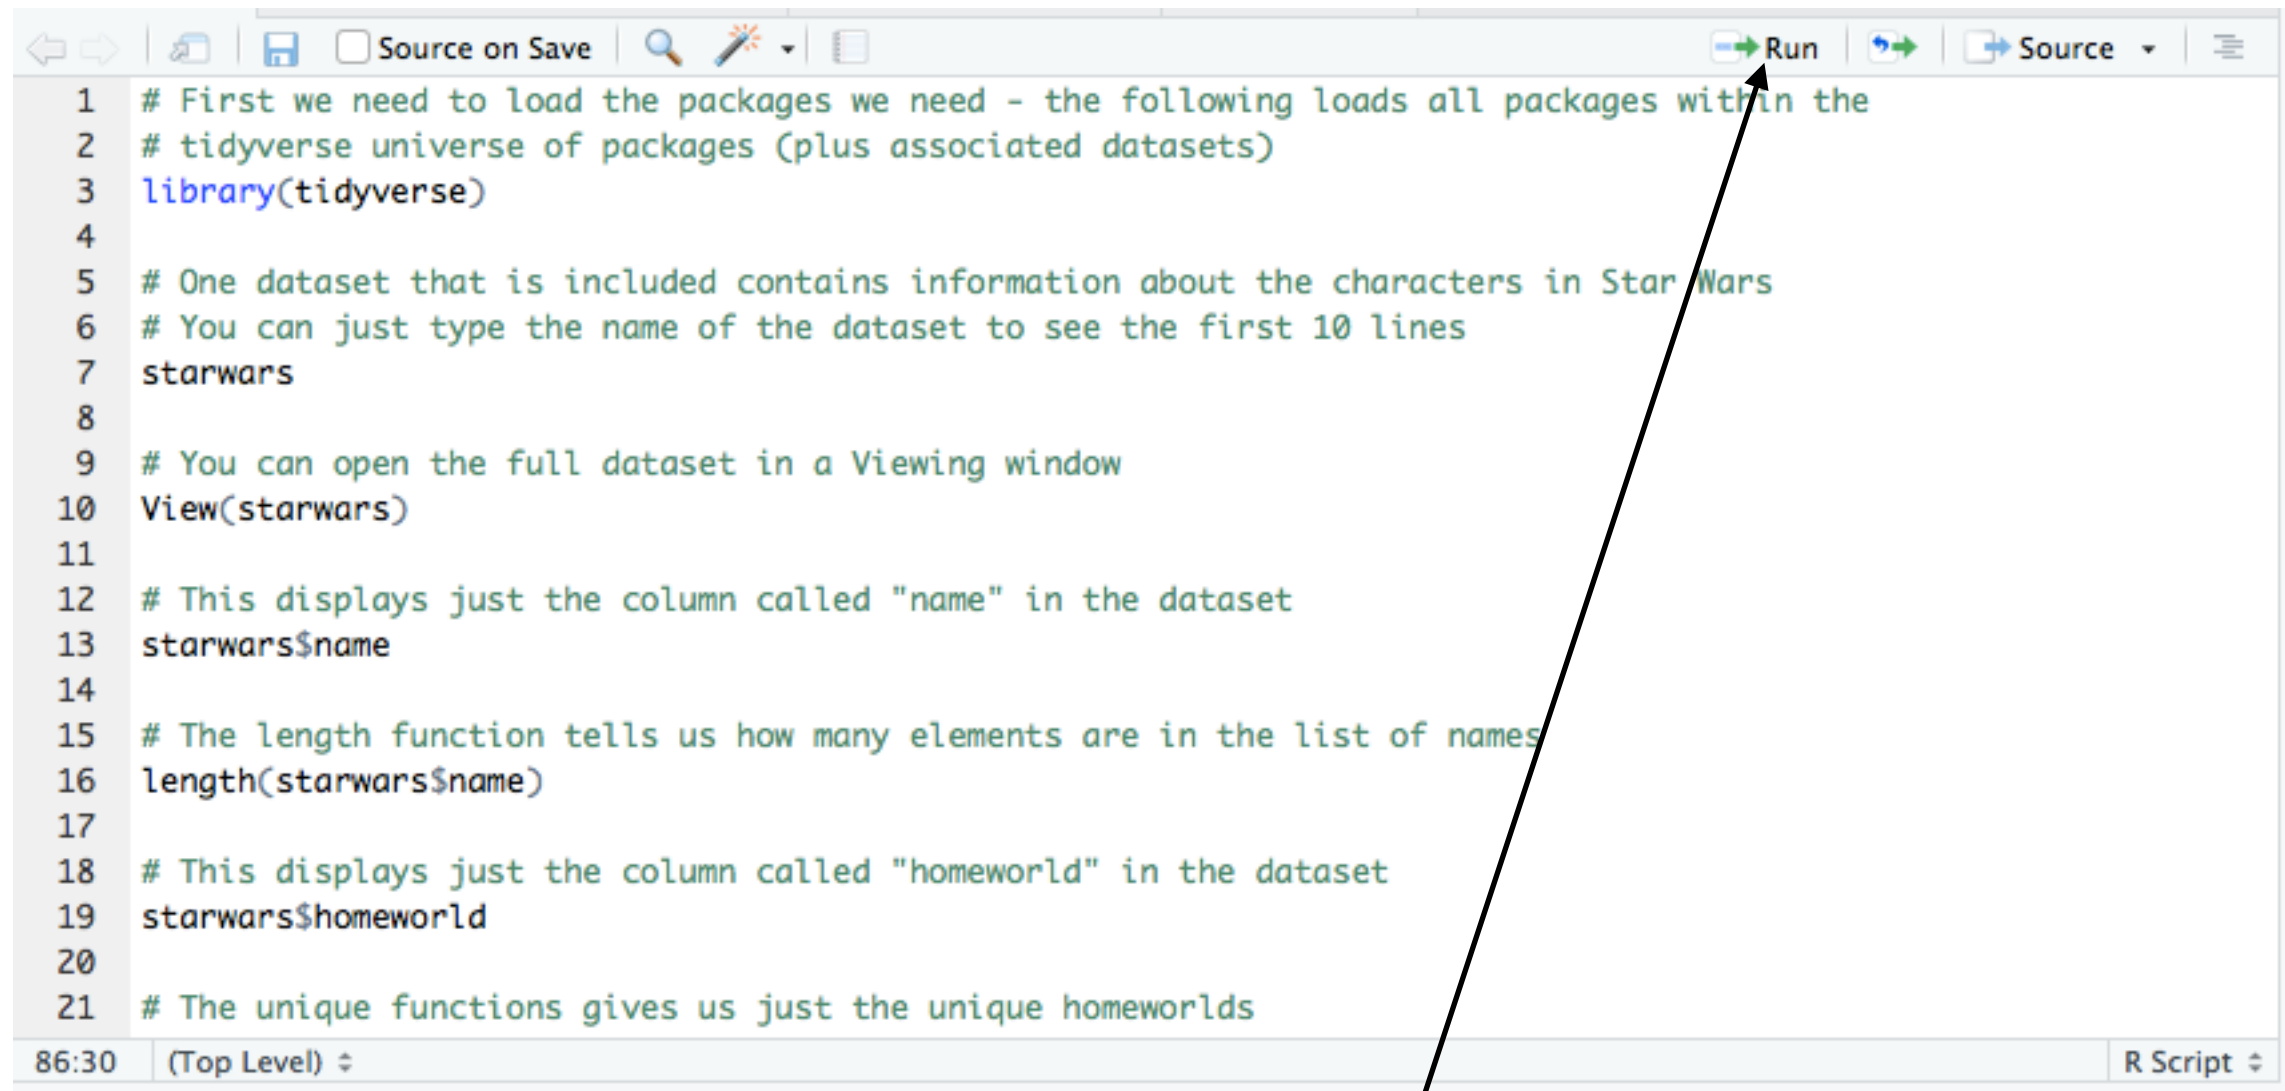

```
1 # First we need to load the packages we need - the following loads all packages within the
2 # tidyverse universe of packages (plus associated datasets)
3 library(tidyverse)
4
5 # One dataset that is included contains information about the characters in Star Wars
6 # You can just type the name of the dataset to see the first 10 lines
7 starwars
8
9 # You can open the full dataset in a Viewing window
10 View(starwars)
11
12 # This displays just the column called "name" in the dataset
13 starwars$name
14
15 # The length function tells us how many elements are in the list of names
16 length(starwars$name)
17
18 # This displays just the column called "homeworld" in the dataset
19 starwars$homeworld
20
21 # The unique functions gives us just the unique homeworlds
```

86:30 (Top Level) ↕ R Script ↕

Once a script is written, you can run the entire script by highlighting it all (CMD-A in OSX) and clicking on 'Run', or you can highlight a section and run only that. CMD-Return will also Run the highlighted code.