mk 04/08/2023

```
In [15]: import numpy as np
   import pandas as pd
   import matplotlib.pyplot as plt
   import seaborn as sns
   from sklearn.linear_model import LogisticRegression
   from sklearn.preprocessing import StandardScaler
   import re
   from sklearn.datasets import load_digits
   from sklearn.model_selection import train_test_split
```

In [16]: a=pd.read_csv(r"C:\Users\user\Downloads\Book8.csv")
a

Out[16]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
0	3197	TELANGANA	1901	6.9	41.8	7.8	45.2	22.0	123.6	237.8	177.2	77.7	75.5
1	3198	TELANGANA	1902	0.0	0.0	0.2	10.7	7.3	52.4	146.3	142.8	190.5	41.7
2	3199	TELANGANA	1903	12.9	4.6	0.0	9.9	40.7	99.2	505.2	246.7	191.9	155.8
3	3200	TELANGANA	1904	0.0	0.0	10.8	8.0	14.7	104.2	139.5	50.0	162.3	44.4
4	3201	TELANGANA	1905	0.0	4.3	12.8	27.6	32.2	129.5	82.4	237.3	179.1	19.6
		•••											
110	3307	TELANGANA	2011	0.0	11.9	2.6	25.6	9.3	83.9	268.2	225.9	107.6	13.9
111	3308	TELANGANA	2012	6.7	0.0	0.2	14.0	8.4	124.4	300.3	229.9	202.4	83.6
112	3309	TELANGANA	2013	2.4	29.0	0.2	24.4	8.5	213.4	453.8	230.6	161.4	205.9
113	3310	TELANGANA	2014	0.2	2.9	58.3	10.3	73.3	62.3	146.0	205.2	146.8	29.6
114	3311	TELANGANA	2015	17.5	0.0	43.0	65.7	23.3	266.9	104.4	160.5	158.3	15.6

115 rows × 20 columns

```
In [17]: a.info()
```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):

#	Column	Non-Null Coun	t Dtype						
0	index	115 non-null	int64						
1	SUBDIVISION	115 non-null	object						
2	YEAR	115 non-null	int64						
3	JAN	115 non-null	float64						
4	FEB	115 non-null	float64						
5	MAR	115 non-null	float64						
6	APR	115 non-null	float64						
7	MAY	115 non-null	float64						
8	JUN	115 non-null	float64						
9	JUL	115 non-null	float64						
10	AUG	115 non-null	float64						
11	SEP	115 non-null	float64						
12	OCT	115 non-null	float64						
13	NOV	115 non-null	float64						
14	DEC	115 non-null	float64						
15	ANNUAL	115 non-null	float64						
16	Jan-Feb	115 non-null	float64						
17	Mar-May	115 non-null	float64						
18	Jun-Sep	115 non-null	float64						
19	Oct-Dec	115 non-null	float64						
<pre>dtypes: float64(17), int64(2), object(1)</pre>									
memo	memory usage: 18.1+ KB								

```
In [18]: b=a.fillna(method='ffill')
b
```


Out[18]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
0	3197	TELANGANA	1901	6.9	41.8	7.8	45.2	22.0	123.6	237.8	177.2	77.7	75.5
1	3198	TELANGANA	1902	0.0	0.0	0.2	10.7	7.3	52.4	146.3	142.8	190.5	41.7
2	3199	TELANGANA	1903	12.9	4.6	0.0	9.9	40.7	99.2	505.2	246.7	191.9	155.8
3	3200	TELANGANA	1904	0.0	0.0	10.8	8.0	14.7	104.2	139.5	50.0	162.3	44.4
4	3201	TELANGANA	1905	0.0	4.3	12.8	27.6	32.2	129.5	82.4	237.3	179.1	19.6
		•••											
110	3307	TELANGANA	2011	0.0	11.9	2.6	25.6	9.3	83.9	268.2	225.9	107.6	13.9
111	3308	TELANGANA	2012	6.7	0.0	0.2	14.0	8.4	124.4	300.3	229.9	202.4	83.6
112	3309	TELANGANA	2013	2.4	29.0	0.2	24.4	8.5	213.4	453.8	230.6	161.4	205.9
113	3310	TELANGANA	2014	0.2	2.9	58.3	10.3	73.3	62.3	146.0	205.2	146.8	29.6
114	3311	TELANGANA	2015	17.5	0.0	43.0	65.7	23.3	266.9	104.4	160.5	158.3	15.6

115 rows × 20 columns


In [19]: b.plot.bar(legend=None)

Out[19]: <AxesSubplot:>

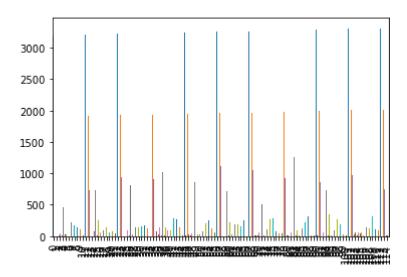


In [20]: b.plot.line(legend=None)

Out[20]: <AxesSubplot:>

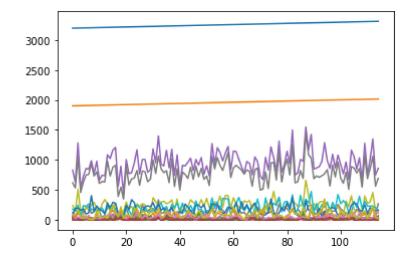


```
In [21]: b.plot.hist(legend=None)
```

Out[21]: <AxesSubplot:ylabel='Frequency'>

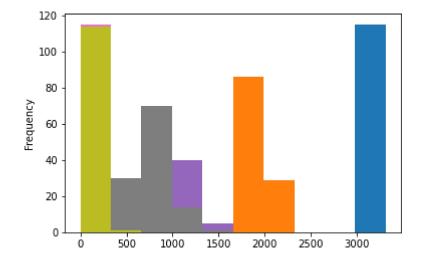

In [22]: a.plot.pie(y='AUG',figsize=(8,8),labels=None,legend=None)

Out[22]: <AxesSubplot:ylabel='AUG'>

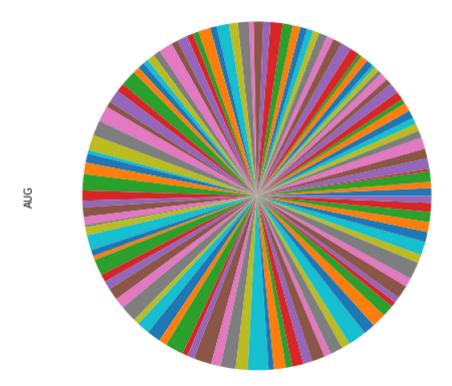

In []: