

mk 04/08/2023

```
In [1]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.linear_model import LogisticRegression
from sklearn.preprocessing import StandardScaler
import re
from sklearn.datasets import load_digits
from sklearn.model_selection import train_test_split
```

```
In [2]: a=pd.read_csv(r"C:\Users\user\Downloads\Book34.csv")
a
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
0	897	BIHAR	1901	51.8	19.6	11.9	1.1	65.6	66.3	245.9	319.4	155.1	8.3
1	898	BIHAR	1902	4.6	0.7	24.3	17.3	66.3	118.2	361.0	225.5	358.7	28.5
2	899	BIHAR	1903	5.3	4.7	2.0	4.7	28.2	192.9	115.0	342.6	173.9	147.0
3	900	BIHAR	1904	6.3	1.7	3.5	5.3	118.7	191.6	394.4	351.3	84.4	98.1
4	901	BIHAR	1905	16.0	30.1	32.6	21.4	77.5	50.5	409.1	495.3	353.9	11.6
...
110	1007	BIHAR	2011	4.2	7.7	9.2	23.9	74.5	211.0	241.1	278.7	234.1	10.0
111	1008	BIHAR	2012	18.1	2.7	7.3	20.4	18.8	96.2	354.0	240.4	233.8	34.3
112	1009	BIHAR	2013	5.1	22.6	0.6	32.3	89.5	183.3	182.0	213.6	143.3	197.1
113	1010	BIHAR	2014	17.0	33.5	8.4	0.7	103.9	115.2	265.4	307.6	160.3	47.8
114	1011	BIHAR	2015	12.8	1.8	27.2	38.7	39.5	122.1	231.5	287.0	101.7	10.4

115 rows × 20 columns



In [3]: a.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):
#   Column                Non-Null Count  Dtype
---  ---
0   index                 115 non-null   int64
1   SUBDIVISION           115 non-null   object
2   YEAR                  115 non-null   int64
3   JAN                   115 non-null   float64
4   FEB                   115 non-null   float64
5   MAR                   115 non-null   float64
6   APR                   115 non-null   float64
7   MAY                   115 non-null   float64
8   JUN                   115 non-null   float64
9   JUL                   115 non-null   float64
10  AUG                   115 non-null   float64
11  SEP                   115 non-null   float64
12  OCT                   115 non-null   float64
13  NOV                   115 non-null   float64
14  DEC                   115 non-null   float64
15  ANNUAL                115 non-null   float64
16  Jan-Feb              115 non-null   float64
17  Mar-May              115 non-null   float64
18  Jun-Sep              115 non-null   float64
19  Oct-Dec              115 non-null   float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.1+ KB
```

In [4]: b=a.fillna(method='ffill')
b

Out[4]:


	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
0	897	BIHAR	1901	51.8	19.6	11.9	1.1	65.6	66.3	245.9	319.4	155.1	8.3
1	898	BIHAR	1902	4.6	0.7	24.3	17.3	66.3	118.2	361.0	225.5	358.7	28.5
2	899	BIHAR	1903	5.3	4.7	2.0	4.7	28.2	192.9	115.0	342.6	173.9	147.0
3	900	BIHAR	1904	6.3	1.7	3.5	5.3	118.7	191.6	394.4	351.3	84.4	98.1
4	901	BIHAR	1905	16.0	30.1	32.6	21.4	77.5	50.5	409.1	495.3	353.9	11.6
...
110	1007	BIHAR	2011	4.2	7.7	9.2	23.9	74.5	211.0	241.1	278.7	234.1	10.0
111	1008	BIHAR	2012	18.1	2.7	7.3	20.4	18.8	96.2	354.0	240.4	233.8	34.3
112	1009	BIHAR	2013	5.1	22.6	0.6	32.3	89.5	183.3	182.0	213.6	143.3	197.1
113	1010	BIHAR	2014	17.0	33.5	8.4	0.7	103.9	115.2	265.4	307.6	160.3	47.8
114	1011	BIHAR	2015	12.8	1.8	27.2	38.7	39.5	122.1	231.5	287.0	101.7	10.4

115 rows × 20 columns




```
In [5]: b.plot.bar(legend=None)
```

```
Out[5]: <AxesSubplot:>
```

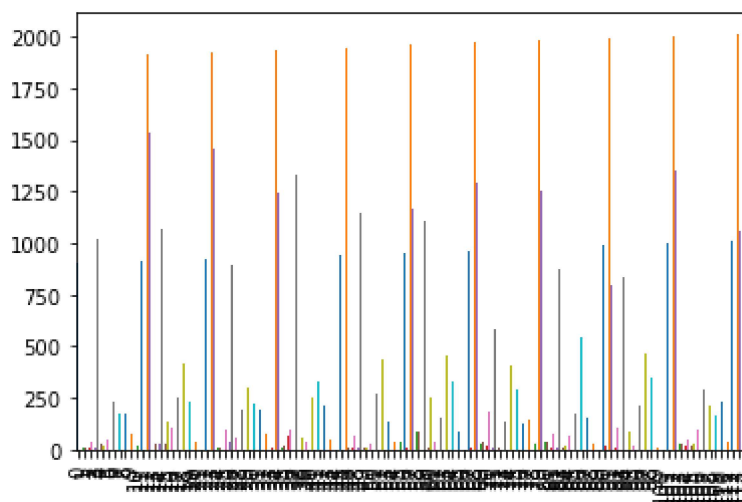


```
In [6]: b.plot.line(legend=None)
```

```
Out[6]: <AxesSubplot:>
```

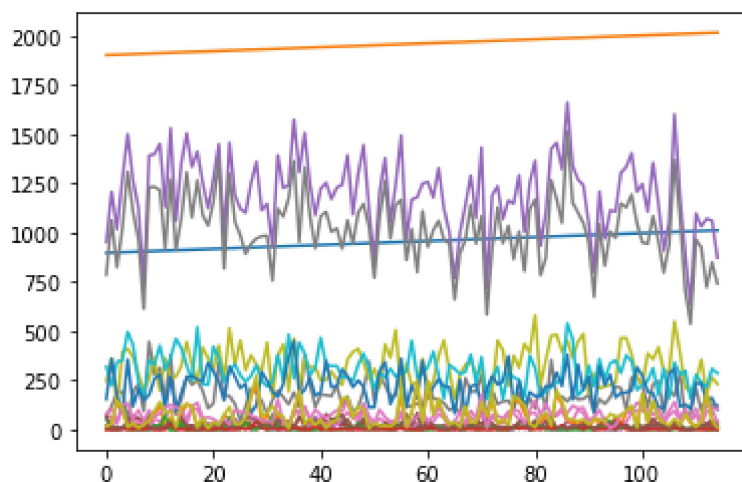


```
In [7]: b.plot.hist(legend=None)
```

```
Out[7]: <AxesSubplot:ylabel='Frequency'>
```

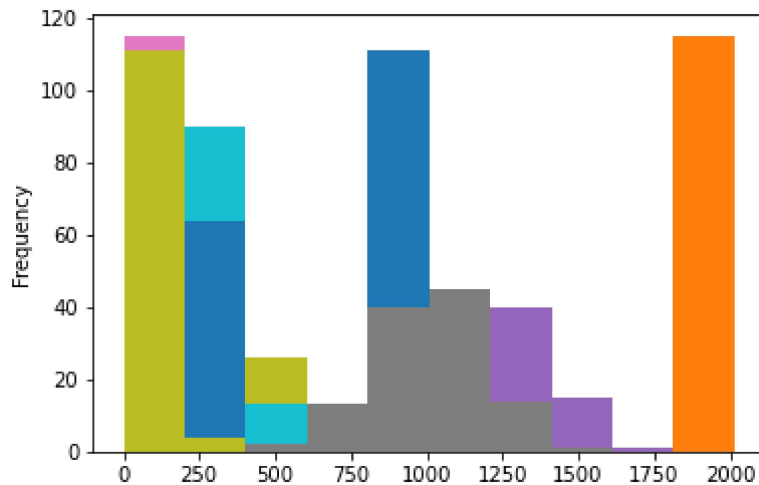

```
In [8]: a.plot.pie(y='APR',figsize=(8,8),labels=None,legend=None)
```

```
Out[8]: <AxesSubplot:ylabel='APR'>
```

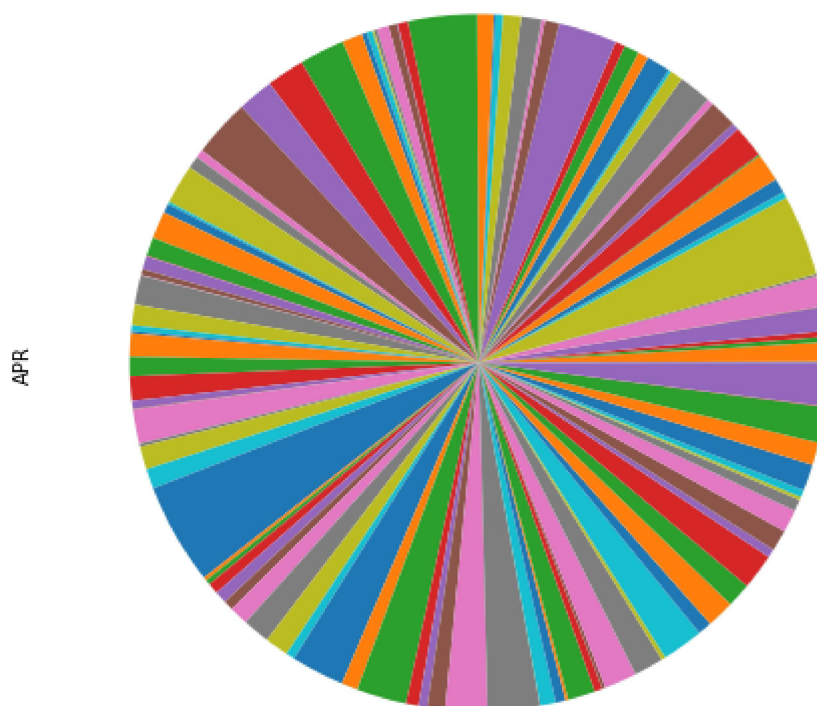

```
In [ ]:
```

