

mk 04/08/2023

```
In [1]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.linear_model import LogisticRegression
from sklearn.preprocessing import StandardScaler
import re
from sklearn.datasets import load_digits
from sklearn.model_selection import train_test_split
```

```
In [2]: a=pd.read_csv(r"C:\Users\user\Downloads\Book21.csv")
a
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	O
0	1702	JAMMU & KASHMIR	1901	66.4	69.3	69.6	132.2	105.8	53.4	171.7	181.3	101.8	2
1	1703	JAMMU & KASHMIR	1902	6.5	9.7	91.3	100.5	70.7	113.3	108.4	136.9	62.2	1
2	1704	JAMMU & KASHMIR	1903	96.2	21.5	238.6	58.7	57.3	18.9	332.5	218.6	176.9	1
3	1705	JAMMU & KASHMIR	1904	110.6	17.3	145.2	64.5	67.8	25.9	182.3	132.2	62.3	5
4	1706	JAMMU & KASHMIR	1905	146.7	76.3	161.4	71.7	65.2	43.3	145.2	111.5	239.7	!
...
110	1812	JAMMU & KASHMIR	2011	43.4	211.6	97.8	89.0	32.4	72.5	81.6	131.2	72.0	1
111	1813	JAMMU & KASHMIR	2012	150.9	95.8	45.2	86.6	48.9	32.6	118.8	264.9	106.7	1
112	1814	JAMMU & KASHMIR	2013	52.2	136.4	41.9	47.4	47.4	80.5	125.1	219.1	41.2	3
113	1815	JAMMU & KASHMIR	2014	75.8	64.0	153.1	76.1	52.7	25.3	100.5	134.6	362.8	3
114	1816	JAMMU & KASHMIR	2015	27.9	187.2	341.4	173.3	64.6	121.4	233.2	129.2	130.2	8

115 rows × 20 columns



```
In [3]: a.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):
#   Column          Non-Null Count  Dtype
---  -
0   index           115 non-null   int64
1   SUBDIVISION     115 non-null   object
2   YEAR            115 non-null   int64
3   JAN             115 non-null   float64
4   FEB             115 non-null   float64
5   MAR             115 non-null   float64
6   APR             115 non-null   float64
7   MAY             115 non-null   float64
8   JUN             115 non-null   float64
9   JUL             114 non-null   float64
10  AUG             115 non-null   float64
11  SEP             115 non-null   float64
12  OCT             115 non-null   float64
13  NOV             114 non-null   float64
14  DEC             114 non-null   float64
15  ANNUAL          114 non-null   float64
16  Jan-Feb        115 non-null   float64
17  Mar-May        115 non-null   float64
18  Jun-Sep        114 non-null   float64
19  Oct-Dec        114 non-null   float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.1+ KB
```

```
In [4]: b=a.fillna(method='ffill')
b
```

Out[4]:


	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	O
0	1702	JAMMU & KASHMIR	1901	66.4	69.3	69.6	132.2	105.8	53.4	171.7	181.3	101.8	24
1	1703	JAMMU & KASHMIR	1902	6.5	9.7	91.3	100.5	70.7	113.3	108.4	136.9	62.2	14
2	1704	JAMMU & KASHMIR	1903	96.2	21.5	238.6	58.7	57.3	18.9	332.5	218.6	176.9	10
3	1705	JAMMU & KASHMIR	1904	110.6	17.3	145.2	64.5	67.8	25.9	182.3	132.2	62.3	50
4	1706	JAMMU & KASHMIR	1905	146.7	76.3	161.4	71.7	65.2	43.3	145.2	111.5	239.7	4
...
110	1812	JAMMU & KASHMIR	2011	43.4	211.6	97.8	89.0	32.4	72.5	81.6	131.2	72.0	14
111	1813	JAMMU & KASHMIR	2012	150.9	95.8	45.2	86.6	48.9	32.6	118.8	264.9	106.7	14
112	1814	JAMMU & KASHMIR	2013	52.2	136.4	41.9	47.4	47.4	80.5	125.1	219.1	41.2	34
113	1815	JAMMU & KASHMIR	2014	75.8	64.0	153.1	76.1	52.7	25.3	100.5	134.6	362.8	34
114	1816	JAMMU & KASHMIR	2015	27.9	187.2	341.4	173.3	64.6	121.4	233.2	129.2	130.2	84

115 rows × 20 columns




```
In [5]: b.plot.bar(legend=None)
```

Out[5]: <AxesSubplot:>

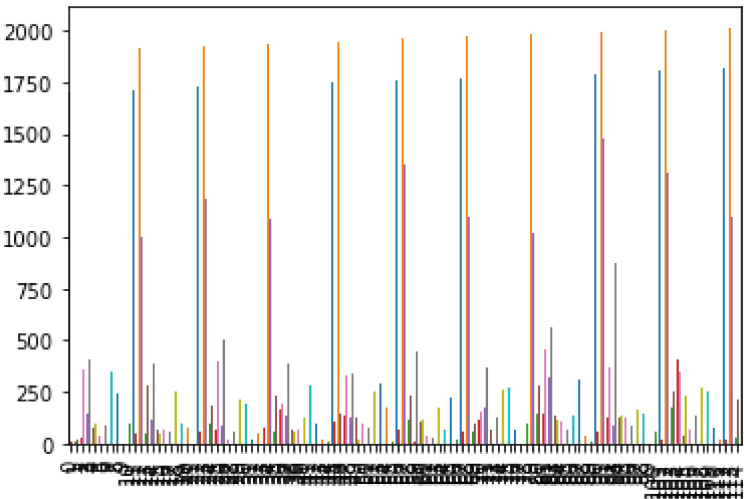


```
In [6]: b.plot.line(legend=None)
```

```
Out[6]: <AxesSubplot:>
```

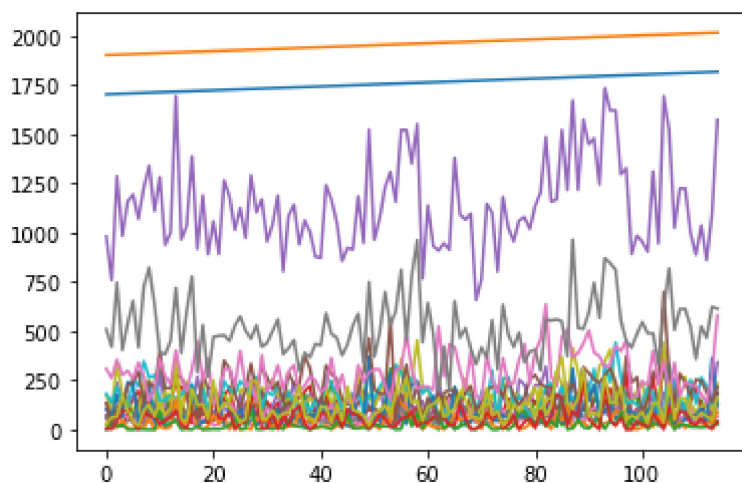


```
In [7]: b.plot.hist(legend=None)
```

```
Out[7]: <AxesSubplot:ylabel='Frequency'>
```

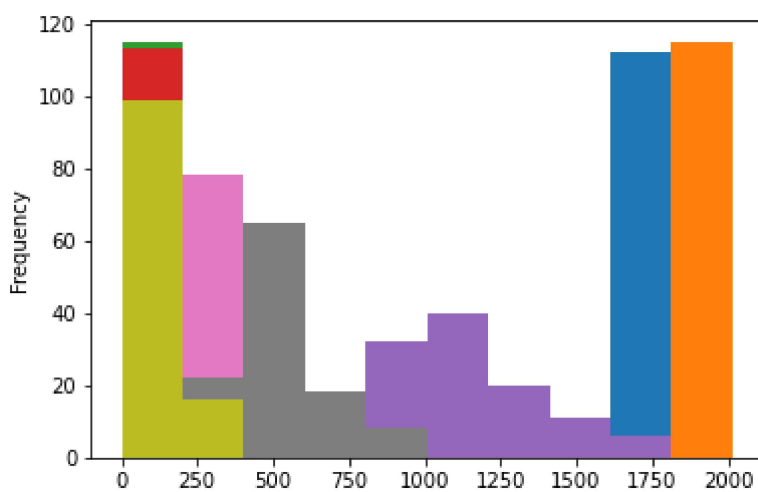

```
In [8]: a.plot.pie(y='JAN',figsize=(8,8),labels=None,legend=None)
```

```
Out[8]: <AxesSubplot:ylabel='JAN'>
```

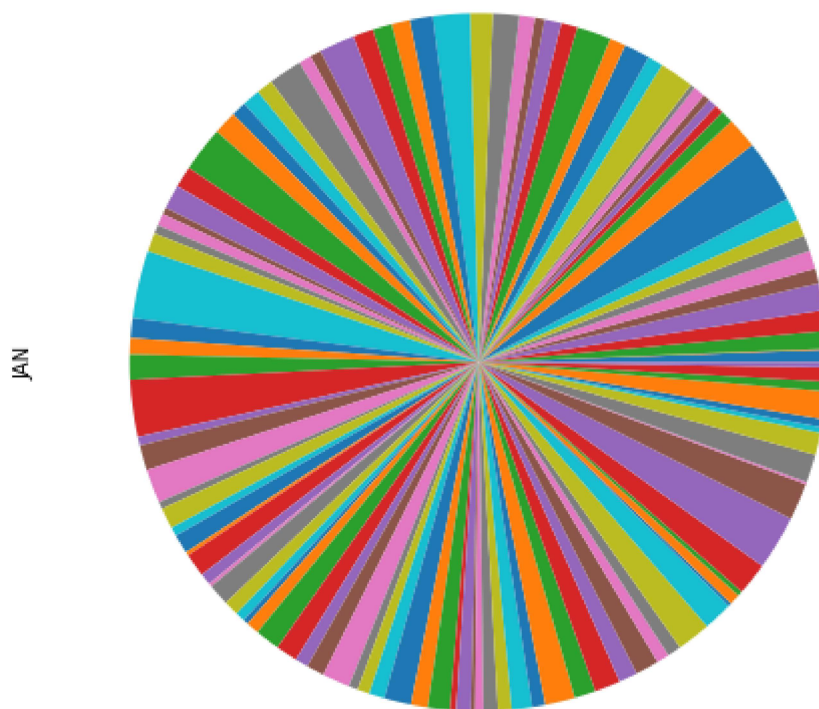

```
In [ ]:
```