## mk 04/08/2023

In [1]: import numpy as np
 import pandas as pd
 import matplotlib.pyplot as plt
 import seaborn as sns
 from sklearn.linear\_model import LogisticRegression
 from sklearn.preprocessing import StandardScaler
 import re
 from sklearn.datasets import load\_digits
 from sklearn.model\_selection import train\_test\_split

In [2]: a=pd.read\_csv(r"C:\Users\user\Downloads\Book28.csv")
a

## Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ос
0	207	ASSAM & MEGHALAYA	1901	27.1	19.5	30.6	223.0	207.0	524.9	430.6	464.1	291.4	163.
1	208	ASSAM & MEGHALAYA	1902	9.3	10.2	105.6	350.0	262.1	620.7	510.8	536.0	441.3	97.
2	209	ASSAM & MEGHALAYA	1903	19.9	25.4	103.6	140.6	206.6	607.4	362.7	551.9	306.4	159.
3	210	ASSAM & MEGHALAYA	1904	11.1	56.1	51.9	457.1	375.2	385.7	477.6	438.8	245.9	115.
4	211	ASSAM & MEGHALAYA	1905	19.9	16.9	137.9	213.0	275.5	521.7	439.1	649.1	276.0	200.
110	317	ASSAM & MEGHALAYA	2011	11.1	11.4	109.0	92.1	238.3	316.0	395.8	302.6	221.6	30.
111	318	ASSAM & MEGHALAYA	2012	15.2	6.9	28.8	279.1	185.8	729.7	444.3	289.2	411.6	199.
112	319	ASSAM & MEGHALAYA	2013	1.1	9.6	44.0	112.8	346.7	286.2	367.8	289.7	229.3	126.
113	320	ASSAM & MEGHALAYA	2014	2.0	28.3	29.3	51.5	351.1	426.4	374.4	484.6	420.2	35.
114	321	ASSAM & MEGHALAYA	2015	13.4	15.5	37.5	250.9	332.5	558.5	300.1	590.9	279.9	62.

115 rows × 20 columns

```
In [3]: a.info()
```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):

	( , , , , , , , , , , , , , , , , , , ,	,	
#	Column	Non-Null Count	Dtype
0	index	115 non-null	int64
1	SUBDIVISION	115 non-null	object
2	YEAR	115 non-null	int64
3	JAN	115 non-null	float64
4	FEB	115 non-null	float64
5	MAR	115 non-null	float64
6	APR	115 non-null	float64
7	MAY	115 non-null	float64
8	JUN	115 non-null	float64
9	JUL	115 non-null	float64
10	AUG	115 non-null	float64
11	SEP	115 non-null	float64
12	OCT	115 non-null	float64
13	NOV	115 non-null	float64
14	DEC	115 non-null	float64
15	ANNUAL	115 non-null	float64
16	Jan-Feb	115 non-null	float64
17	Mar-May	115 non-null	float64
18	Jun-Sep	115 non-null	float64
19	Oct-Dec	115 non-null	float64
dtypes: float64(17		7), int64(2), ob	oject(1)

memory usage: 18.1+ KB

In [4]: b=a.fillna(method='ffill')
b


## Out[4]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ос
0	207	ASSAM & MEGHALAYA	1901	27.1	19.5	30.6	223.0	207.0	524.9	430.6	464.1	291.4	163.
1	208	ASSAM & MEGHALAYA	1902	9.3	10.2	105.6	350.0	262.1	620.7	510.8	536.0	441.3	97.
2	209	ASSAM & MEGHALAYA	1903	19.9	25.4	103.6	140.6	206.6	607.4	362.7	551.9	306.4	159.
3	210	ASSAM & MEGHALAYA	1904	11.1	56.1	51.9	457.1	375.2	385.7	477.6	438.8	245.9	115.
4	211	ASSAM & MEGHALAYA	1905	19.9	16.9	137.9	213.0	275.5	521.7	439.1	649.1	276.0	200.
													•
110	317	ASSAM & MEGHALAYA	2011	11.1	11.4	109.0	92.1	238.3	316.0	395.8	302.6	221.6	30.
111	318	ASSAM & MEGHALAYA	2012	15.2	6.9	28.8	279.1	185.8	729.7	444.3	289.2	411.6	199.
112	319	ASSAM & MEGHALAYA	2013	1.1	9.6	44.0	112.8	346.7	286.2	367.8	289.7	229.3	126.
113	320	ASSAM & MEGHALAYA	2014	2.0	28.3	29.3	51.5	351.1	426.4	374.4	484.6	420.2	35.
114	321	ASSAM & MEGHALAYA	2015	13.4	15.5	37.5	250.9	332.5	558.5	300.1	590.9	279.9	62.

115 rows × 20 columns


In [5]: b.plot.bar(legend=None)

## Out[5]: <AxesSubplot:>

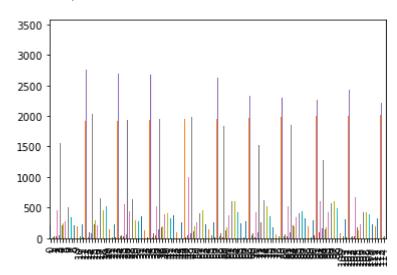


In [6]: b.plot.line(legend=None)

Out[6]: <AxesSubplot:>

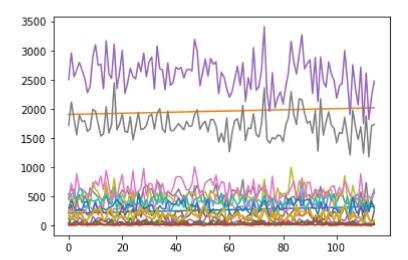

In [7]: b.plot.hist(legend=None)

Out[7]: <AxesSubplot:ylabel='Frequency'>

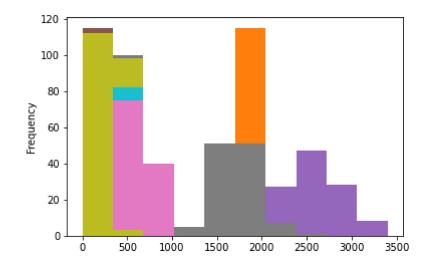

In [8]: a.plot.pie(y='MAR',figsize=(8,8),labels=None,legend=None)

Out[8]: <AxesSubplot:ylabel='MAR'>



In [ ]: