#### mk 04/08/2023

In [1]: import numpy as np
 import pandas as pd
 import matplotlib.pyplot as plt
 import seaborn as sns
 from sklearn.linear\_model import LogisticRegression
 from sklearn.preprocessing import StandardScaler
 import re
 from sklearn.datasets import load\_digits
 from sklearn.model\_selection import train\_test\_split

# Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ
0	3772	SOUTH INTERIOR KARNATAKA	1901	4.9	31.8	3.0	32.7	109.6	106.0	210.0	109.2	140.8	170.1
1	3773	SOUTH INTERIOR KARNATAKA	1902	1.9	0.5	6.7	42.6	97.7	91.7	210.0	82.1	138.4	219.1
2	3774	SOUTH INTERIOR KARNATAKA	1903	0.3	0.0	1.1	11.6	125.1	129.7	284.4	155.7	197.1	154.2
3	3775	SOUTH INTERIOR KARNATAKA	1904	1.0	0.5	5.2	43.5	144.7	167.9	197.1	73.2	89.6	120.4
4	3776	SOUTH INTERIOR KARNATAKA	1905	1.7	7.9	14.2	23.6	118.6	95.9	148.4	140.6	43.1	142.8
110	3882	SOUTH INTERIOR KARNATAKA	2011	2.1	12.4	12.4	80.2	83.5	177.1	202.4	199.5	111.2	144.8
111	3883	SOUTH INTERIOR KARNATAKA	2012	4.6	5.5	8.1	99.0	45.6	81.8	144.7	236.5	100.6	62.8
112	3884	SOUTH INTERIOR KARNATAKA	2013	0.5	10.1	11.7	34.6	95.6	176.2	307.4	151.7	191.8	103.7
113	3885	SOUTH INTERIOR KARNATAKA	2014	0.4	2.4	17.7	46.7	130.5	106.8	271.6	254.6	161.6	152.9
114	3886	SOUTH INTERIOR KARNATAKA	2015	1.7	0.2	24.4	80.5	125.3	218.7	112.0	136.6	164.5	106.1

115 rows × 20 columns

```
In [3]: a.info()
```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 0 to 114
Data columns (total 20 columns):

#	Column	Non-Null Count	Dtype					
0	index	115 non-null	int64					
1	SUBDIVISION	115 non-null	object					
2	YEAR	115 non-null	int64					
3	JAN	115 non-null	float64					
4	FEB	115 non-null	float64					
5	MAR	115 non-null	float64					
6	APR	115 non-null	float64					
7	MAY	115 non-null	float64					
8	JUN	115 non-null	float64					
9	JUL	115 non-null	float64					
10	AUG	115 non-null	float64					
11	SEP	115 non-null	float64					
12	OCT	115 non-null	float64					
13	NOV	115 non-null	float64					
14	DEC	115 non-null	float64					
15	ANNUAL	115 non-null	float64					
16	Jan-Feb	115 non-null	float64					
17	Mar-May	115 non-null	float64					
18	Jun-Sep	115 non-null	float64					
19	Oct-Dec	115 non-null	float64					
<pre>dtypes: float64(17), int64(2), object(1)</pre>								
memory usage: 18.1+ KB								

localhost:8888/notebooks/Untitled29.ipynb?kernel\_name=python3#

In [4]: b=a.fillna(method='ffill')
b


# Out[4]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост
0	3772	SOUTH INTERIOR KARNATAKA	1901	4.9	31.8	3.0	32.7	109.6	106.0	210.0	109.2	140.8	170.1
1	3773	SOUTH INTERIOR KARNATAKA	1902	1.9	0.5	6.7	42.6	97.7	91.7	210.0	82.1	138.4	219.1
2	3774	SOUTH INTERIOR KARNATAKA	1903	0.3	0.0	1.1	11.6	125.1	129.7	284.4	155.7	197.1	154.2
3	3775	SOUTH INTERIOR KARNATAKA	1904	1.0	0.5	5.2	43.5	144.7	167.9	197.1	73.2	89.6	120.4
4	3776	SOUTH INTERIOR KARNATAKA	1905	1.7	7.9	14.2	23.6	118.6	95.9	148.4	140.6	43.1	142.8
		•••											
110	3882	SOUTH INTERIOR KARNATAKA	2011	2.1	12.4	12.4	80.2	83.5	177.1	202.4	199.5	111.2	144.8
111	3883	SOUTH INTERIOR KARNATAKA	2012	4.6	5.5	8.1	99.0	45.6	81.8	144.7	236.5	100.6	62.8
112	3884	SOUTH INTERIOR KARNATAKA	2013	0.5	10.1	11.7	34.6	95.6	176.2	307.4	151.7	191.8	103.7
113	3885	SOUTH INTERIOR KARNATAKA	2014	0.4	2.4	17.7	46.7	130.5	106.8	271.6	254.6	161.6	152.9
114	3886	SOUTH INTERIOR KARNATAKA	2015	1.7	0.2	24.4	80.5	125.3	218.7	112.0	136.6	164.5	106.1

115 rows × 20 columns


In [5]: b.plot.bar(legend=None)

### Out[5]: <AxesSubplot:>

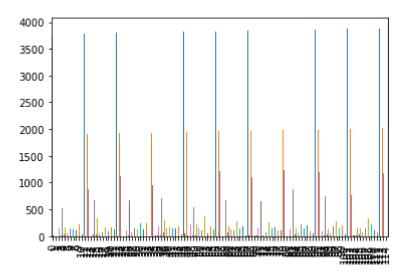


# In [6]: b.plot.line(legend=None)

### Out[6]: <AxesSubplot:>

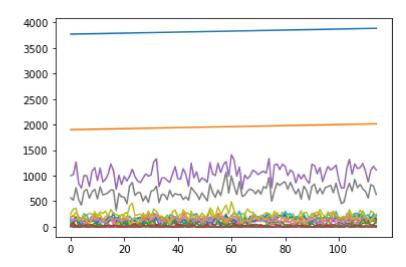

```
In [7]: b.plot.hist(legend=None)
```

Out[7]: <AxesSubplot:ylabel='Frequency'>

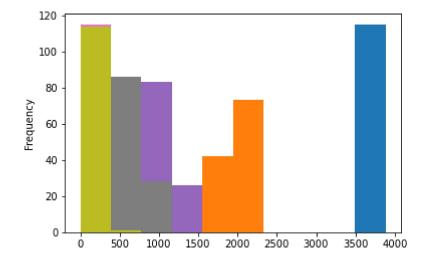

In [8]: a.plot.pie(y='JUN',figsize=(8,8),labels=None,legend=None)

Out[8]: <AxesSubplot:ylabel='JUN'>



```
In [ ]:
```